


15-163-20448-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

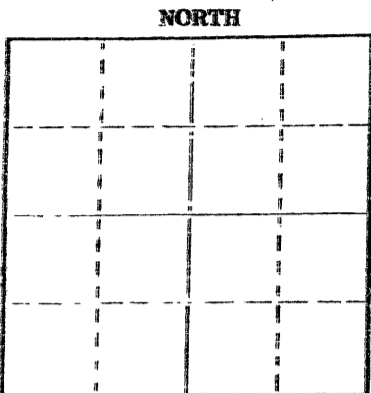

Locate well correctly on above Section Plat

Rocks _____ County. Sec. 7 Twp. 8s Rge. _____ (E) 17 (W) _____
Location as "NE/CNWSW2" or footage from lines NW SE NW
Lease Owner Clinton Oil Company
Lease Name Margaret Smith Well No. 1 V
Office Address Wichita, Kansas 67201
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 6-20 19 72
Application for plugging filed 7-1 19 74
Application for plugging approved 7-1 19 74
Plugging commenced 7-29 19 74
Plugging completed 7-29 19 74
Reason for abandonment of well or producing formation Depletion

If a producing well is abandoned, date of last production 3-2 19 74

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3446 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4"	199'	none
				5 1/2"	3395'	2440'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set wooden plug at 3000'.
Set sand & cement plug from 3000' to 2950'.
Pumped 25 sacks of gel from 1320' to 670'.
Pumped 70 sacks of cement from 670' to 460'.
Pumped 10 sacks of gel from 460' to 210'.
pumped 70 sacks of cement from 210' to surface.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Allied Cementing
Address Russell Kansas


STATE OF Kansas COUNTY of Sedgwick ss. Ronald E. Rowe

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ronald E. Rowe
Wichita, Kansas 67201
(Address)

Subscribed and sworn to before me this 23rd day of September 19 74

Carolyn Smith
Notary Public.



RECEIVED
STATE CORPORATION COMMISSION
SEP 24 1974
CONSERVATION DIVISION
Wichita, Kansas