

KANSAS CORPORATION COMMISSION  
OIL & GAS CONSERVATION DIVISION  
**WELL PLUGGING APPLICATION**  
Please TYPE Form and File ONE Copy

**RECEIVED**  
MAY 19 2006  
KCC WICHITA

Form CP-1  
September 2003  
This Form must be Typed  
This Form must be Signed  
All blanks must be Filled

API # 15 - 015-21,375 - 00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued,

indicate original spud or completion date \_\_\_\_\_.

Well Operator: VESS OIL CORPORATION KCC License #: 5030

Address: 8100 E. 22nd Street North, Bldg. 300 City: Wichita

State: KS Zip Code: 67226 Contact Phone: ( 316 ) 682 - 1537 X103

Lease: Augusta Unit Well #: 5-53 Sec. 11 Twp. 28S S. R. 04E  East  West

50'S - of - SE - NW Spot Location / QQQQ County: Butler

*GPS* 2030' 3264' Feet (in exact footage) From  North /  South (from nearest outside section corner) Line of Section (Not Lease Line)  
*Log* 1980' 3388' Feet (in exact footage) From  East /  West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One:  Oil Well  Gas Well  D&A  Cathodic  Water Supply Well  
 SWD Docket # \_\_\_\_\_  ENHR Docket # \_\_\_\_\_  Other: \_\_\_\_\_

Conductor Casing Size: \_\_\_\_\_ Set at: \_\_\_\_\_ Cemented with: \_\_\_\_\_ Sacks

Surface Casing Size: 8-5/8" Set at: 257' Cemented with: 200 Sacks

Production Casing Size: 5-1/2" Set at: 2588' Cemented with: 250 Sacks

List (ALL) Perforations and Bridgeplug Sets: Simpson OH 2588-2599'; CIBP - 2490' KC Perfs: 2075-80'; 2088-2108'

Elevation: 1298/1303 ( G.L. /  K.B.) T.D.: 2599' PBD: 2490' Anhydrite Depth: \_\_\_\_\_  
(Stone Corral Formation)

Condition of Well:  Good  Poor  Casing Leak  Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Run tbg to 2050', spot 50 sx Class A, 3% cc. Pull out, wireline tag.

Free point csg, probably pull, get shot off and recover 1000'. Run tbg to 310', circulate hole full with 60/40 pozmix, 6% gel

Is Well Log attached to this application as required?  Yes  No Is ACO-1 filed?  Yes  No

If not explain why? \_\_\_\_\_

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Casey Coats

Phone: ( 316 ) 682 - 1537 X104

Address: 8100 E. 22nd St., North, Bldg. 300 City / State: Wichita, KS 67226

Plugging Contractor: United Cementing and Acid Company, INC. KCC License #: 30437


Address: 2510 W. 6th, El Dorado, KS 67042 Phone: ( 316 ) 321- - 4680

Proposed Date and Hour of Plugging (if known?): 5/18/06 - 3:00 p.m. for bottom plug

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 5/18/06 Authorized Operator / Agent: Casey Coats  
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

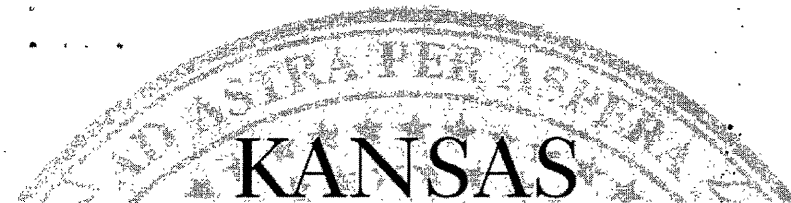

CORPORATION COMMISSION

Kathleen Sebelius, Governor    Brian J. Moline, Chair    Robert E. Krehbiel, Commissioner    Michael C. Moffet, Commissioner

**NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)**

Vess Oil Corporation  
8100 E. 22nd N. Bldg. 300  
Wichita, KS 67226

May 19, 2006

Re: AUGUSTA UNIT #5-53  
API 15-015-21375-00-00  
S2SENW 11-28S-4E, 3264 FSL 3388 FEL  
BUTLER COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

**Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

**This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.**

District: #2  
3450 N. Rock Road, Suite 601  
Wichita, KS 67226  
(316) 630-4000

Sincerely

David P. Williams  
Production Supervisor