

RECEIVED

MAY 18 2006

KCC WICHITA

STATE OF KANSAS  
KANSAS CORPORATION COMMISSION  
CONSERVATION DIVISION  
130 South Market - Room 2078  
Wichita, Kansas 67202

FORM CP-1 (1/3/92)

WELL PLUGGING APPLICATION FORM

15-111-19007-0000 (PLEASE TYPE FORM and File ONE Copy)

API # NA Drilled 1962 (Identifier number of this well). This must be listed for wells drilled since 1967; if no API# was issued, indicate spud or completion date.

WELL OPERATOR Schankie Well Service, Inc. KCC LICENSE # 6470  
(owner/company name) (operator's)

ADDRESS 1006 SW Blvd, PO Box 397 CITY Madison

STATE Kansas ZIP CODE 66860 CONTACT PHONE # (620) 437-2595

LEASE Nuessen WELL# B-3 SEC. 31 T. 21S R. 12 (East/West)

- SE - SE - NE SPOT LOCATION/0000 COUNTY Lyon

3174 2310 FEET (in exact footage) FROM S/N (circle one) LINE OF SECTION (NOT Lease Line)

296 330 FEET (in exact footage) FROM E/W (circle one) LINE OF SECTION (NOT Lease Line)

Check One: OIL WELL  GAS WELL  D&A  SWD/ENHR WELL  DOCKET# \_\_\_\_\_

CONDUCTOR CASING SIZE NA SET AT \_\_\_\_\_ CEMENTED WITH \_\_\_\_\_ SACKS

SURFACE CASING SIZE 8 5/8" SET AT 106' CEMENTED WITH 75 SACKS

PRODUCTION CASING SIZE 4 1/2" SET AT 1903' CEMENTED WITH 40 SACKS

LIST (ALL) PERFORATIONS and BRIDGEPLUG SETS: \_\_\_\_\_

ELEVATION NA T.D. 1908' PBDT 1908' ANHYDRITE DEPTH NA  
(G.L./K.B.) (Stone Corral Formation)

CONDITION OF WELL: GOOD  POOR  CASING LEAK  JUNK IN HOLE

PROPOSED METHOD OF PLUGGING Spot plug down 2 3/8" Tubing @ 1845' 5sx Cement & 3sx Gel, Rip pipe @ 850' & pull, set plugs @ 800' 17sx Cement & 2sx Gel, @ 150' 34sx Cement to surface  
(If additional space is needed attach separate page)

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? Yes IS ACO-1 FILED? No

If not explain why? \_\_\_\_\_

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. I. AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

LIST NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:

Clifford Schankie PHONE# 620 437-2595

ADDRESS PO Box 397 City/State Madison, KS 66860

PLUGGING CONTRACTOR Schankie Well Service, Inc. KCC LICENSE # 6470  
(company name) (contractor's)

ADDRESS PO Box 397 Madison, KS 66860 PHONE # 620 437-2595

PROPOSED DATE AND HOUR OF PLUGGING (If Known?) 3-16-06

PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-118) WILL BE GUARANTEED BY OPERATOR OR AGENT

DATE: 3-16-06 AUTHORIZED OPERATOR/AGENT: Clifford Schankie  
(signature)

15111 19007 0000

CASING RECORD

8 5/8                    106' cemented  
                              /W/75 sx.

4 1/2                    1903' cemented  
                              W/40 sx.

T. D.                    1908'

Location: SE SE NE  
          Sec.31-21S-12E  
          Greenwood Co., Kans.

Farm:        Nuessen B-3

Well Owner: W&E Drilling, Inc.

Contr:      WHITE & ELLIS DRLG., INC.

Spudded: 1/20/62

Under Surf: 4/4/62

Completed: 4/7/62

Kelly Bushing Measurement 5' above Ground Level


<u>FORMATION</u>	<u>DEPTH</u>
------------------	--------------

Soil	0-3
Lime	50
Shale & shells	100
Lime	105
Shale	190
Lime & shale stks.	290
Lime	330
Shale & lime stks.	442
Lime	451
Shale & lime stks.	570
Lime, hd. stks.	622
Shale & lime stks.	705
Shale & Shells	830
Sand	967
Sandy shale	981
Lime	1105
Lime w/shale stks.	1132
Shale	1212
Lime	1389
Shale & lime stks.	1906
Sand	1908

TOPS

Lansing	971
Kansas City	1202
B/ Kansas City	1379
Bartlesville	1904

RECEIVED  
MAY 18 2006  
KCC WICHITA

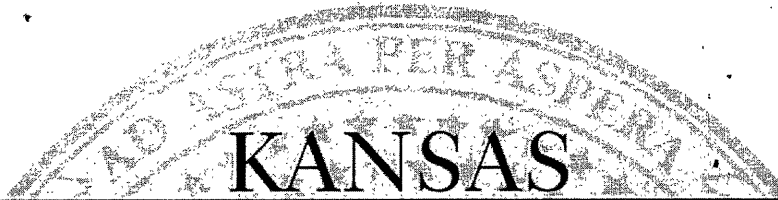

**NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)**

Schankie Well Service, Inc.  
1006 SW Blvd.  
Madison, KS 66860

May 19, 2006

Re: NUESSEN #B 3  
API 15-111-19007-00-00  
SESENE 31-21S-12E, 2310 FNL 330 FEL  
LYON COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.


Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

**Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

**This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.**

District: #3  
1500 W. 7th  
Chanute, KS 67220  
(620) 432-2300

Sincerely  


David P. Williams  
Production Supervisor