



HALLIBURTON

ARRAY COMPENSATED
TRUE RESISTIVITY
5" LOG

HALLIBURTON ARRAY COMPENSATED TRUE RESISTIVITY 5" LOG														
COMPANY WELL FIELD/BLOCK COUNTY STATE					MERIT ENERGY COMPANY, LLC LCSLU 204 BIG SKY GRANT KANSAS									
Permanent Datum Log measured from Drilling measured from					GL KB KB 13.0 ft above perm. Datum					Elev.: K.B. D.F. G.L. 3110.0 ft 3108.0 ft 3097.0 ft				
Date					01-Nov-17									
Run No.					1									
Depth - Driller					6610.0 ft									
Depth - Logger					6609.0 ft									
Bottom - Logged Interval					6599									
Top - Logged Interval					1456									
Casing - Driller					8.625 in @ 1455.0 ft					@				
Casing - Logger					1456.0 ft					@				
Bit Size					7.875 in					@				
Type Fluid in Hole					Water Based Mud									
Density					9.0 ppg					53.00 s/qt				
PH					10.00 pH					7.2 cpm				
Source of Sample					FLOWLINE									
Rm @ Meas. Temperature					0.76 ohmm @ 82.00 degF					@				
Rmf @ Meas. Temperature					0.58 ohmm @ 79.00 degF					@				
Rmc @ Meas. Temperature					0.93 ohmm @ 79.00 degF					@				
Source Rmf					MEAS					MEAS				
Rm @ BHT					0.44 ohmm @ 148.0 degF					@				
Time Since Circulation					17:00 hr									
Time on Bottom					01-Nov-17 05:27									
Max. Rec. Temperature					148.00 degF @ 6609.0 ft					@				
Equipment					12156883					EL RENO				
Recorded By					WHITLOCK									
Witnessed By					MARTIN LANGE					TIM HEDRICK				

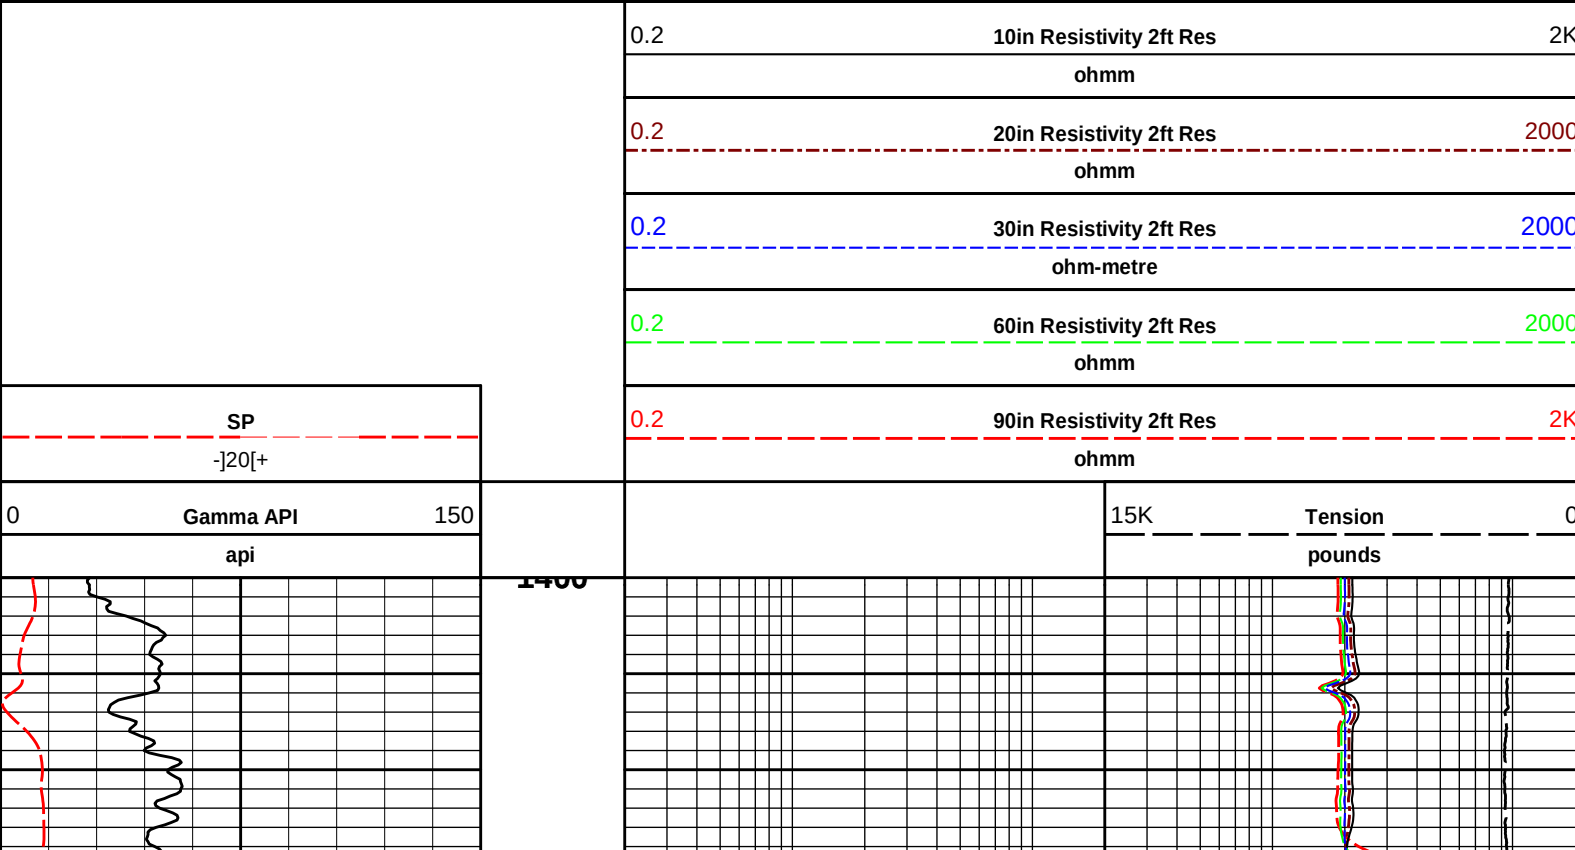


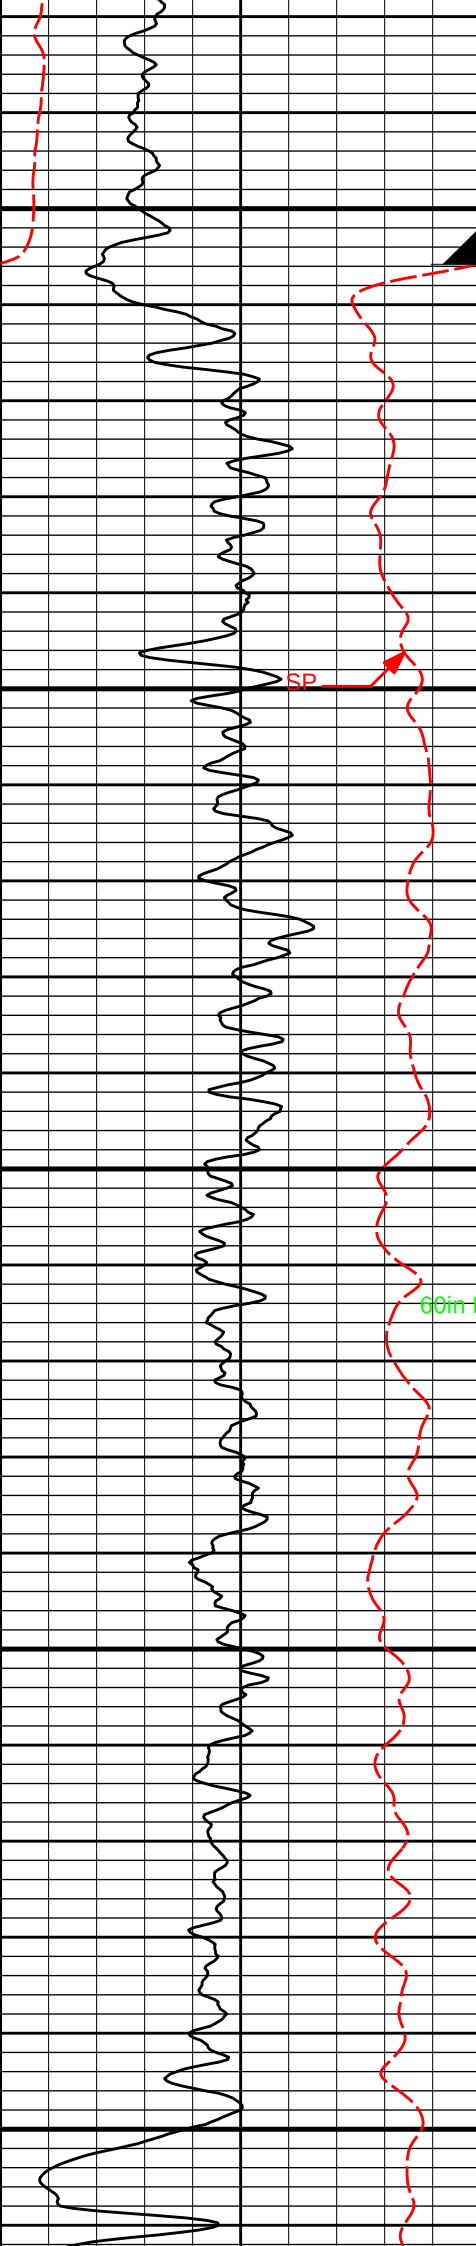


CSG

1500

1600

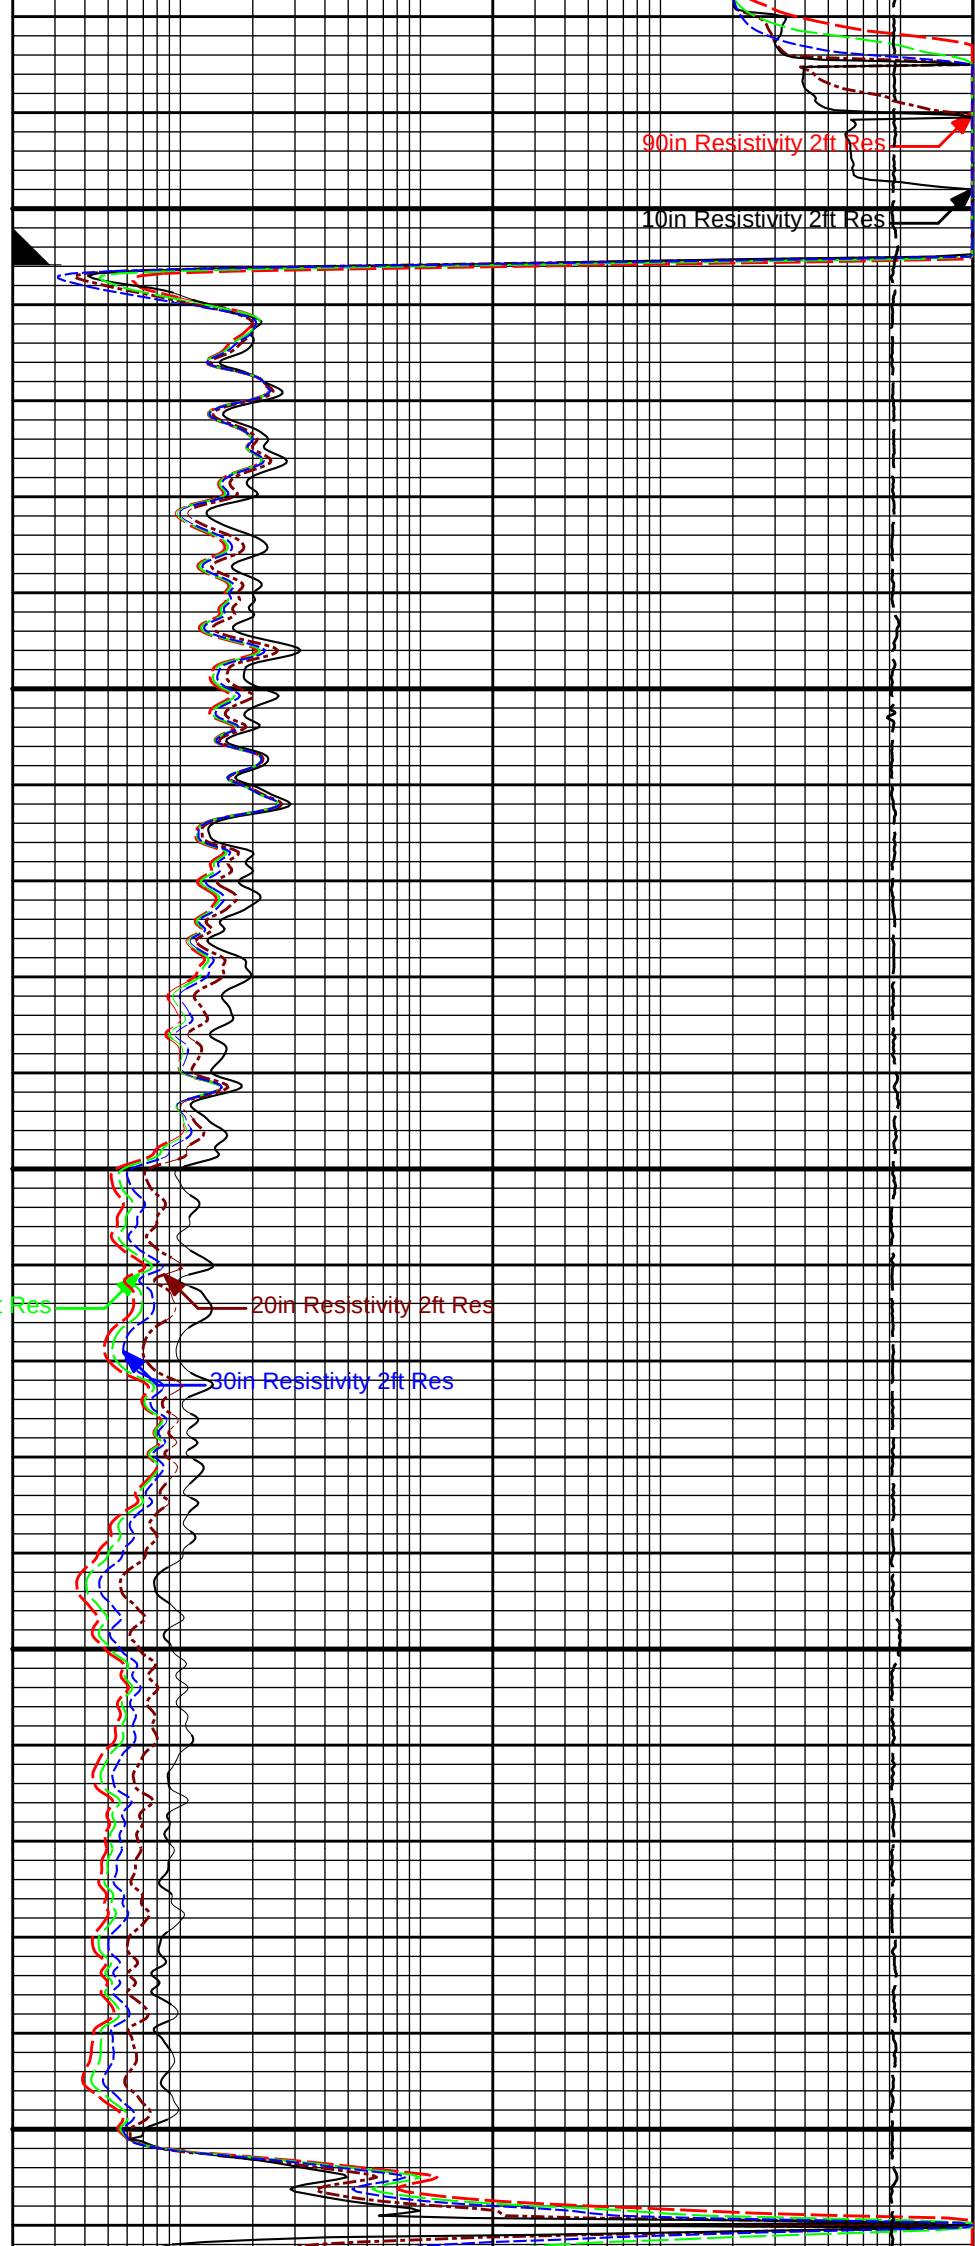


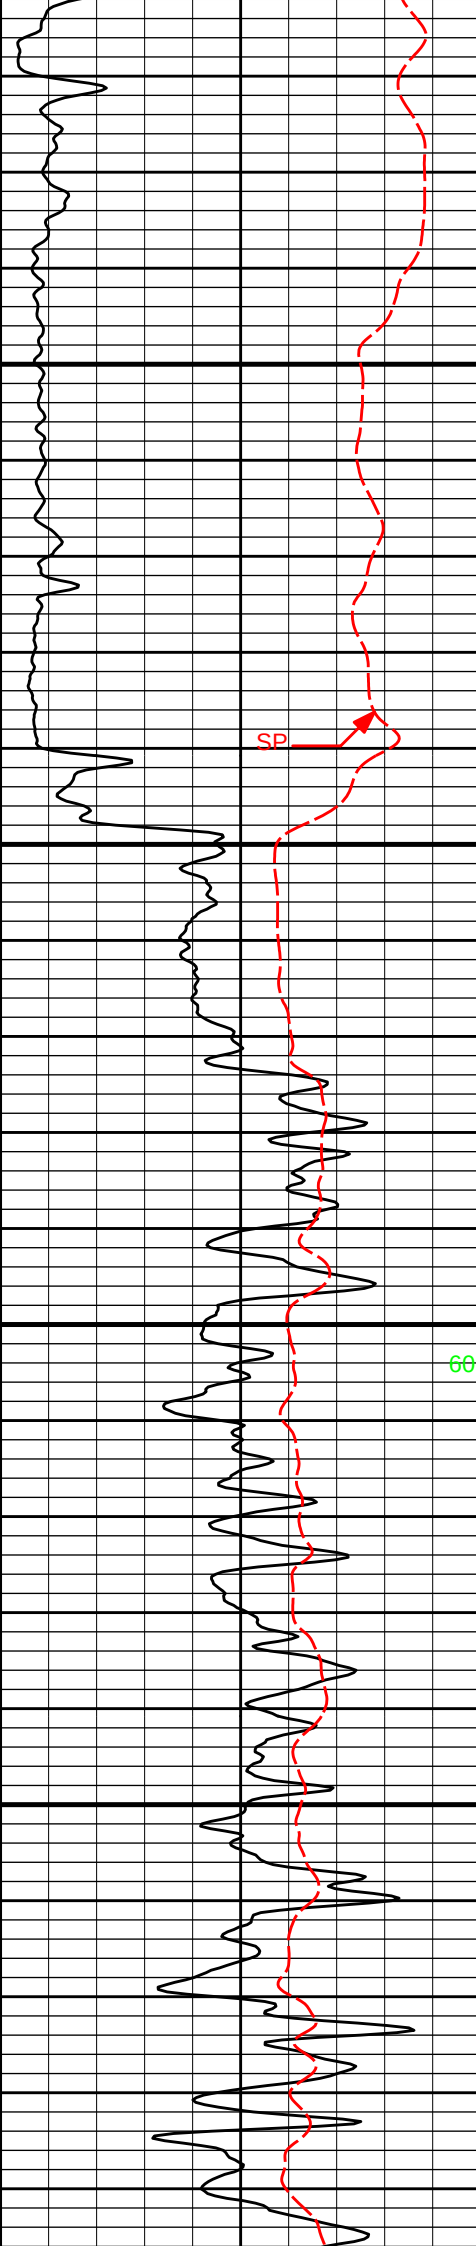


1700

1800

60in Resistivity 2ft Res

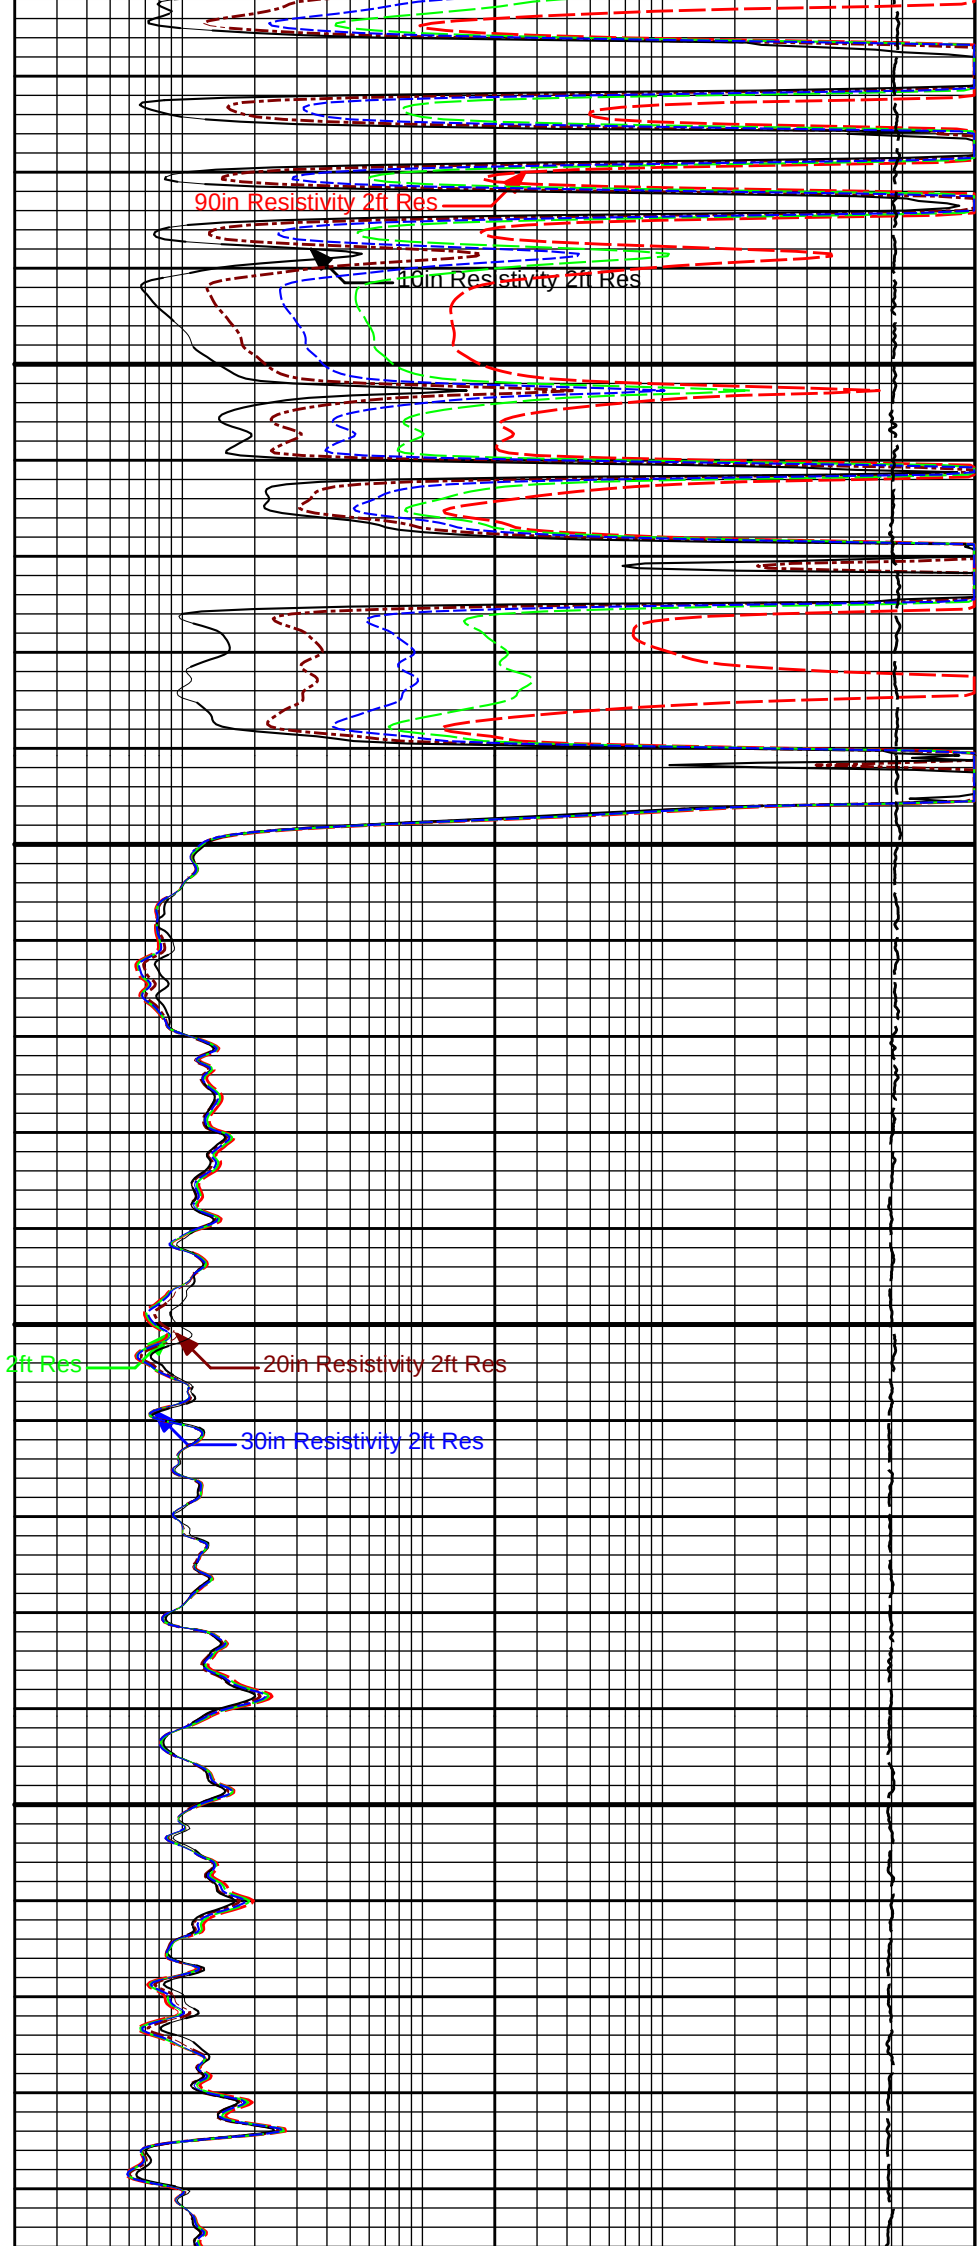


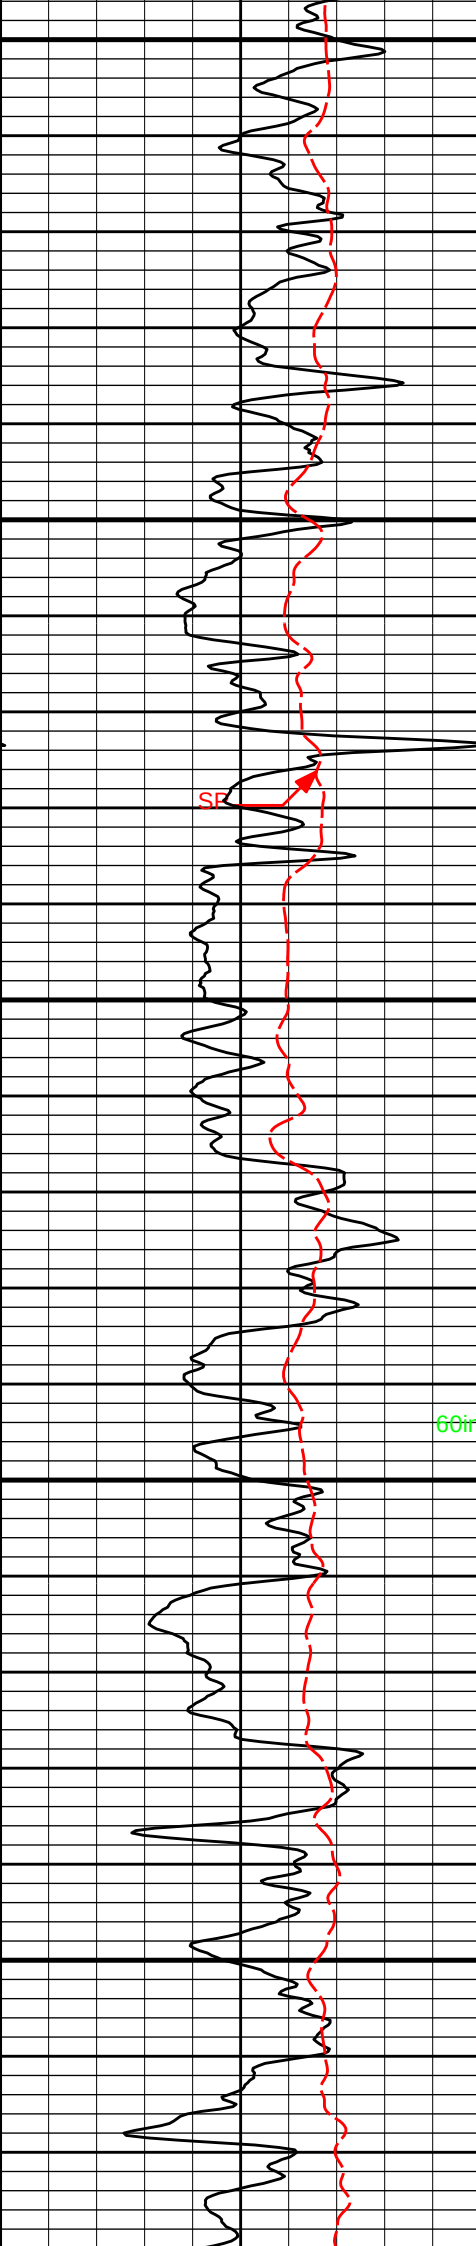


1900

2000


2100


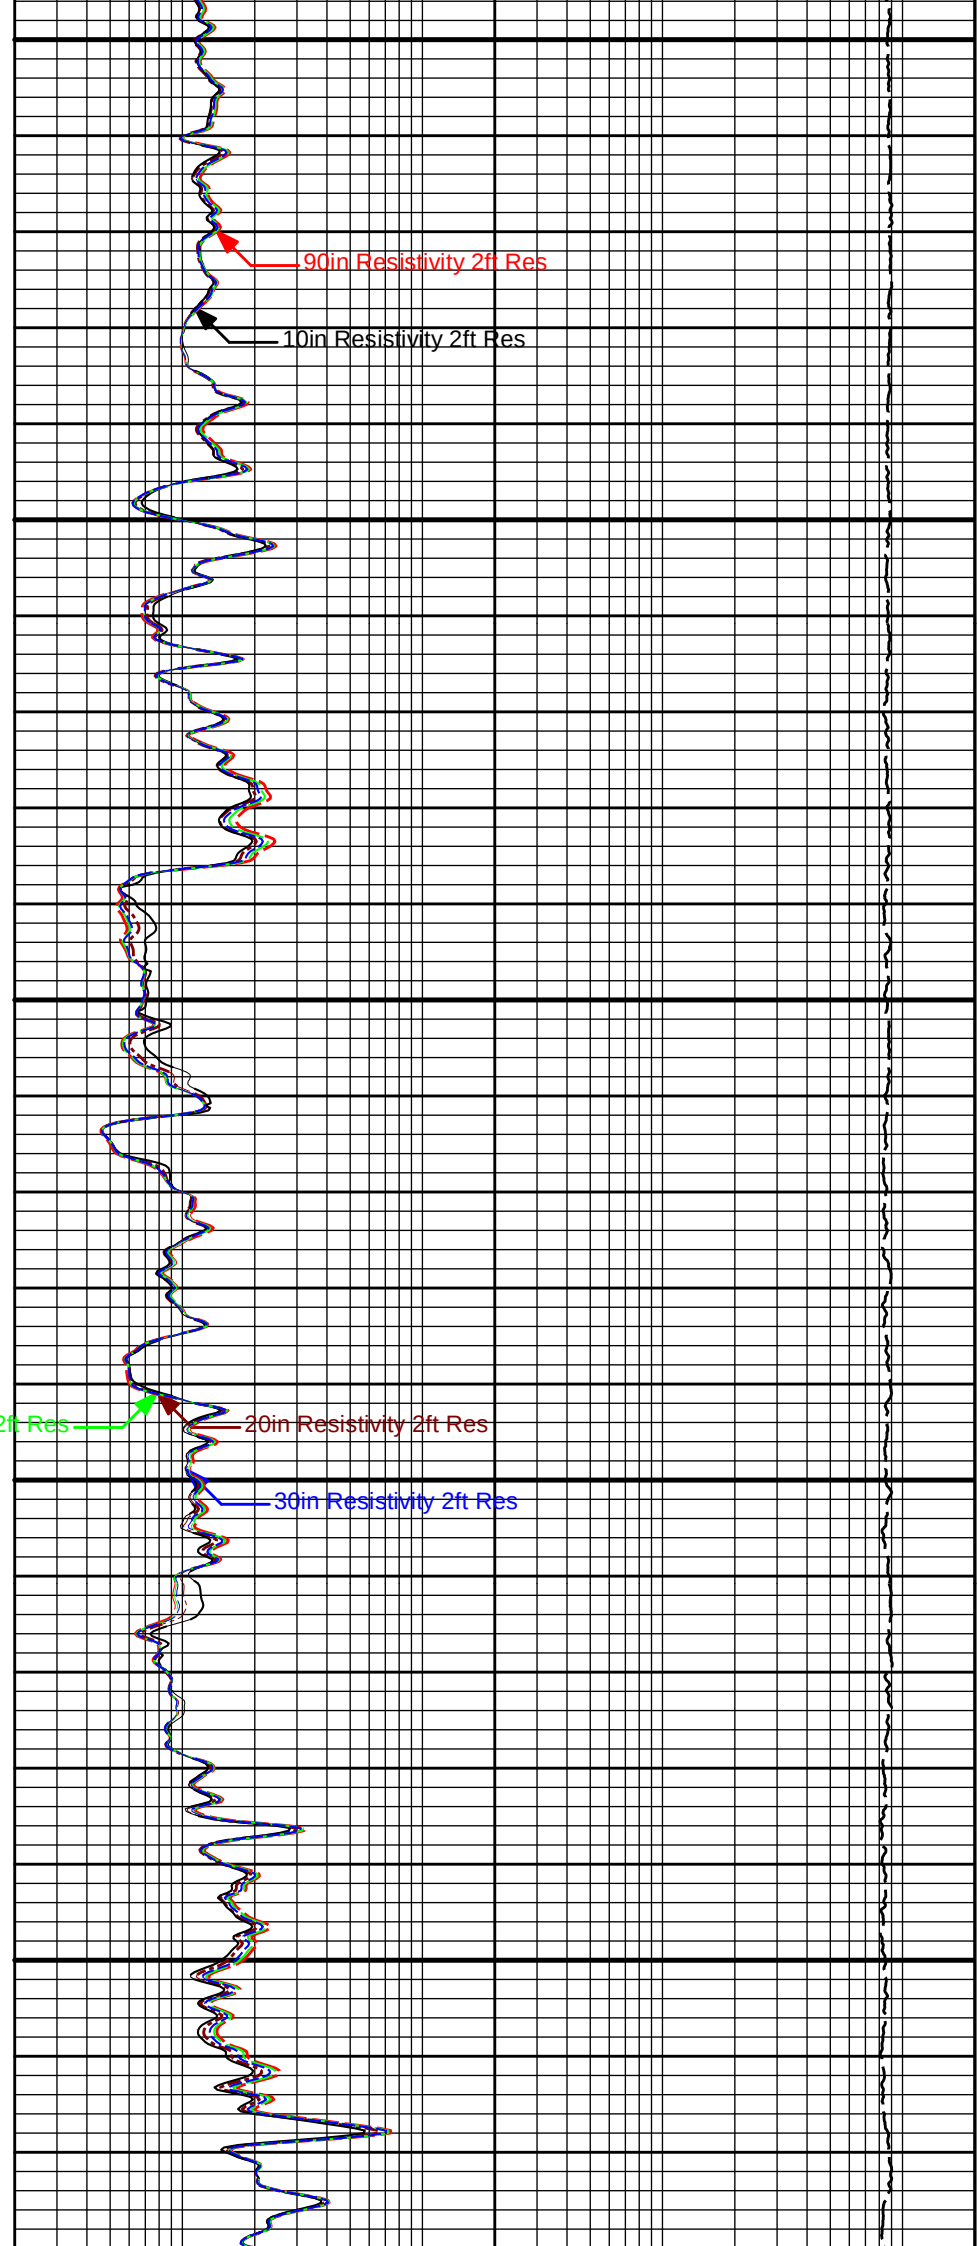


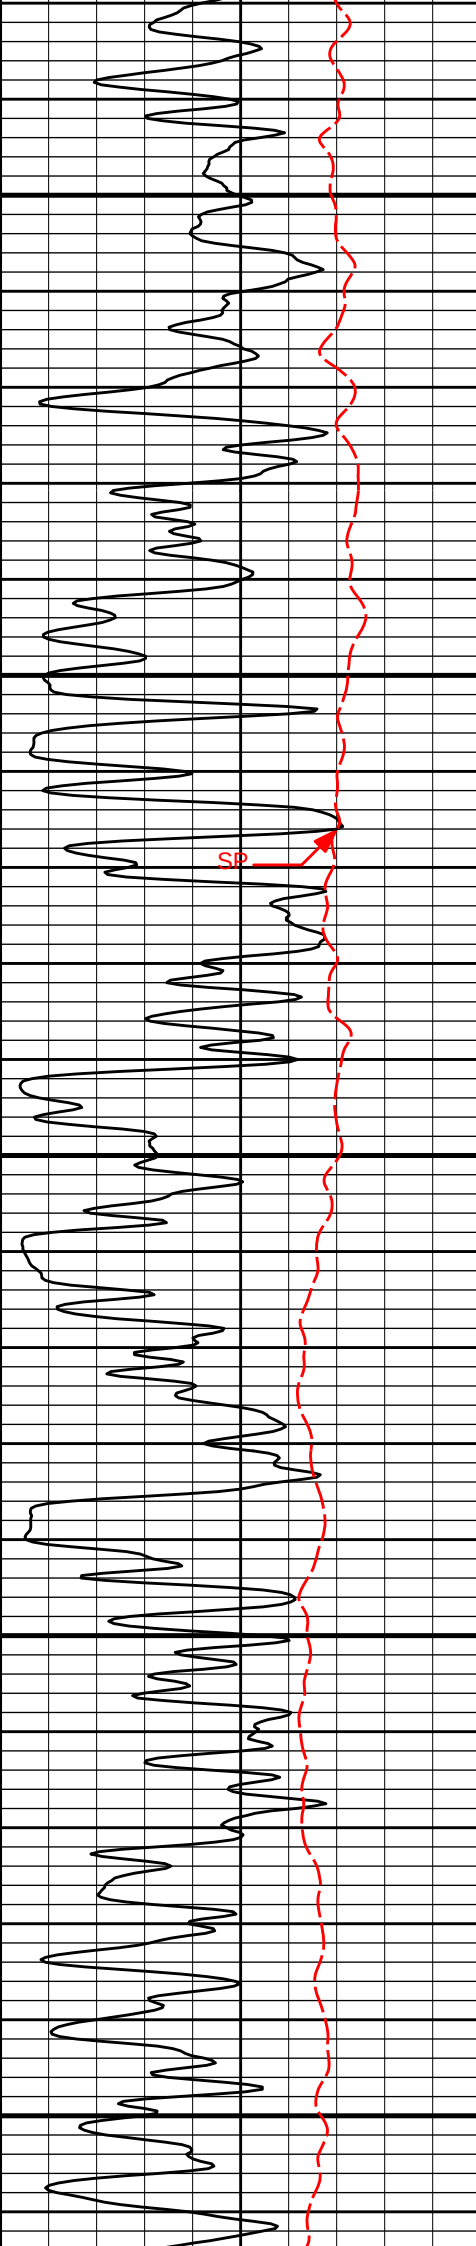


2200

2300

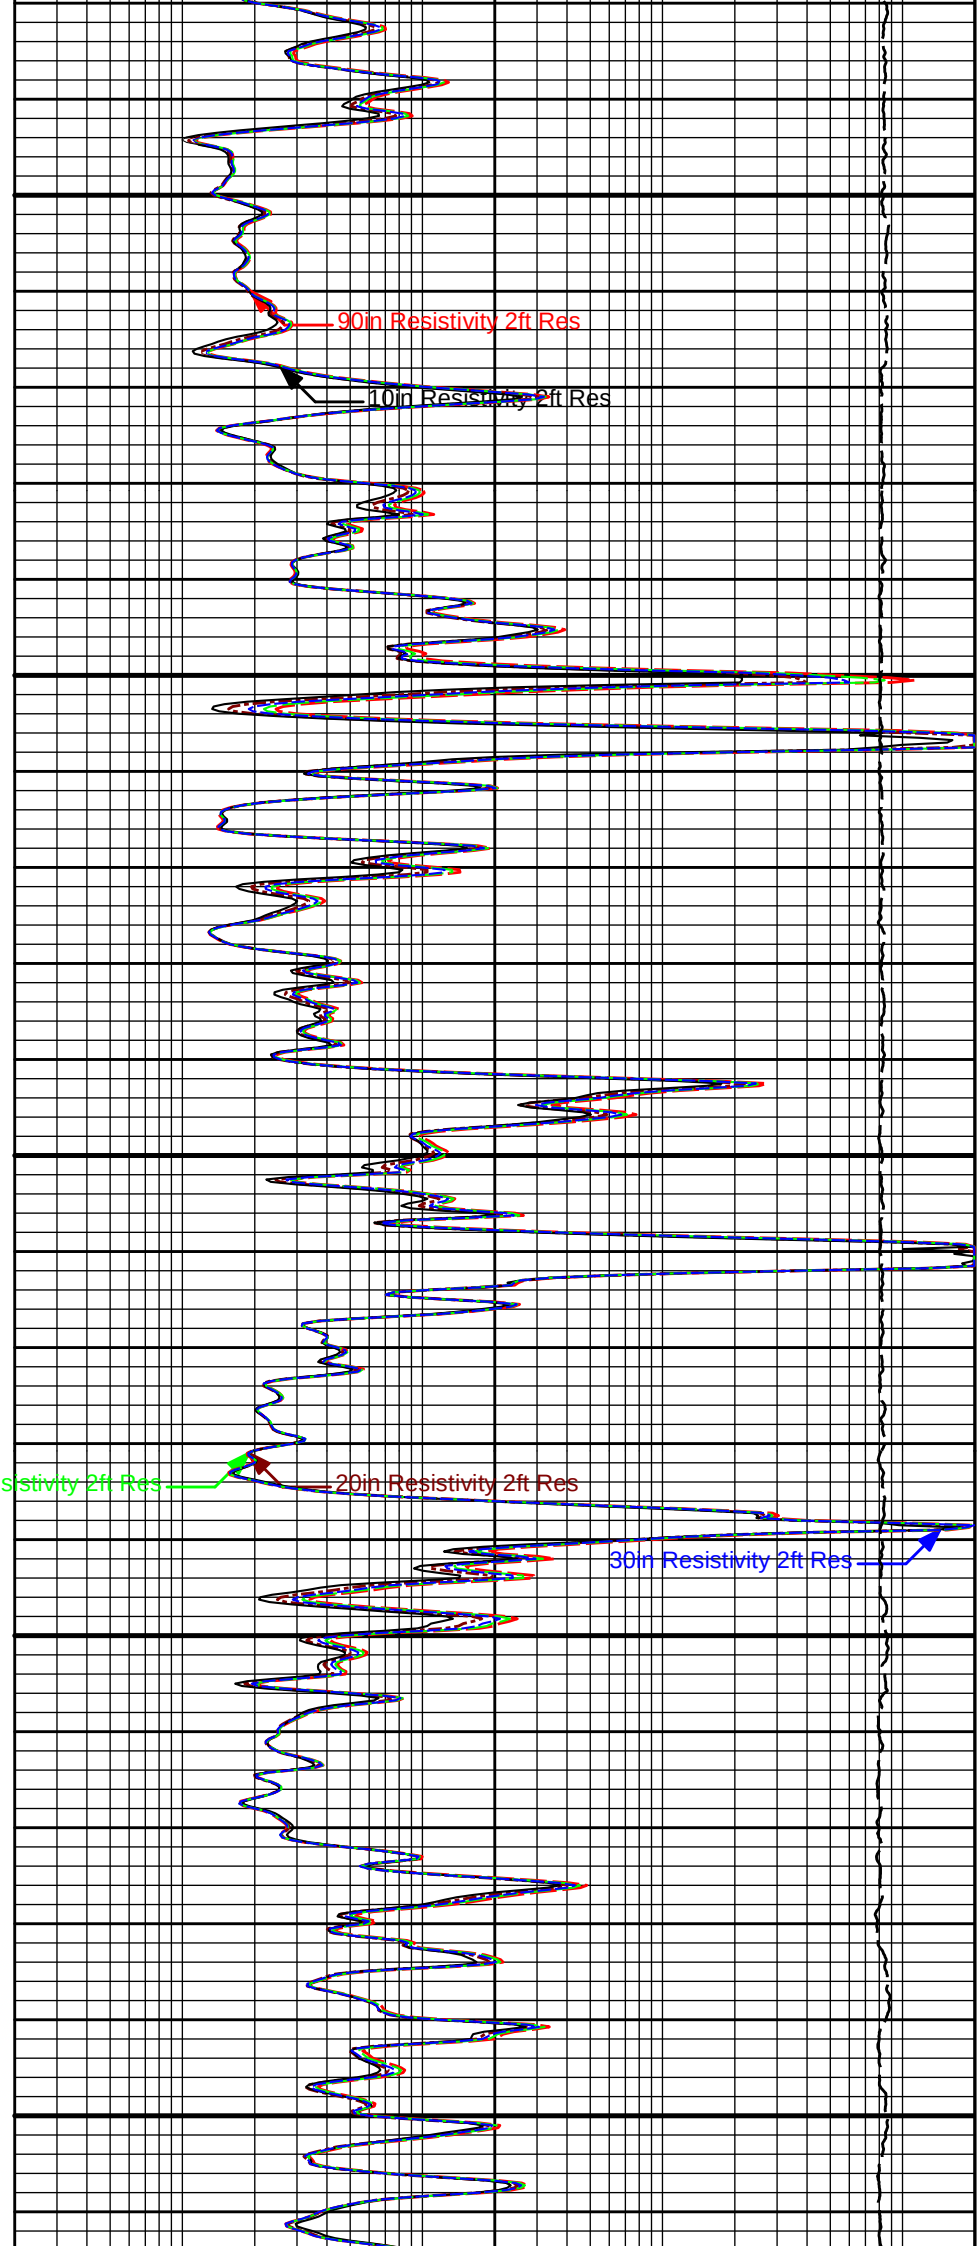

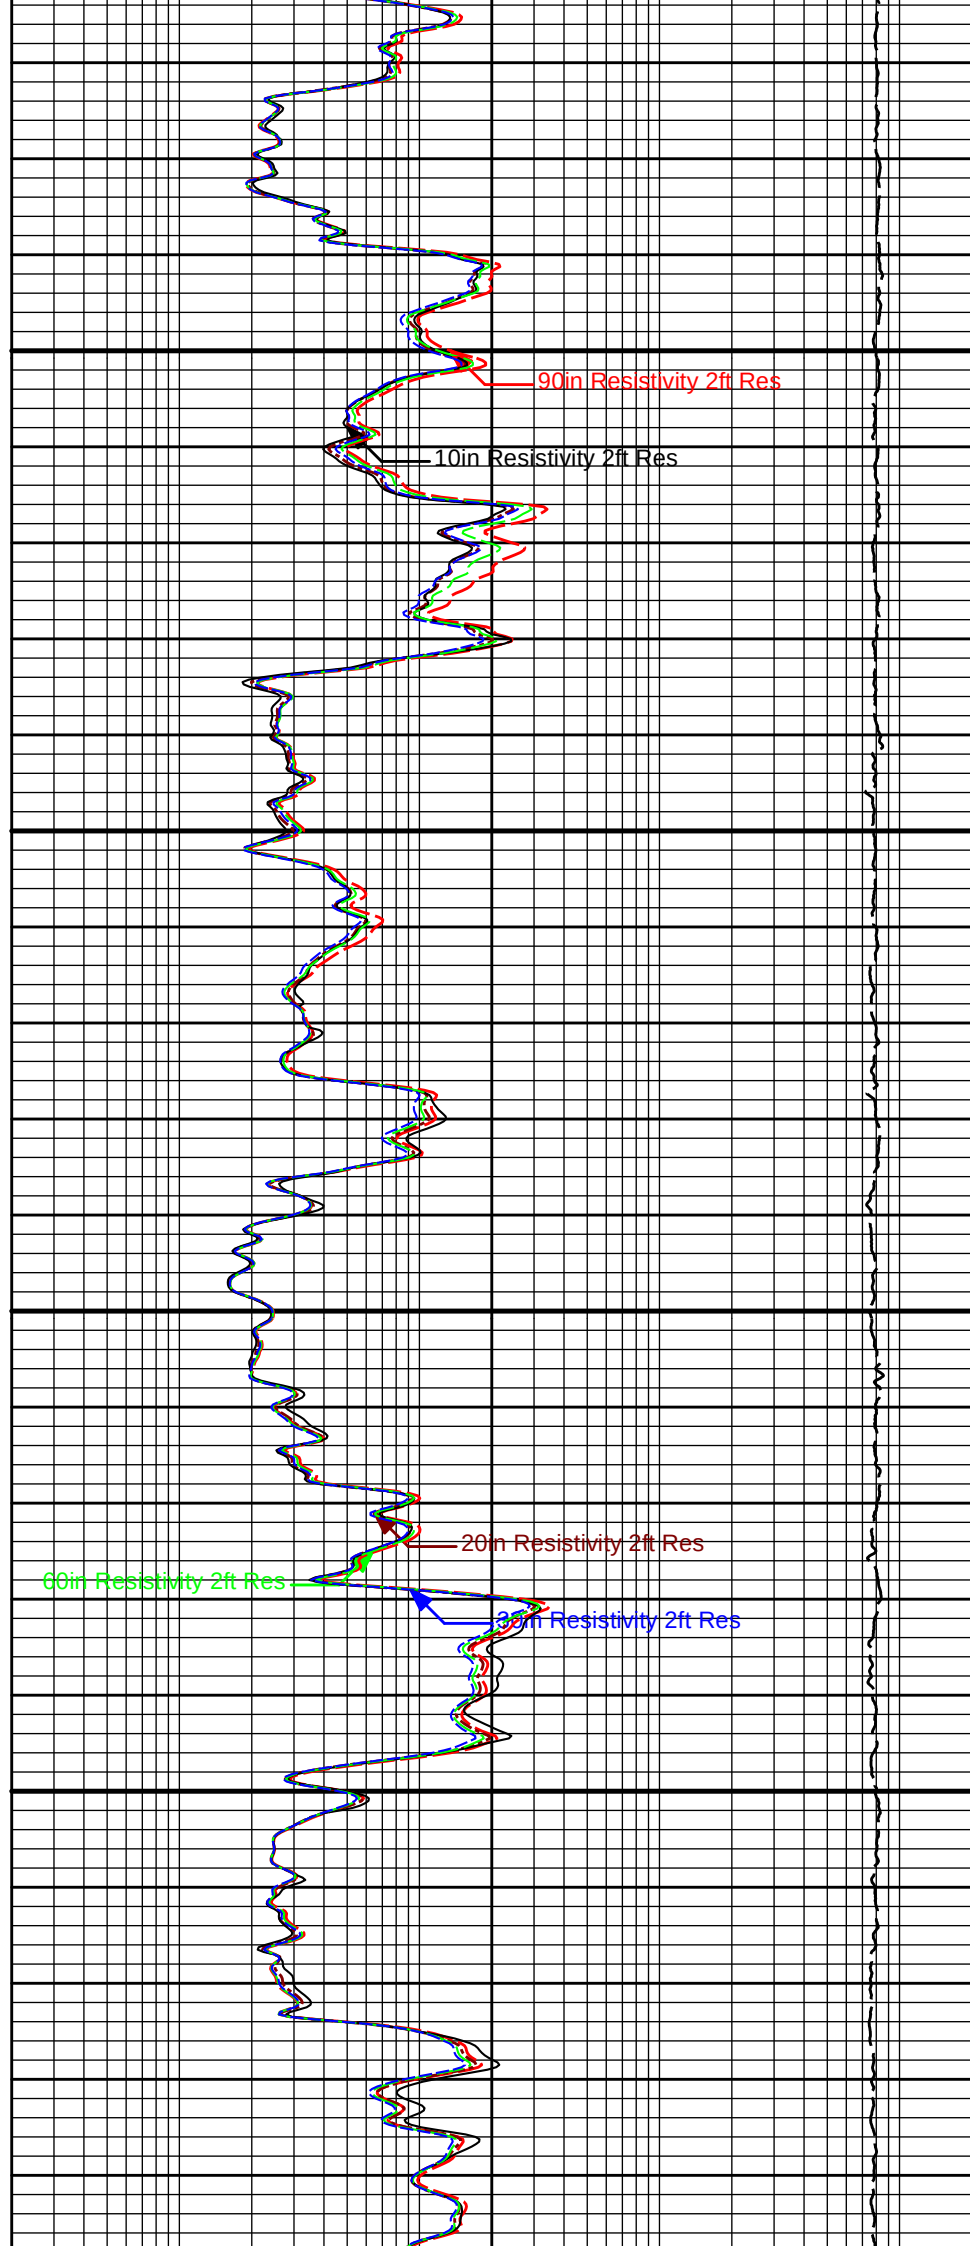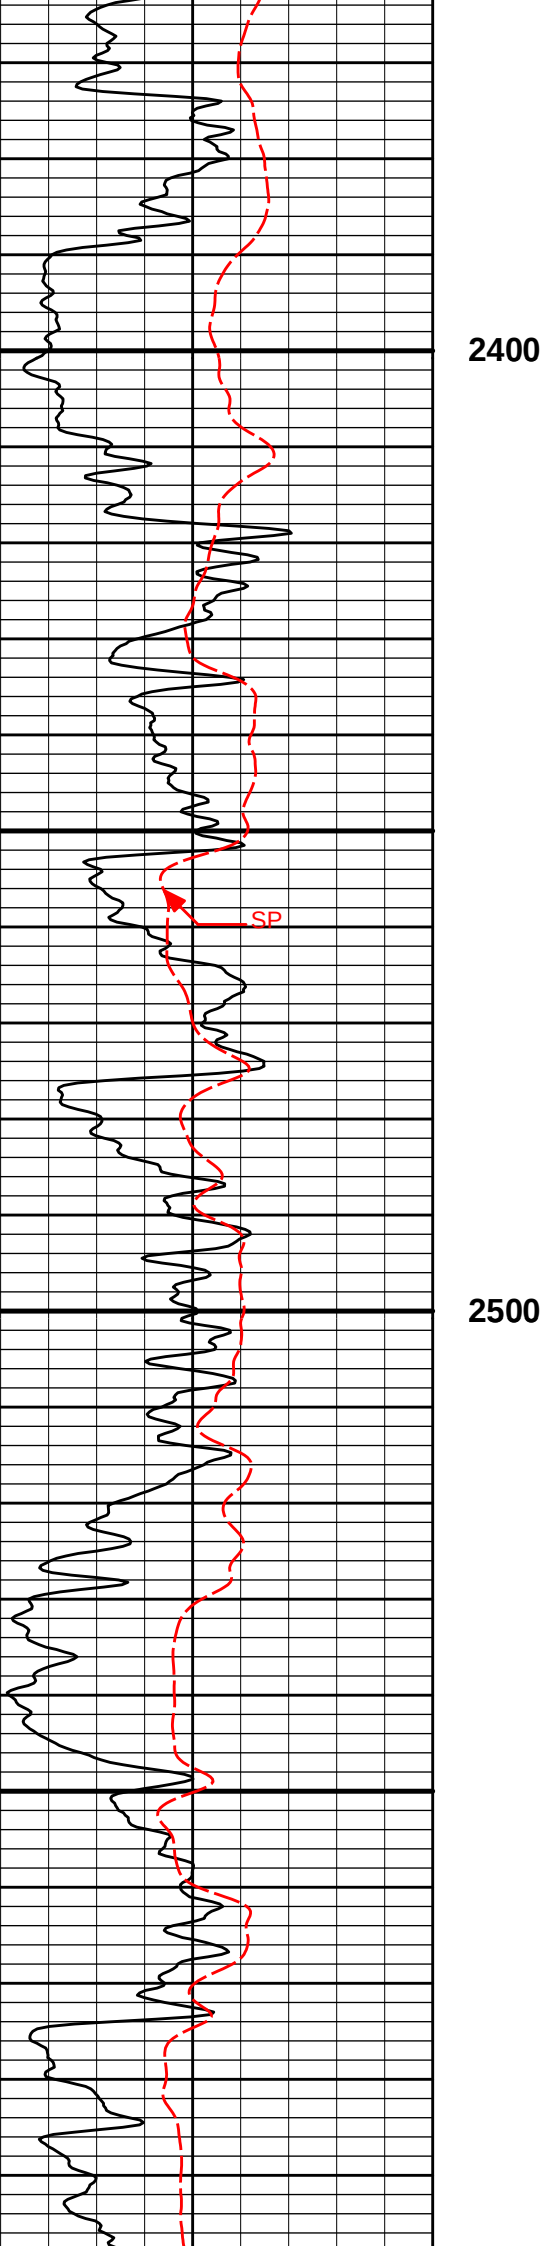


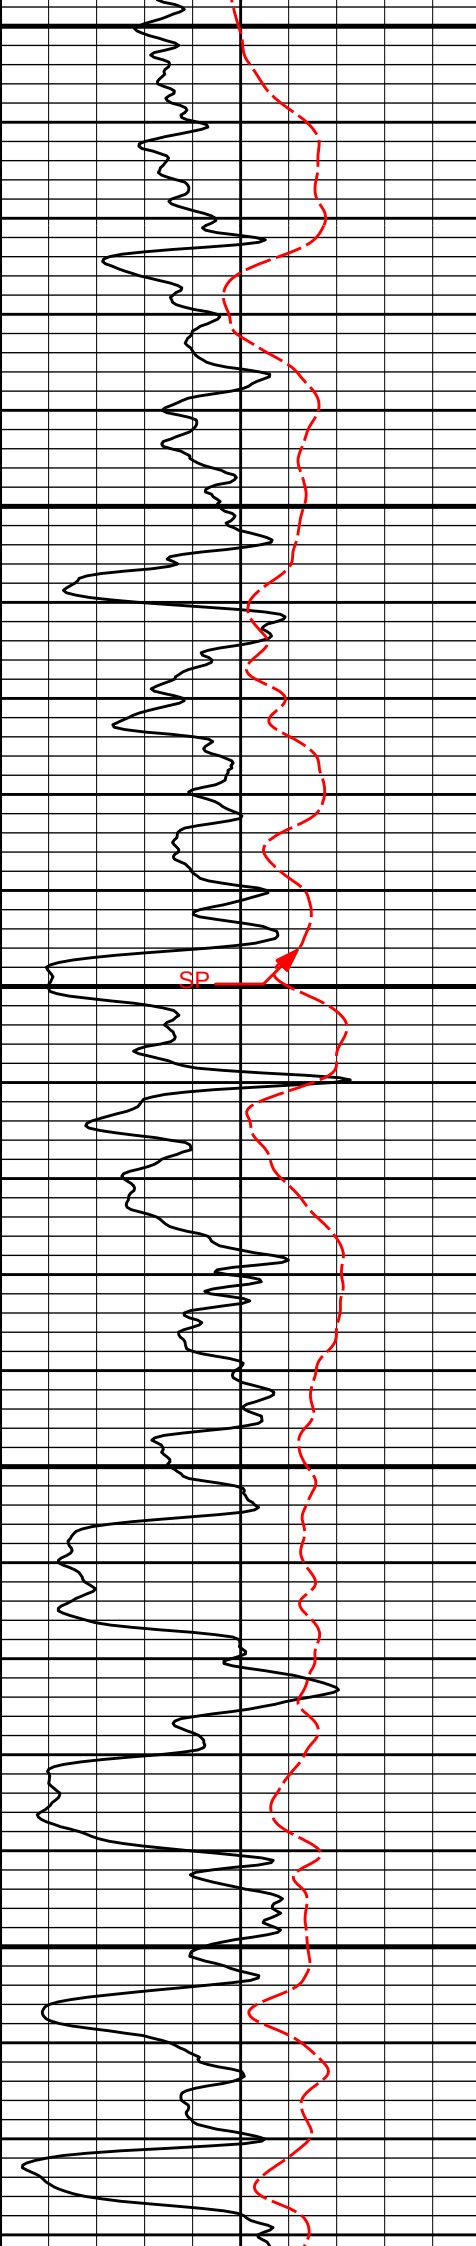


2600

2700


2800

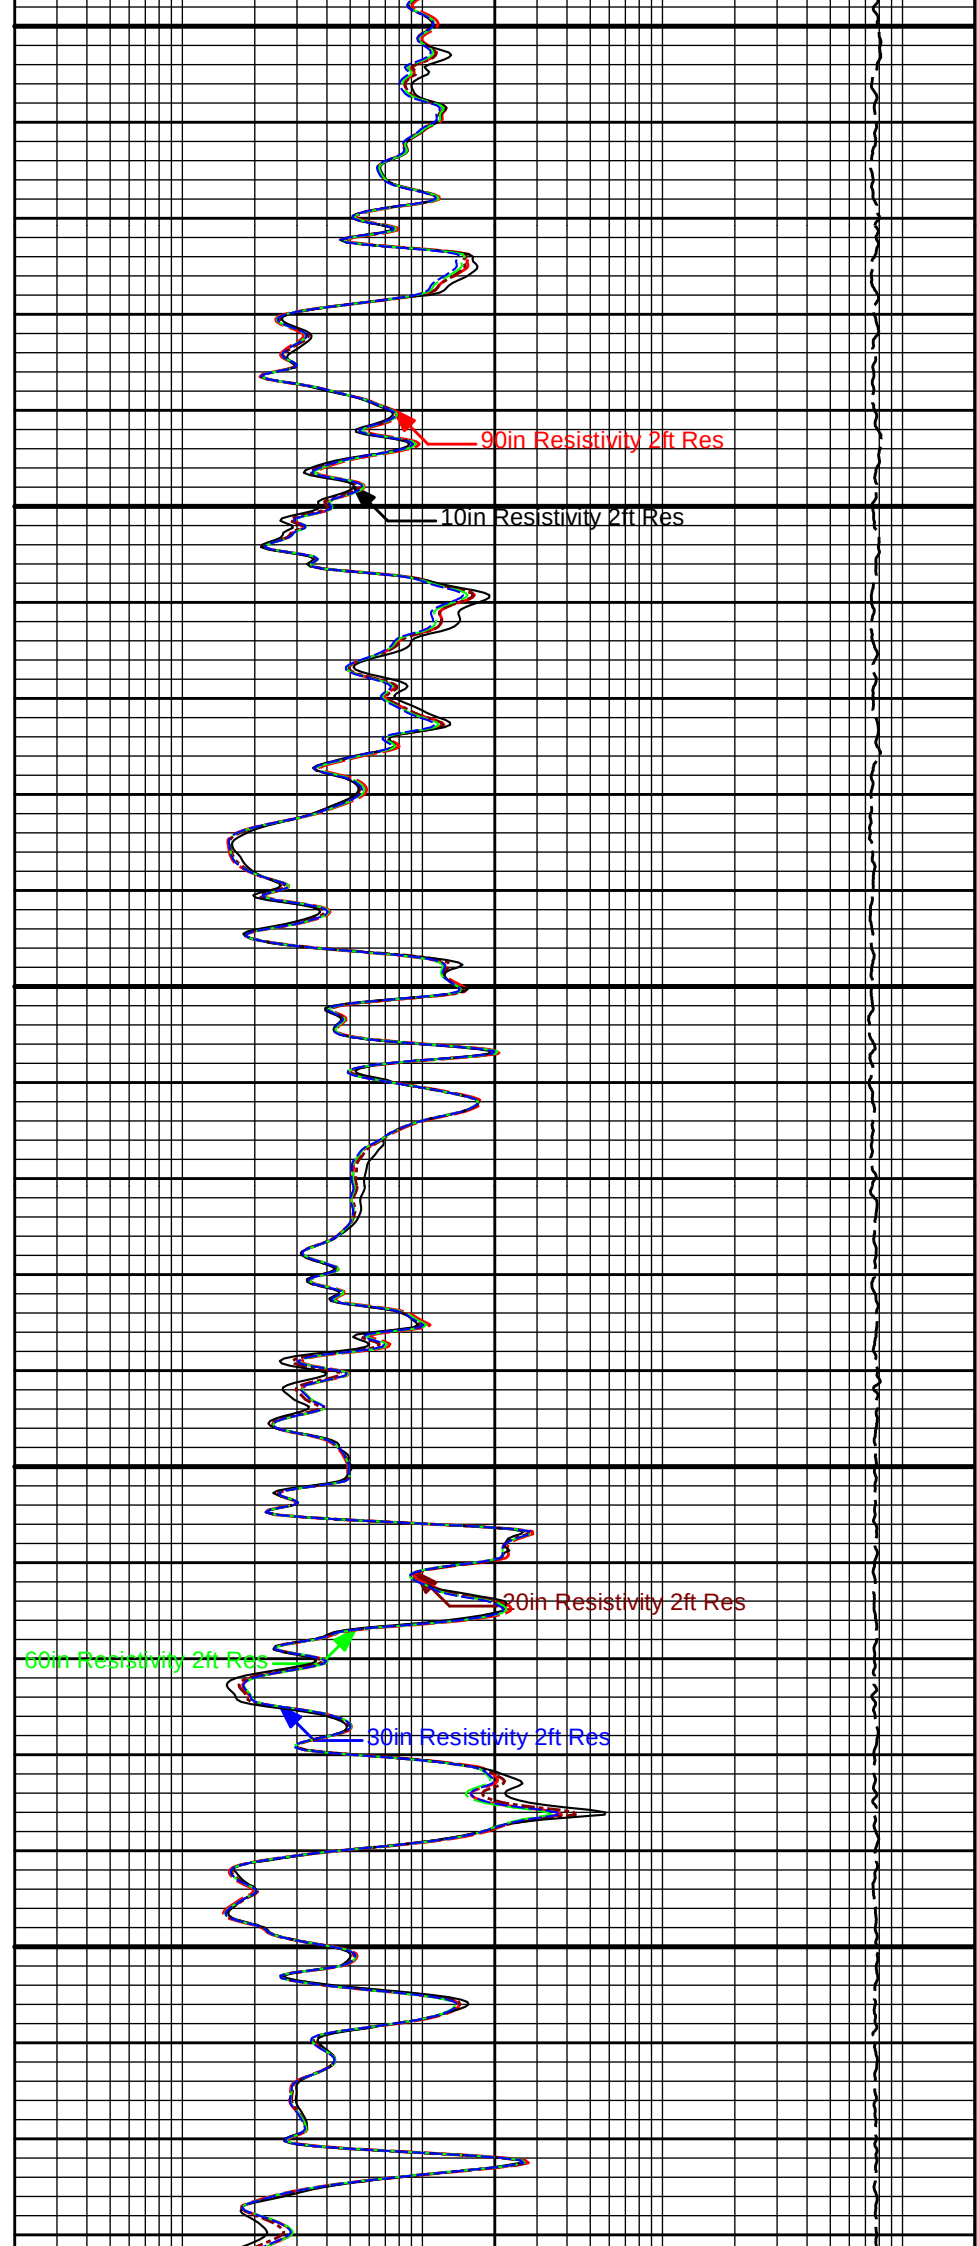


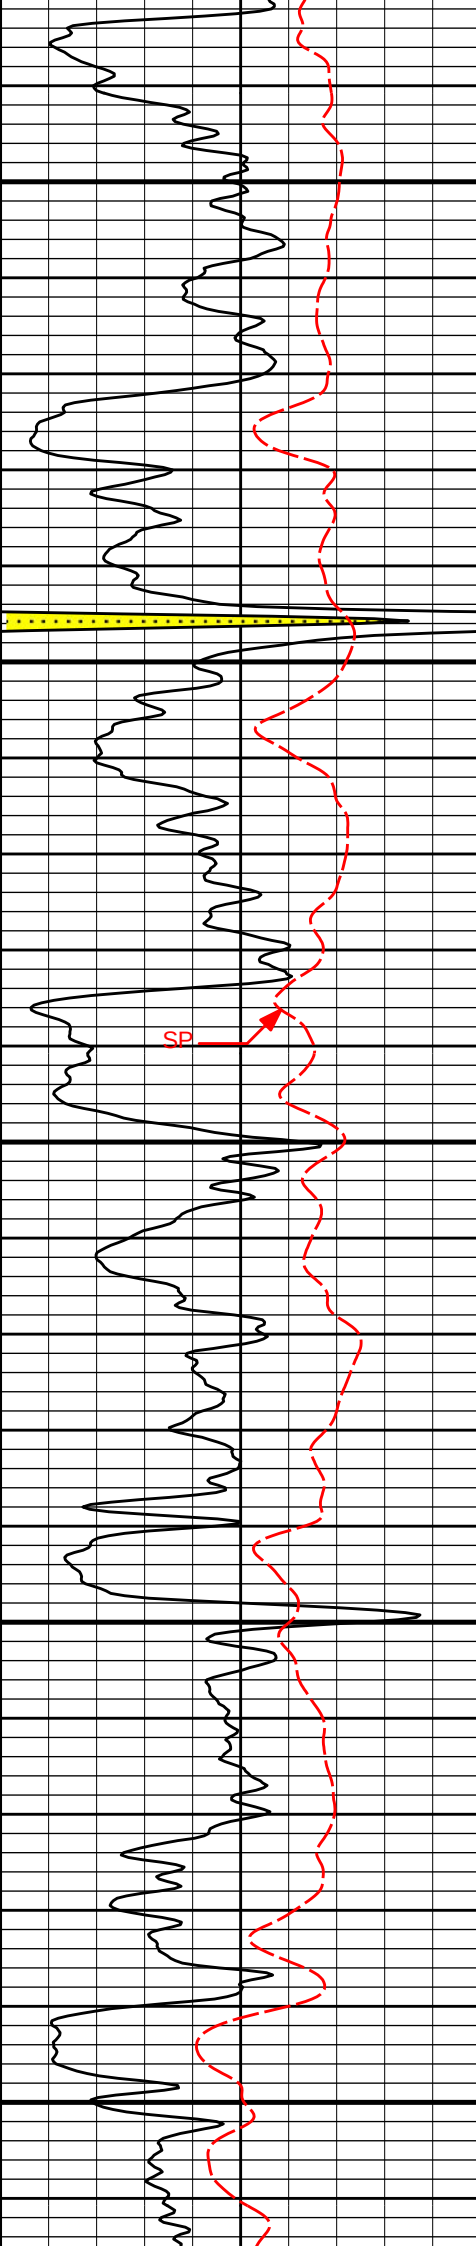

2900


3000

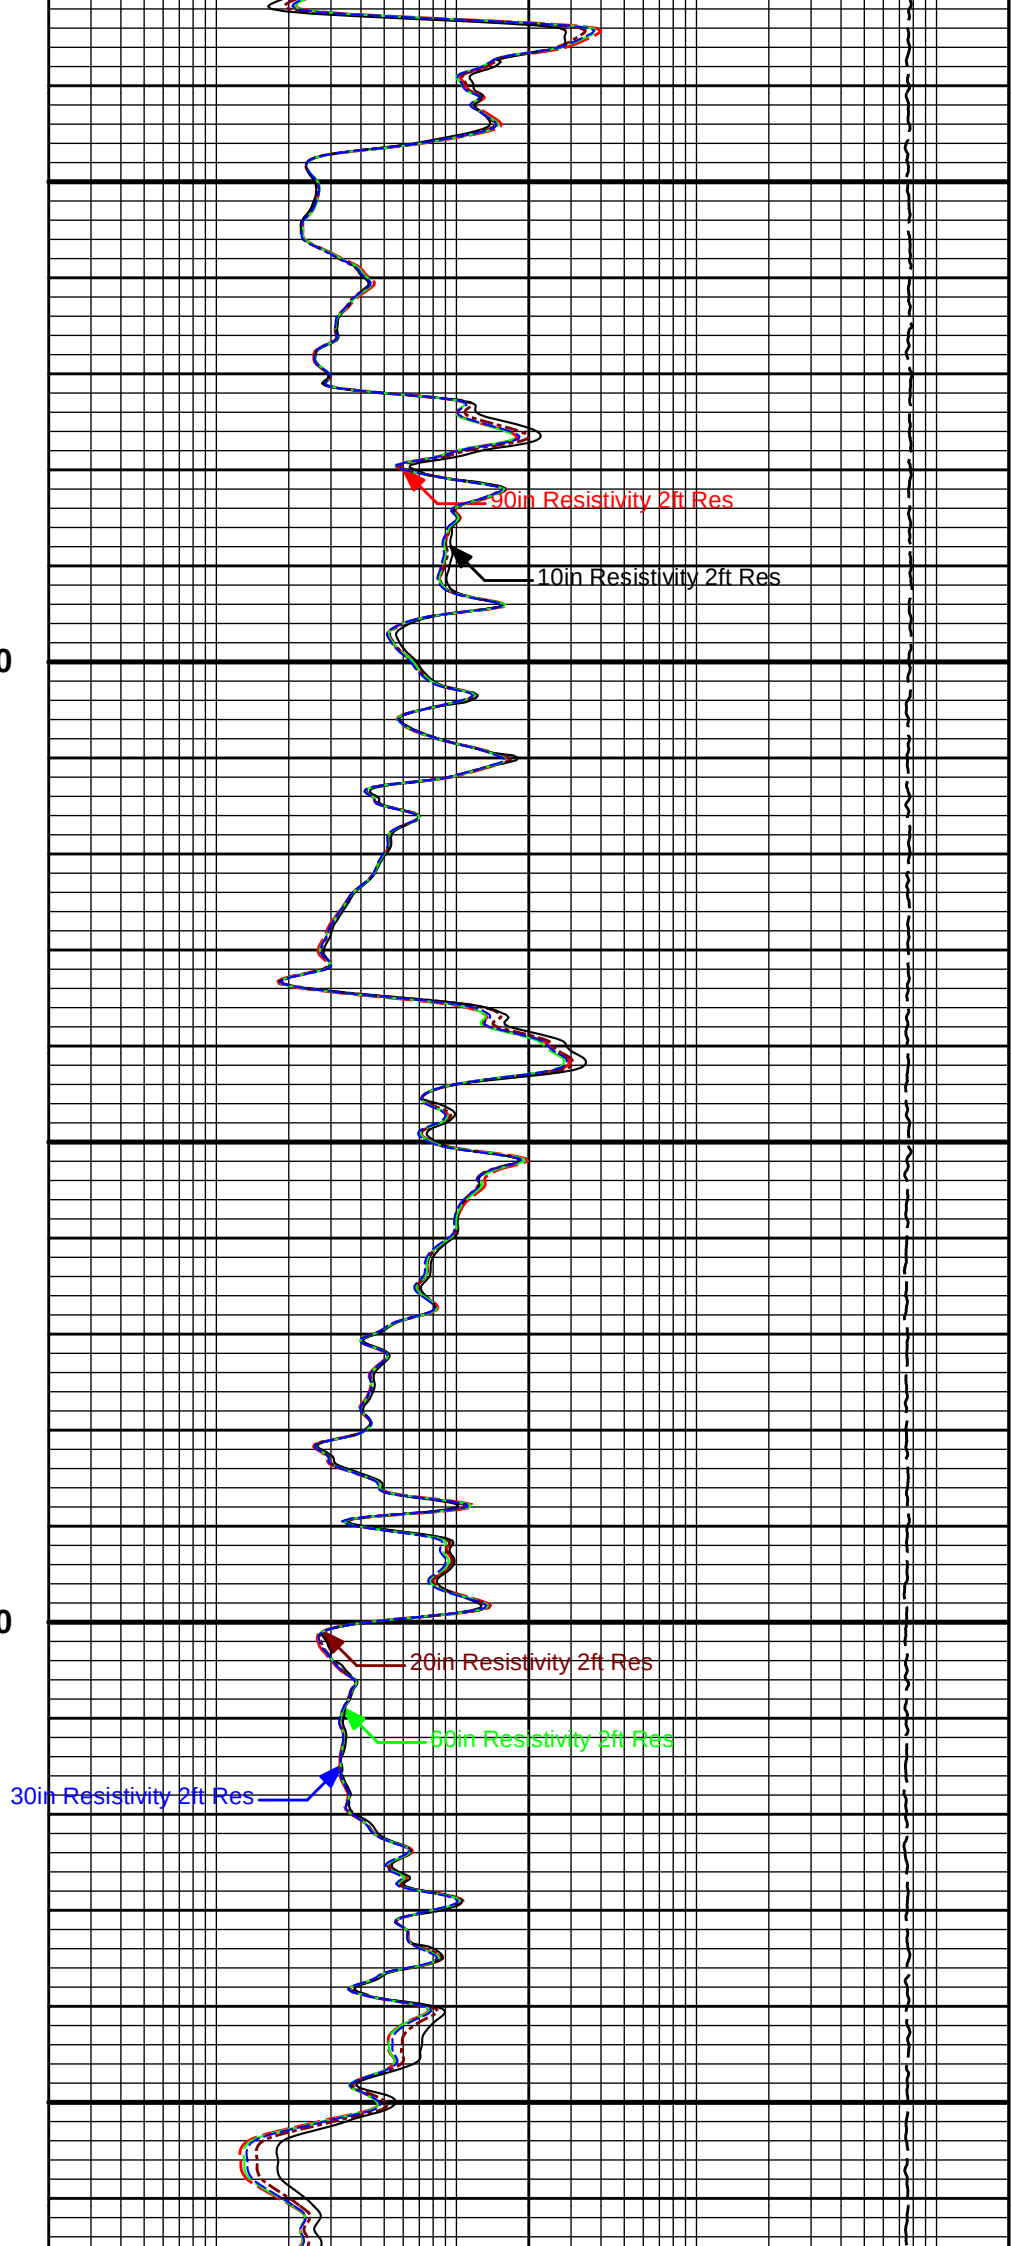


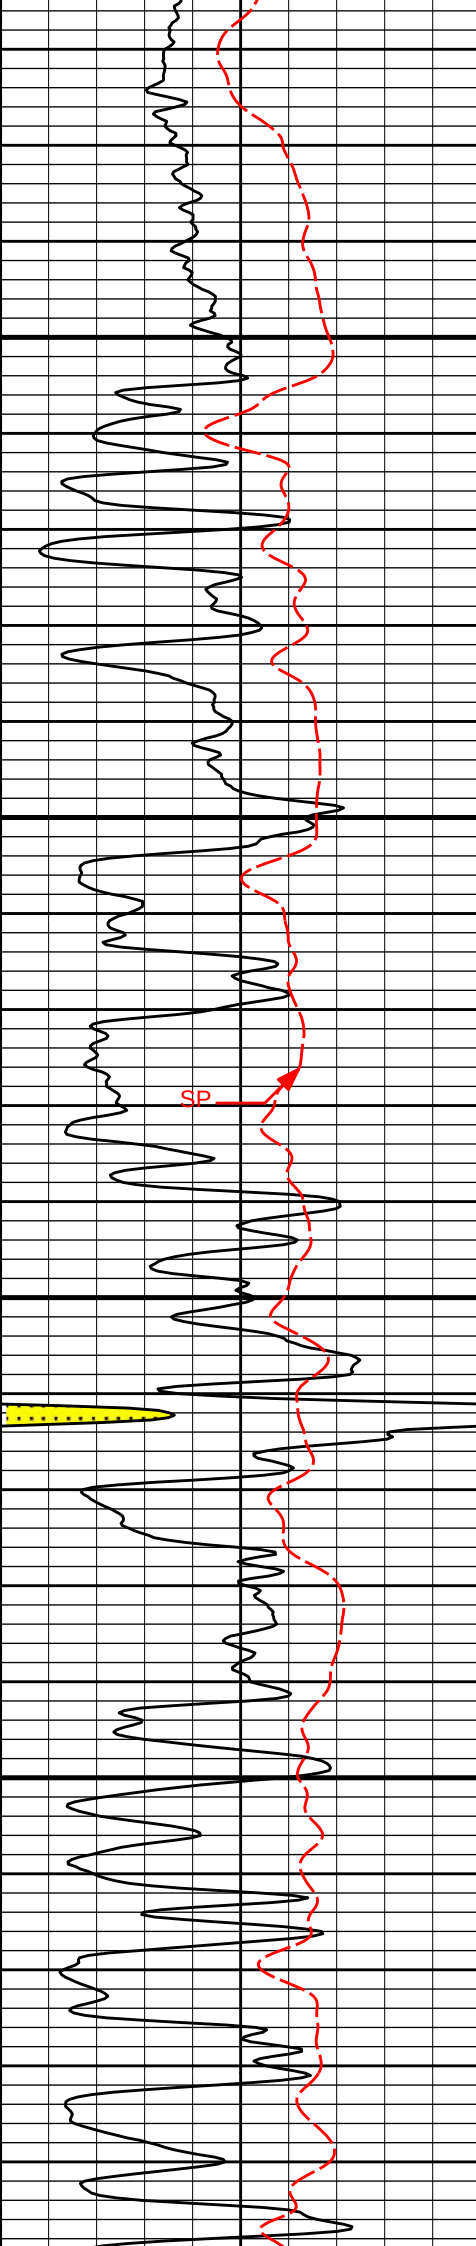

3100

3200

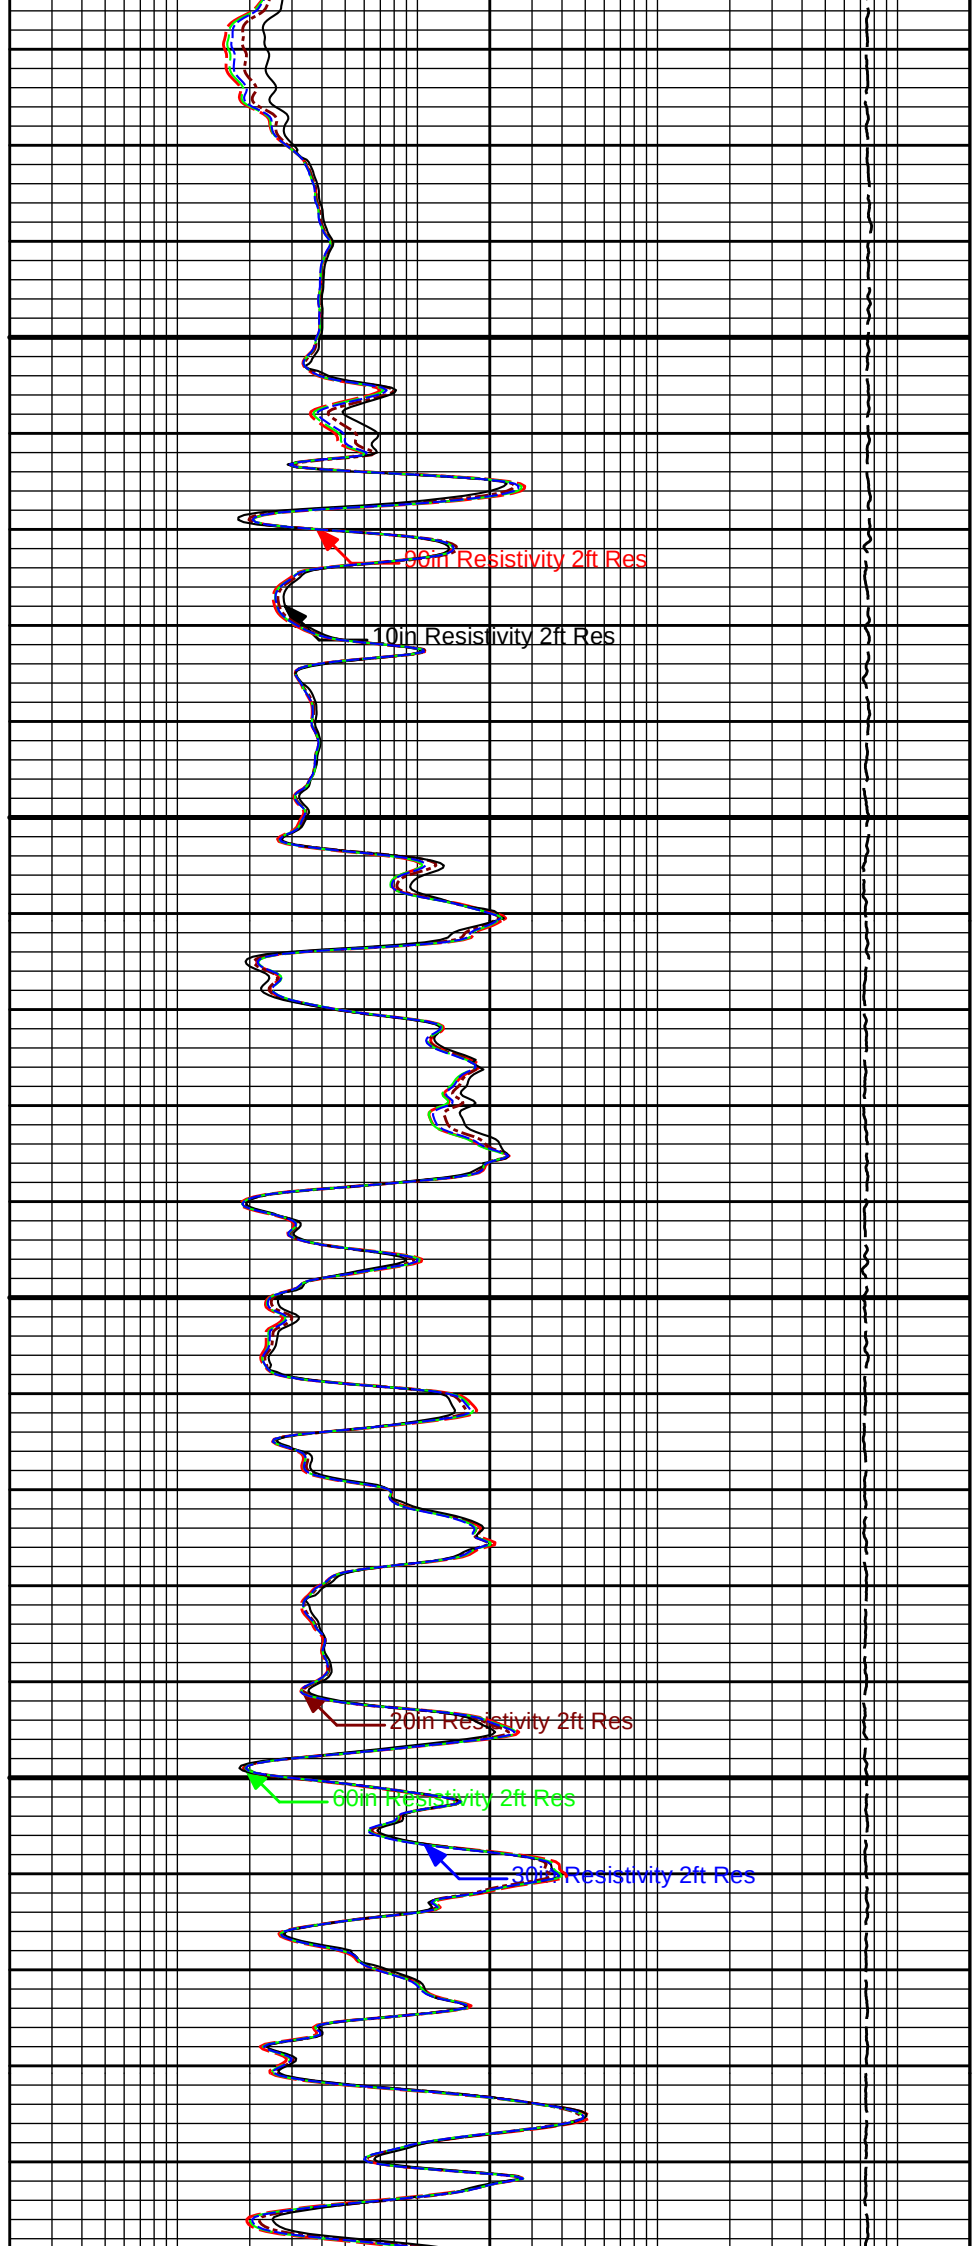


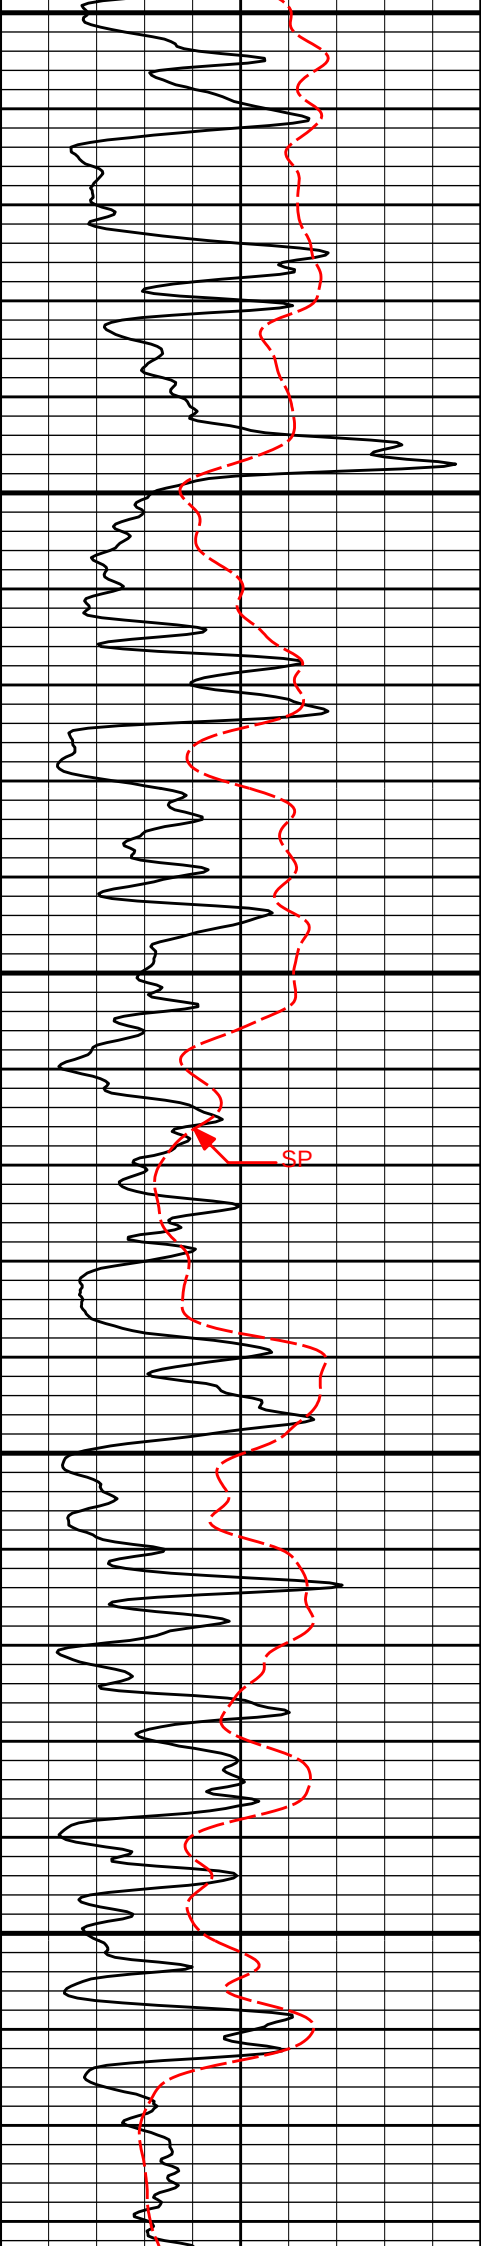


3300

3400


3500

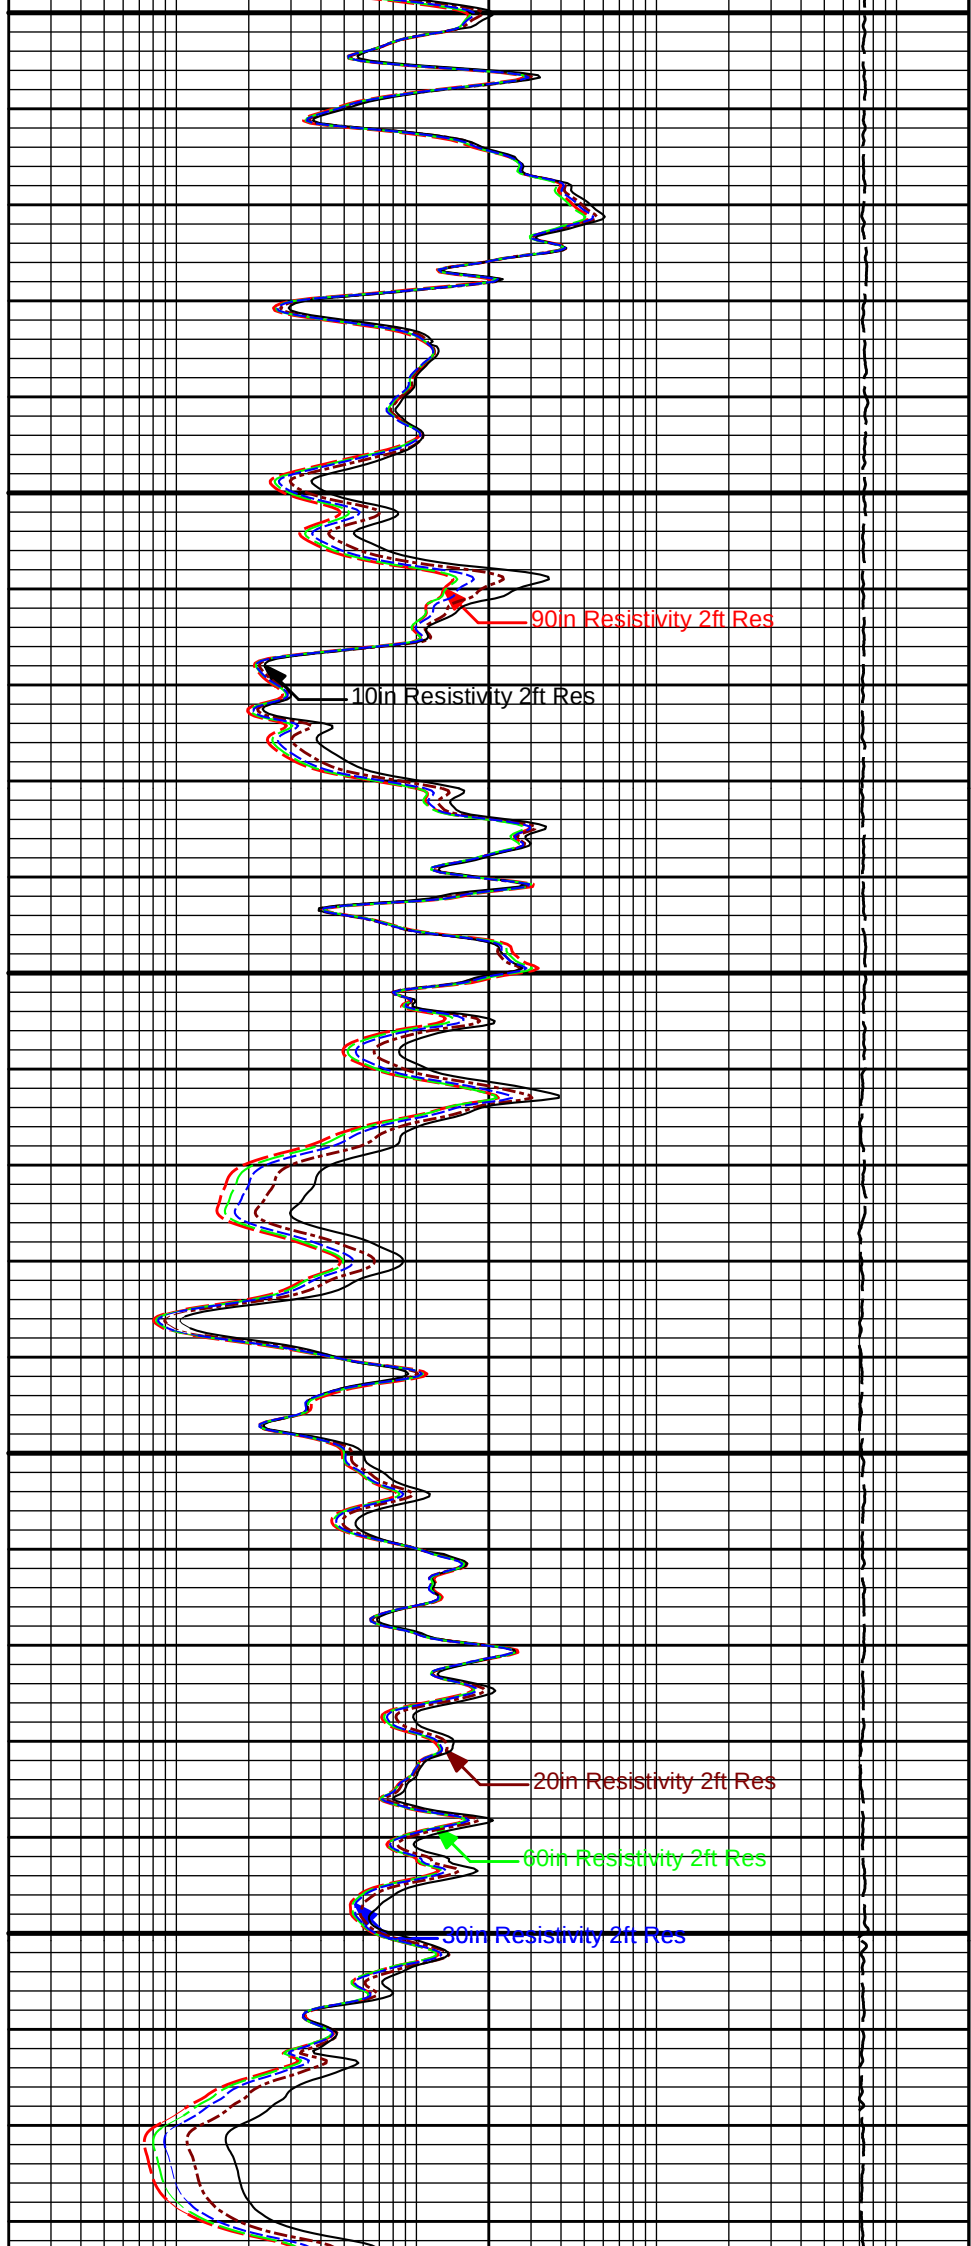


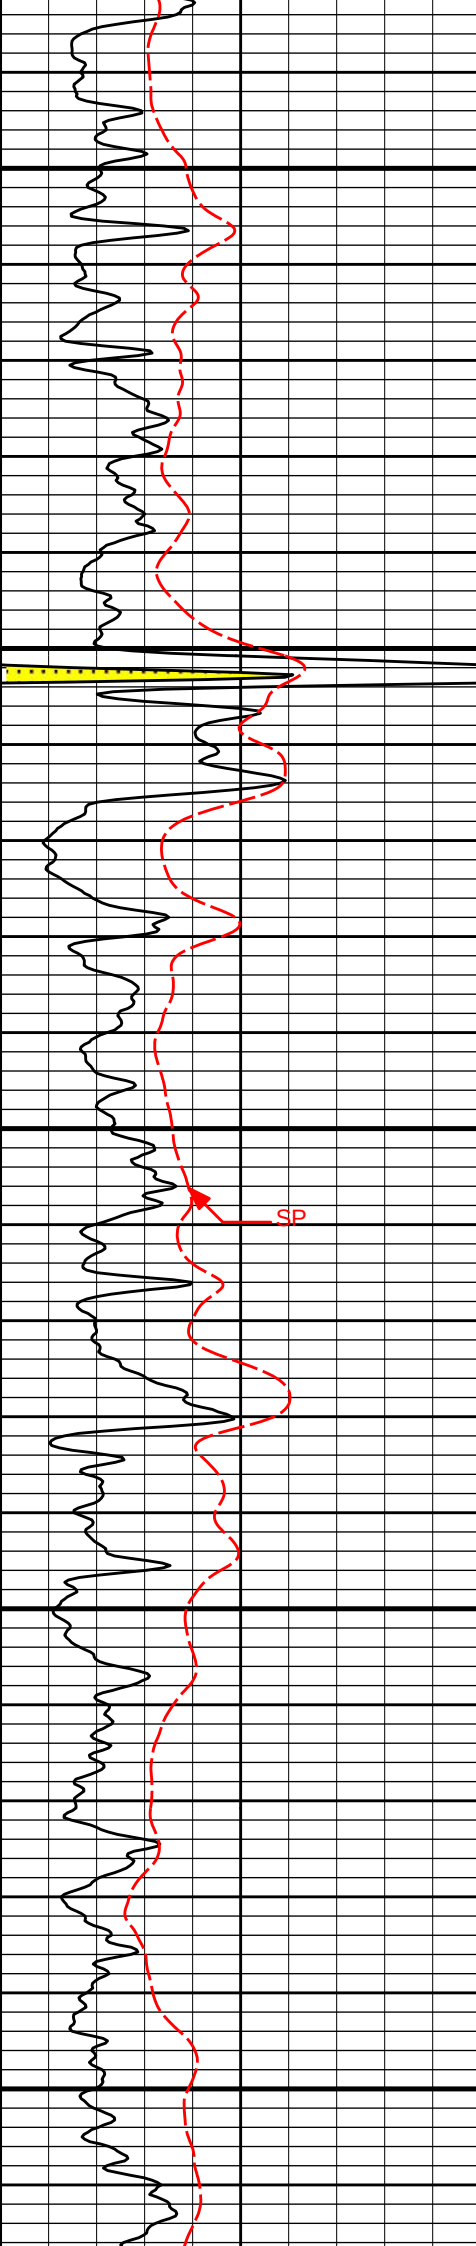

3600

3700

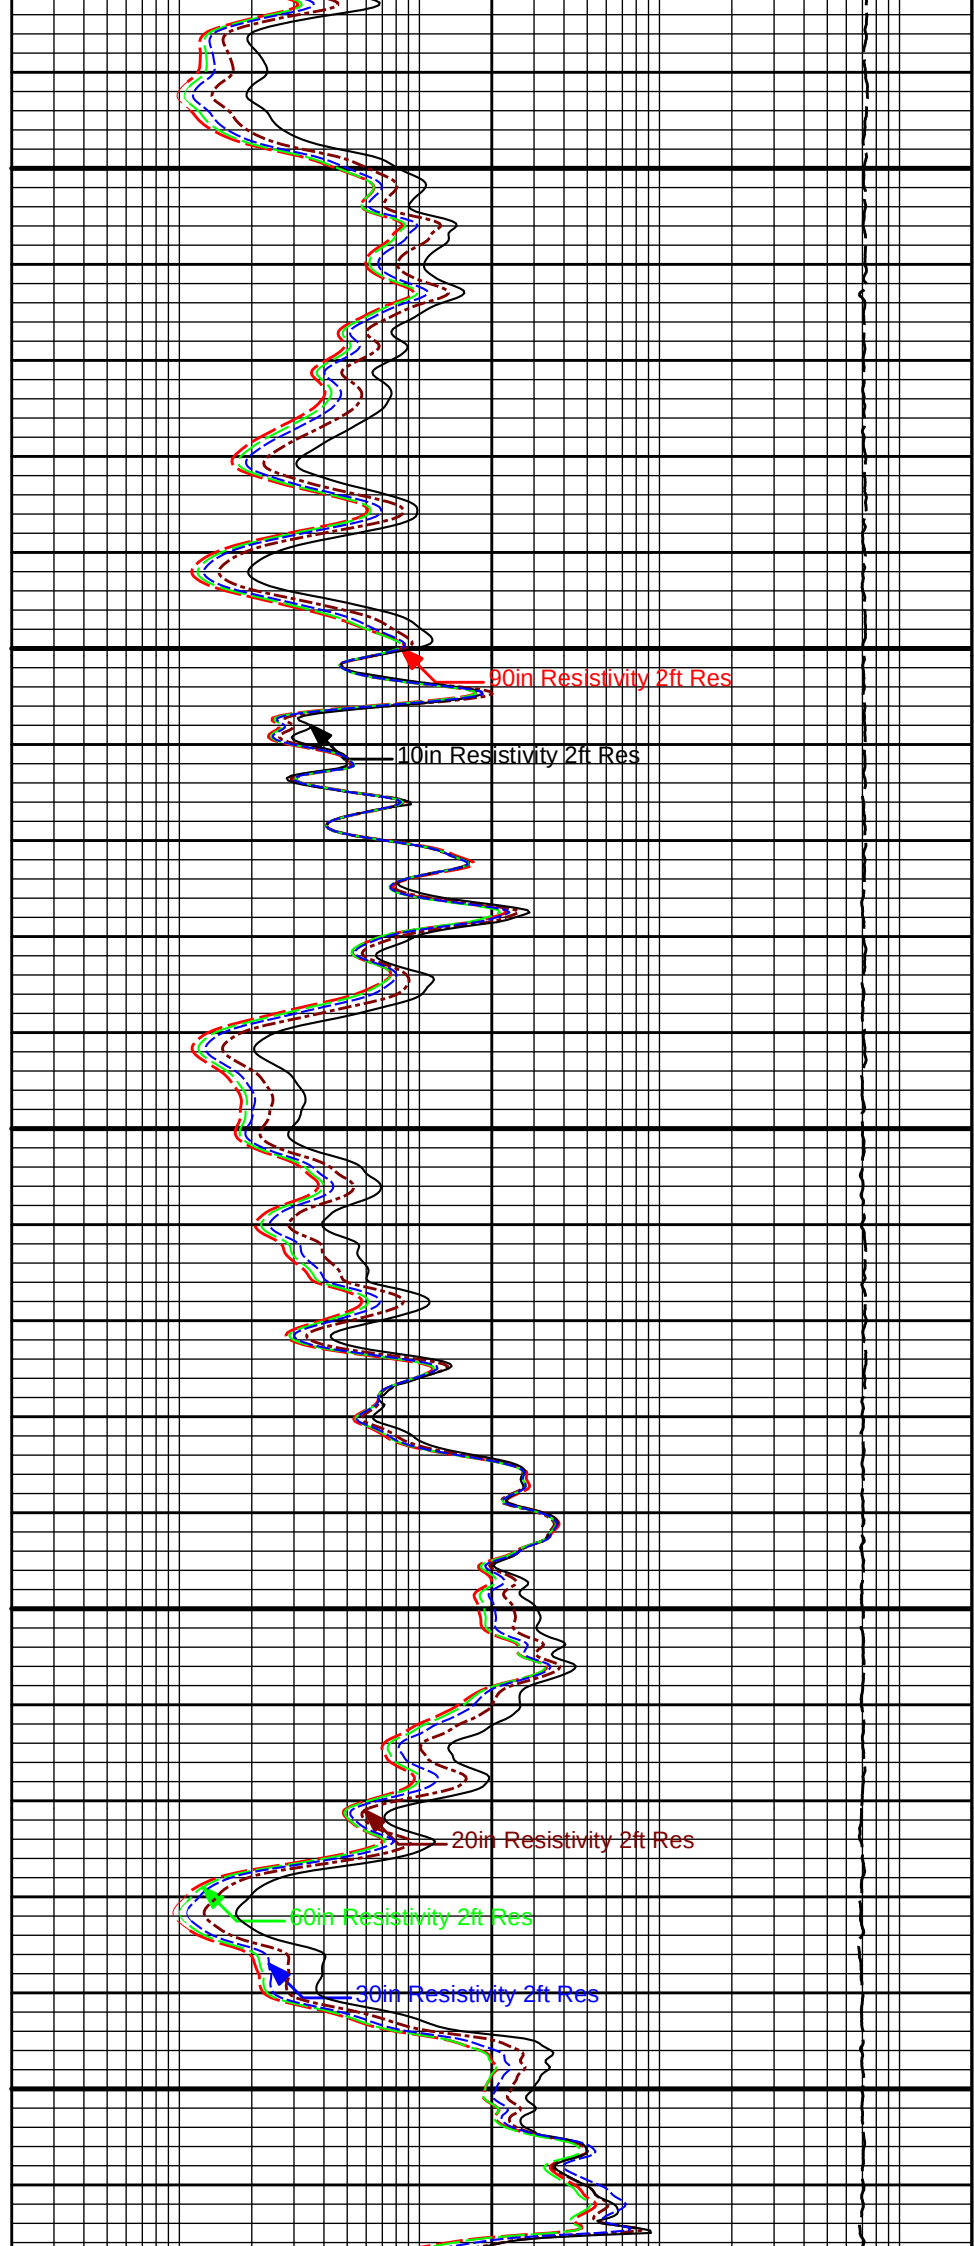


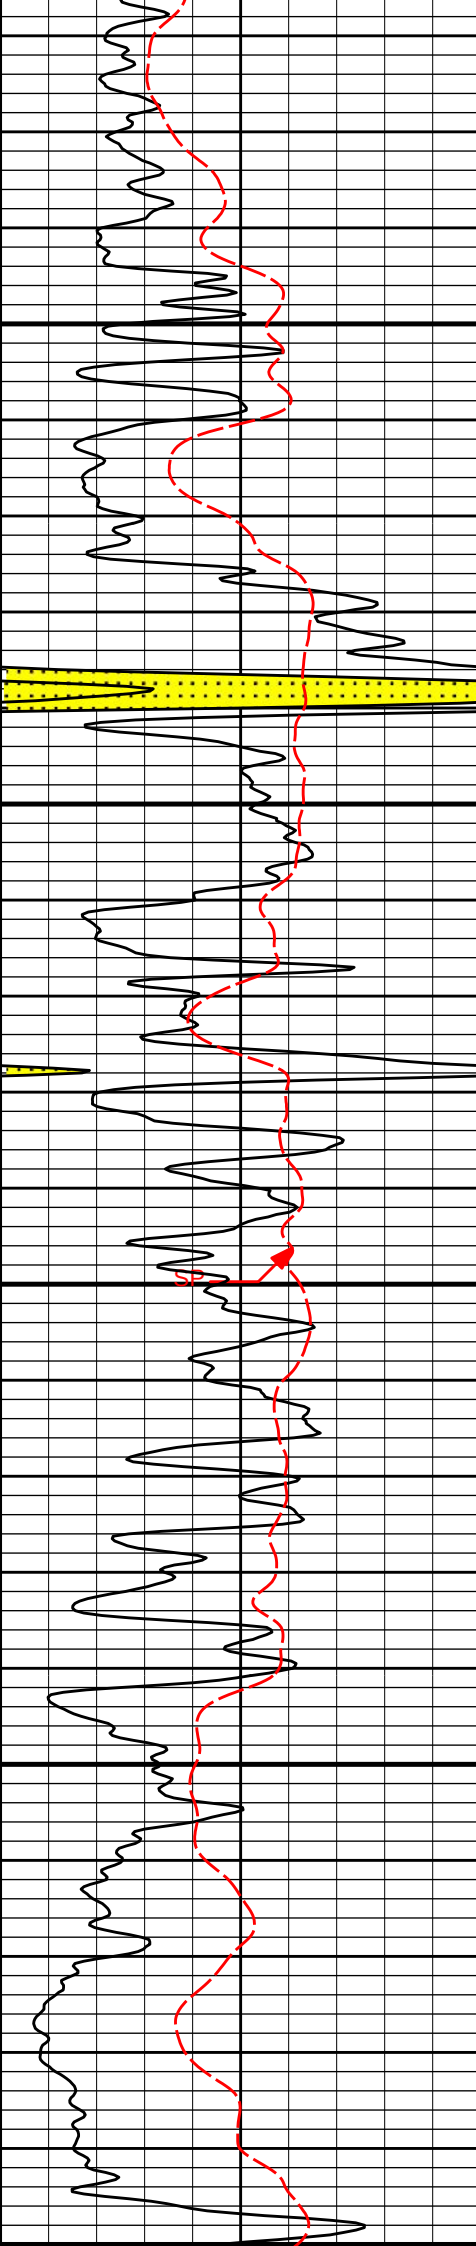


3800

3900

4000

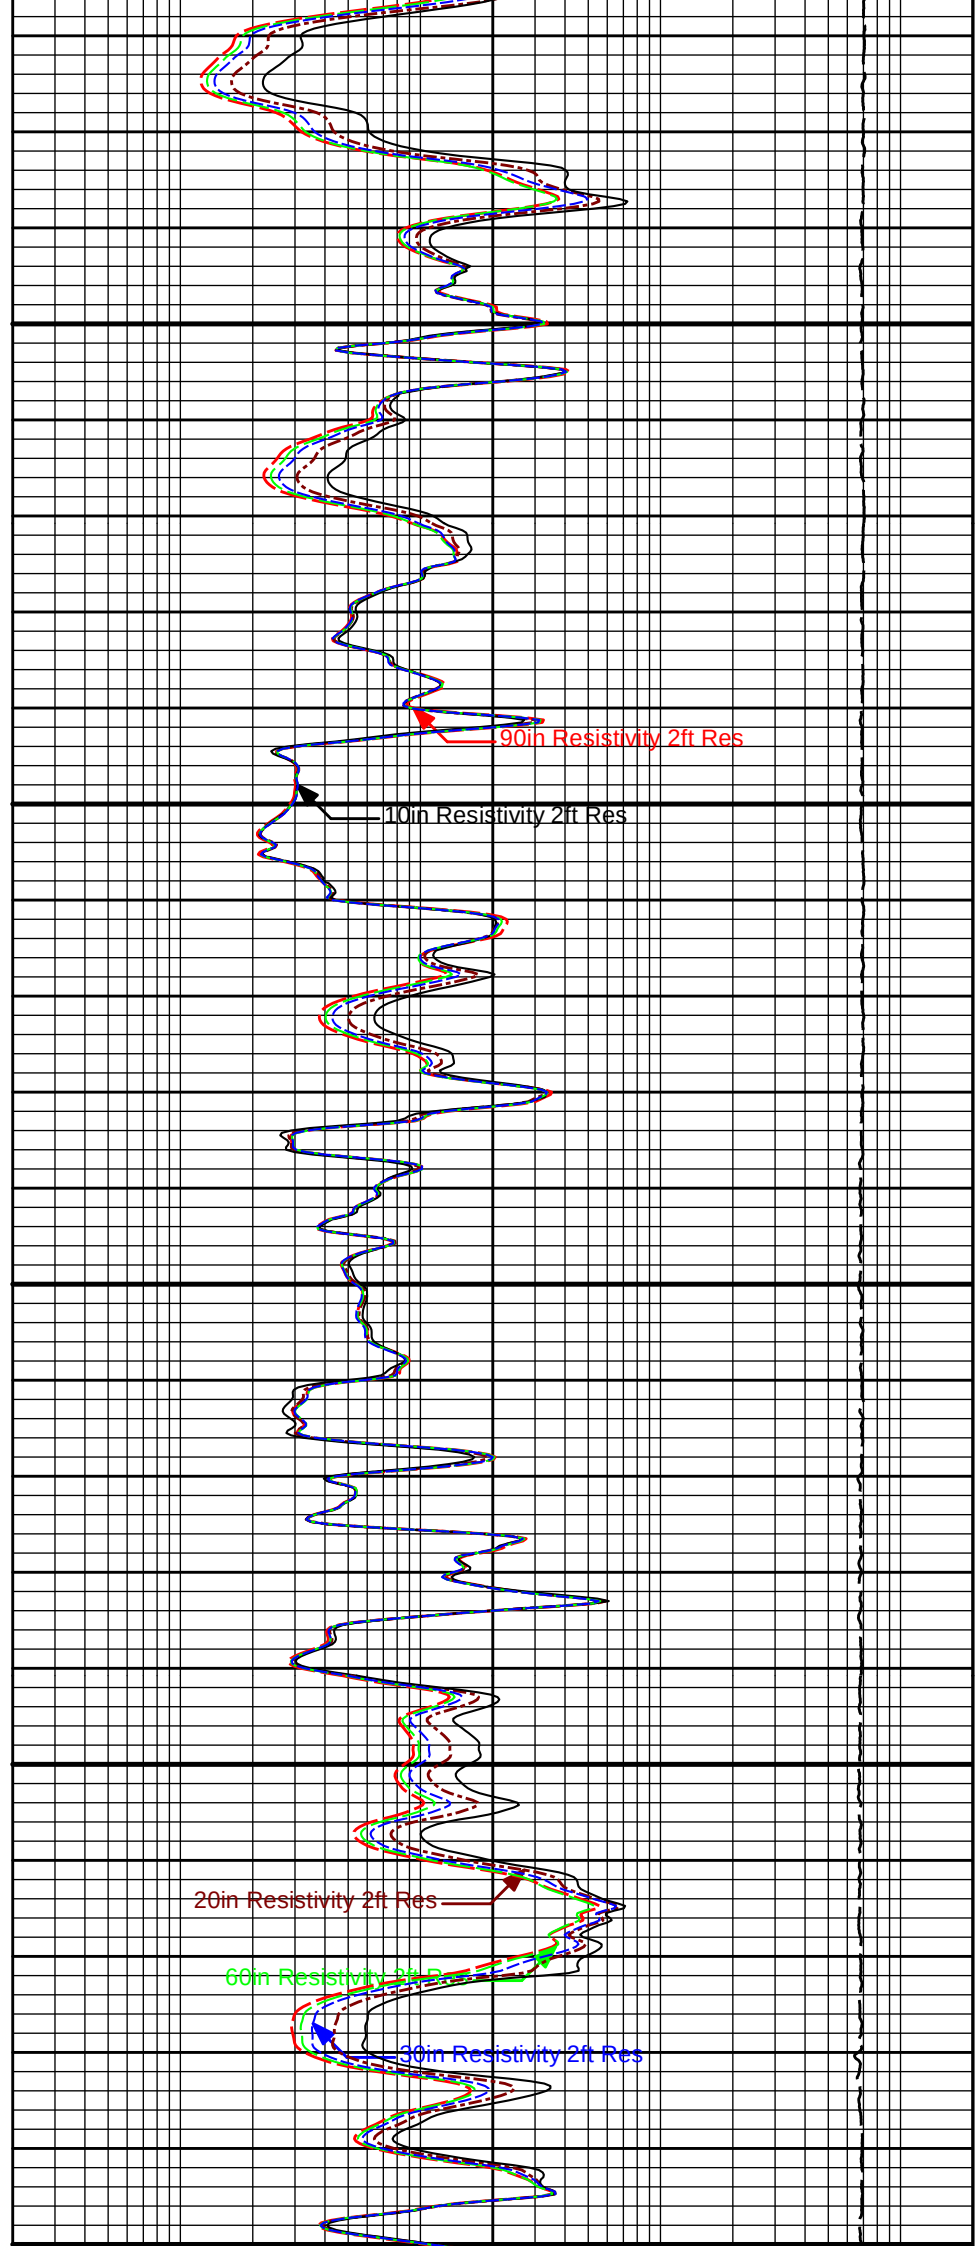


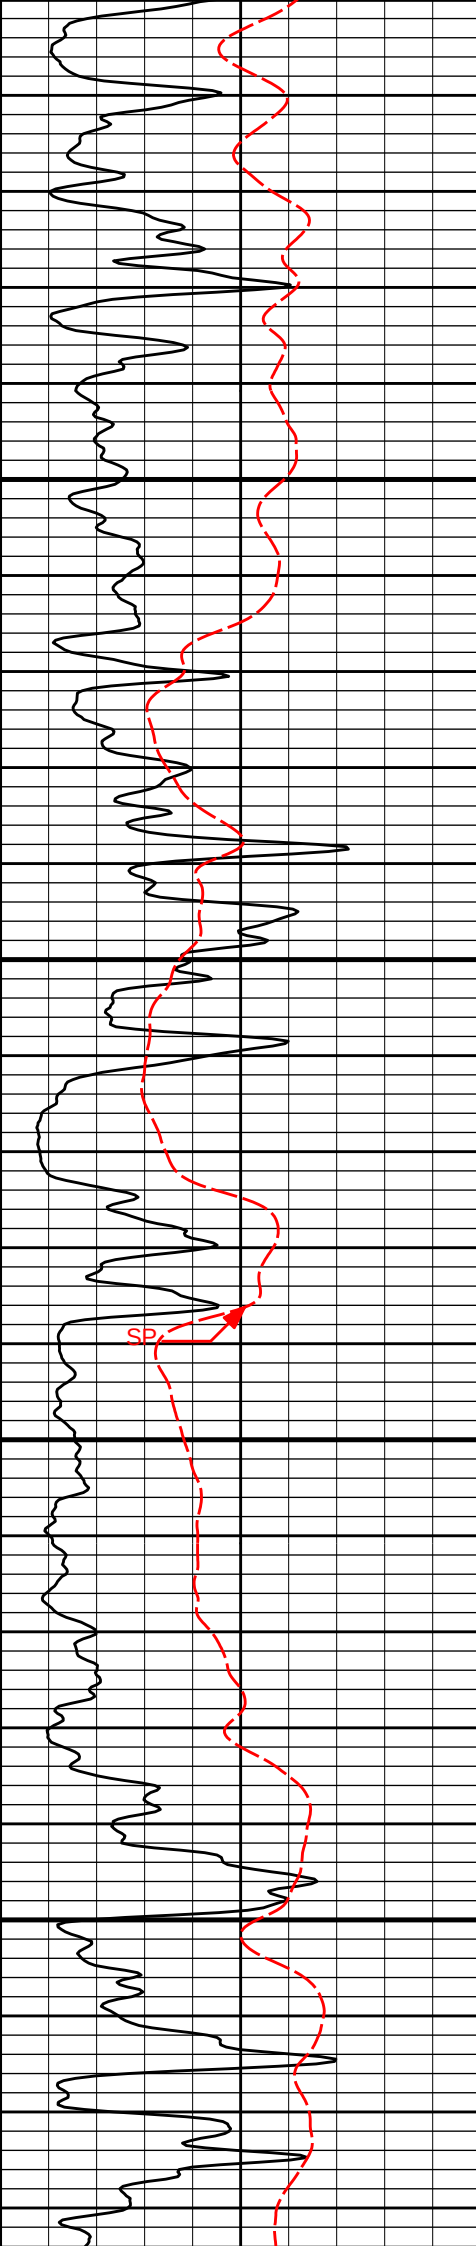


4000

4100


4200

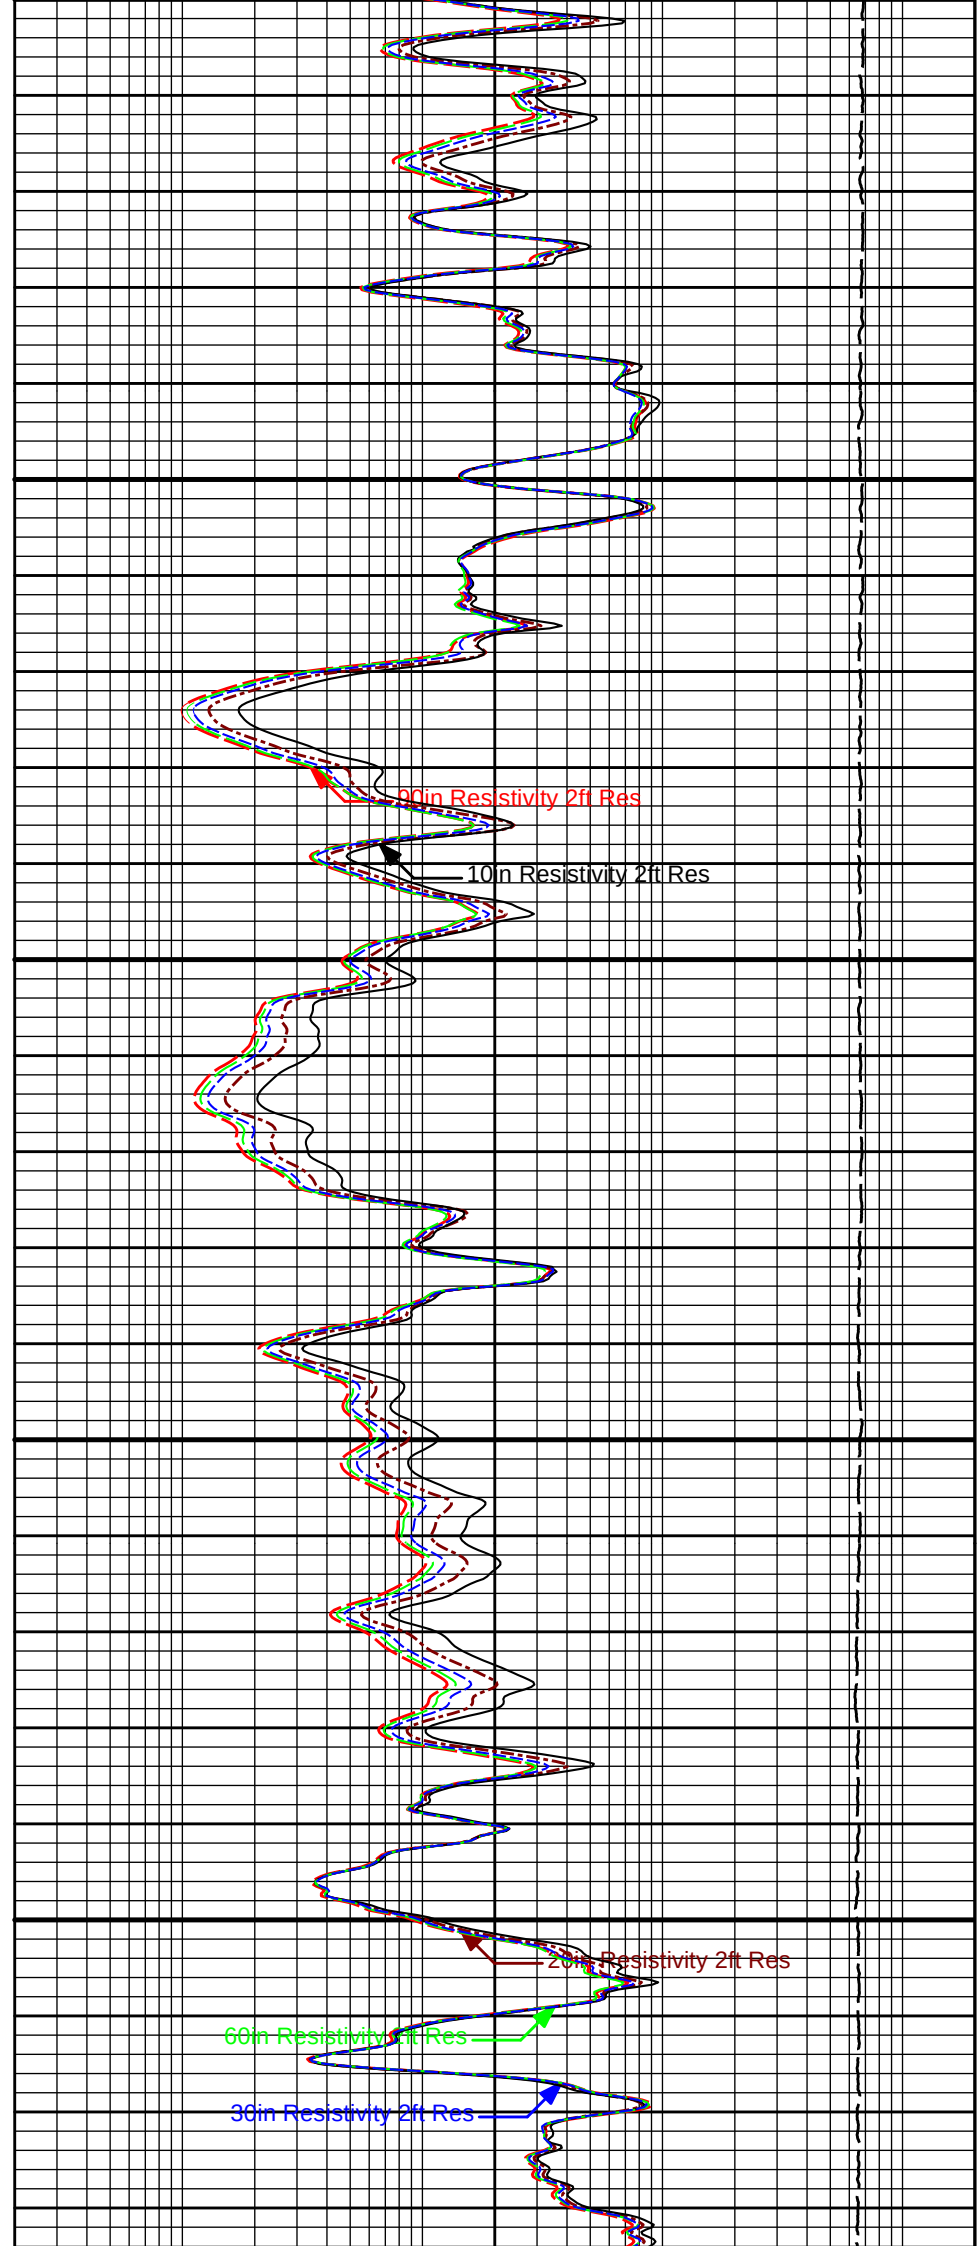


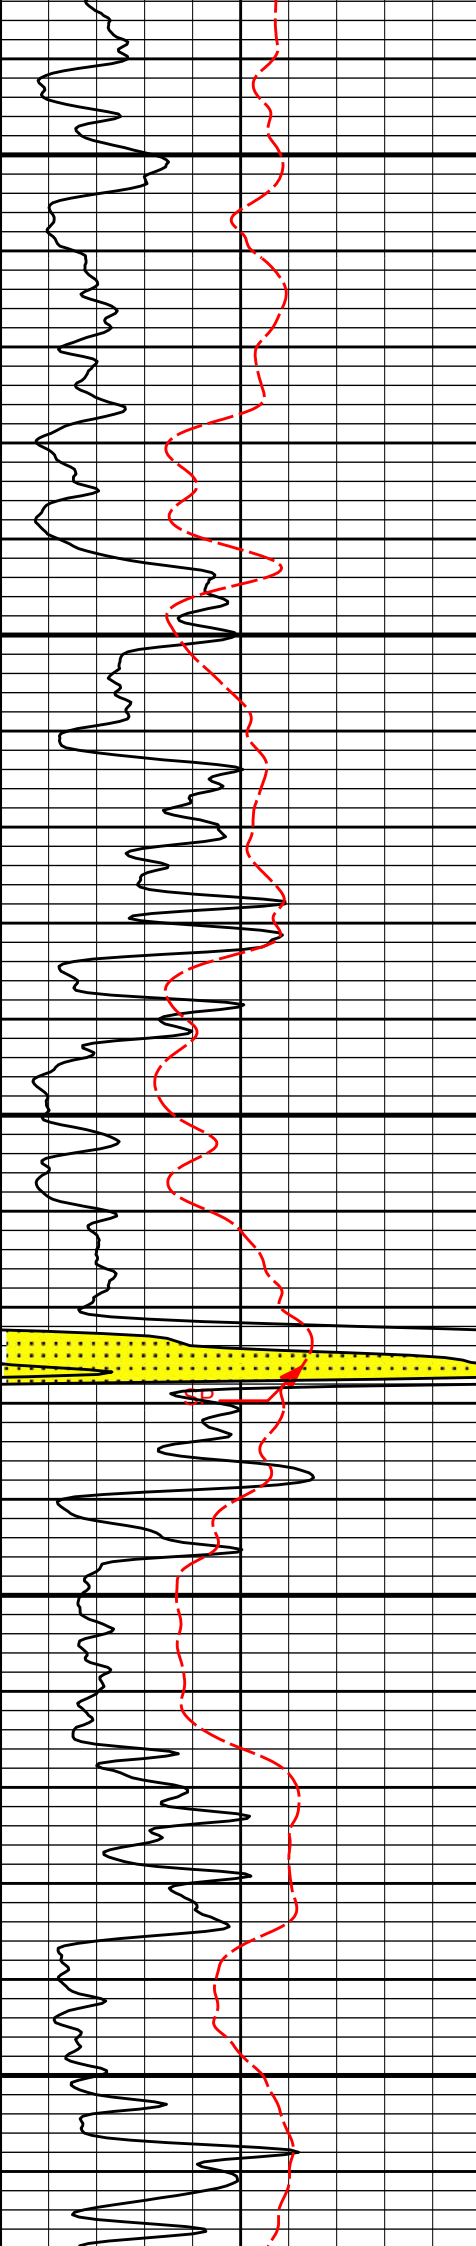

4300

4400

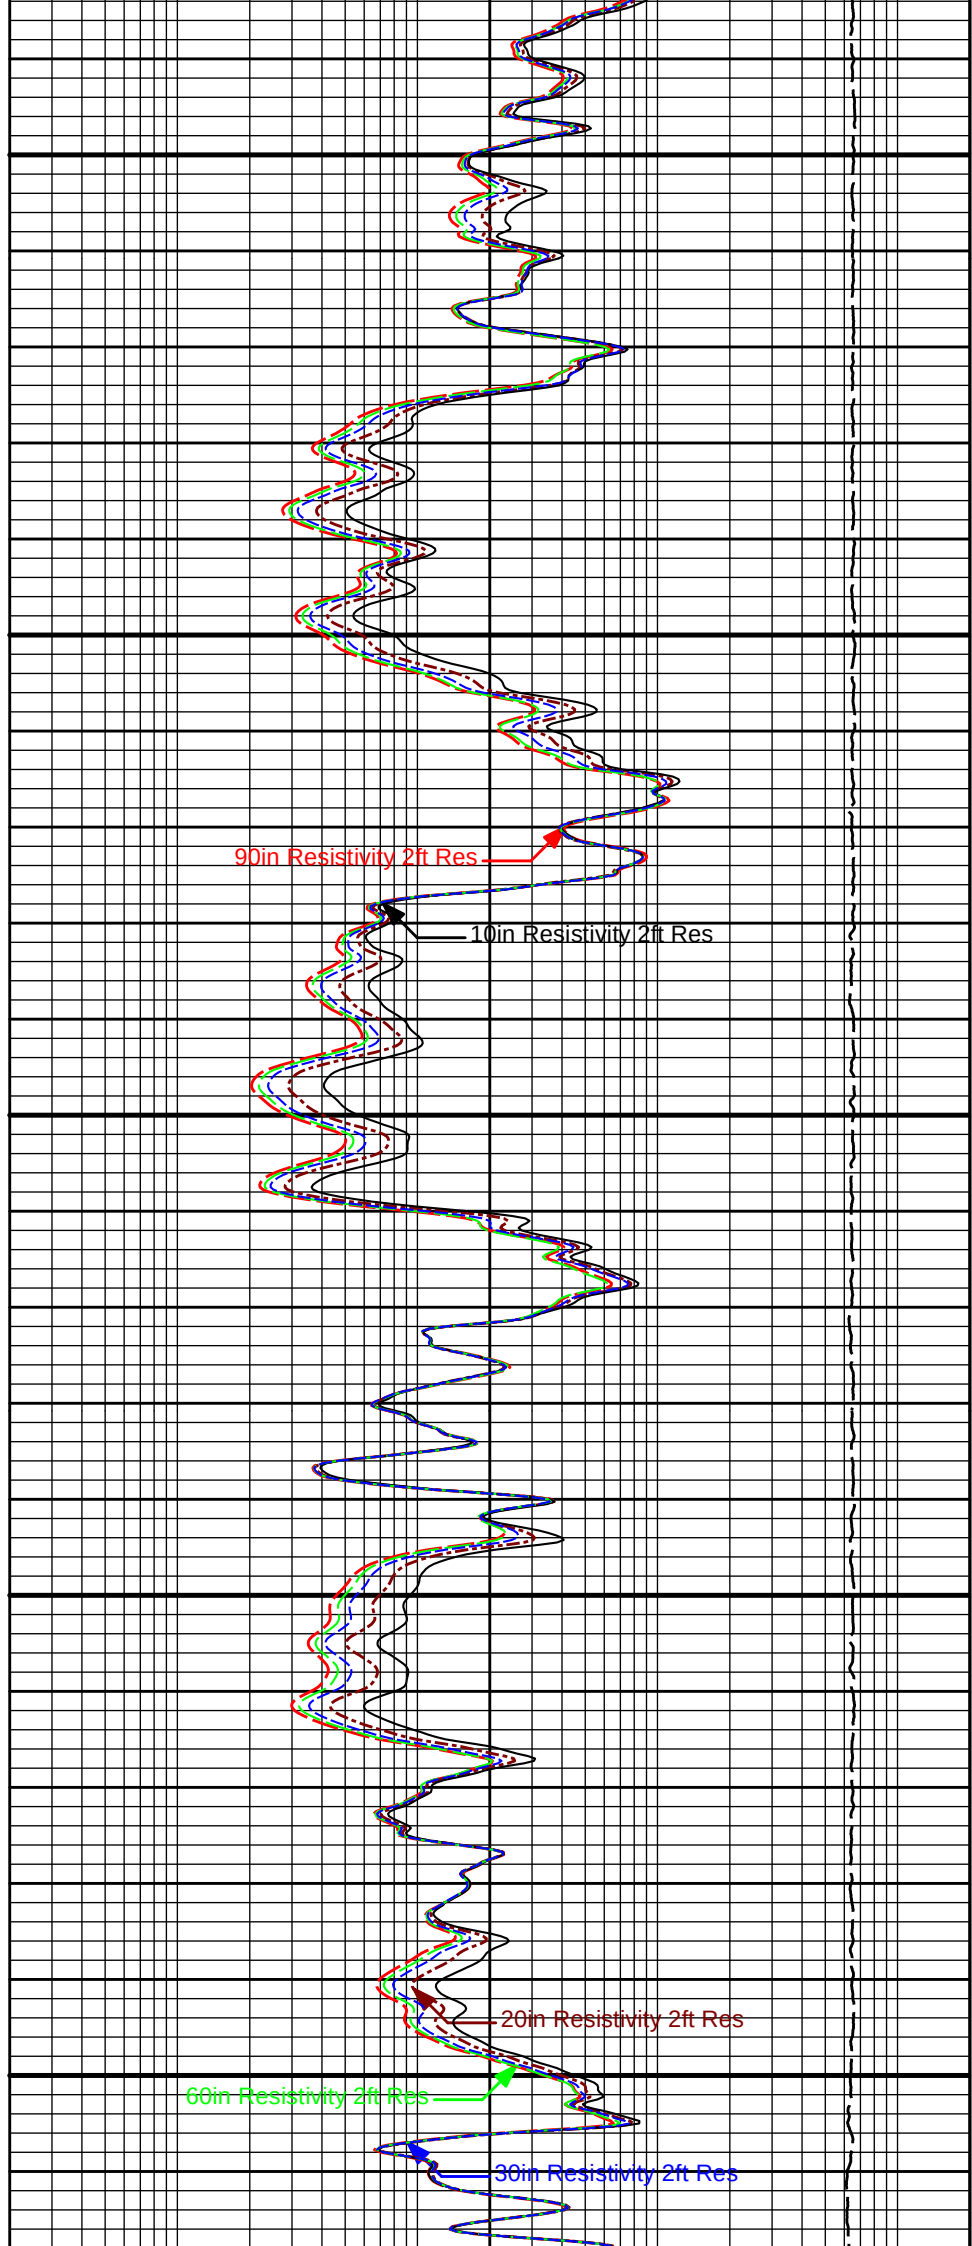


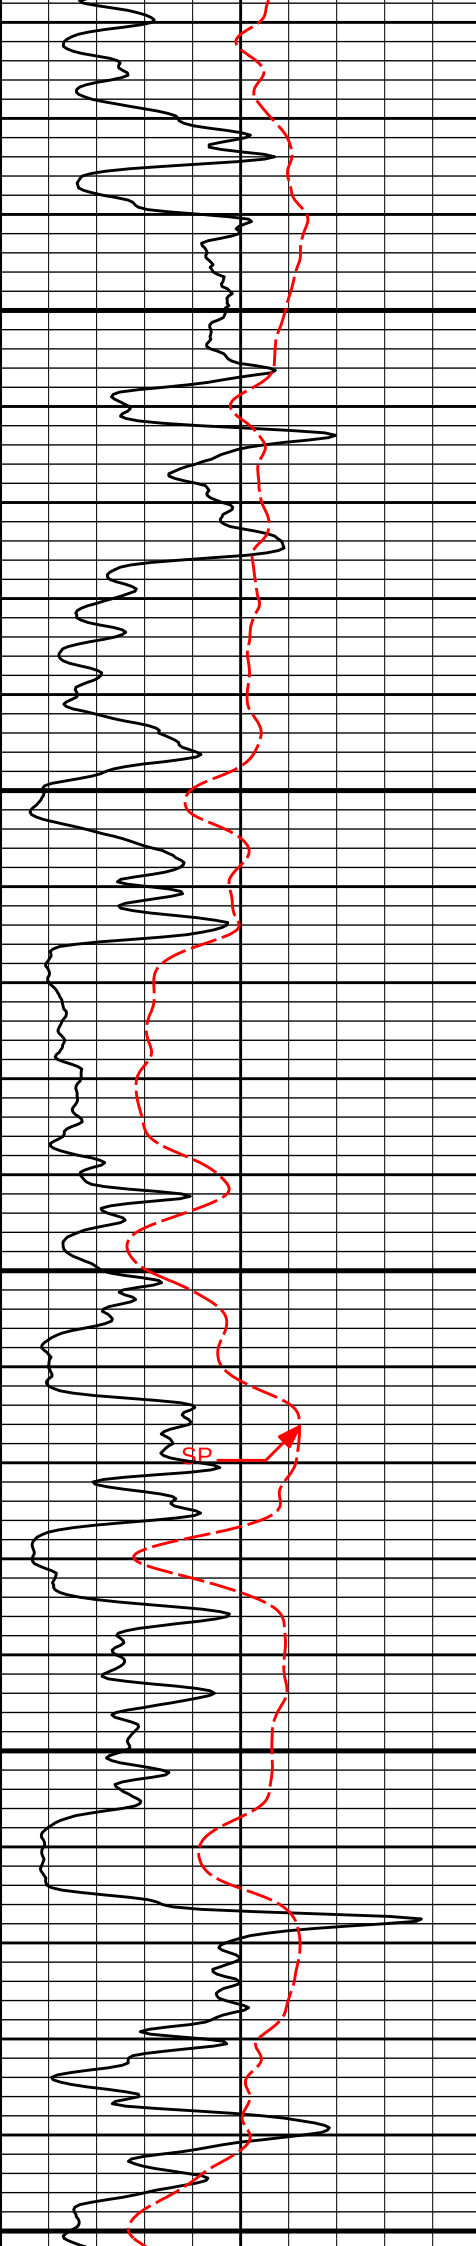


4500

4600


4700

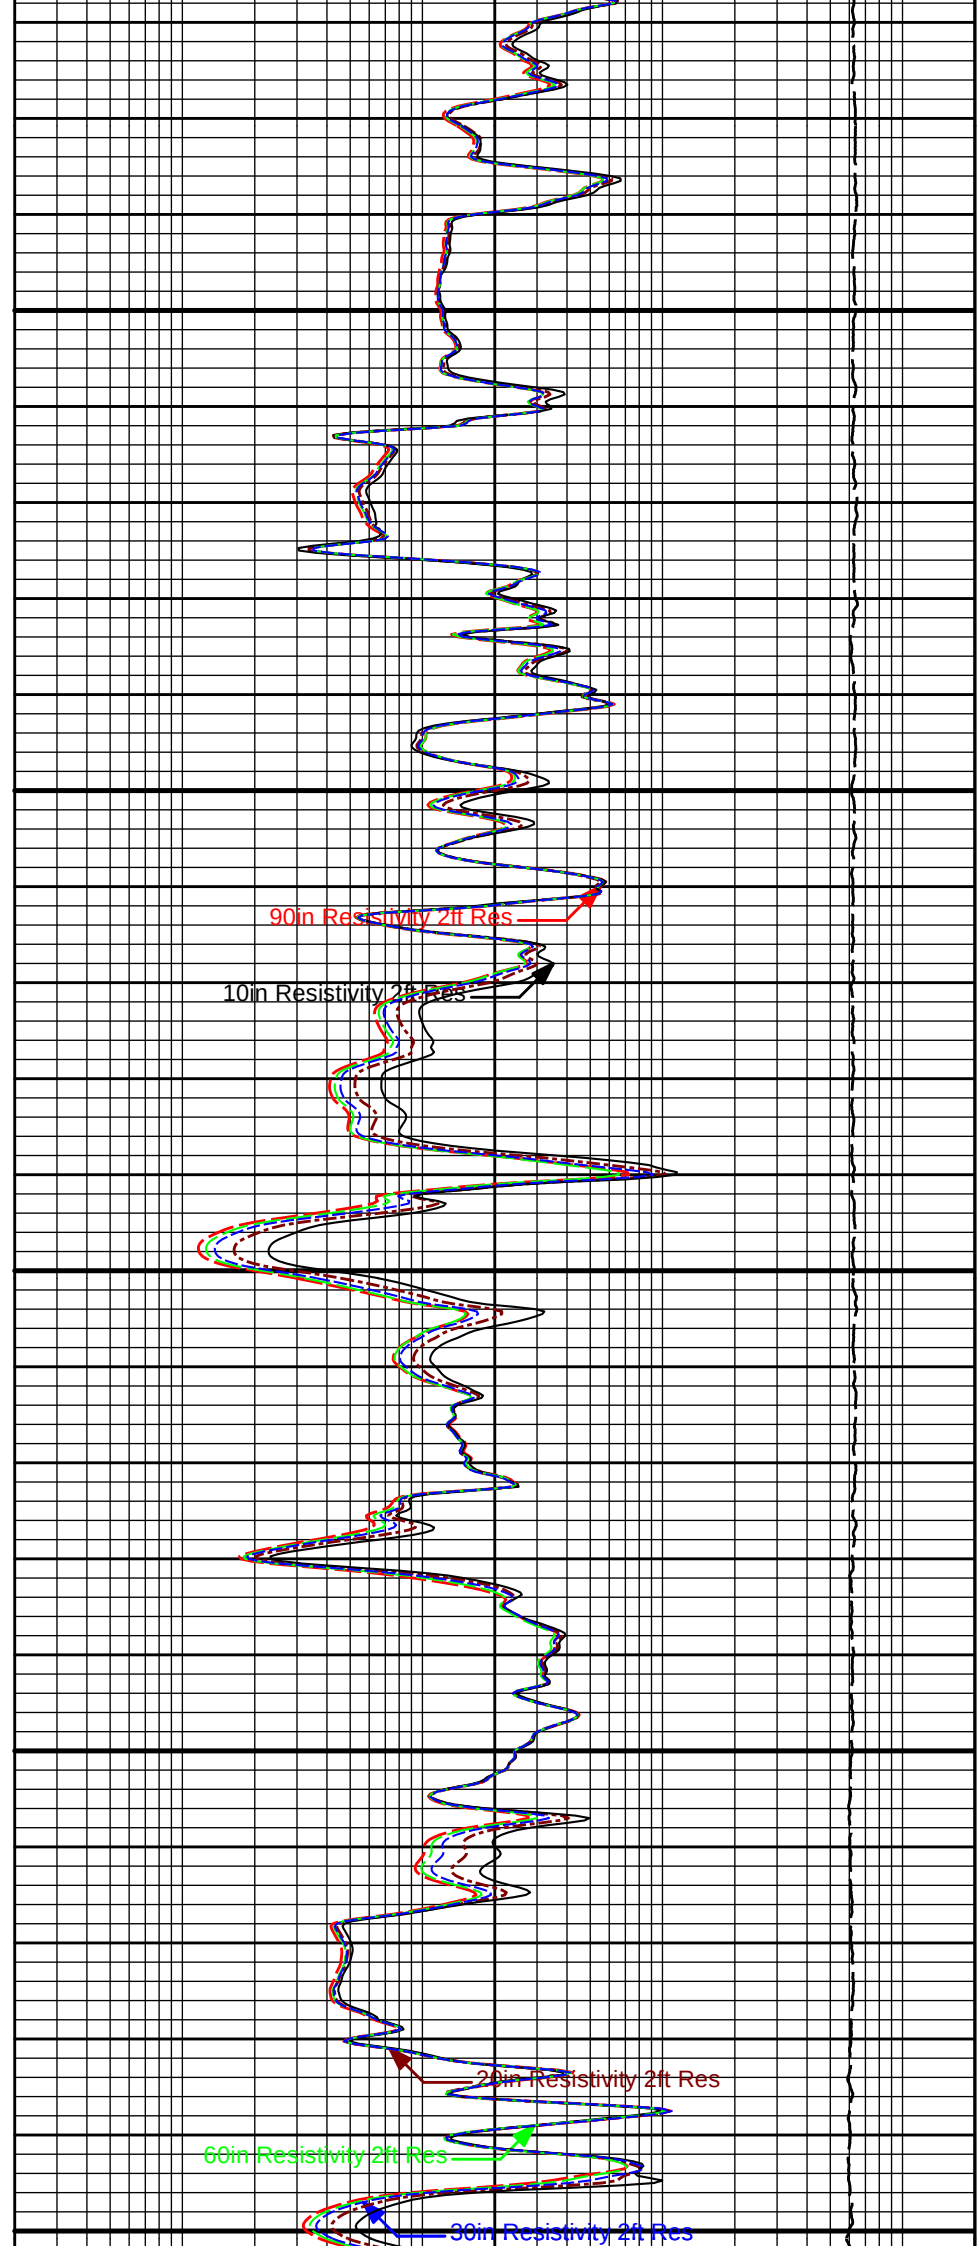


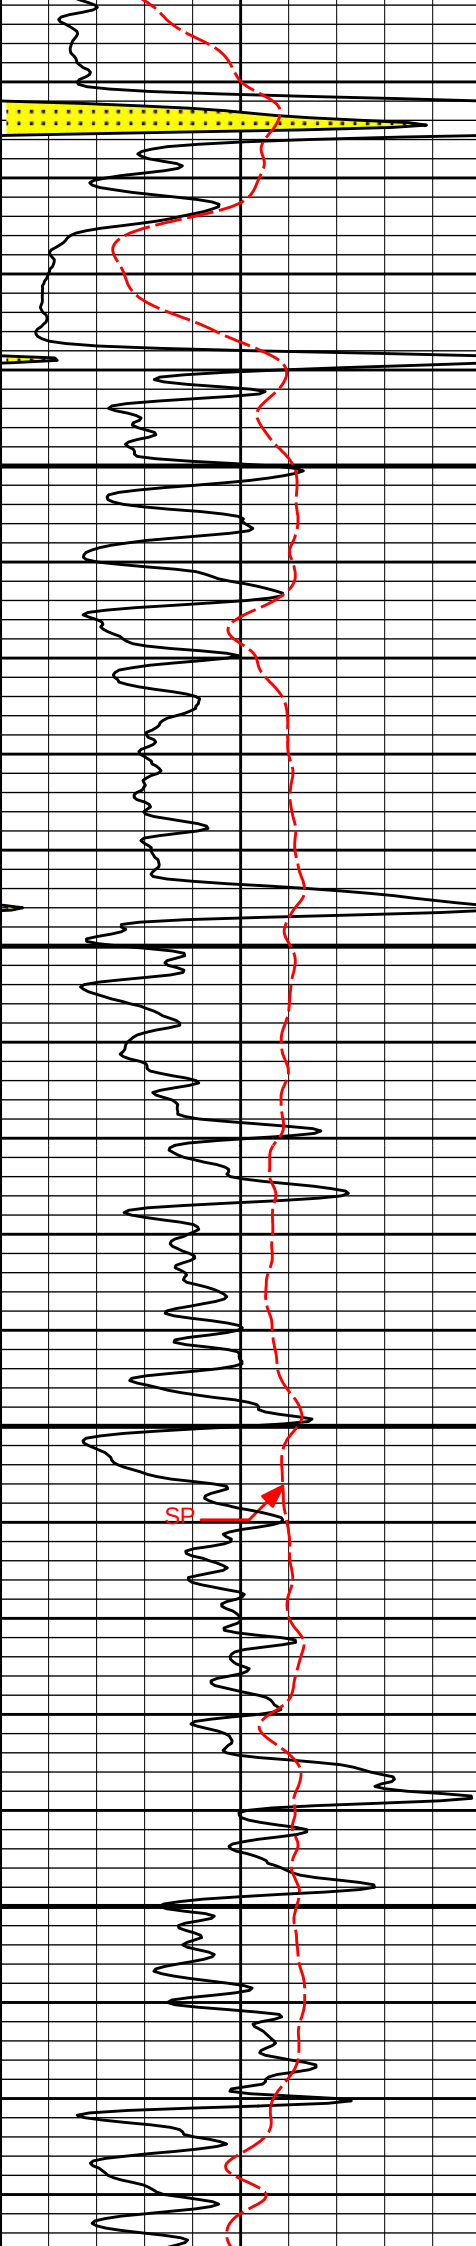

4800


4900

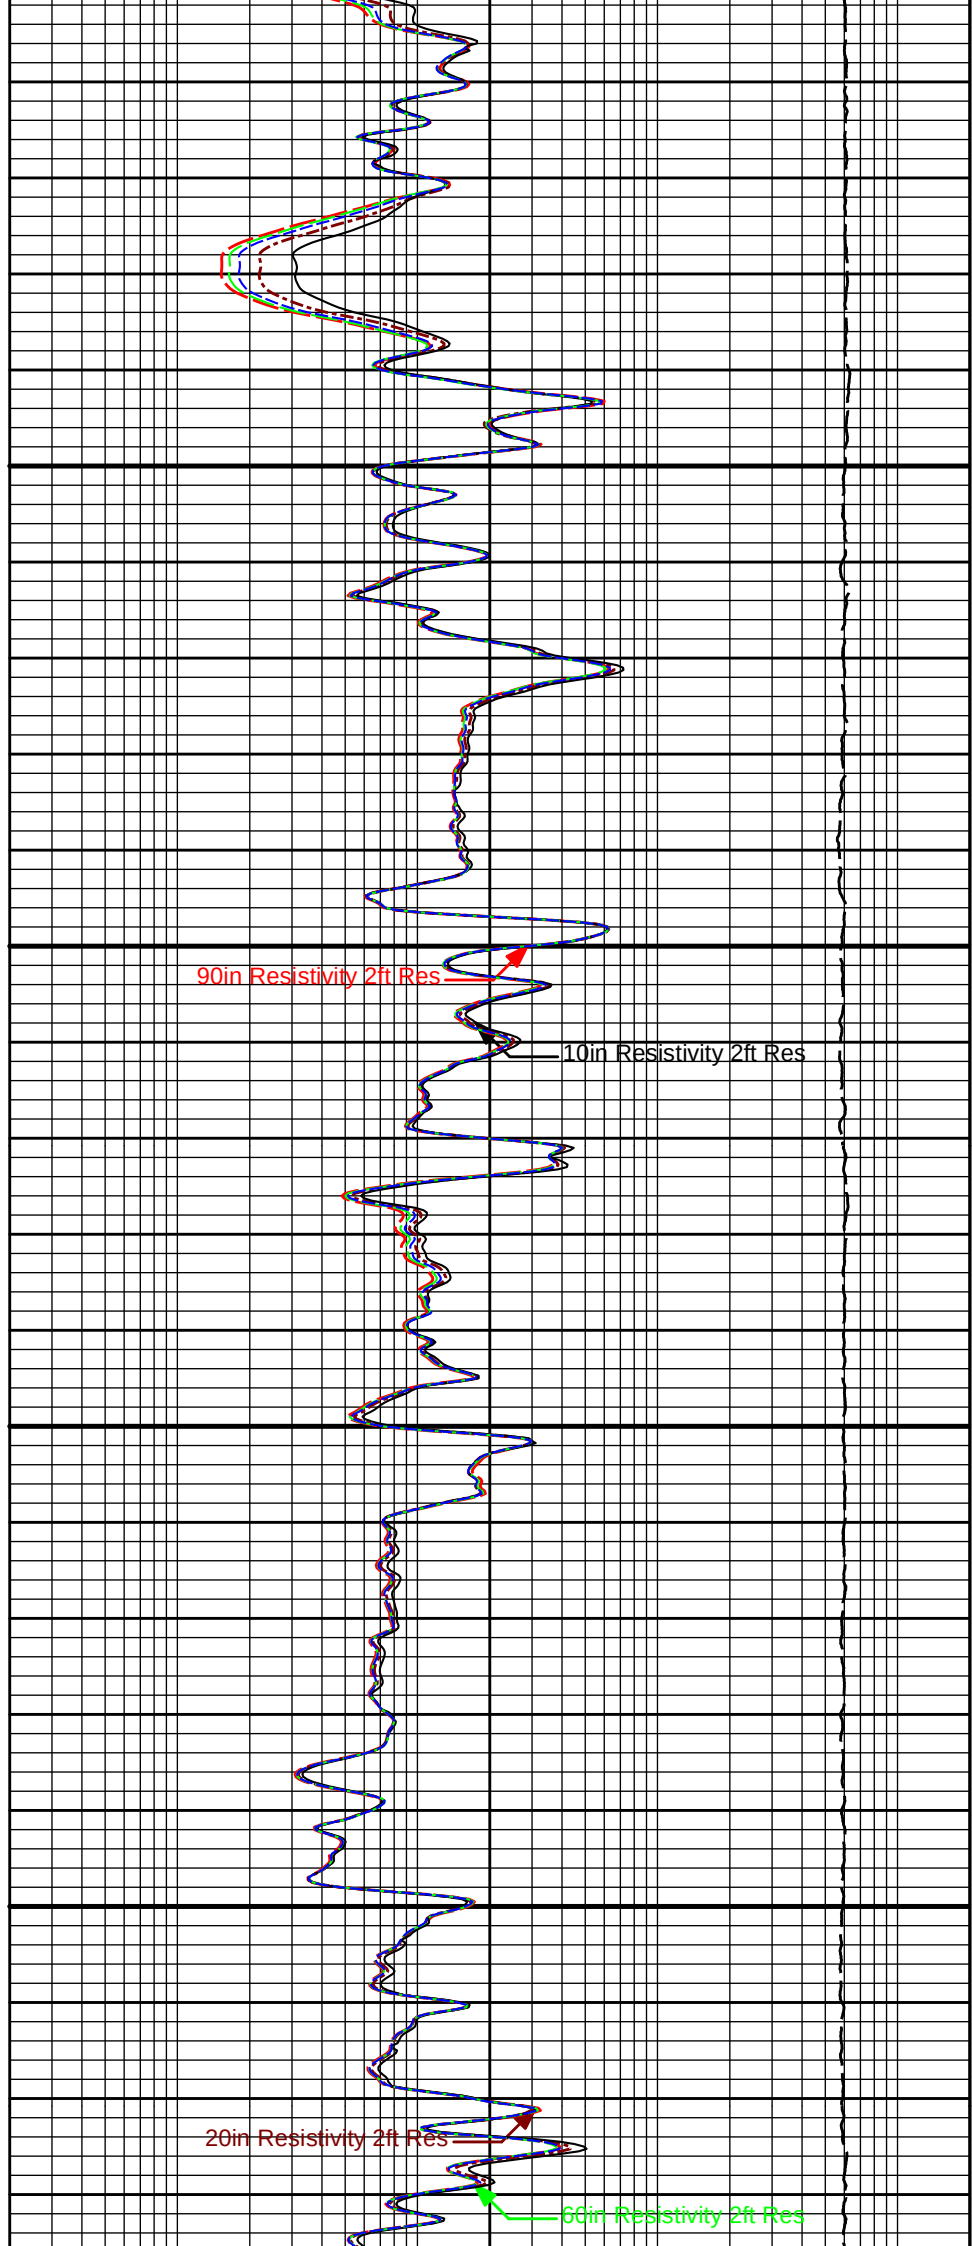


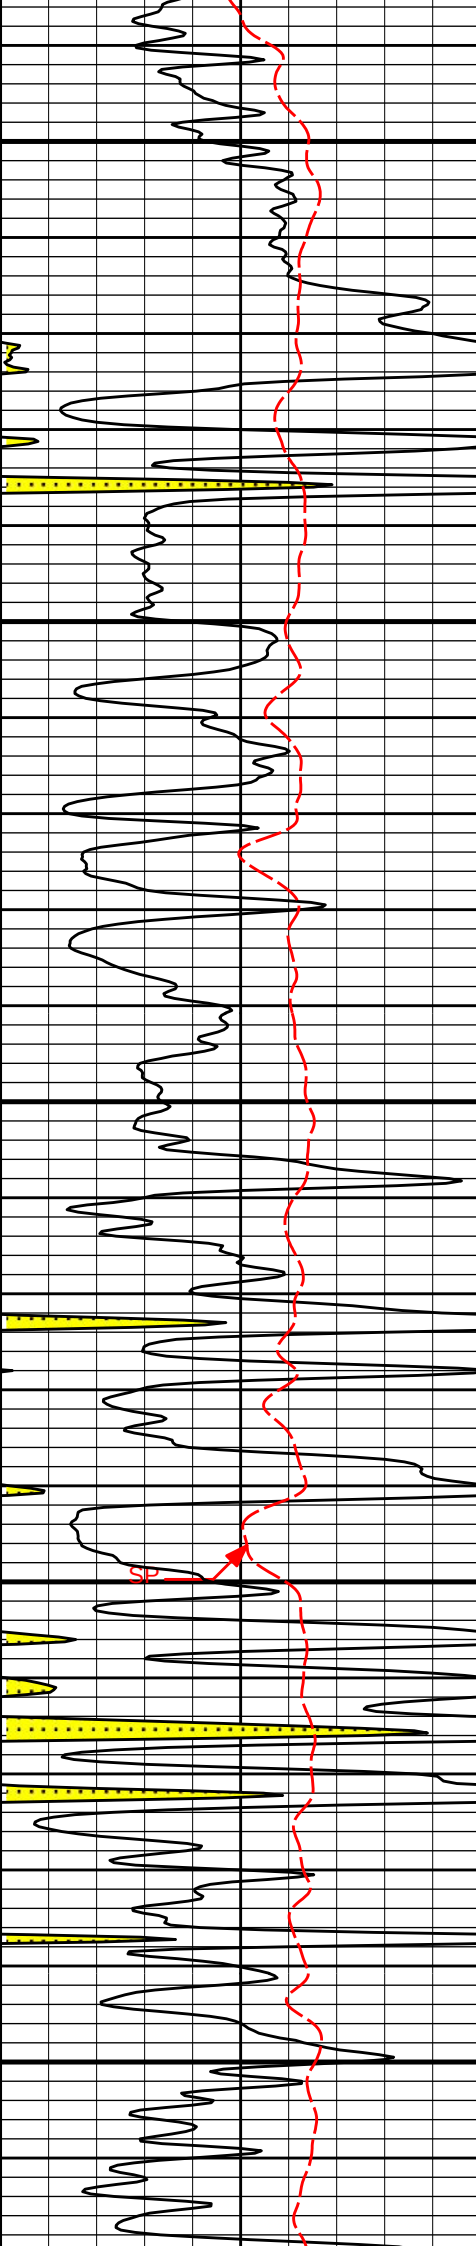

5000

5100

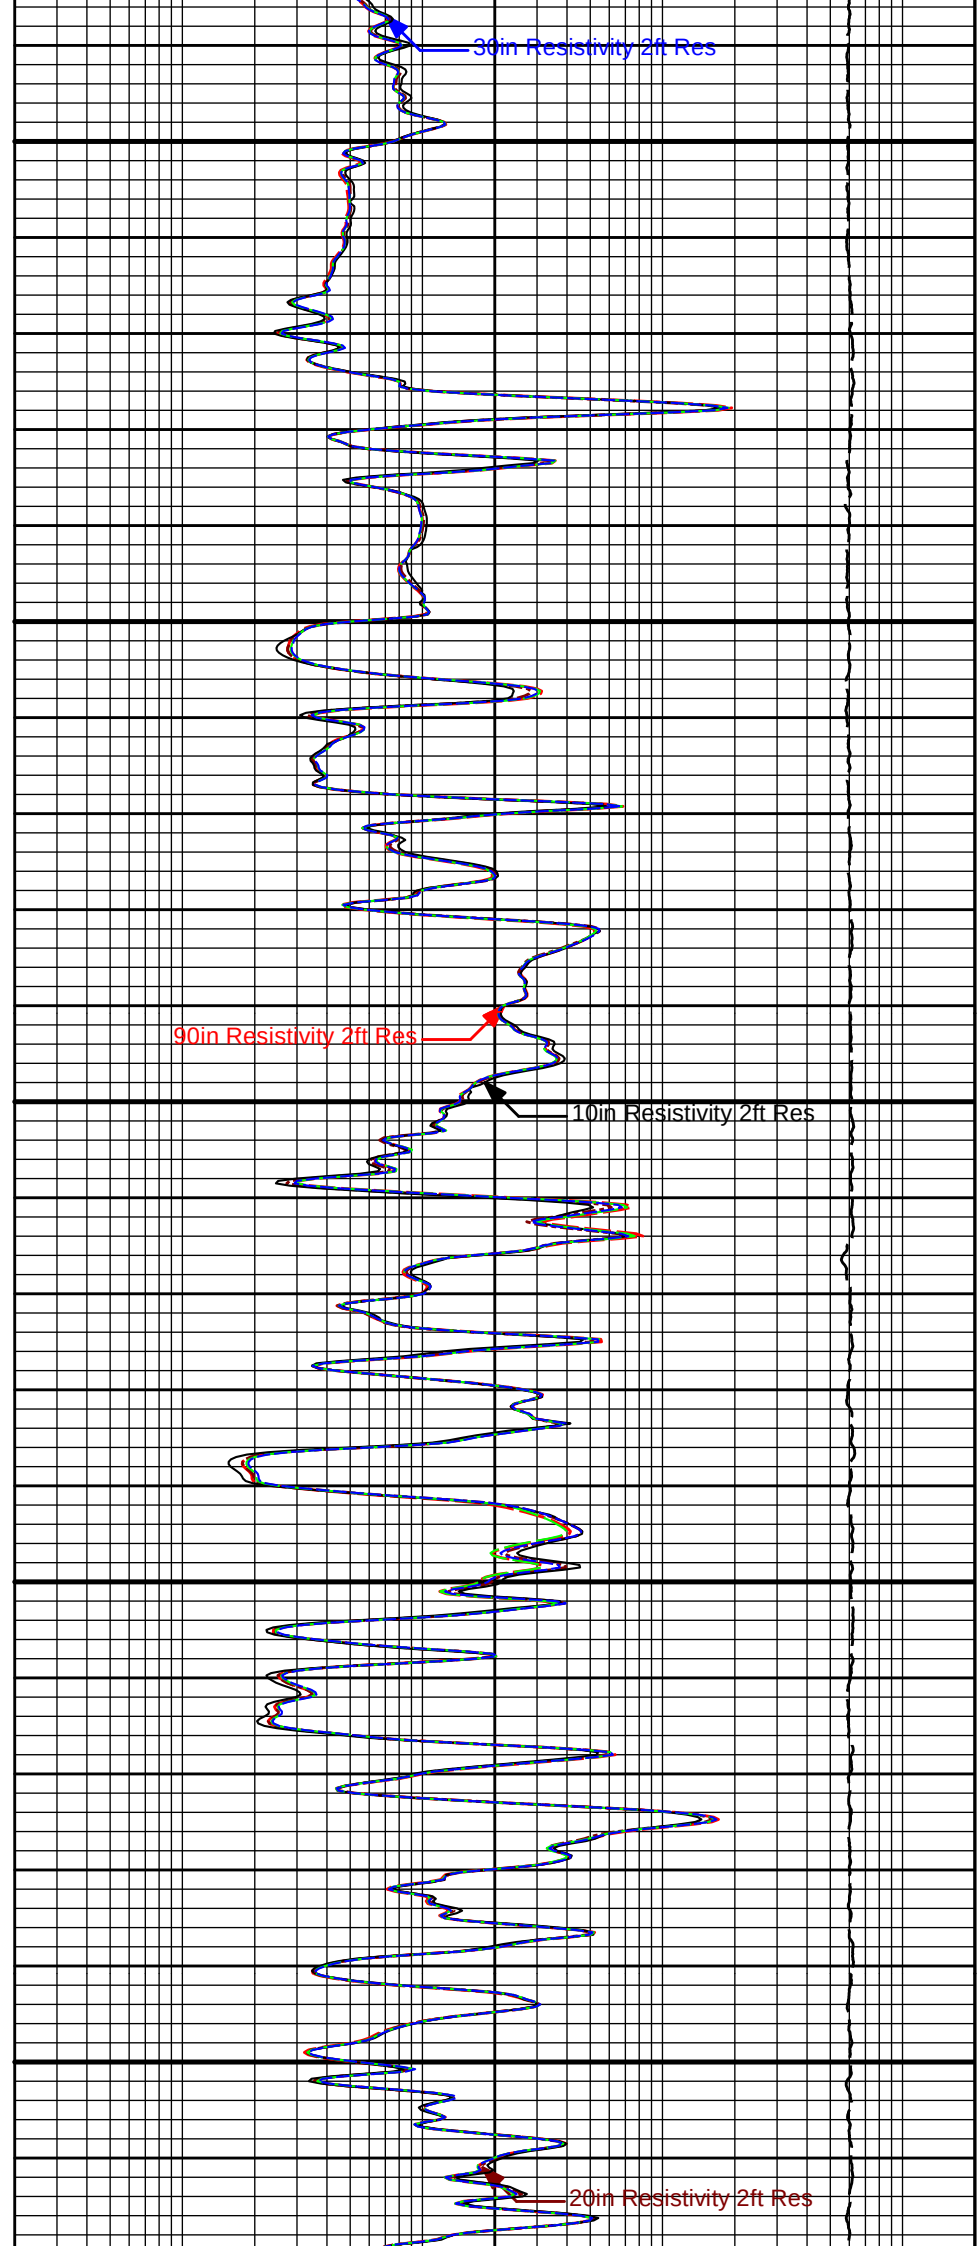


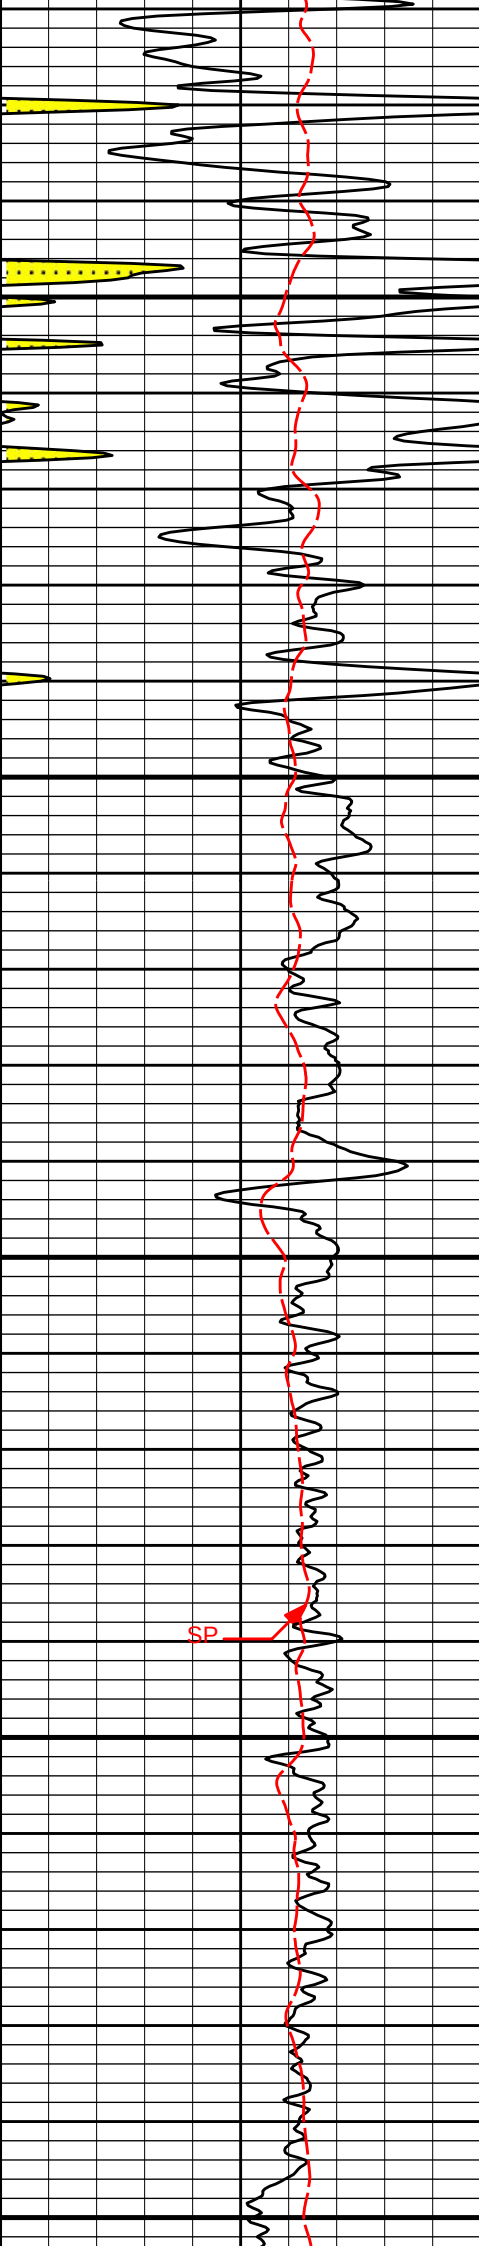


5200

5300


5400

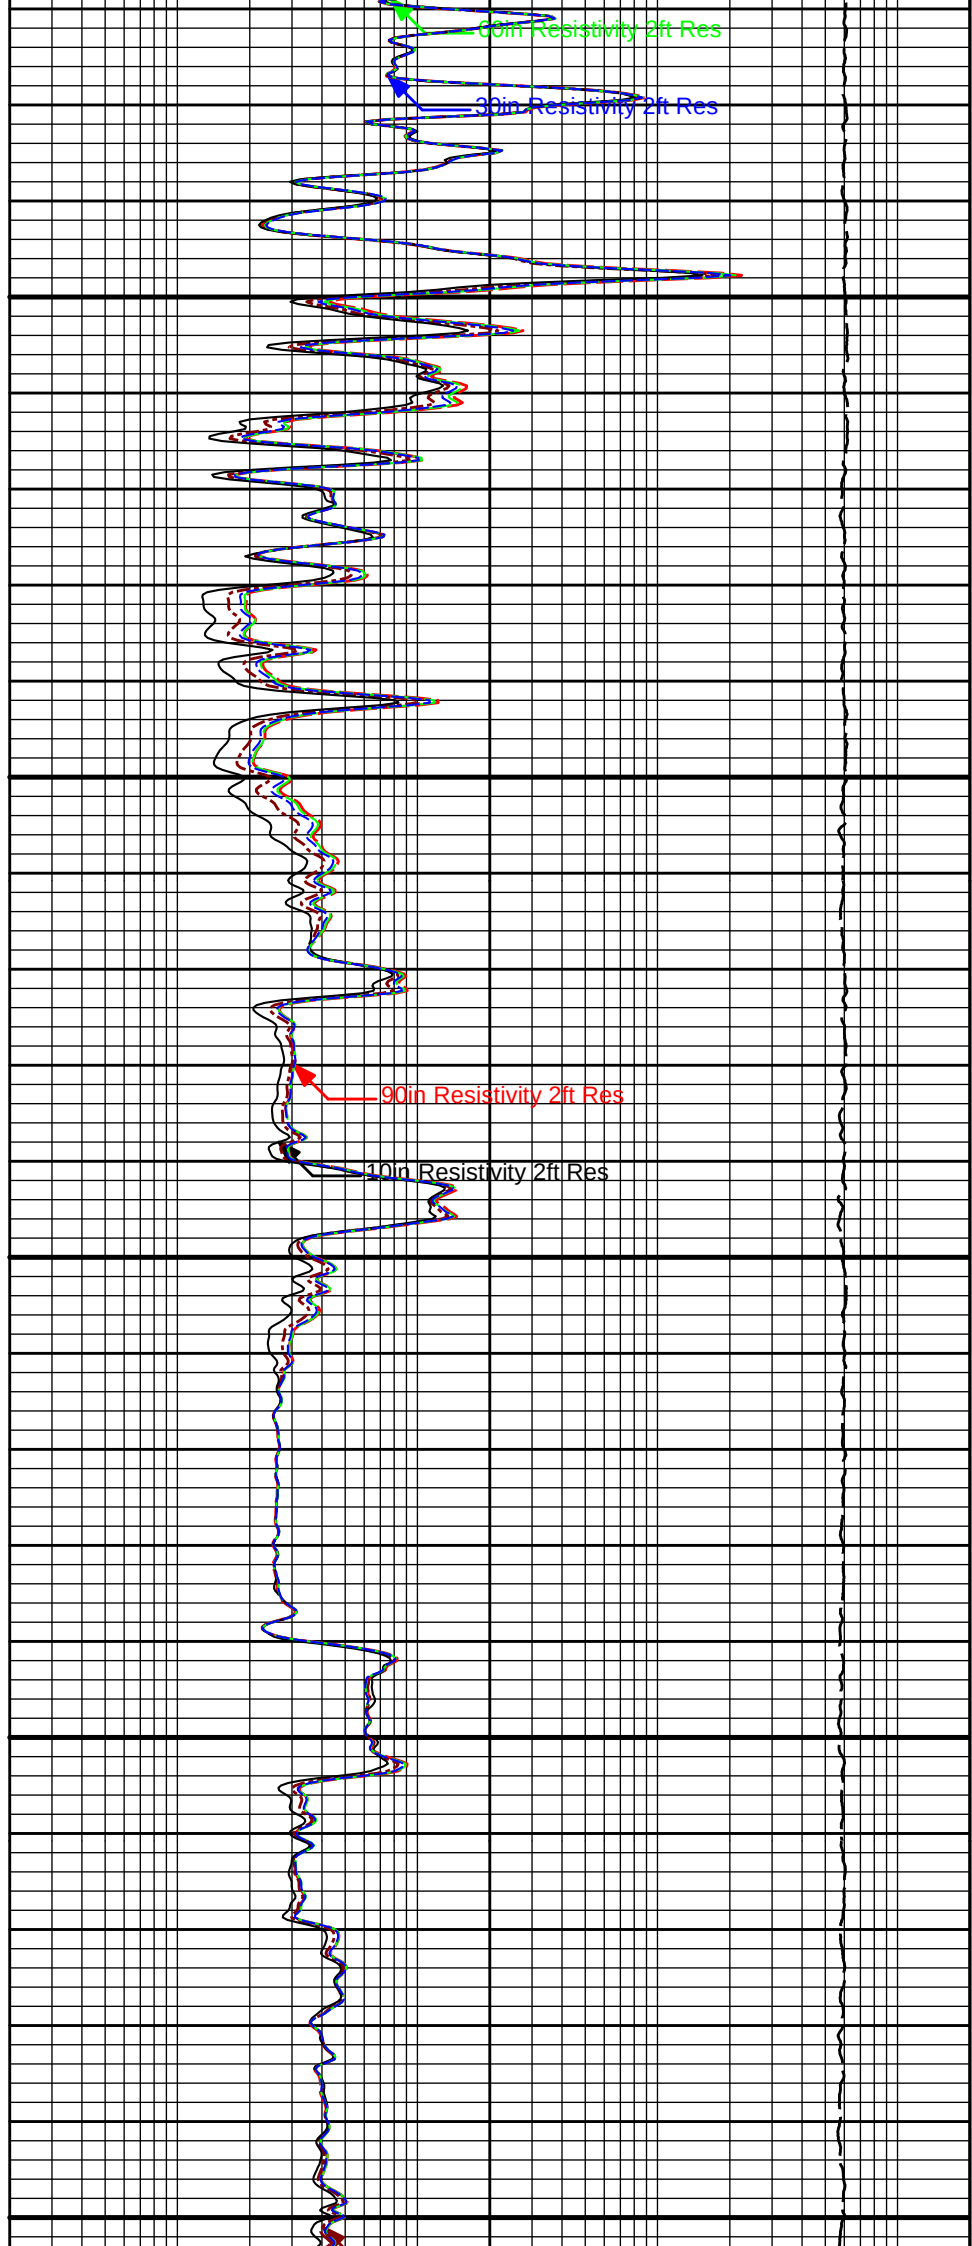

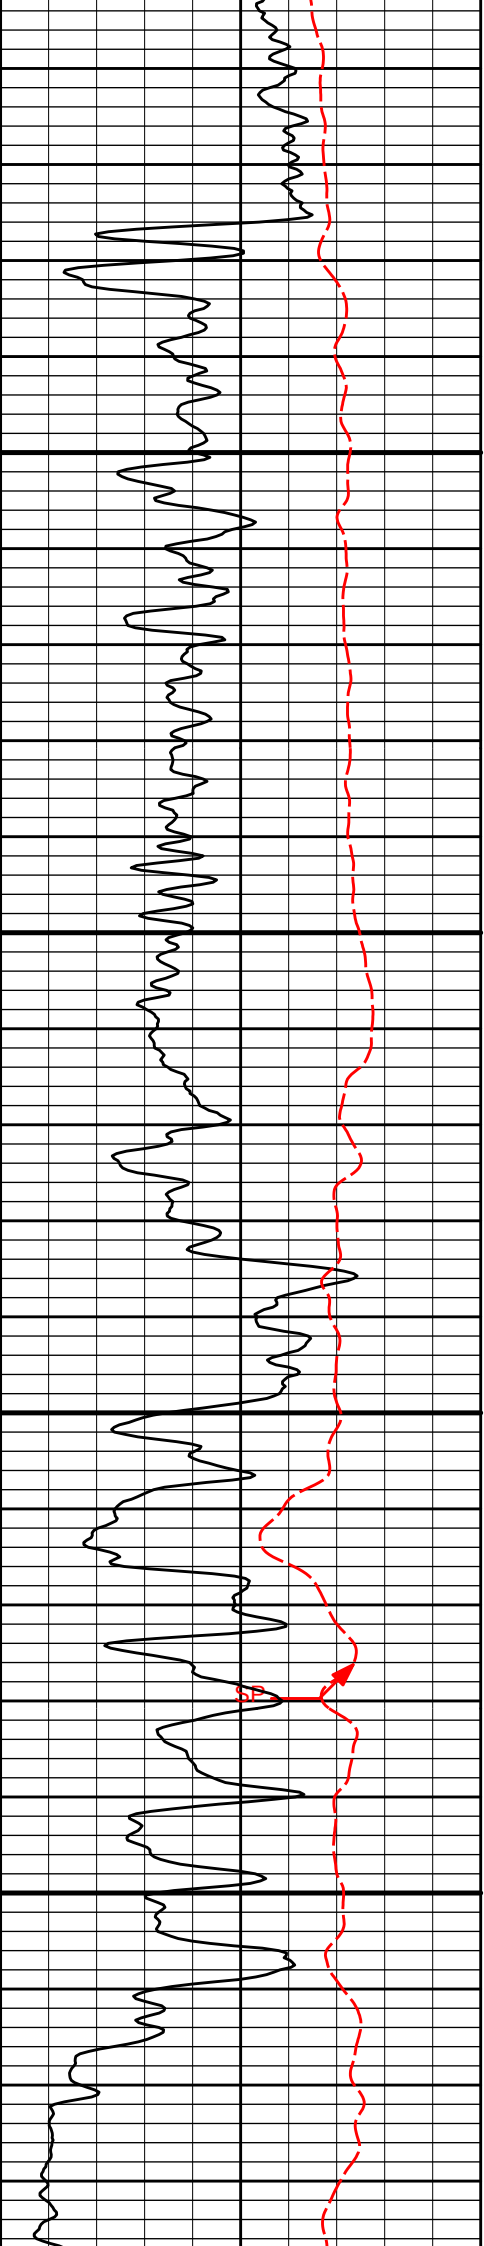

5500


5600

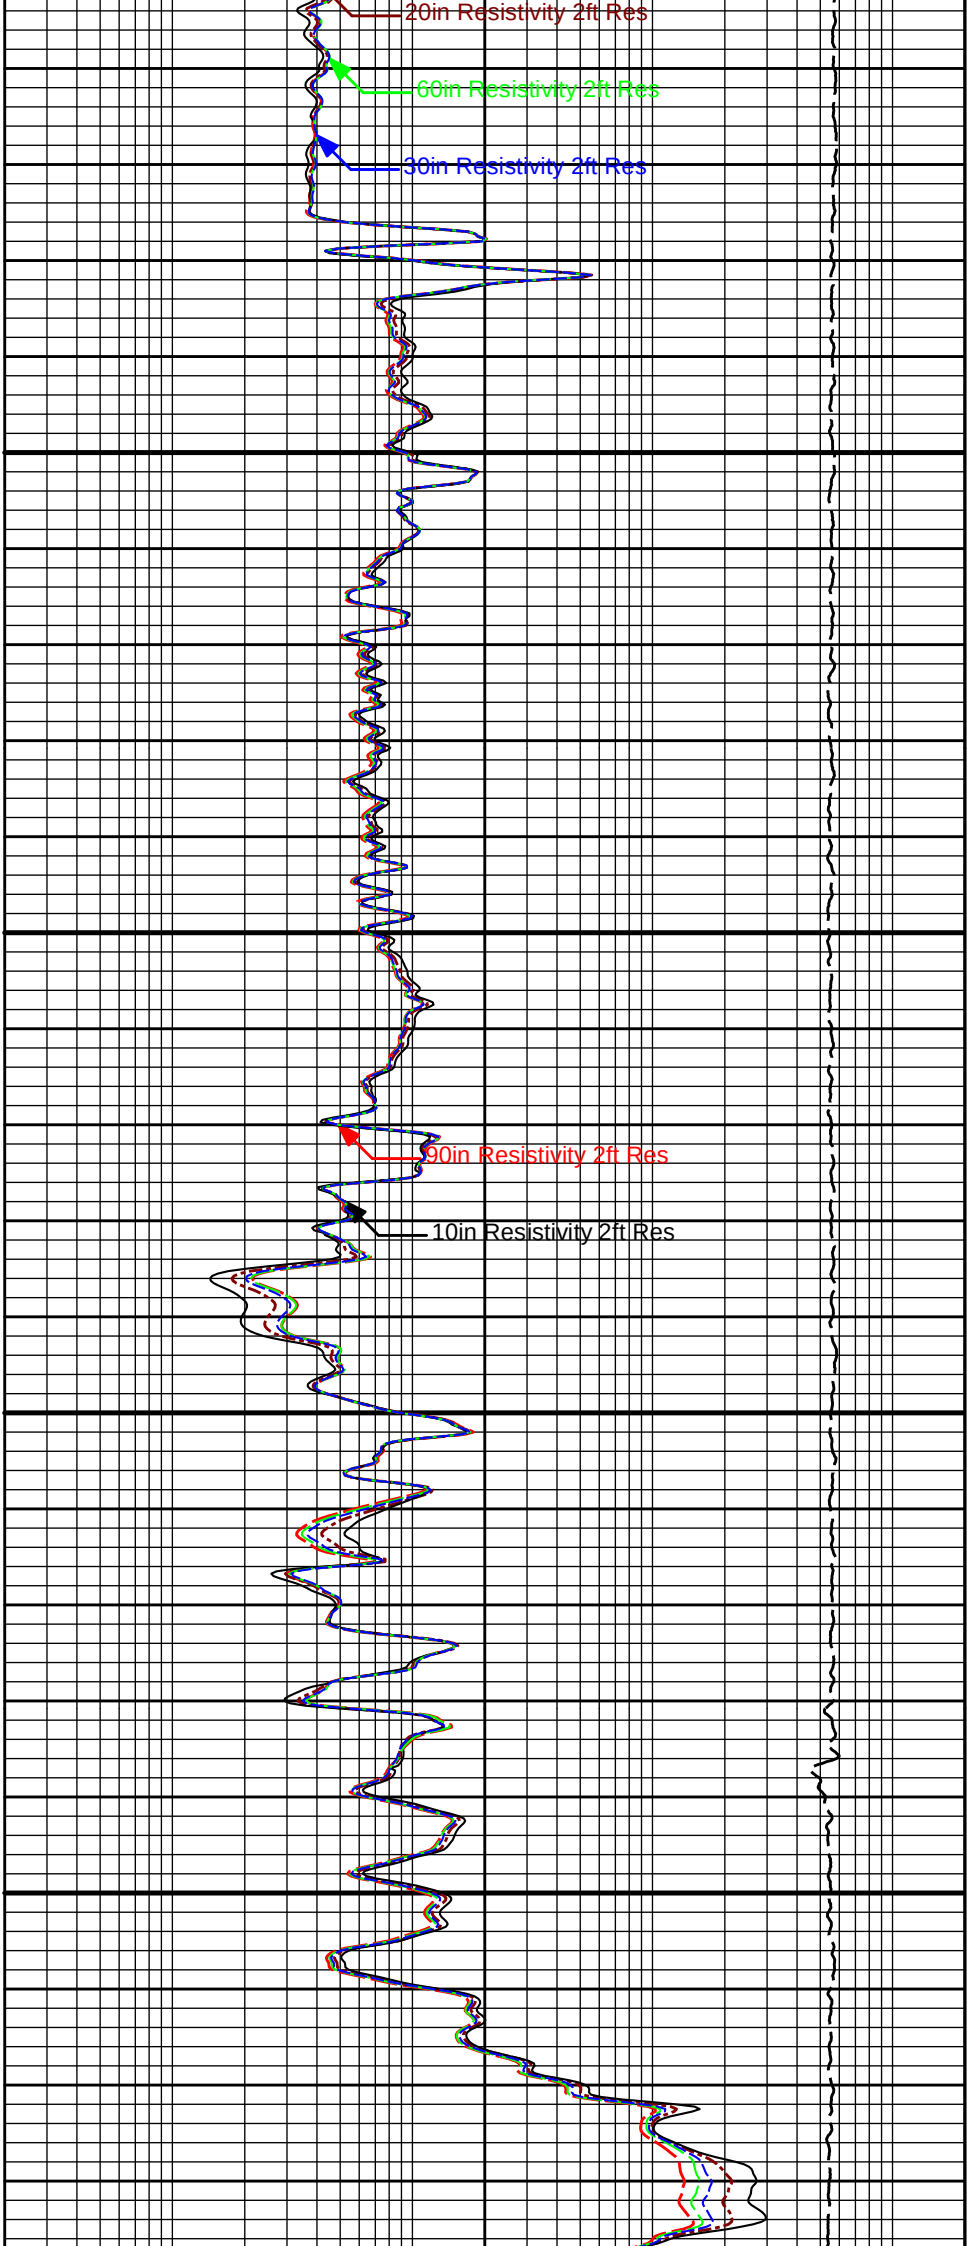



5700

5800

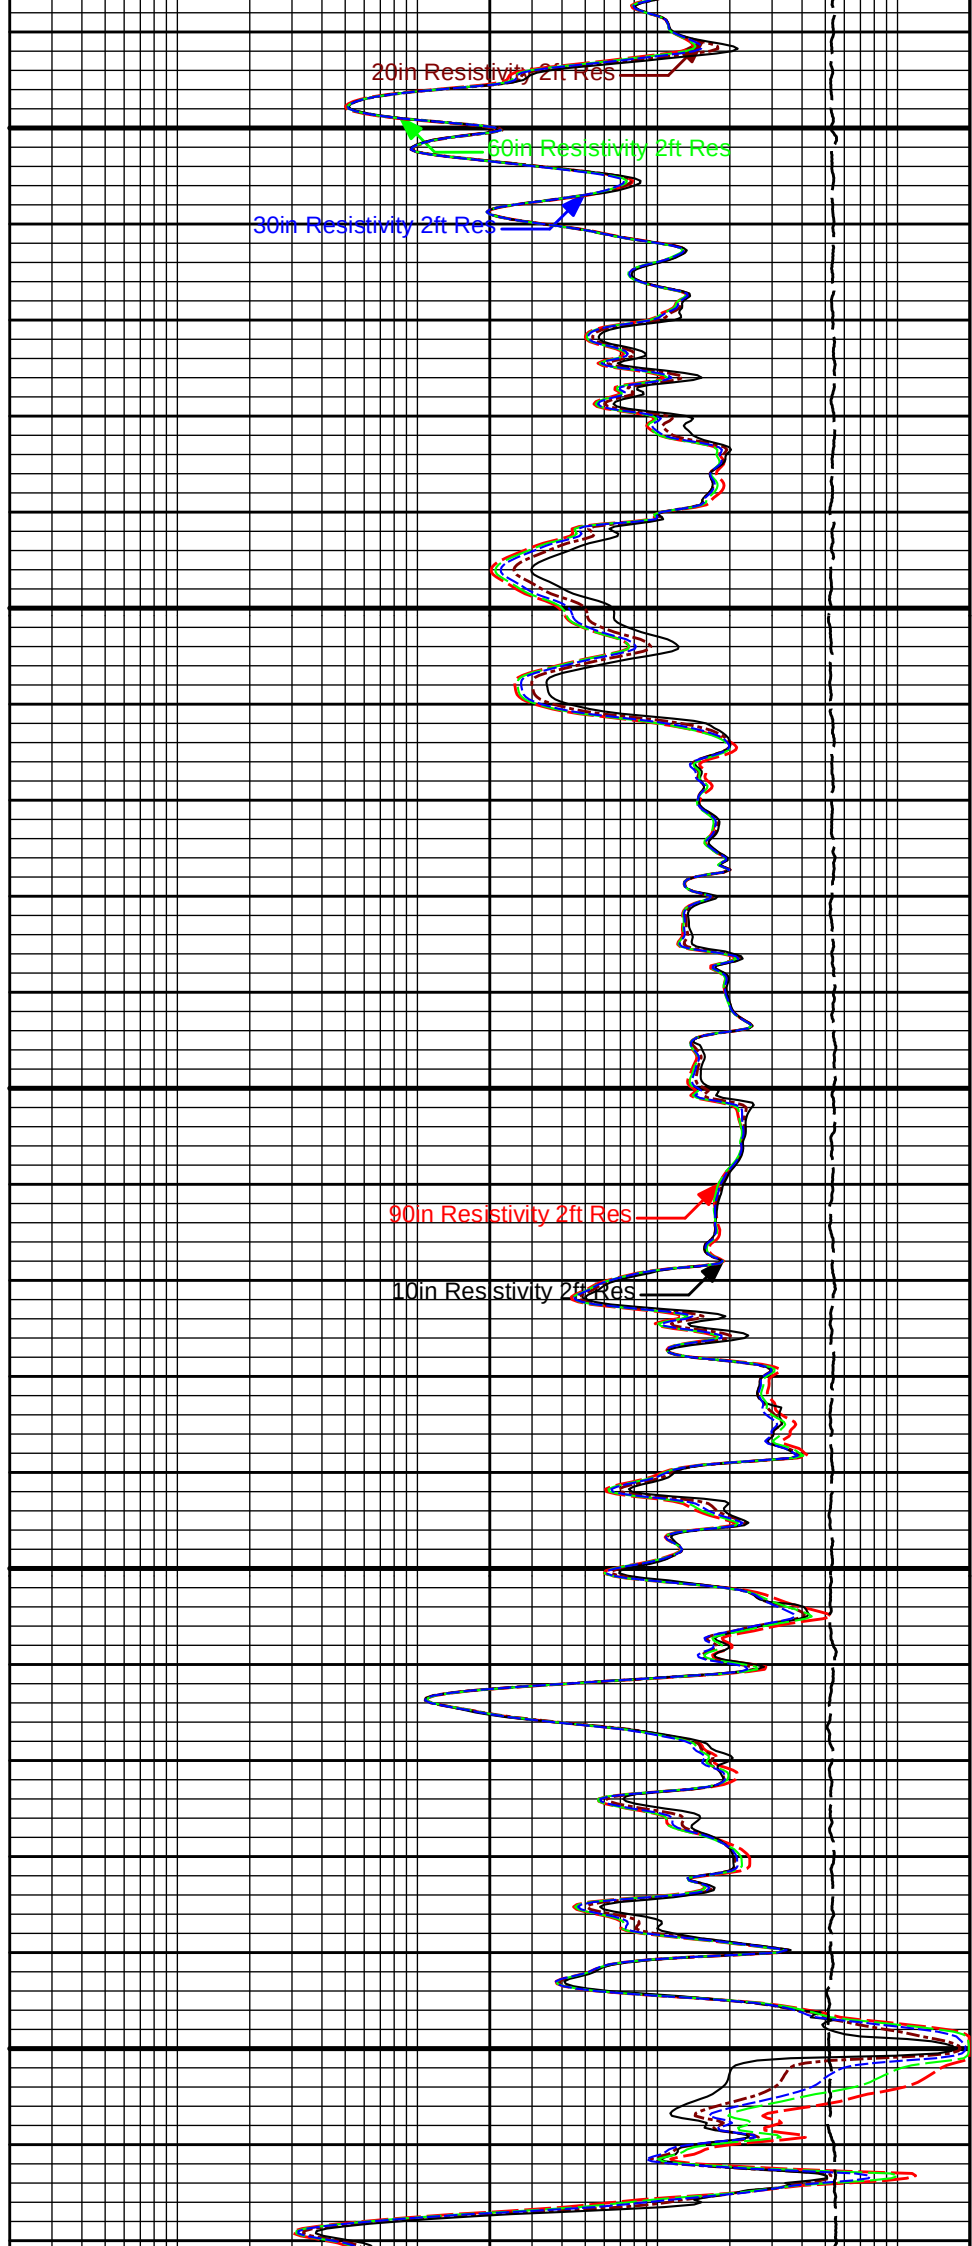




5900

6000


6100

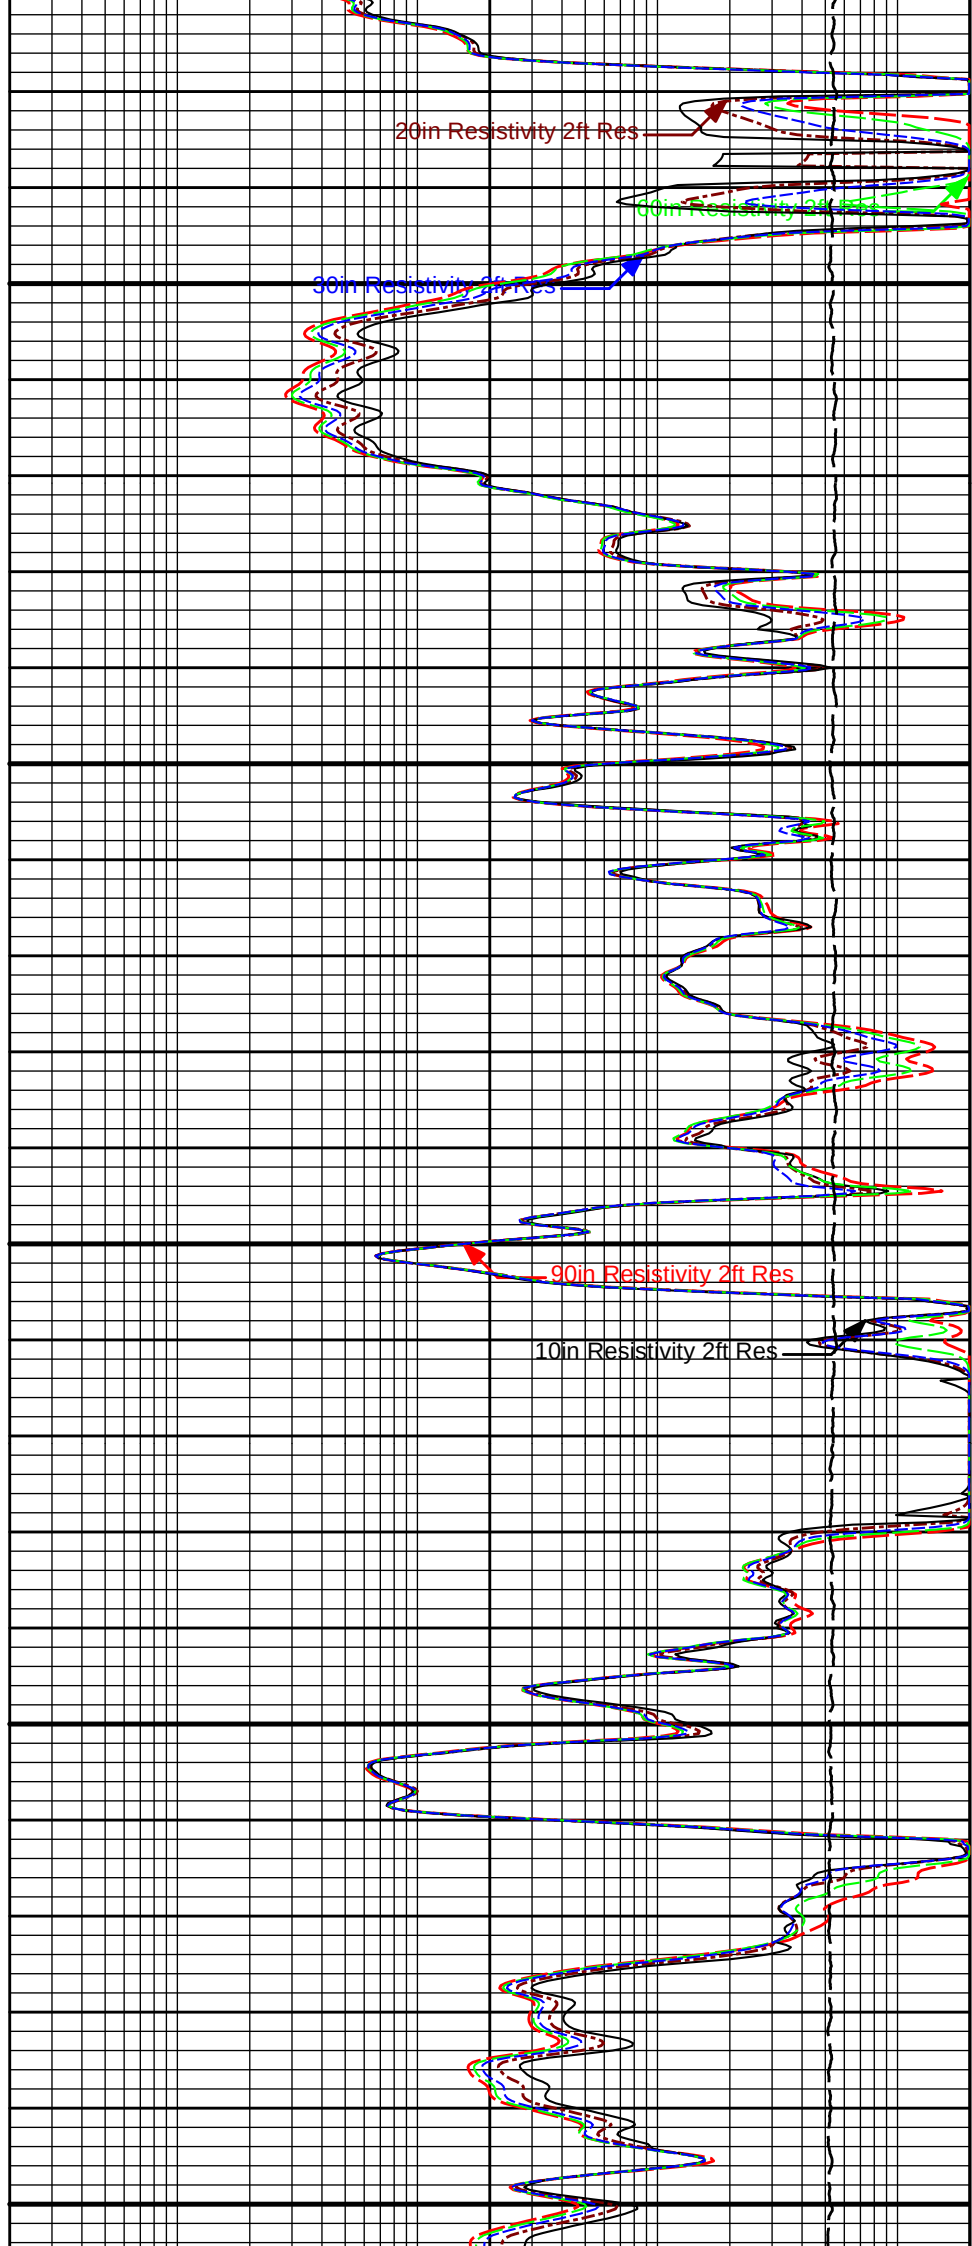




6200


6300

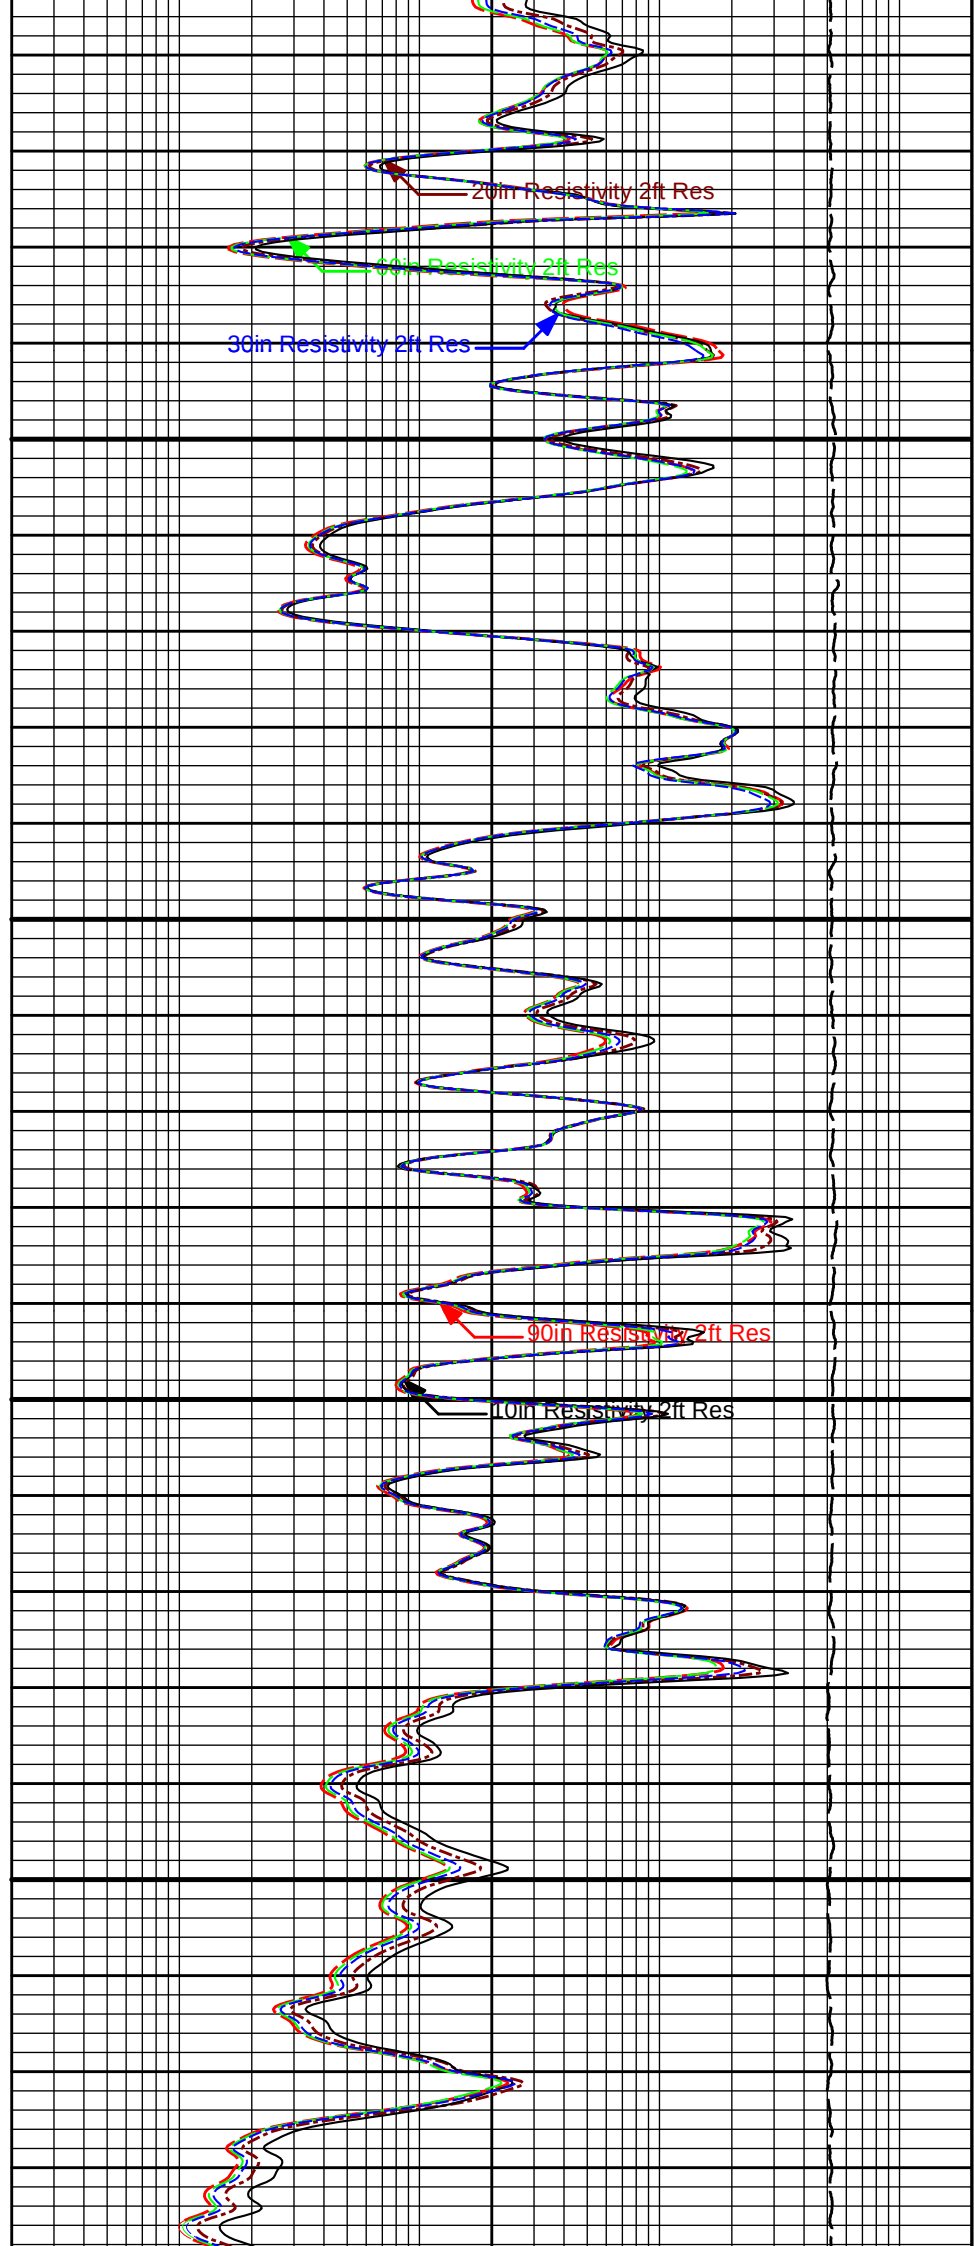


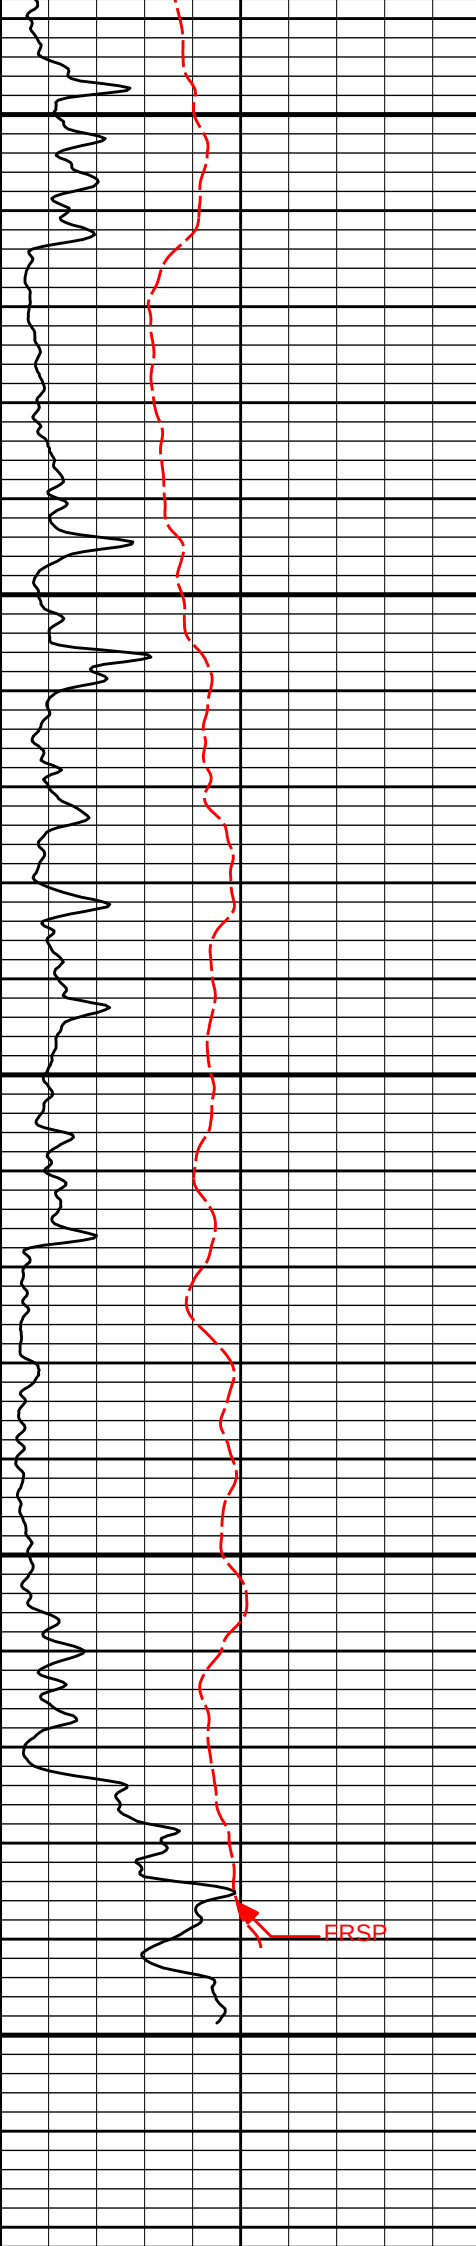



6400

6500

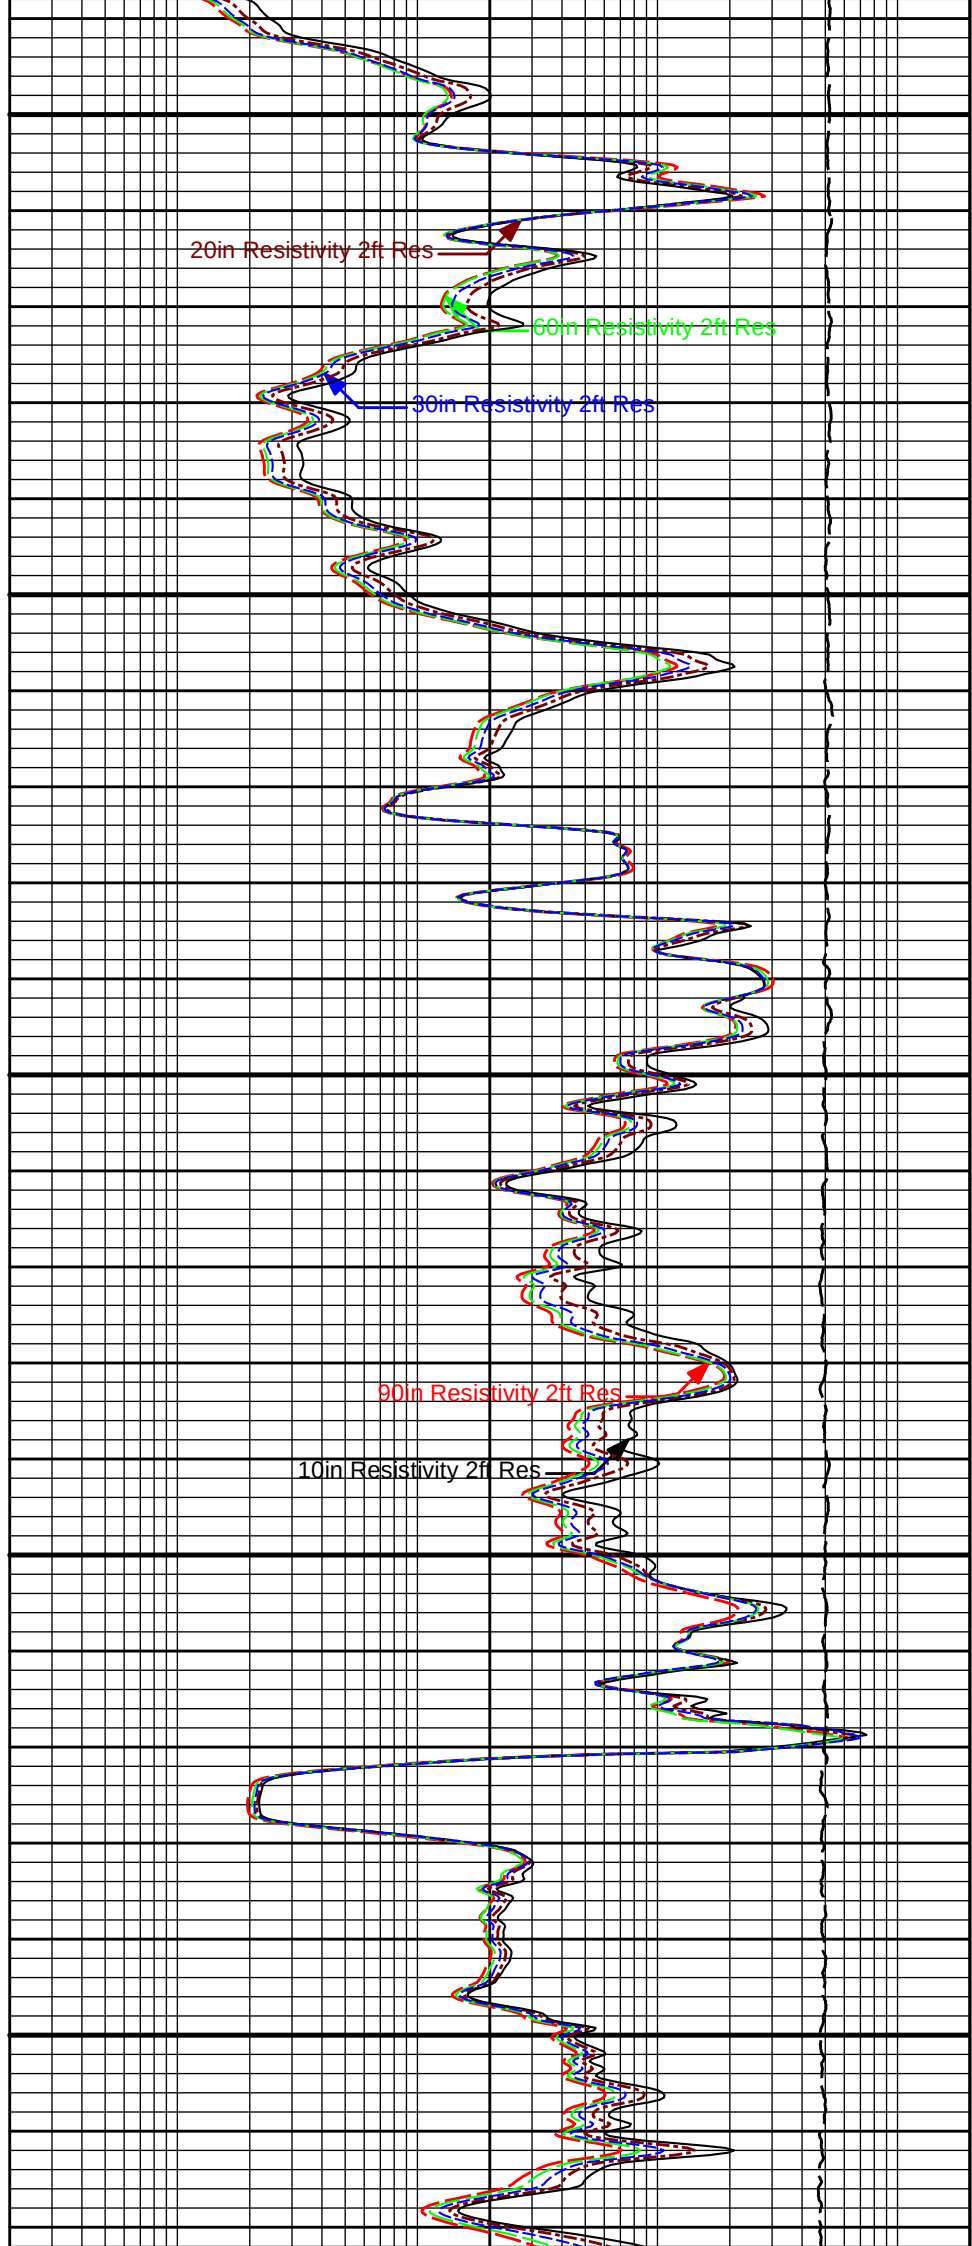

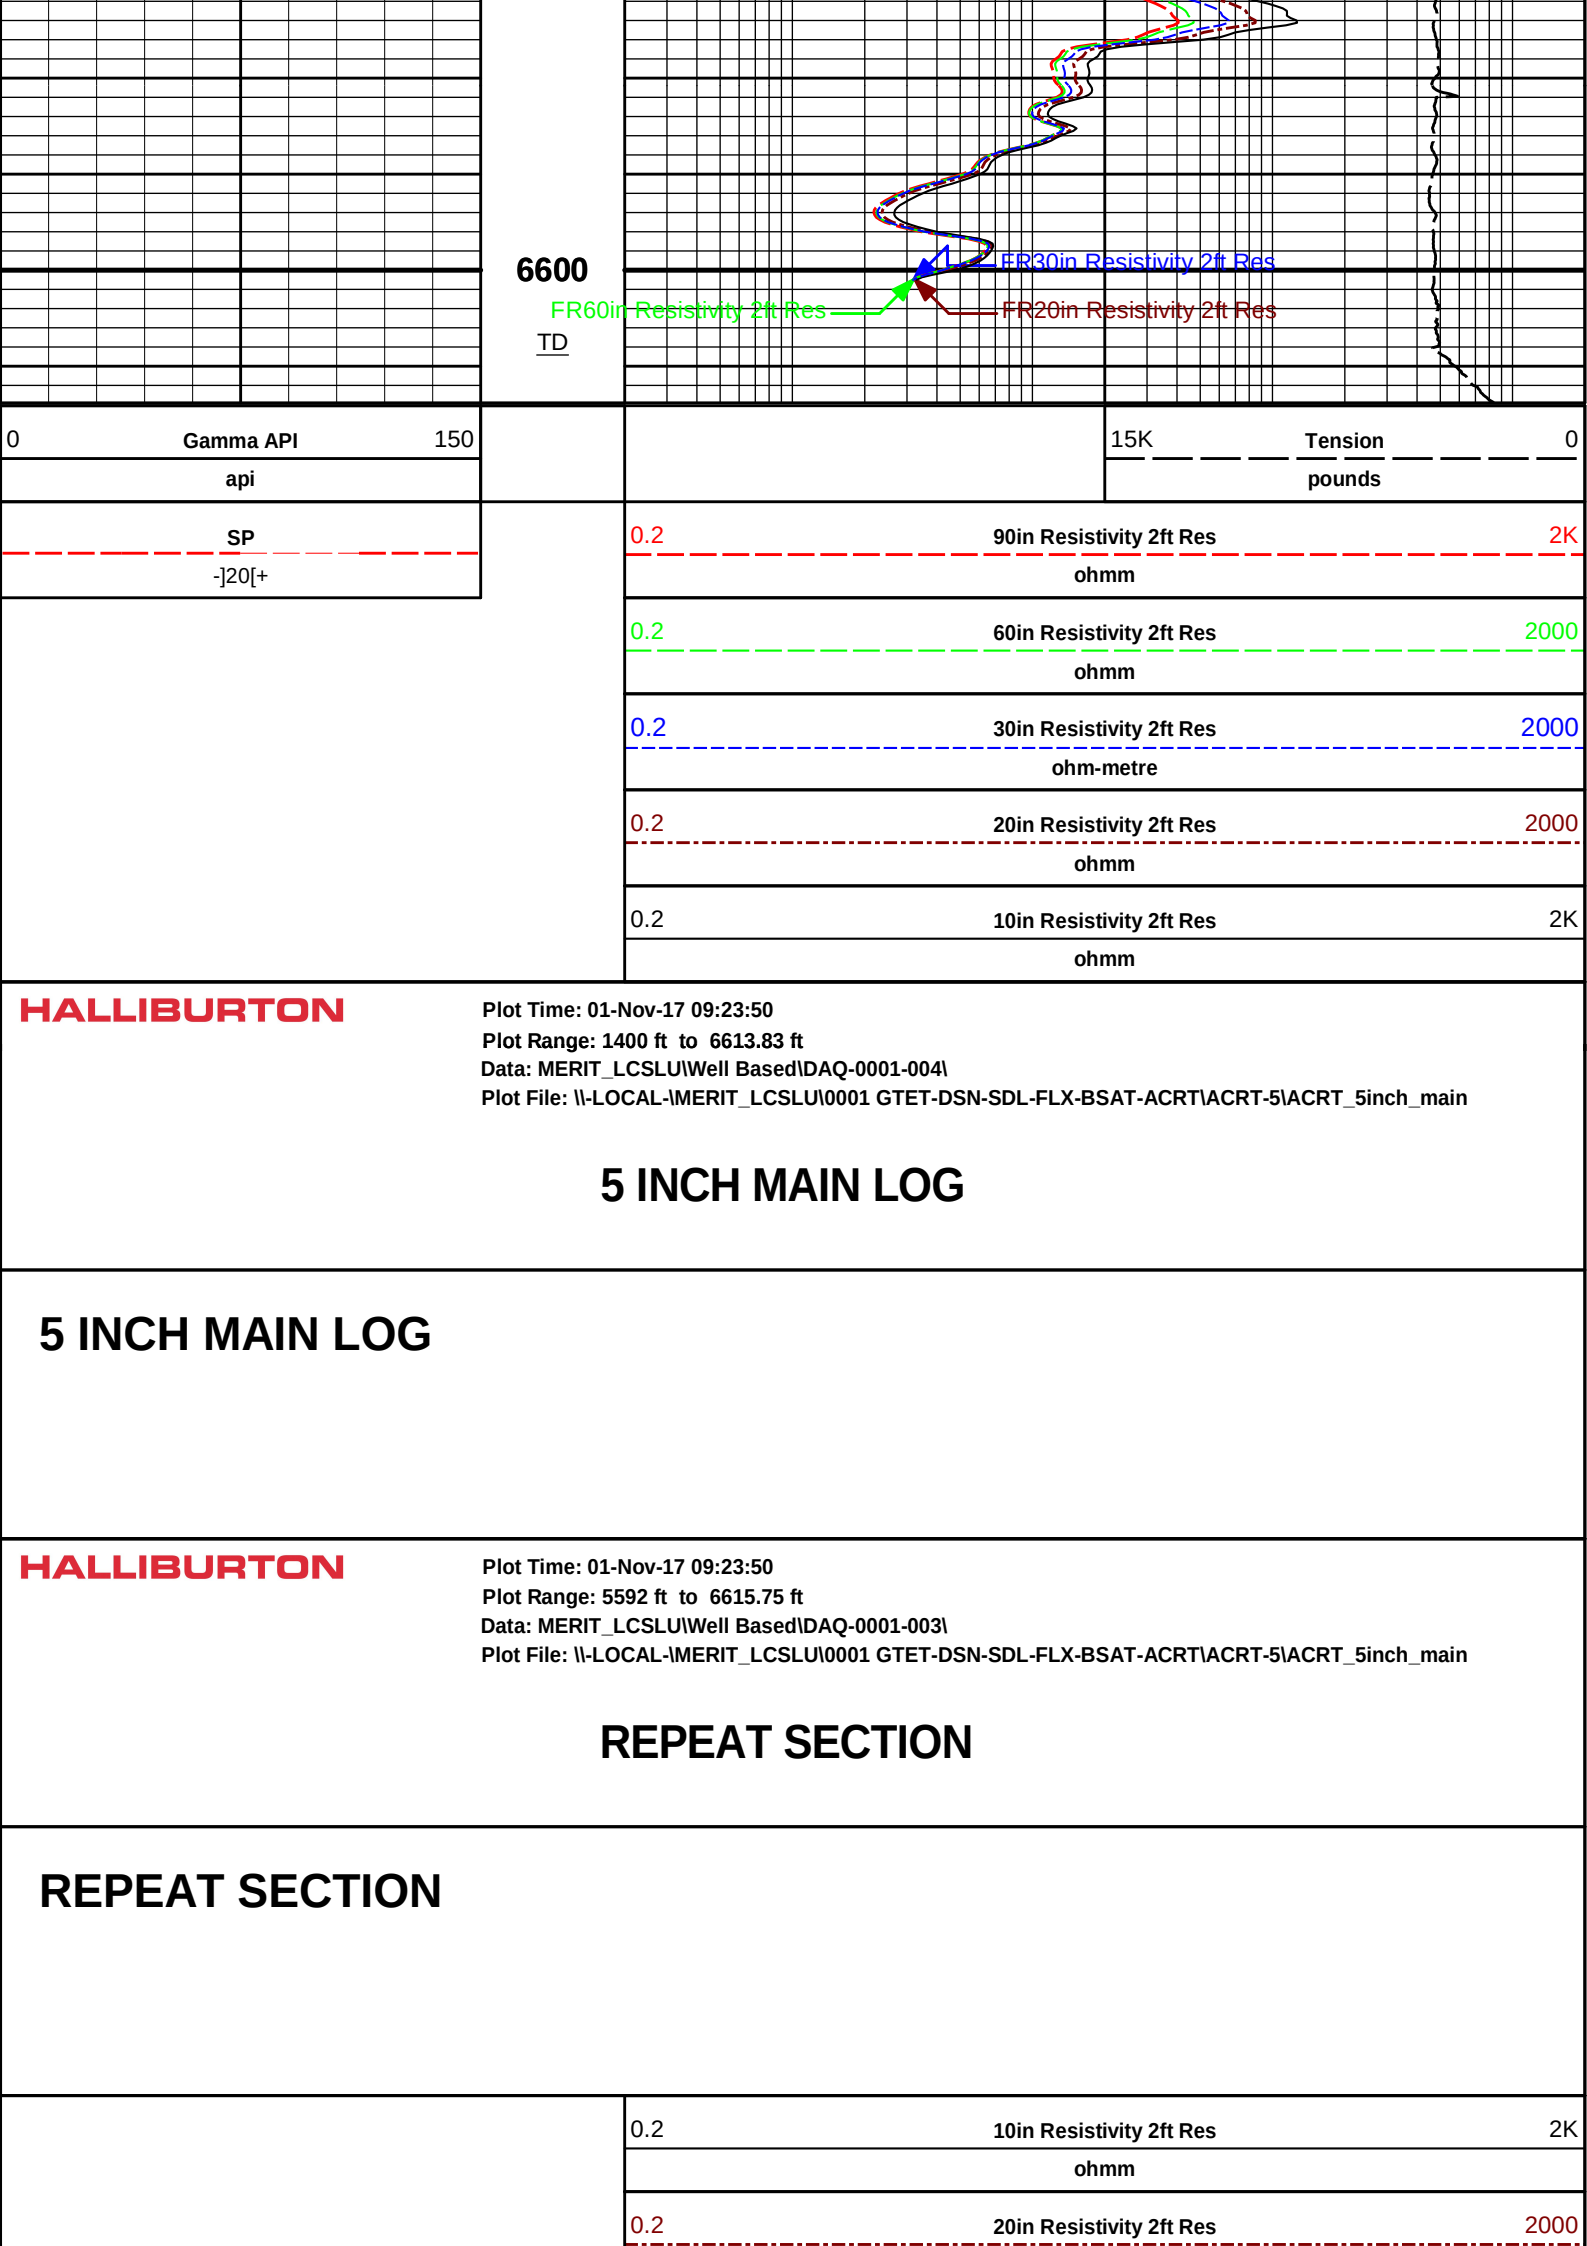

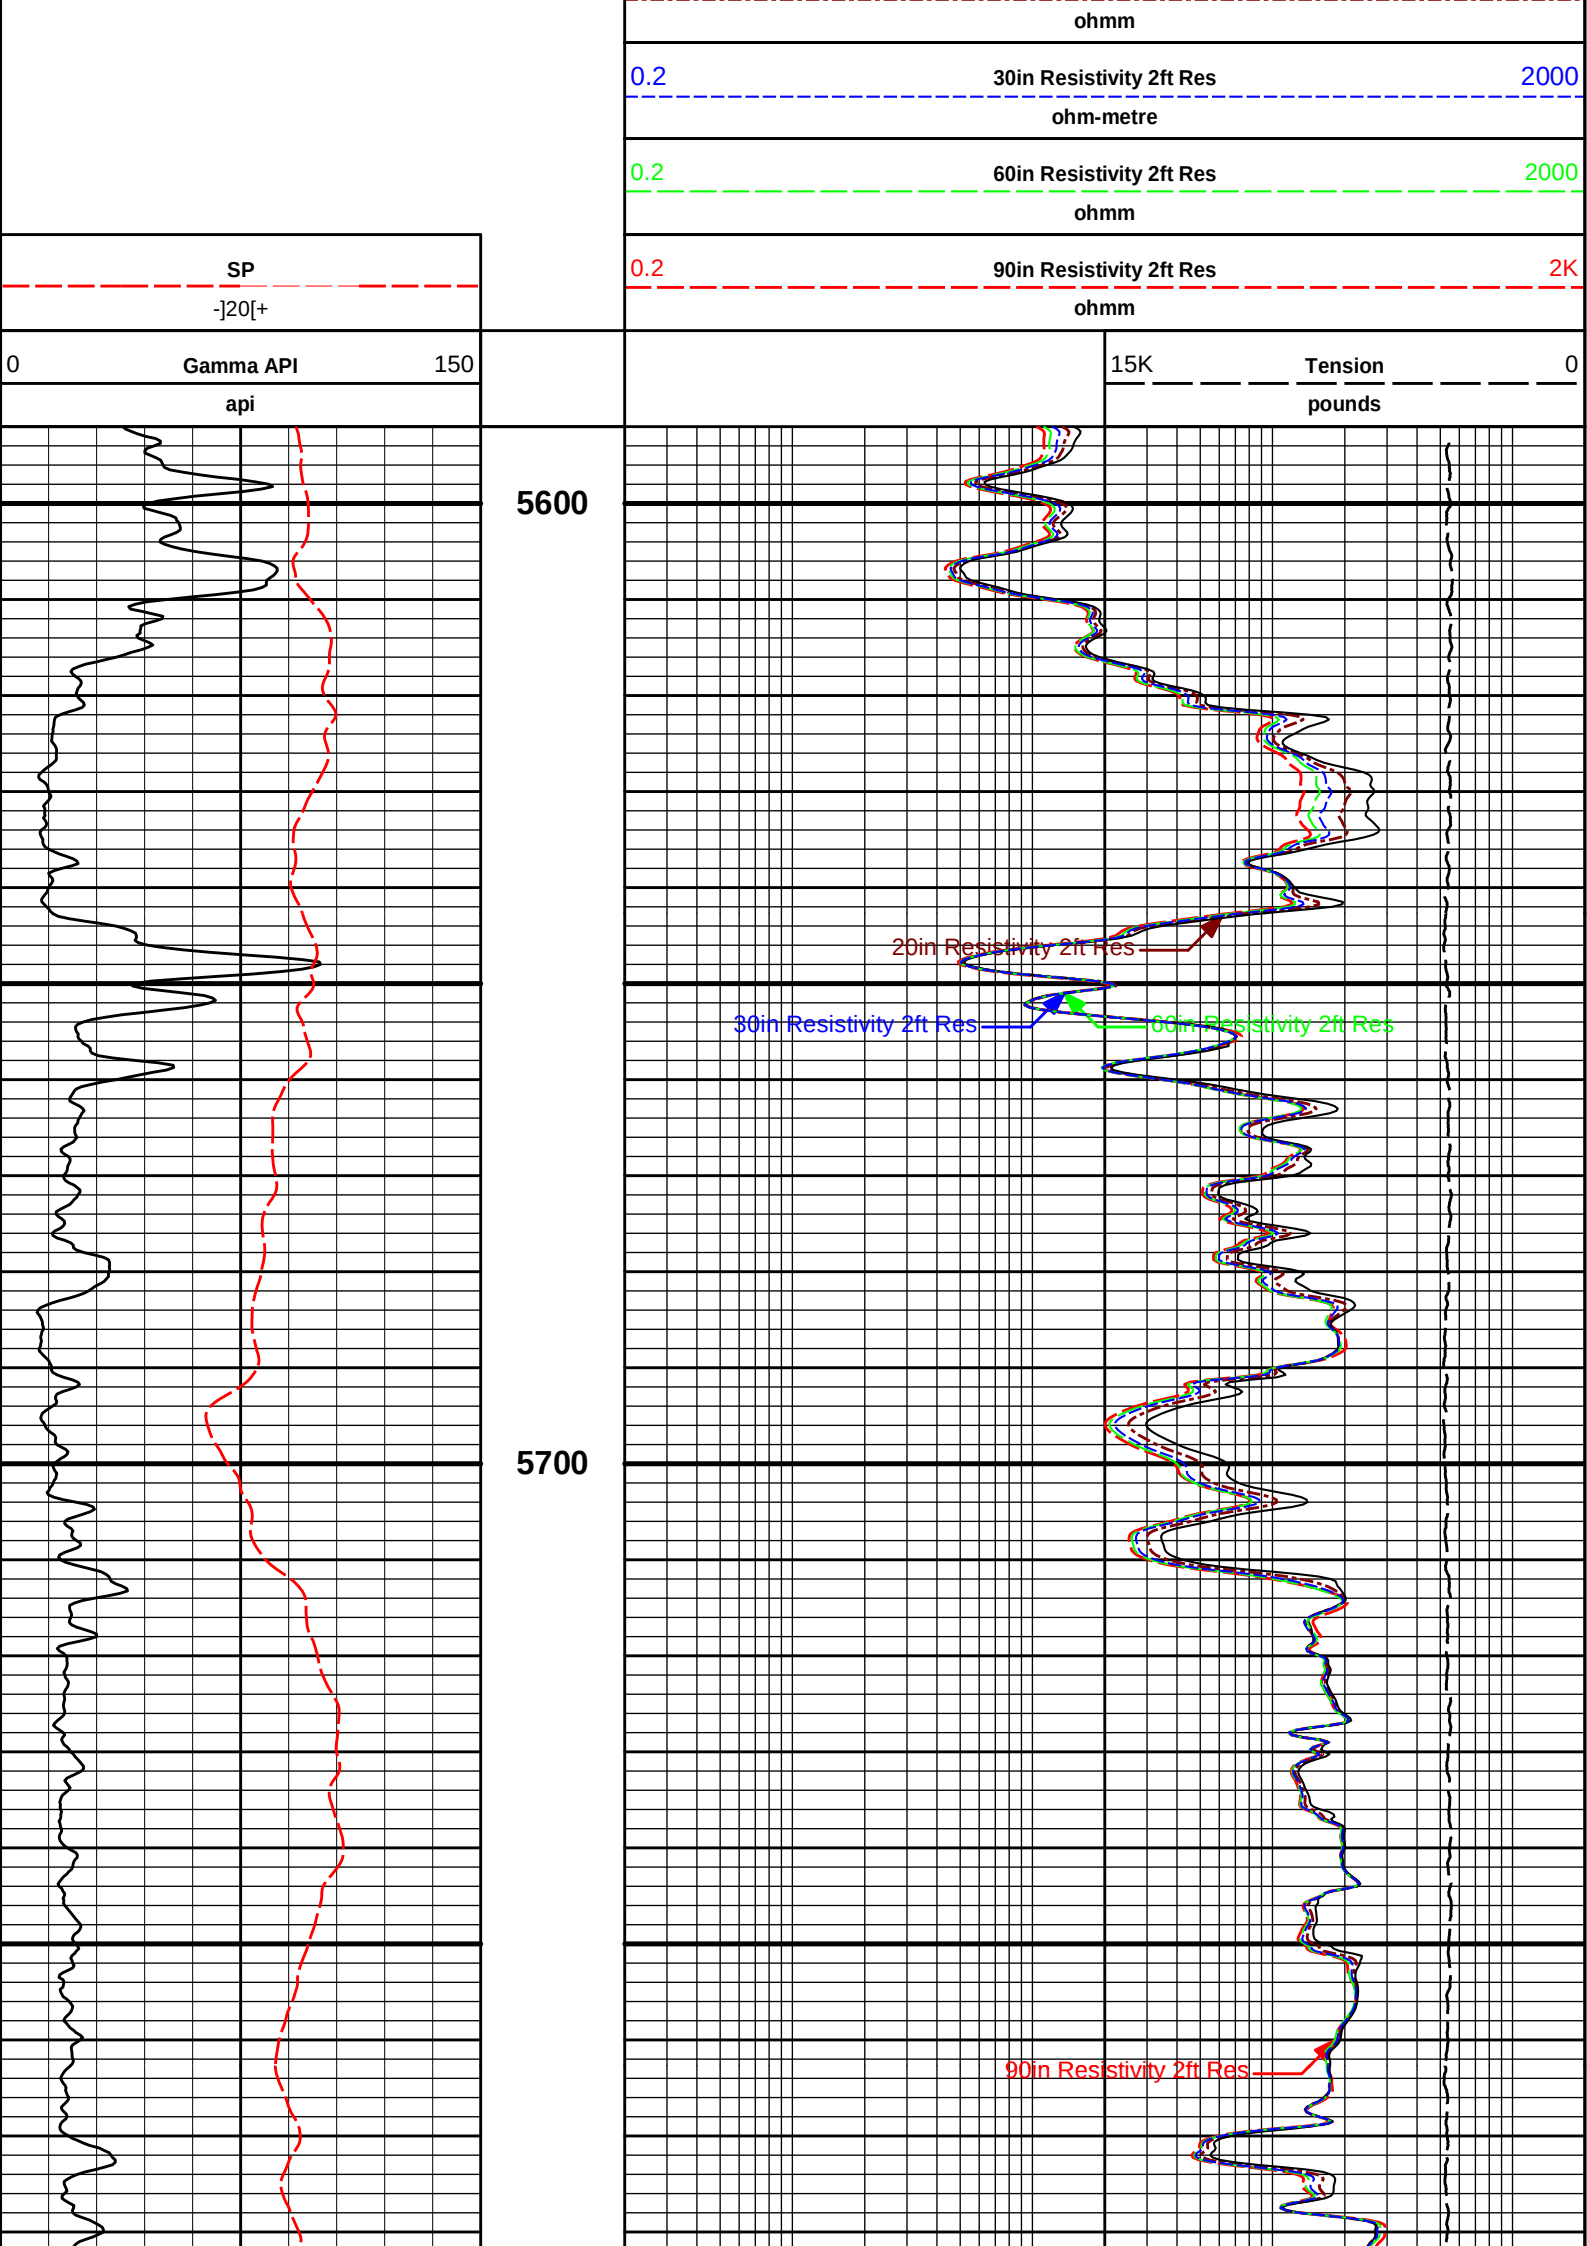


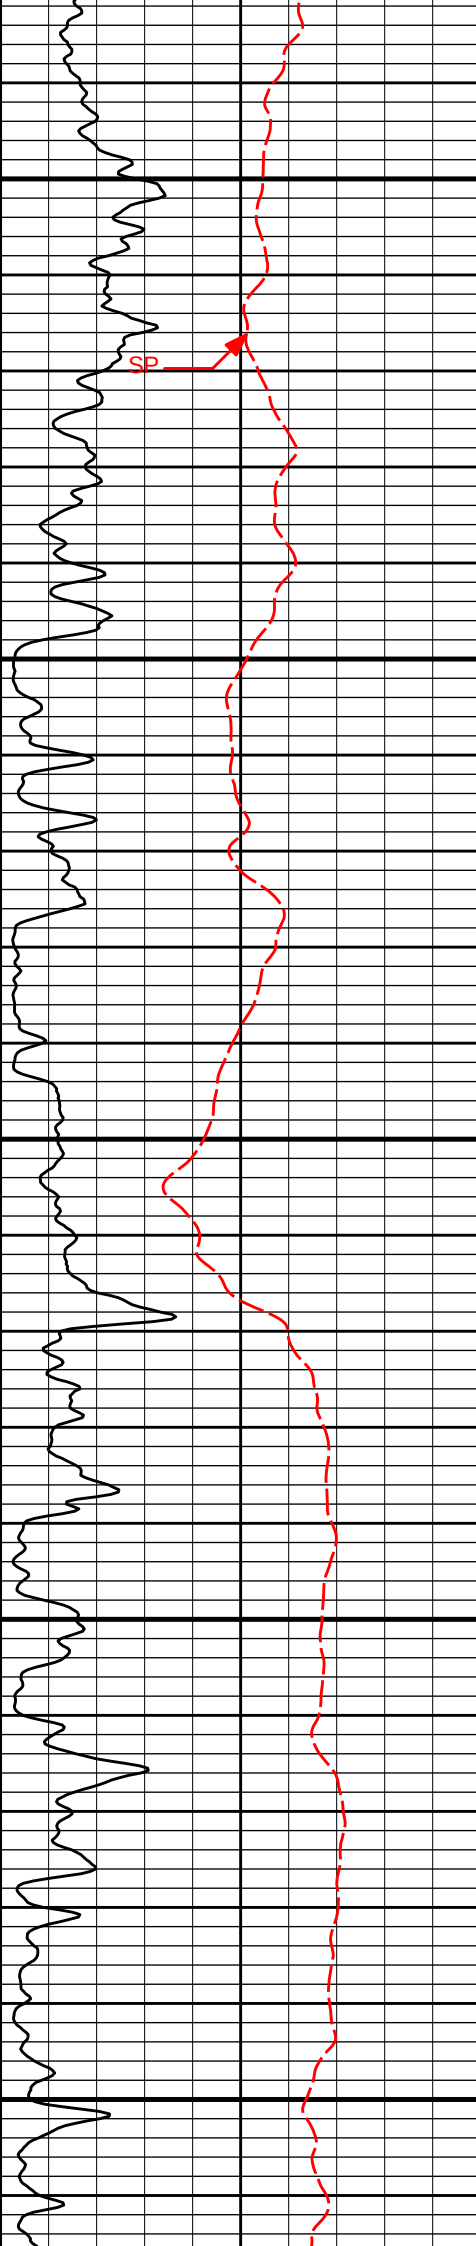

5800

5900

6000

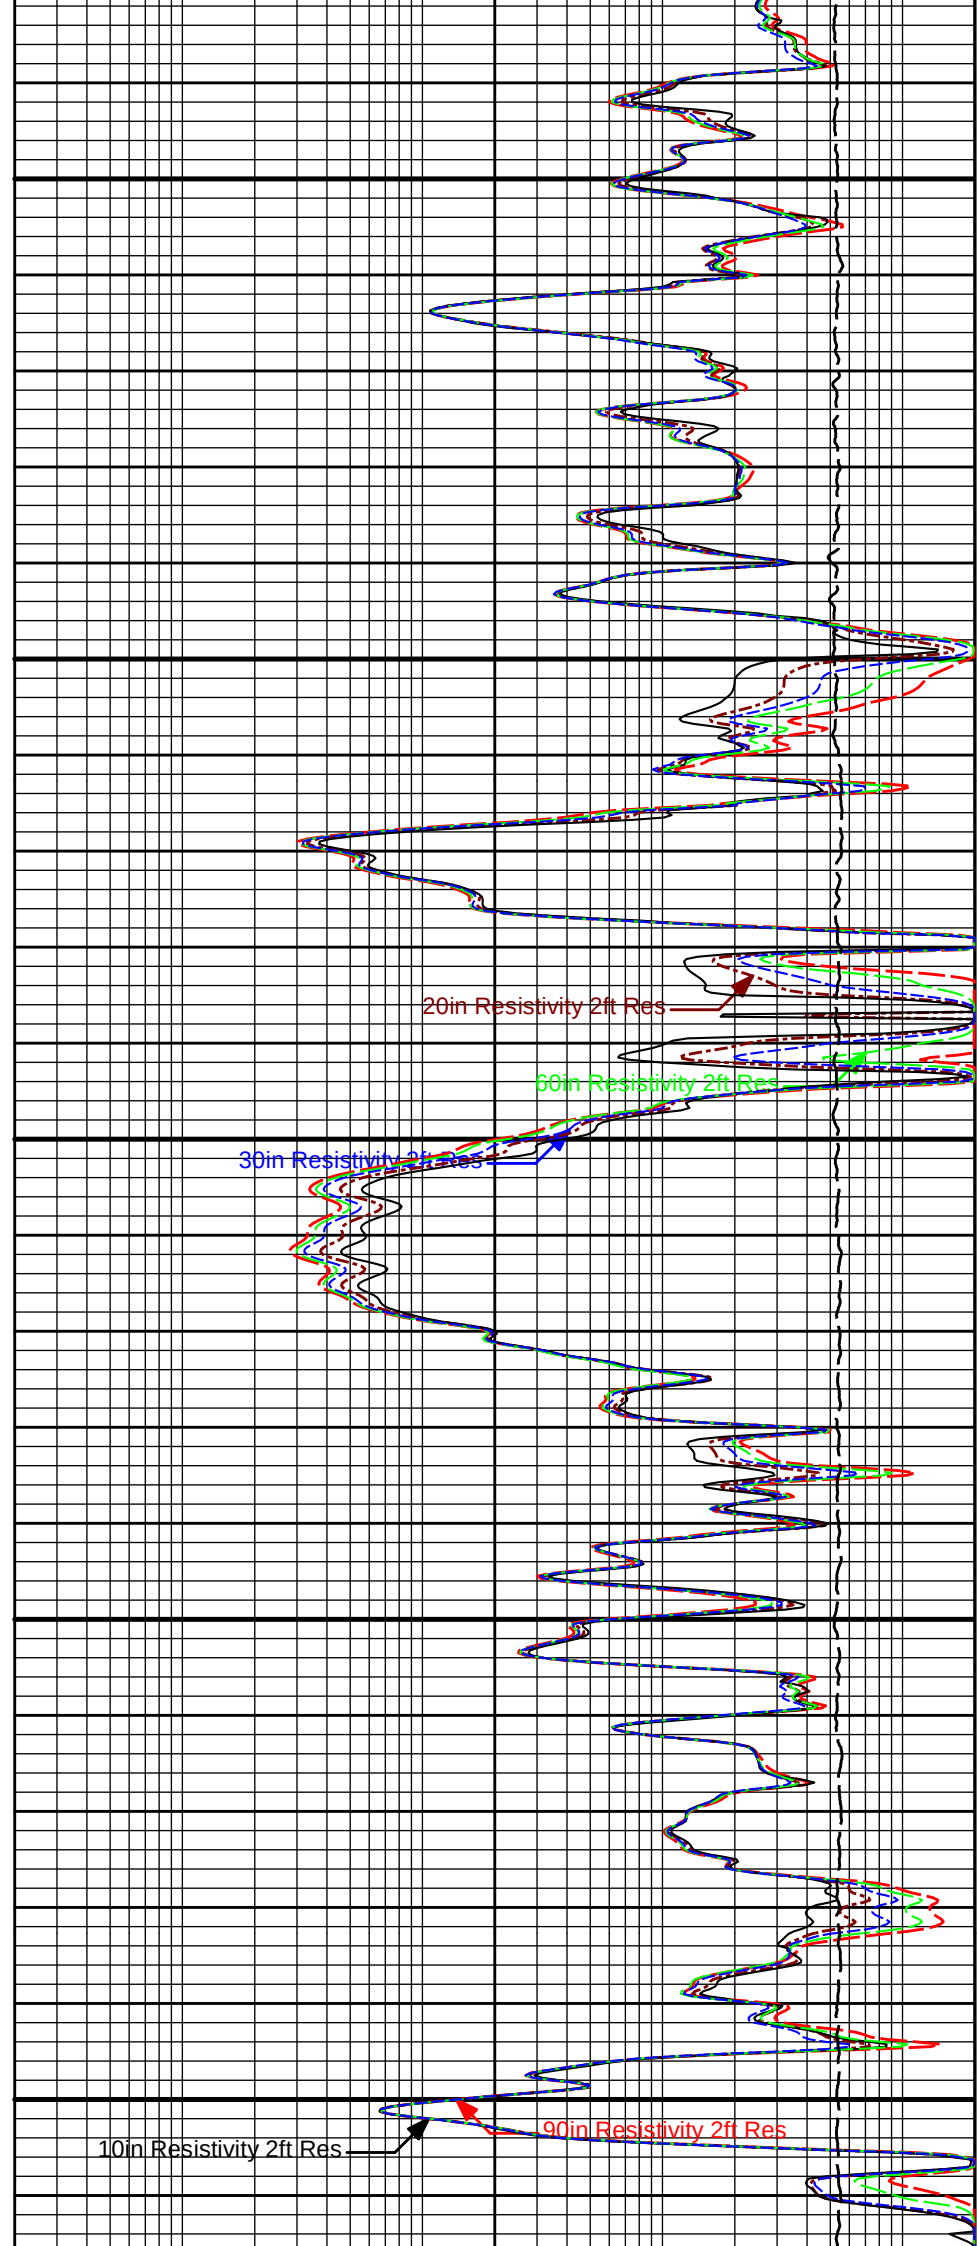


20in Resistivity 2ft Res

30in Resistivity 2ft Res

30in Resistivity 2ft Res


10in Resistivity 2ft Res


90in Resistivity 2ft Res

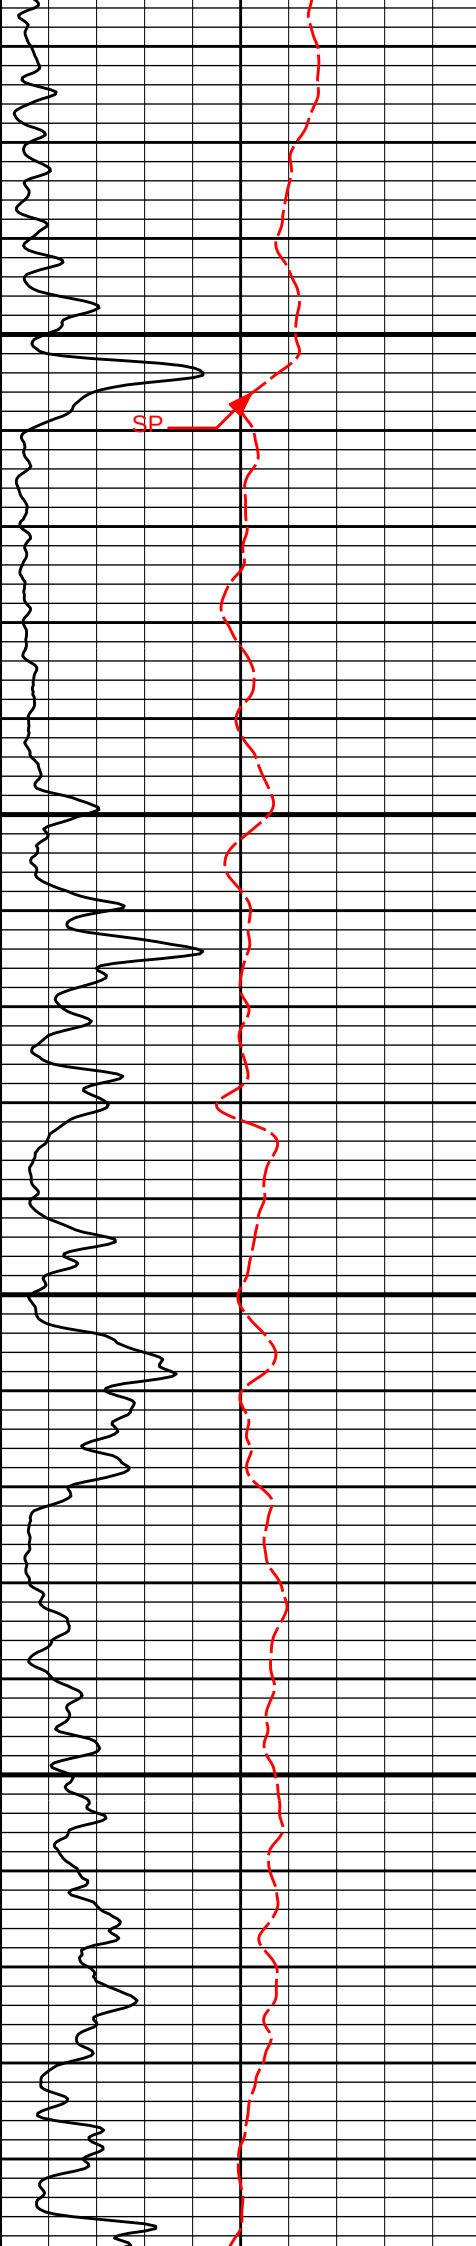

6100


6200

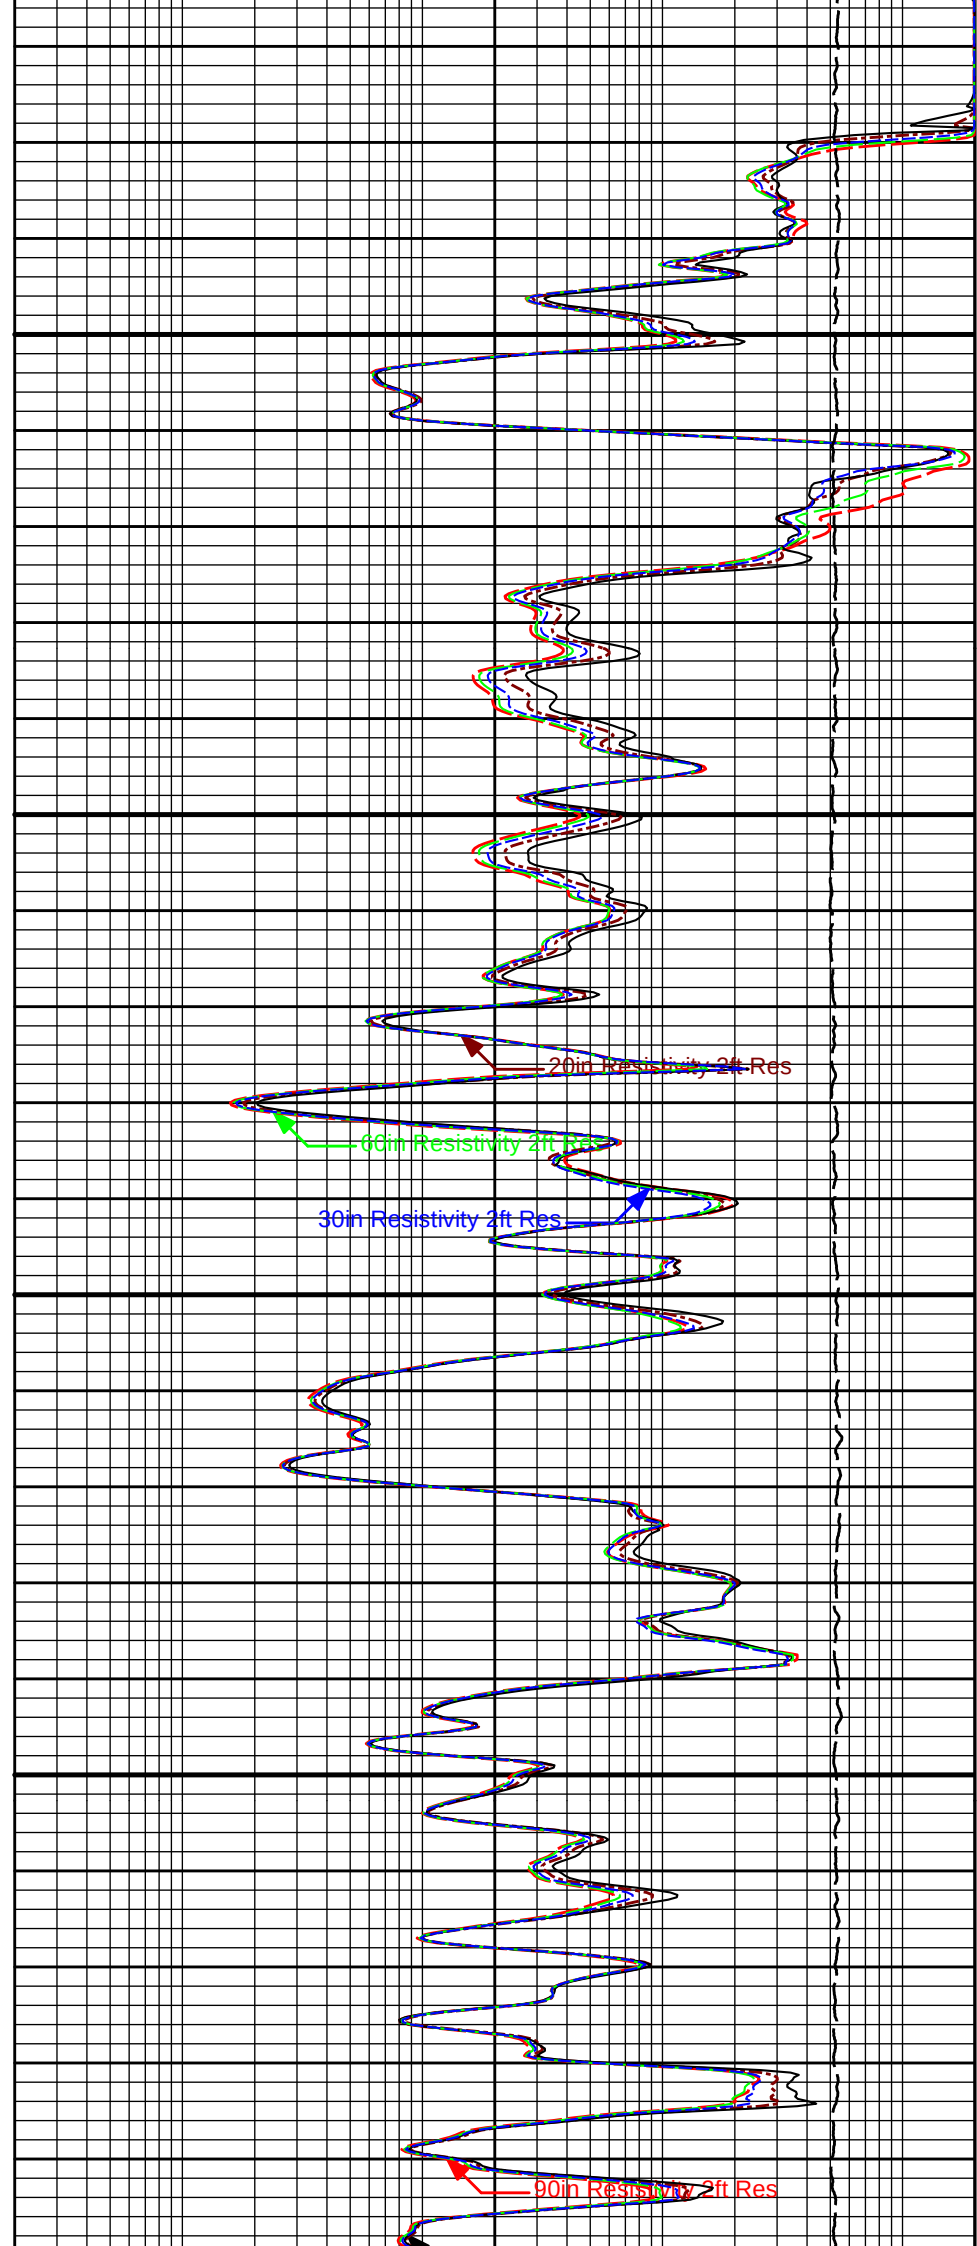


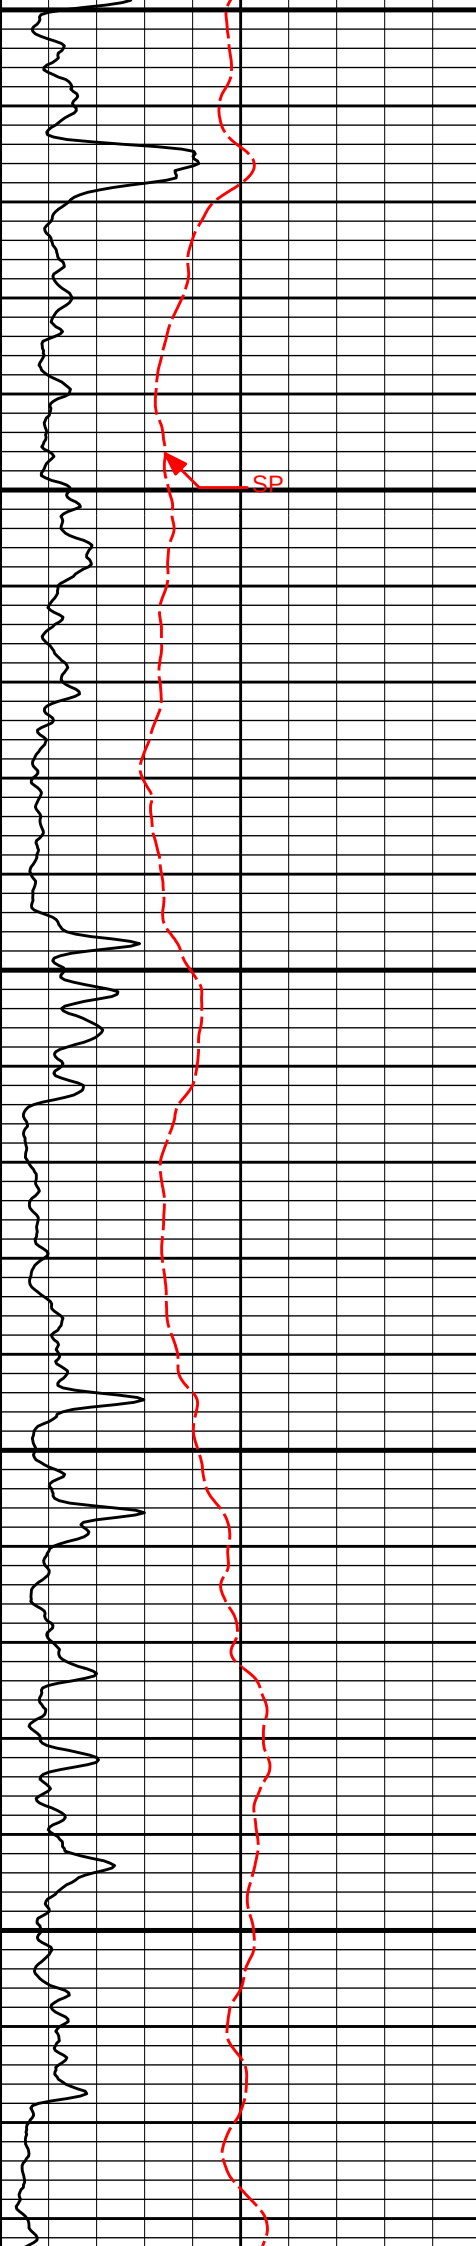

6300

6400

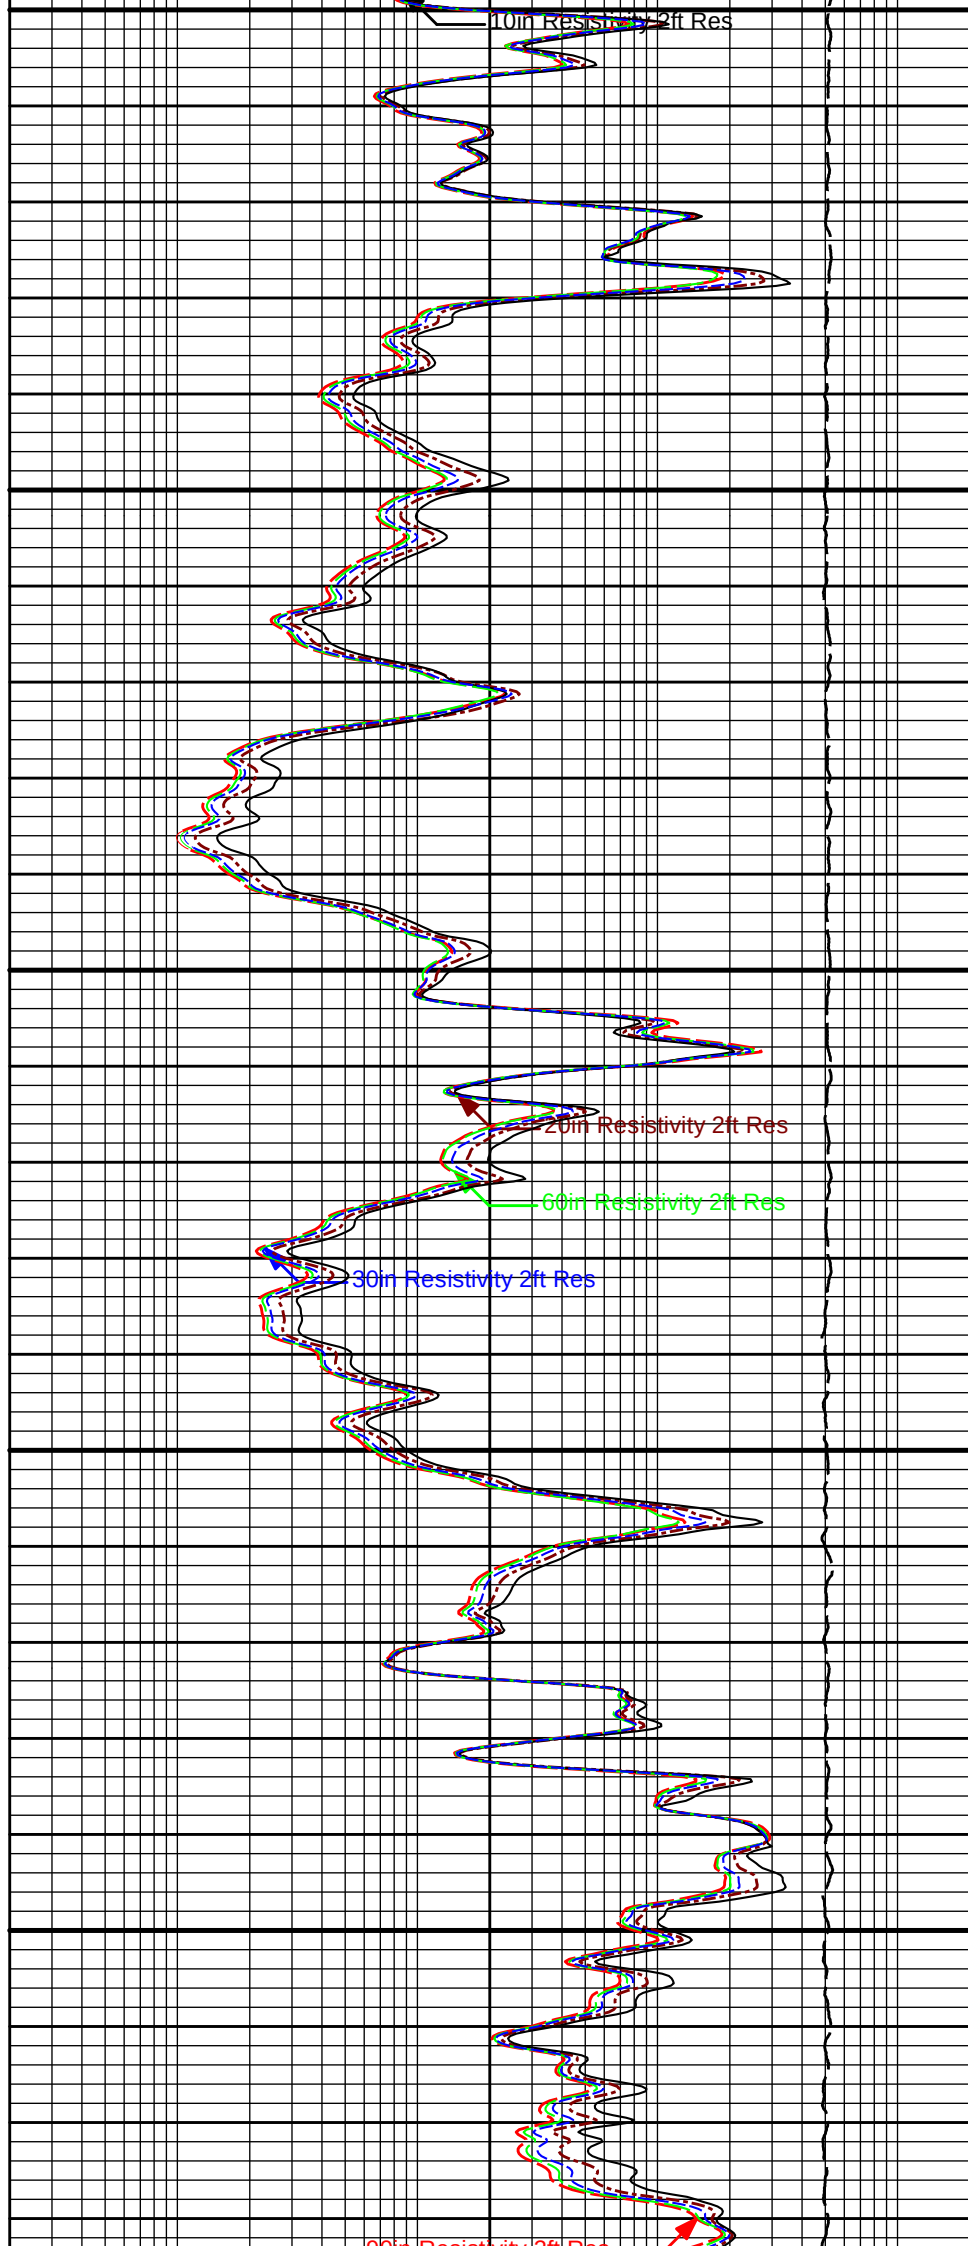

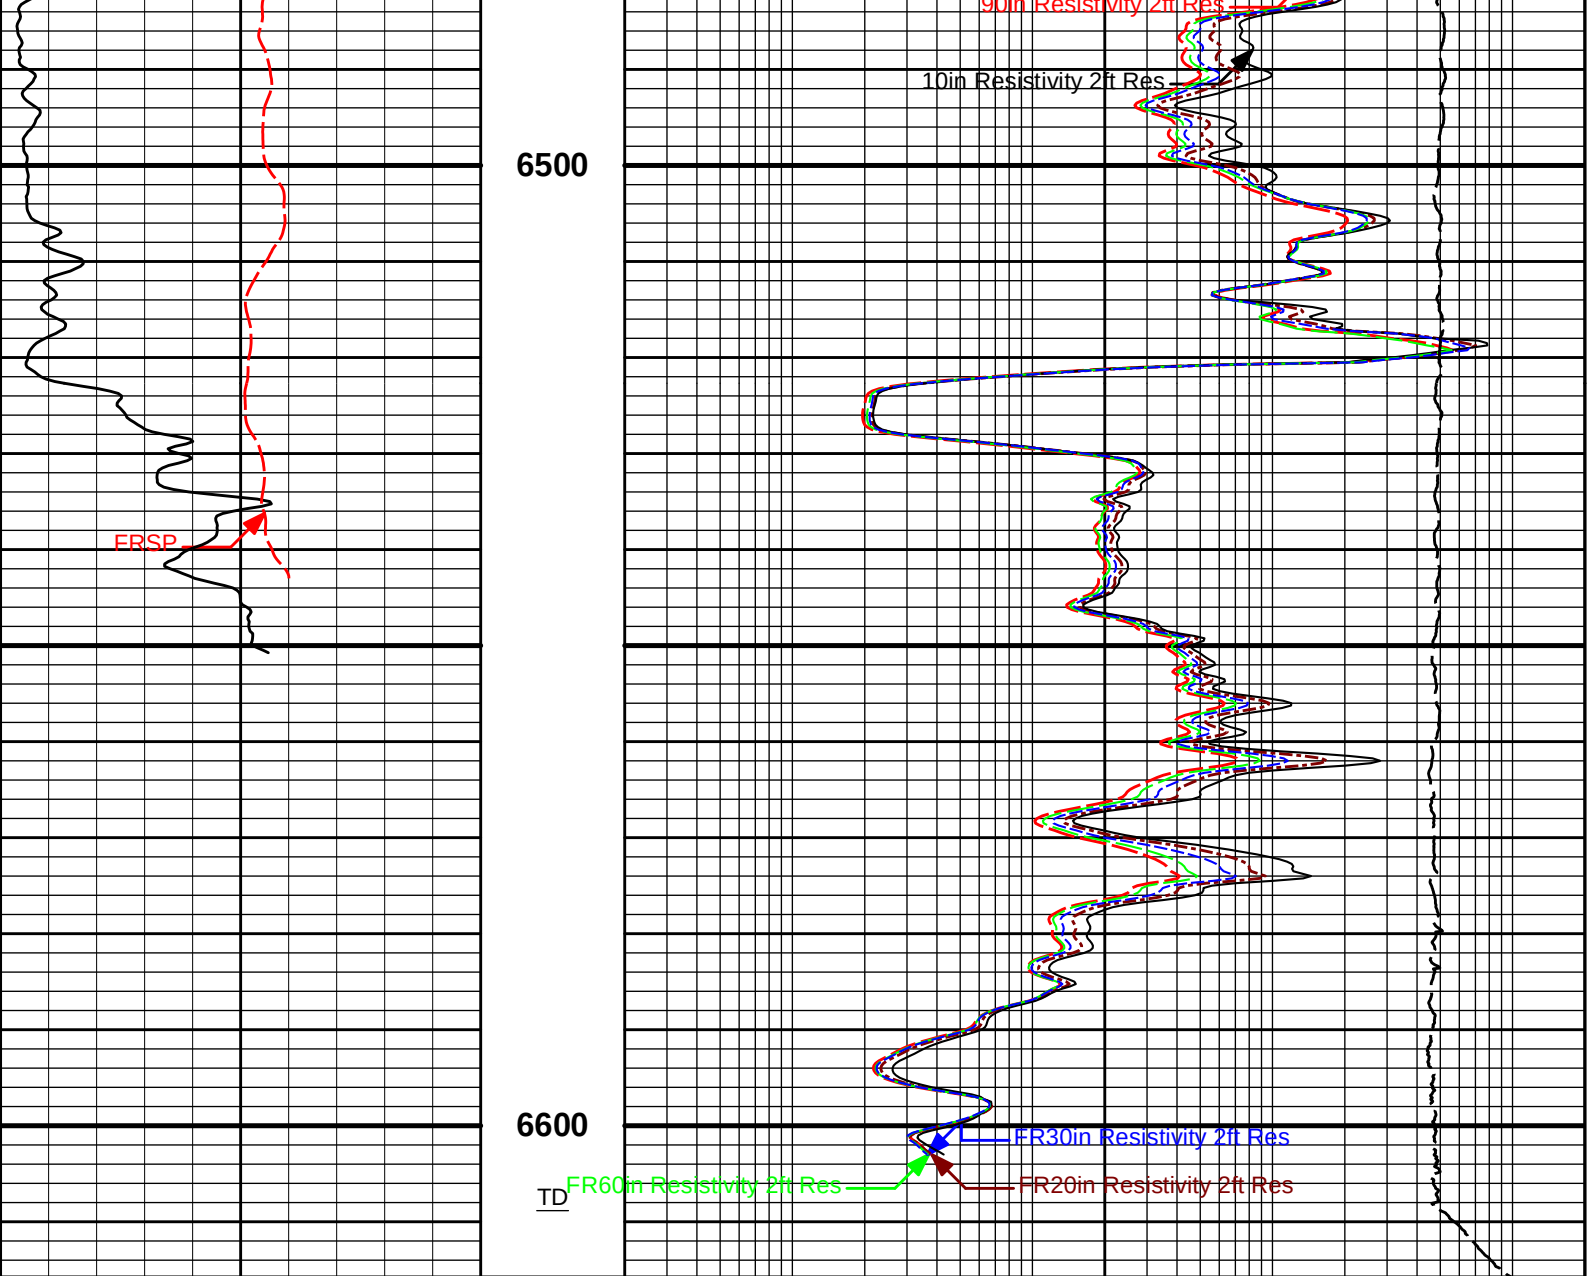

0	Gamma API	150		15K	Tension	0
	api				pounds	
	SP		0.2	90in Resistivity 2ft Res		2K
	-]20[+			ohmm		
			0.2	60in Resistivity 2ft Res		2000
				ohmm		
			0.2	30in Resistivity 2ft Res		2000
				ohm-metre		
			0.2	20in Resistivity 2ft Res		2000
				ohmm		
			0.2	10in Resistivity 2ft Res		2K
				ohmm		

HALLIBURTON

Plot Time: 01-Nov-17 09:23:53
Plot Range: 5592 ft to 6615.75 ft
Data: MERIT_LCSLUIWell Based\DAQ-0001-003\
Plot File: \\-LOCAL-\\MERIT_LCSLUI0001 GTET-DSN-SDL-FLX-BSAT-ACRT\\ACRT-5\\ACRT_5inch_main

REPEAT SECTION

REPEAT SECTION

CALIBRATION REPORT

SURFACE TENSION SHOP CALIBRATION

Tool Name: Depth Panel - PROT01

Reference Calibration Date: 18-Oct-17 01:21:15

Engineer: MICHAEL RICHTER

Calibration Date: 19-Oct-17 01:16:32

Software Version: WL INSITE R5.0.5 (Build 8)

Calibration Version: 1

SURFACE TENSION LOAD CELL				
Measurement	Load Cell Value	Measurement	Calibrated	Units
Low	10840.82	-5.49	0.00	lbs
High	17350.41	7821.21	7830.00	lbs

DOWNHOLE TENSION SHOP CALIBRATION

Tool Name: CH_HOS - CH_HOS_I

Reference Calibration Date: 18-Oct-17 01:28:42

Engineer: MICHAEL RICHTER

Calibration Date: 19-Oct-17 01:20:41

Software Version: WL INSITE R5.0.5 (Build 8)

Calibration Version: 1

DOWNHOLE LOAD CELL				
Measurement	Tool Value	Measurement	Calibrated	Units
Low	-547.18	16.15	0.00	lbs
High	2593.77	989.87	1030.00	lbs

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name: GTET - 11021139

Reference Calibration Date: 06-Oct-17 11:06:34

Engineer: WHITLOCK

Calibration Date: 31-Oct-17 09:35:18

Software Version: WL INSITE R5.0.5 (Build 8)

Calibration Version: 1

Calibrator Source S/N: TB79
Calibrator API Reference:222.00 api
Equivalent Calibrator API Reference:225.9 api

Measurement	Measured	Calibrated	Units
Background	20.9	20.9	api
Background + Calibrator	247.2	246.8	api
Calibrator	226.2	225.9	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION

Tool Name: GTET - 11021139

Reference Calibration Date: 31-Oct-17 09:35:18

Engineer: WHITLOCK

Calibration Date: 31-Oct-17 09:40:12

Software Version: WL INSITE R5.0.5 (Build 8)

Calibration Version: 1

Calibrator Source S/N: TB79
Calibrator API Reference:222.00 api
Equivalent Calibrator API Reference:225.9 api

Field Verification	Shop	Field	Units
Background	20.9	22.7	api
Background + Calibrator	246.8	247.5	api
Calibrator	225.9	224.8	api

Shop	Field	Difference	Tolerance
225.9	224.8	1.1	+/- 9.00

DUAL SPACED NEUTRON SHOP CALIBRATION

Tool Name:	DSNT - 11660709	Reference Calibration Date:	14-Jul-17 14:37:56
Engineer:	MICHAEL RICHTER	Calibration Date:	21-Oct-17 10:02:19
Software Version:	WL INSITE R5.4.5 (Build 2)	Calibration Version:	1

Logging Source S/N: DSN-424
Tank Serial Number: EL RENO
Reference value assigned to Tank: 56.100
Snow Block S/N: 668
Calibration Tank Water Temperature: 79 degF
Min. Tool Housing Outside Diameter: 3.625 in

CALIBRATION CONSTANTS			
Measurement	Prev. Value	New Value	Control Limit On New Value
Gain:	1.01791	1.01437	0.900 - 1.100

WATER TANK SUMMARY (Horizontal Water Tank)				
Measurement	Current Reading (Previous Coef.)	Calibrated (New Coef.)	Change	Control Limit On Change
Porosity (decp):	0.2369	0.2358	0.0011	+/- 0.0020
Calibrated Ratio:	10.5966	10.5597	0.037	+/- 0.050

VERIFIER		
Measurement	Value	Control Limit
Snow-Block Porosity (decp):	0.0811	0.02000 - 0.09000

PASS/FAIL SUMMARY	
Background Check:	Passed
Gain-Range Check:	Passed
Snow-Block Check:	Passed

DUAL SPACED NEUTRON FIELD CALIBRATION			
Tool Name:	DSNT - 11660709	Reference Calibration Date:	21-Oct-17 10:02:19
Engineer:	WHITLOCK	Calibration Date:	31-Oct-17 09:49:47
Software Version:	WL INSITE R5.0.5 (Build 8)	Calibration Version:	1

Logging Source S/N: DSN-424
Snow Block S/N: 668

NEUTRON FIELD-CHECK SUMMARY				
	Shop	Field	Difference	Control Limit On Change
Snow-Block Porosity (decp):	0.0811	0.0704	-0.0106	+/- 0.0150

PASS/FAIL SUMMARY	
Block Change Check:	Passed
Snow Block Stat Check:	Passed
Temperature Check:	Passed

DENSITY CALIPER SHOP CALIBRATION			
Tool Name:	SDLT - 11014296	Reference Calibration Date:	21-Oct-17 17:29:11
Engineer:	MICHAEL RICHTER	Calibration Date:	21-Oct-17 17:35:11
Software Version:	WL INSITE R5.4.5 (Build 2)	Calibration Version:	1
Host Tool Name:	DSNT - 11660709		

CALIBRATION COEFFICIENTS			
Measurement	Previous Value	New Value	Control Limit On New Value
Pad Offset	-4037.57	-3976.32	-7000.00 - -1000.00
Pad Gain	0.0002850	0.0002840	0.0002000 - 0.0006000

Pad Gain	0.0003890	0.0003840	0.0002000 - 0.0006000
Arm Offset	-3741.15	-3704.04	-5000.00 - 3000.00
Arm Gain	0.0005006	0.0004953	0.000300 - 0.000700
Arm Power	-0.000004136	-0.000003872	-0.000010000 - 0.000010000

The ring diameter is computed from: DIAMETER = PAD EXTENSION + ARM EXTENSION + TOOL DIAMETER

Tool Diameter: 4.50 in

CALIBRATION RINGS				
Measurement	Current Reading (Previous Coeff.)	Calibrated (New Coeff.)	Change	Control Limit On New Value
PAD EXTENSION:				
Small Ring (in)	1.98	2.00	0.02	+/- 0.20
Medium Ring (in)	3.74	3.75	0.01	+/- 0.20
RING DIAMETER:				
Small Ring (in)	6.48	6.50	0.02	+/- 0.20
Medium Ring (in)	8.24	8.25	0.01	+/- 0.20
Large Ring (in)	15.00	15.00	0.00	+/- 0.20

PASS/FAIL SUMMARY	
Calibration-Coefficients Range Check:	Passed
Ring-Measurement Check:	Passed
PASS/FAIL SUMMARY	
Calibration-Coefficients Range Check:	Passed

SDLT CALIPER FIELD CALIBRATION

Tool Name:	SDLT - 11014296	Reference Calibration Date:	21-Oct-17 17:35:11
Engineer:	MICHAEL RICHTER	Calibration Date:	31-Oct-17 09:25:10
Software Version:	WL INSITE R5.4.5 (Build 2)	Calibration Version:	1

MEASURED CALIPER VALUES				
Measurement	Shop	Field	Change	Control Limit On New Value
Pad Extension	3.75	3.74	-0.01	+/- 0.10
Ring Diameter	8.25	8.24	-0.01	+/- 0.15

PASS/FAIL SUMMARY	
Pad Extension Check:	Passed
Diameter Check:	Passed

BSAT FIELD CASING CHECK

Tool Name:	BSAT - 10939049	Calibration Date:	30-Mar-17 10:01:32
Engineer:	HARRIS		
Software Version:	WL INSITE R5.0.5 (Build 8)	Calibration Version:	1

Pre-Log Check	Check Depth	Shop	Field	Difference	Tolerance	Units
Delta-T Compensated	147.01	57.00	56.56	0.4400	1.00	uspf

ARRAY COMPENSATED TRUE RESISTIVITY SHOP CALIBRATION

Tool Name:	ACRt Sonde - 11038385	Reference Calibration Date:	12-Sep-17 13:48:00
Engineer:	JORGE ORLANDO PEREZ	Calibration Date:	12-Sep-17 13:58:19
Software Version:	WL INSITE R5.0.5 (Build 8)	Calibration Version:	1
Host Tool Name:	ACRt Instrument - 11055059		

TYPICAL GAIN RANGE

Subarray	R12KHz			R36KHz			R72KHz		
	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper
A1 (80")	0.95	1.0395	1.05	0.95	1.0229	1.05	0.95	1.0146	1.05
A2 (50")	0.95	1.0409	1.05	0.95	1.0225	1.05	0.95	1.0165	1.05
A3 (29")	0.95	1.0384	1.05	0.95	1.0194	1.05	0.95	1.0115	1.05
A4 (17")	0.95	1.0346	1.05	0.95	1.0160	1.05	0.95	1.0080	1.05

R12KHz					
	Measured (mmho/m)	Last Month (mmho/m)	Difference (mmho/m)	Tolerance (mmho/m)	Pass/Fail
A1 (80")	-223155904.000	-223150640.000	5264.000	11157532.000	Pass
A2 (50")	-220713888.000	-220710416.000	3472.000	11035520.800	Pass
A3 (29")	-216614880.000	-216612000.000	2880.000	10830600.000	Pass
A4 (17")	-214578320.000	-214578224.000	96.000	10728911.200	Pass
A5 (10")	-214986432.000	-214982096.000	4336.000	10749104.800	Pass
A6 (6")	-214394544.000	-214391936.000	2608.000	10719596.800	Pass
R36KHz					
	Measured (mmho/m)	Last Month (mmho/m)	Difference (mmho/m)	Tolerance (mmho/m)	Pass/Fail
A1 (80")	60628184.000	60610992.000	17192.000	3030549.600	Pass
A2 (50")	62049960.000	62033248.000	16712.000	3101662.400	Pass
A3 (29")	53214172.000	53197224.000	16948.000	2659861.200	Pass
A4 (17")	50561756.000	50544860.000	16896.000	2527243.000	Pass
A5 (10")	52600244.000	52584856.000	15388.000	2629242.800	Pass
A6 (6")	50656572.000	50641704.000	14868.000	2532085.200	Pass
R72KHz					
	Measured (mmho/m)	Last Month (mmho/m)	Difference (mmho/m)	Tolerance (mmho/m)	Pass/Fail
A1 (80")	-92698504.000	-92694664.000	3840.000	4634733.200	Pass
A2 (50")	-89662344.000	-89657152.000	5192.000	4482857.600	Pass
A3 (29")	-89109216.000	-89105528.000	3688.000	4455276.400	Pass
A4 (17")	-84842648.000	-84836840.000	5808.000	4241842.000	Pass
A5 (10")	-83337800.000	-83332480.000	5320.000	4166624.000	Pass
A6 (6")	-84561904.000	-84554136.000	7768.000	4227706.800	Pass
PASS/FAIL SUMMARY					
Std Deviation Verification				Pass	
Average Verification				Pass	
Gain Tolerance Verification				Pass	

MICRO LOG SHOP CALIBRATION					
Tool Name:	Microlog Pad - 11014296			Reference Calibration Date:	21-Oct-17 17:40:50
Engineer:	MICHAEL RICHTER			Calibration Date:	21-Oct-17 17:42:32
Software Version:	WL INSITE R5.4.5 (Build 2)			Calibration Version:	1
Host Tool Name:	DSNT - 11660709				

CALIBRATION COEFFICIENT SUMMARY					
Measurement	Micro Log Normal		Micro Log Lateral		Units
	Measured	Calibrated	Measured	Calibrated	
Tool Zero	-0.11	-0.14	0.01	0.01	ohmm
Calibration Point #1	0.02	0.00	-0.01	0.00	ohmm
Calibration Point #2	20.00	20.00	19.99	20.00	ohmm
Internal Reference	19.95	19.94	20.00	20.01	ohmm
Measurement	Micro Log Normal Tool Value		Micro Log Lateral Tool Value		Units
Tool Zero	-10.63		4.50		V
Calibration Point #1	24.92		-0.13		V
Calibration Point #2	5262.56		6875.93		V
Internal Reference	5247.65		6879.76		V

MICRO LOG FIELD CHECK					
Tool Name:	Microlog Pad - 11014296			Reference Calibration Date:	21-Oct-17 17:42:32
Engineer:	WHITLOCK			Calibration Date:	31-Oct-17 09:30:12


Mud Cell	1.00	-----	-----	0	-----	ohm-m
Microlog Pad-11014296						
MicroLog Normal	19.94	19.77	-----	0.17	+/-0.80	ohmm
MicroLog Lateral	20.01	19.83	-----	0.18	+/-0.80	ohmm
SDLT Pad-10809130						
Near(B+D+P+L)	1339.219	1326.077	-----	13.142	+/-14.801	cps
Far(B+D+P+L)	810.608	805.315	-----	5.293	+/-15.737	cps
Data: MERIT_LCSLU0001 GTET-DSN-SDL-FLX-BSAT-ACRTIDLE						
Date: 01-Nov-17 00:21:37						





PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.000	ppg
	SHARED	WAGT	Weighting Agent	Barite	
	SHARED	BSAL	Borehole salinity	0.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	2.000	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	CSTR	Compressive Strength	1000.00	psia
	SHARED	ST	Surface Temperature	75.0	degF
	SHARED	TD	Total Well Depth	6610.00	ft
	SHARED	BHT	Bottom Hole Temperature	138.0	degF
	SHARED	SVTM	Navigation and Survey Master Tool	NONE	
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
	SHARED	TEMM	CBM Temperature Master Tool	GTET	
	Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	
	Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
	Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
	Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
	Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
	Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
	Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
	Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
	Rwa / CrossPlot	BHSM	Borehole Size Source Tool	SDLT	
	Rwa / CrossPlot	ROIN	Input for RO Calculation	Rwa	
	GTET	GROK	Process Gamma Ray?	Yes	
	GTET	GEOK	Process Gamma Ray EVR?	No	
	GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
	GTET	BHSM	Borehole Size Source Tool	SDLT	
	DSNT	DNOK	Process DSN?	Yes	
	DSNT	DEOK	Process DSN EVR?	No	
	DSNT	NLIT	Neutron Lithology	Limestone	

DSNT	DSNO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
DSNT	DNTT	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
DSNT	BHSM	Borehole Size Source Tool	SDLT	
SDLT	CLOK	Process Caliper Outputs?	Yes	
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
SDLT Pad	BHSM	Borehole Size Source Tool	SDLT	
BSAT	MBOK	Compute BCAS Results?	Yes	
BSAT	FLLO	Frequency Filter Low Pass Value?	5000	Hz
BSAT	FLHI	Frequency Filter High Pass Value?	27000	Hz
BSAT	DTFL	Delta -T Pore Fluid	189.00	uspf
BSAT	DTMT	Delta -T Matrix Type	Limestone 47.6	
BSAT	DTSH	Delta -T Shale	100.00	uspf
BSAT	SPEQ	Acoustic Porosity Equation	Wyllie	
ACRt Sonde	RTOK	Process ACRT?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Upr	
ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMAX	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm
ACRt Sonde	BHSM	Borehole Size Source Tool	SDLT	
ACRt Sonde	MBFL	Apply Corkscrew Effect?	No	
BOTTOM_____				
Data: MERIT_LCSLU0001 GTET-DSN-SDL-FLX-BSAT-ACRTIDLE			Date: 01-Nov-17 00:23:57	

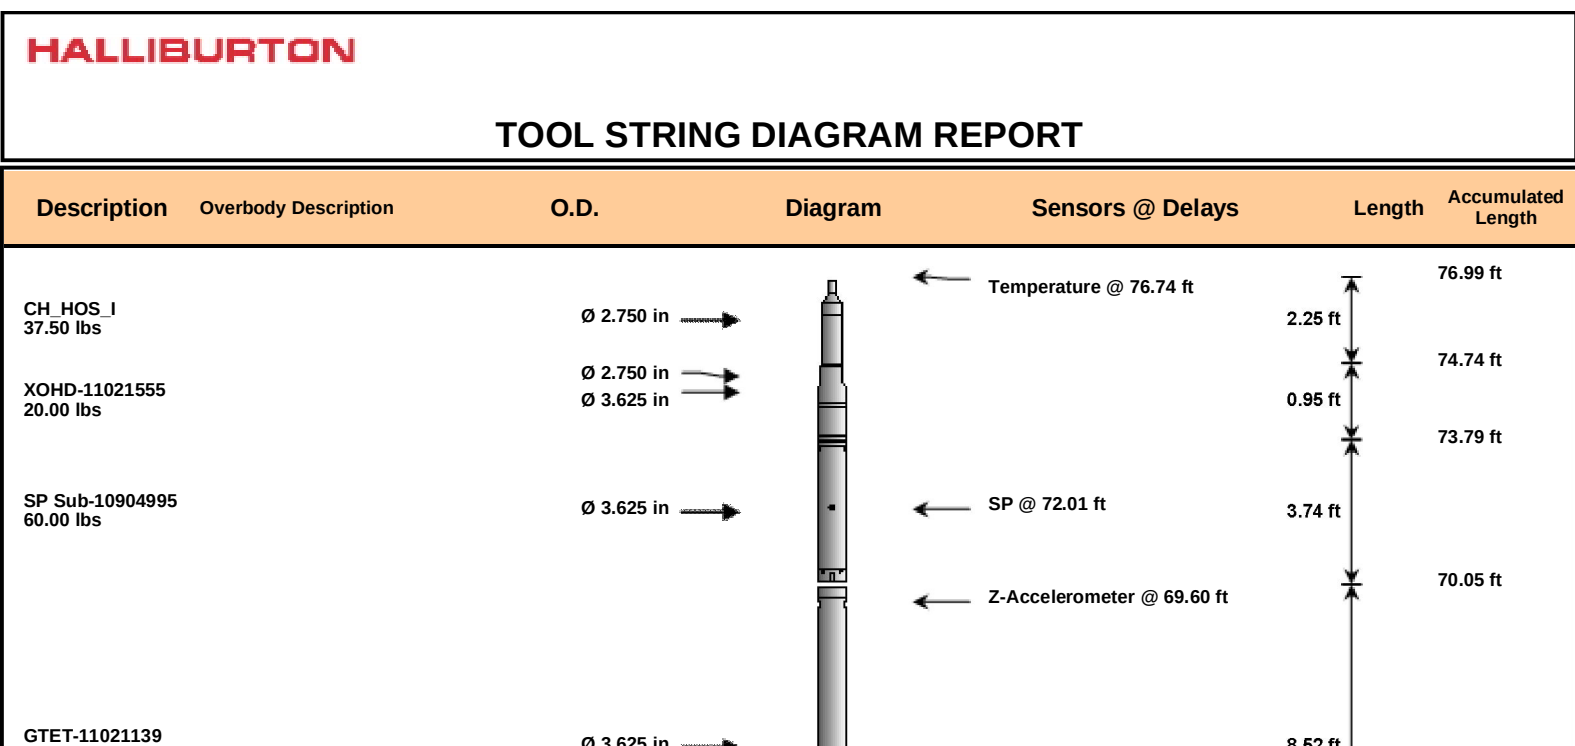

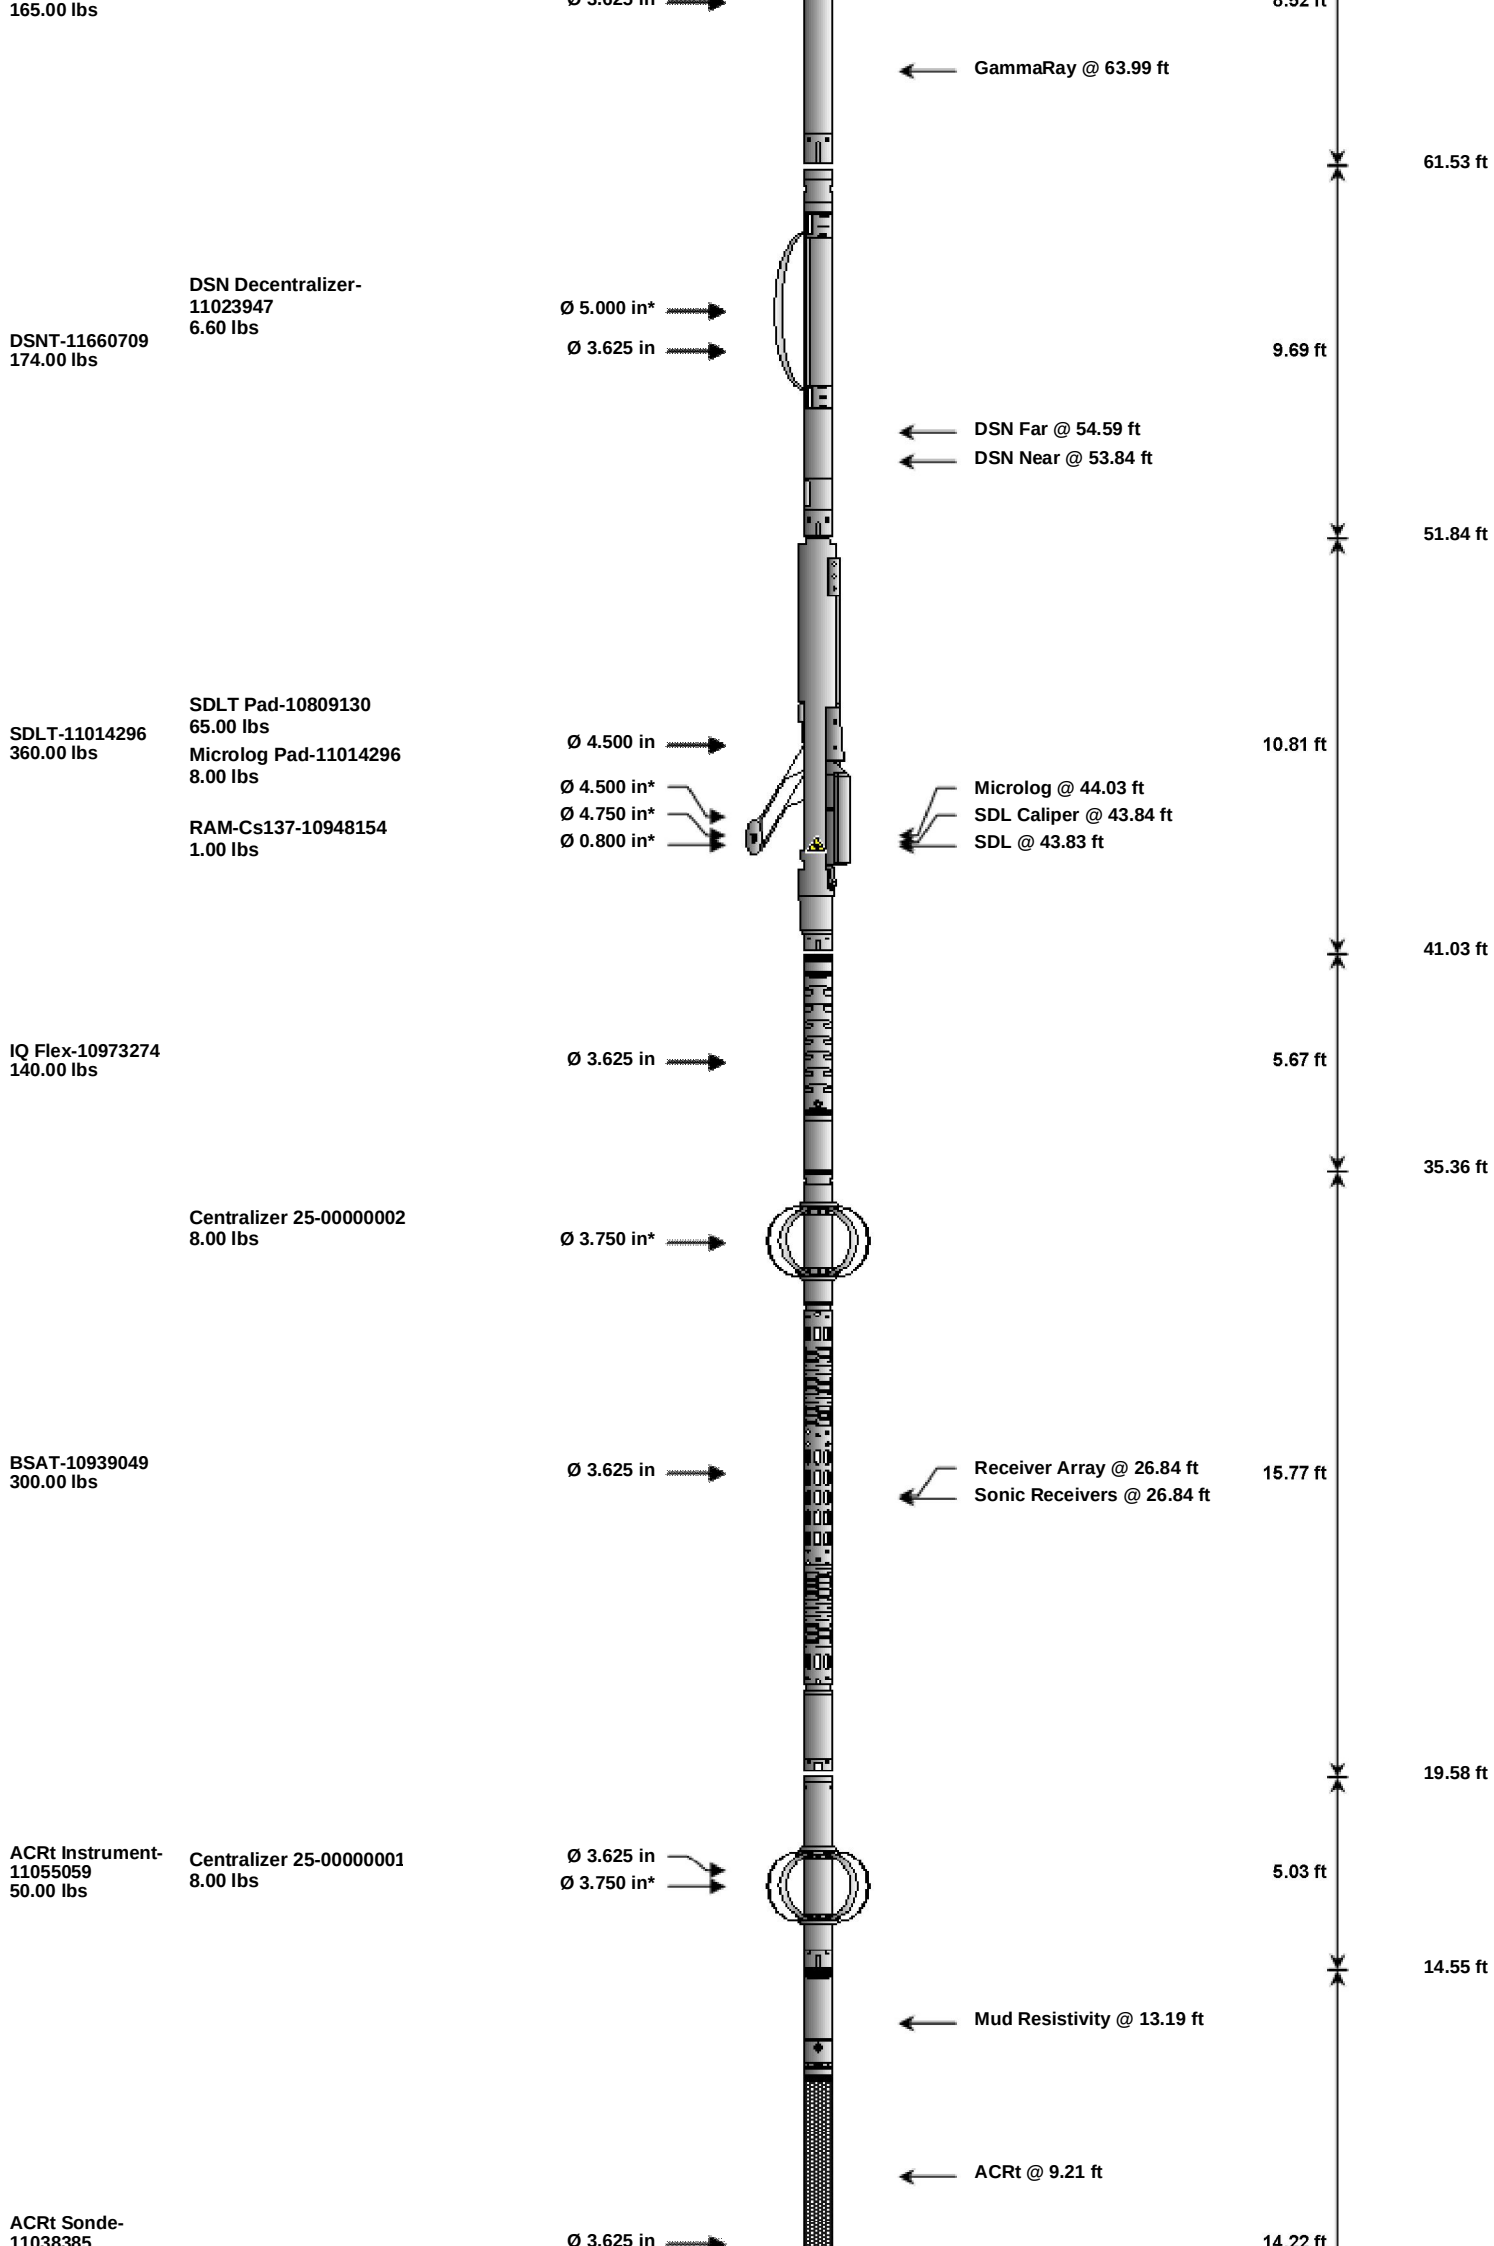

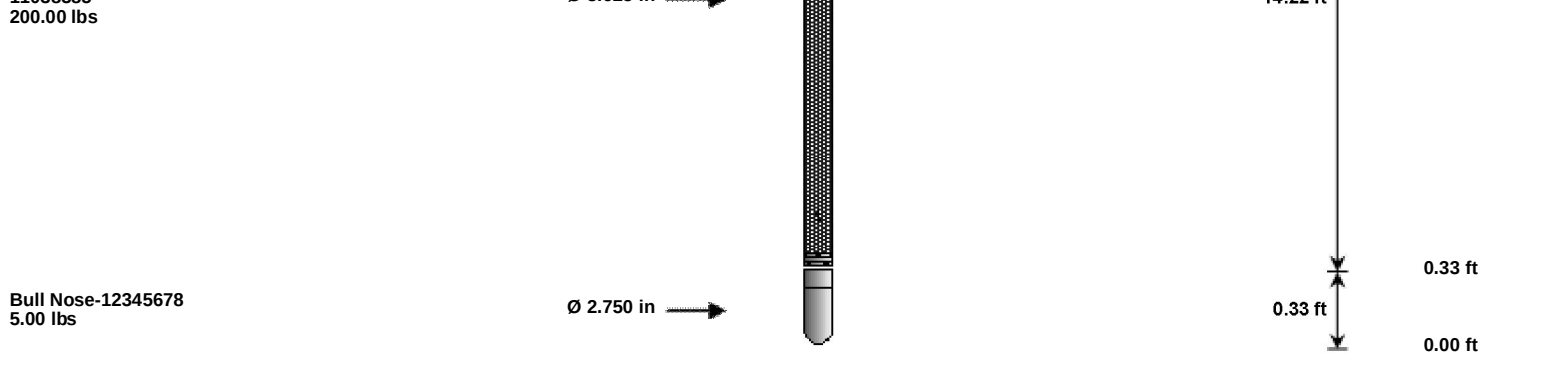

Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)
CH_HOS	Hostile Cable Head with Load Cell	CH_HOS_I	37.50	2.25	74.74	300.00
XOHD	Hostile to Dits Cross Over	11021555	20.00	0.95	73.79	300.00
SP	SP Sub	10904995	60.00	3.74	70.05	300.00
GTET	Gamma Telemetry Tool	11021139	165.00	8.52	61.53	60.00
DSNT	Dual Spaced Neutron	11660709	174.00	9.69	51.84	60.00
DCNT	DSN Decentralizer	11023947	6.60	5.13	* 55.17	300.00
SDLT	Spectral Density Tool	11014296	360.00	10.81	41.03	60.00
SDLP	Density Insite Pad	10809130	65.00	2.55	* 43.24	60.00
Cs137	Logging Source, SDLT-I, 1.78 Ci - Cs137	10948154	1.00	0.80	* 43.47	300.00
MICP	Microlog Pad	11014296	8.00	1.00	* 43.53	60.00
IQF	IQ Flex tool	10973274	140.00	5.67	35.36	300.00
BSAT	Borehole Sonic Array Tool	10939049	300.00	15.77	19.58	60.00
OBCEN	Centralizer - 25 in. Overbody	00000002	8.00	2.08	* 32.44	300.00
ACRt	Array Compensated True Resistivity Instrument Section	11055059	50.00	5.03	14.55	120.00
OBCEN	Centralizer - 25 in. Overbody	00000001	8.00	2.08	* 15.70	300.00
ACRt	Array Compensated True Resistivity Sonde Section	11038385	200.00	14.22	0.33	120.00
BLNS	Bull Nose	12345678	5.00	0.33	0.00	300.00

Total	1,608.10	76.99	* Not included in Total Length and Length Accumulation.
Data: MERIT_LCSLU0001 GTET-DSN-SDL-FLX-BSAT-ACRTIDLE			
			Date: 01-Nov-17 00:24:18