

MICRO LOG


Company		EAGLE CREEK CORPORATION	
Well		DECKER #1-6	
Field		WILDCAT	
County		SCOTT	
State		KANSAS	
Location:		API # : 15-171-21217-0000	
Permanent Datum		GROUND LEVEL	
Log Measured From		KELLY BUSHING 5' A.G.L.	
Drilling Measured From		KELLY BUSHING	
SEC 6 TWP 17S RGE 34W		Elevation	
		K.B. 3164	
		D.F. 3162	
		G.L. 3159	
Other Services		CDL/CNL/PE	
		DIL	
Date	3/13/18		
Run Number	TWO		
Depth Driller	4970		
Depth Logger	4972		
Bottom Logged Interval	4970		
Top Log Interval	3500		
Casing Driller	8 5/8"@261'		
Casing Logger	261		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 5,500 PPM	
Density / Viscosity	9.5/56		
pH / Fluid Loss	10.5/7.2		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.500@75F		
Rmf @ Meas. Temp	.375@75F		
Rmc @ Meas. Temp	.600@75F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.300@125F		
Time Circulation Stopped	5 HOURS		
Time Logger on Bottom	8:45 A.M.		
Maximum Recorded Temperature	125F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	ROCKY MILFORD		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
PENCE, KS., 2W. TO "APACHE RD.", 4S., W. INTO

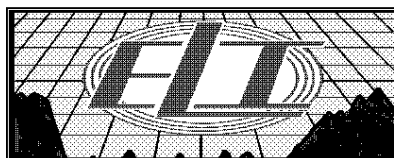


MAIN SECTION

Database File: 2347pe.db
Dataset Pathname: pass6.8
Presentation Format: micro
Dataset Creation: Tue Mar 13 10:03:05 2018
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

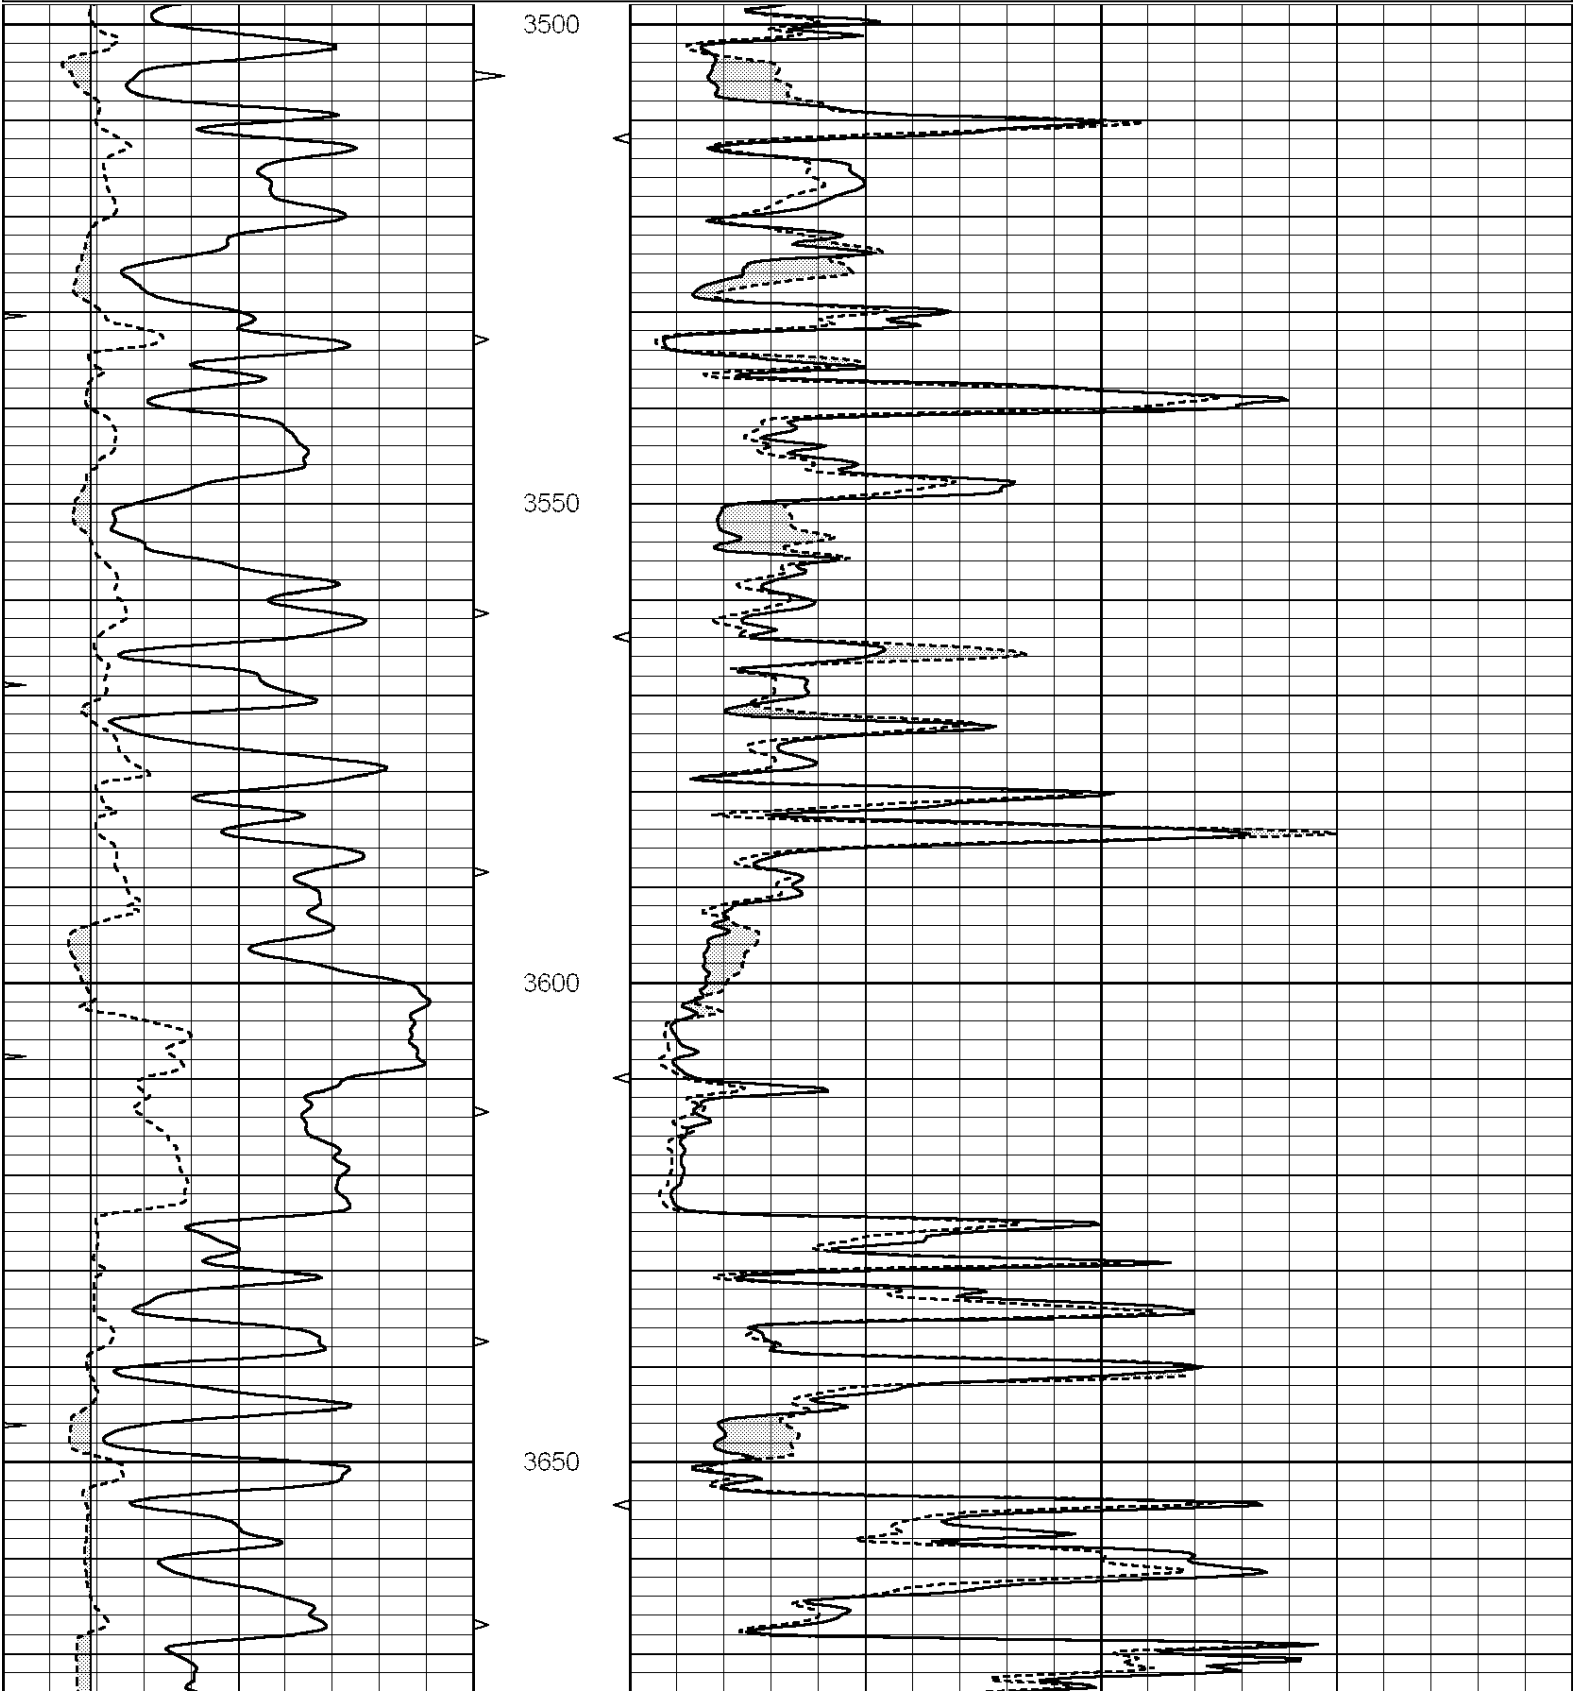

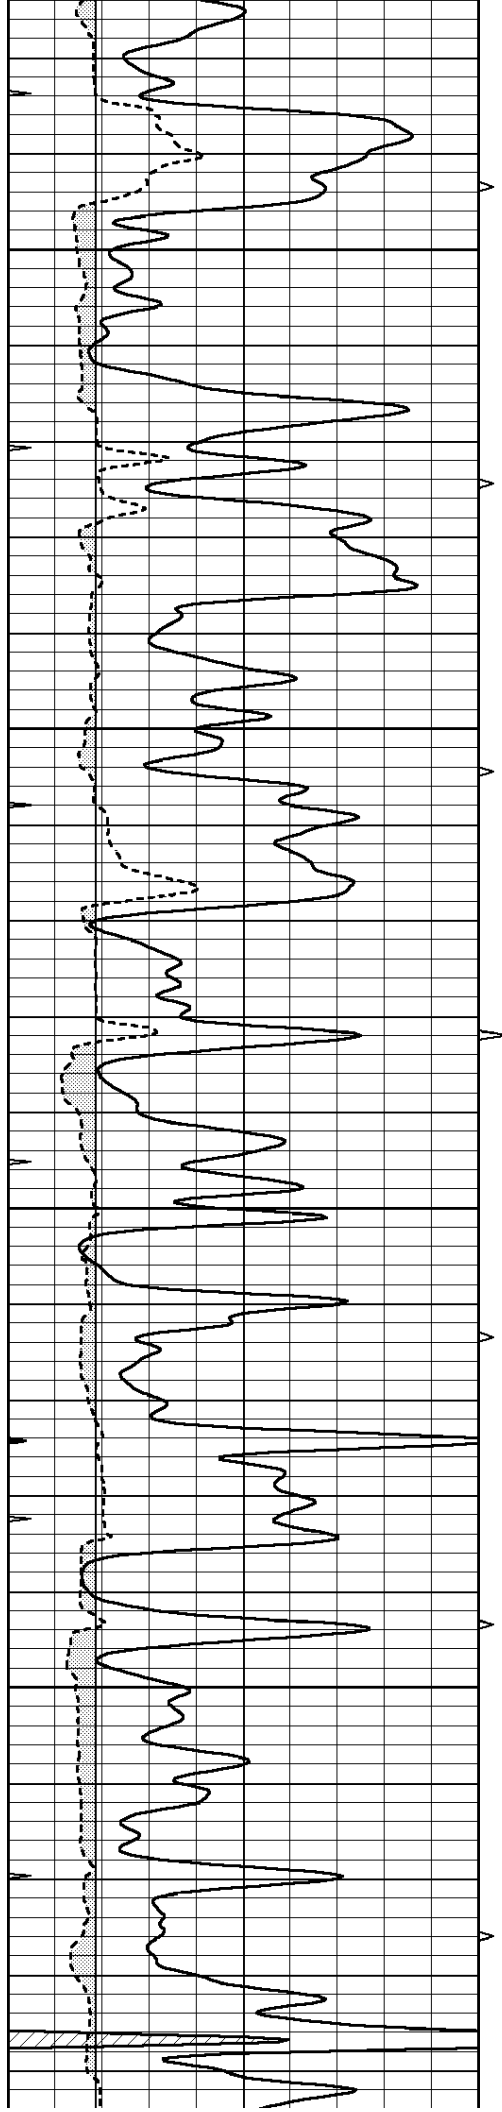




3700


3750

3800

3850

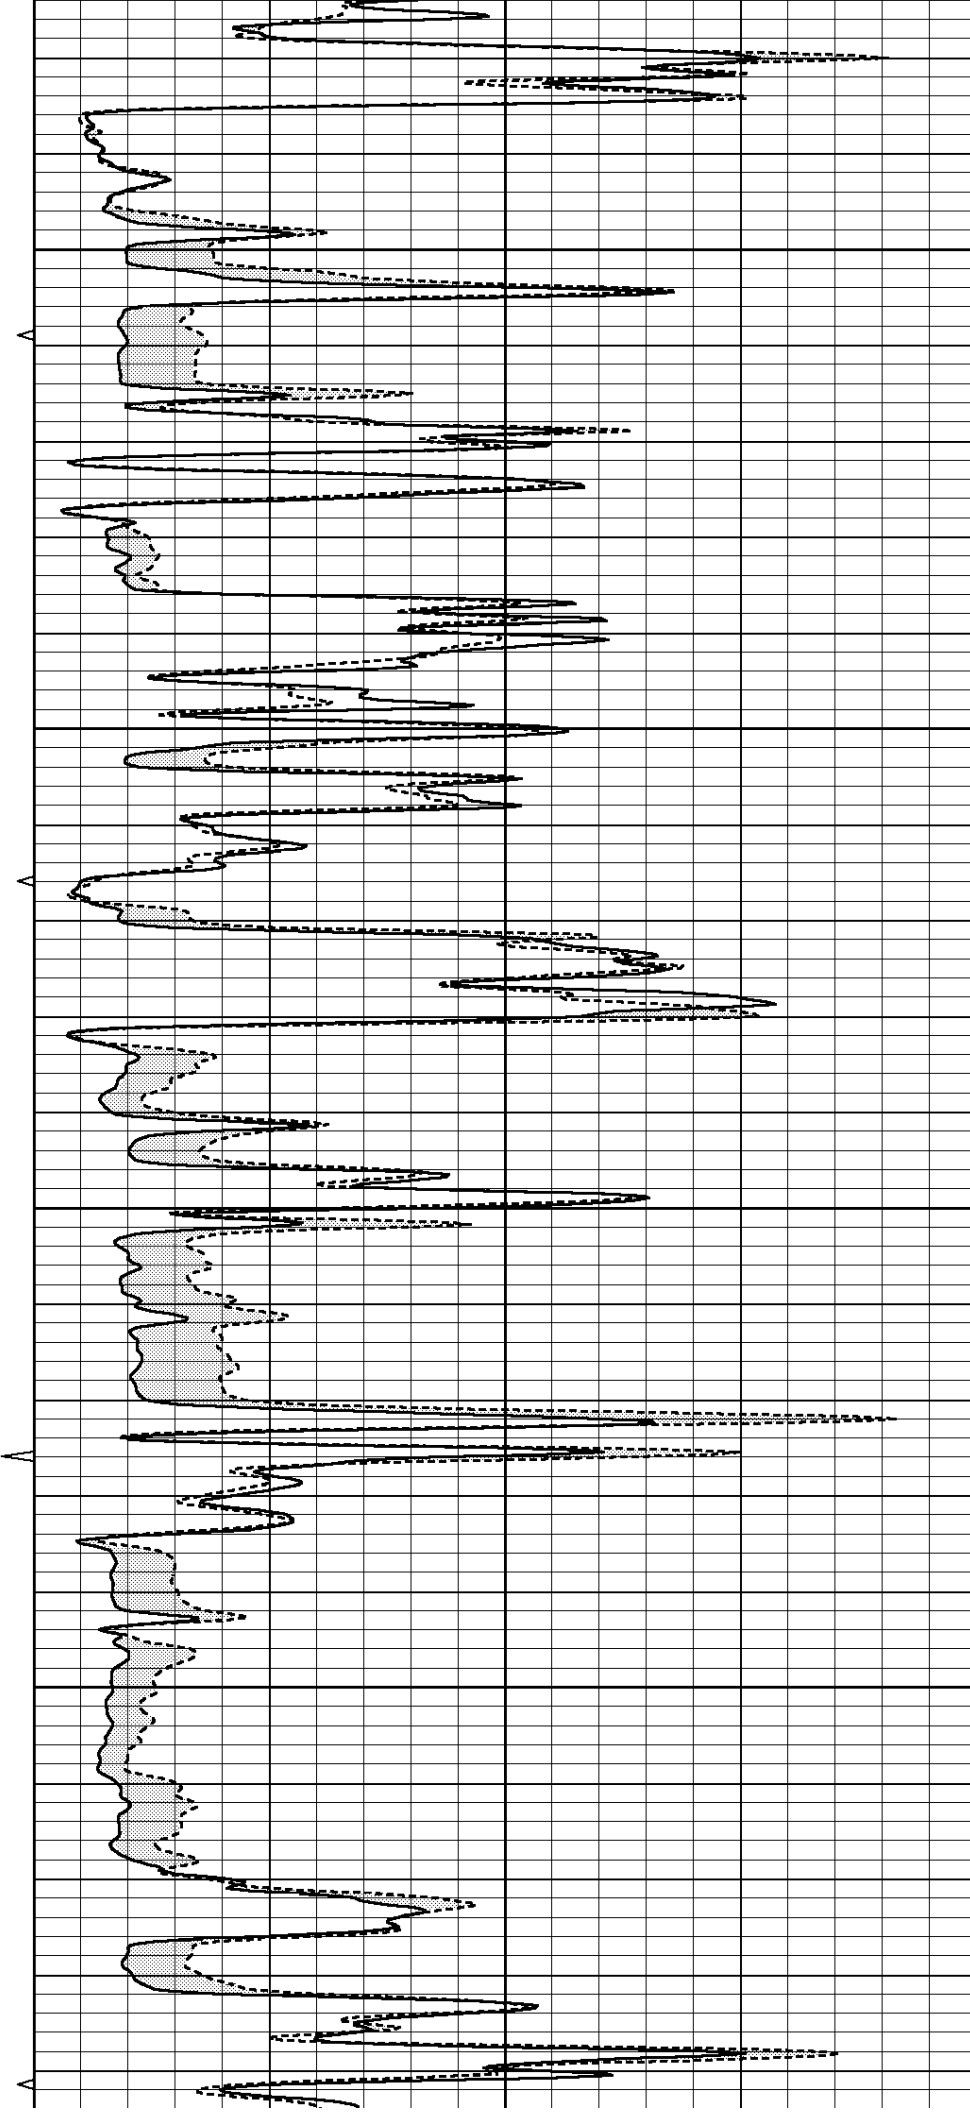

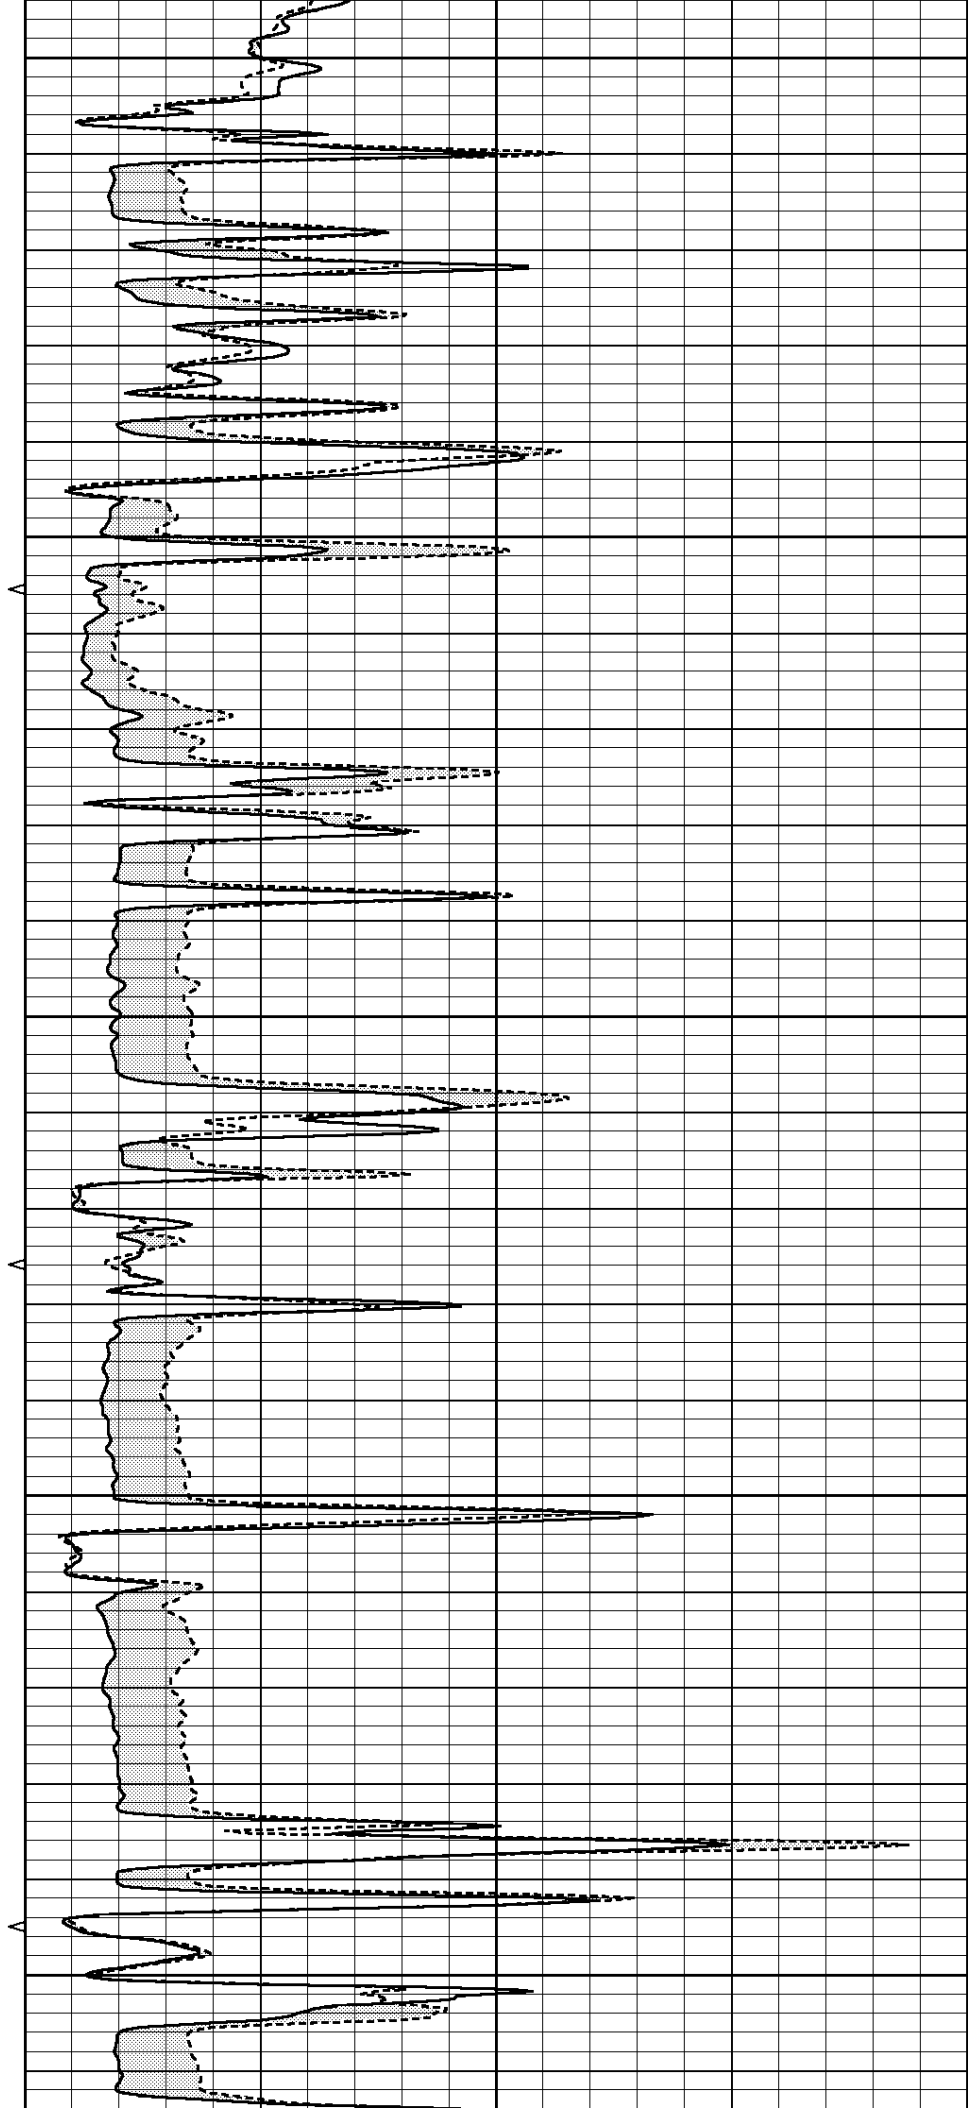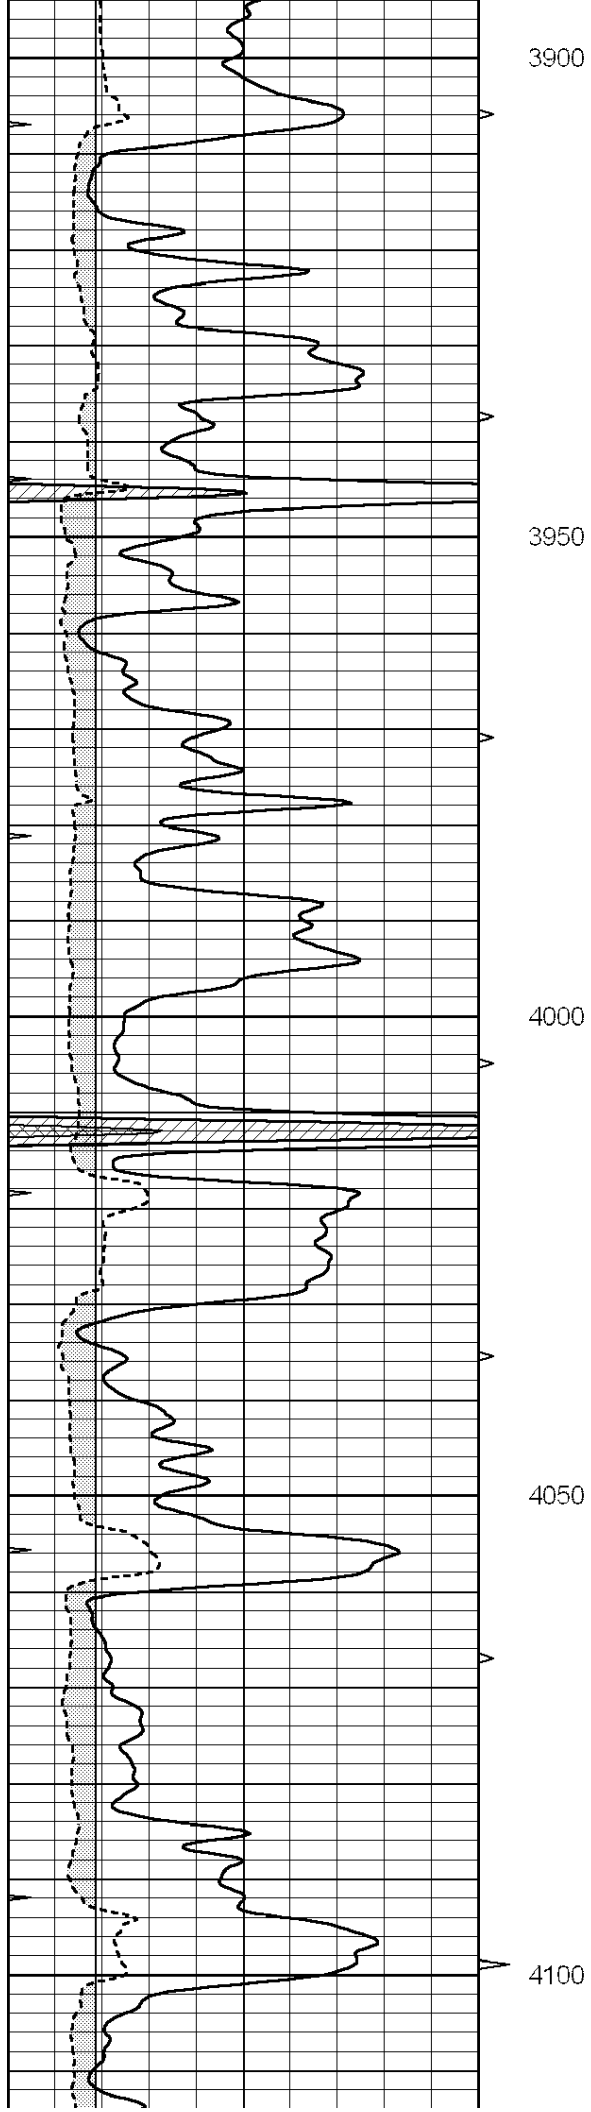

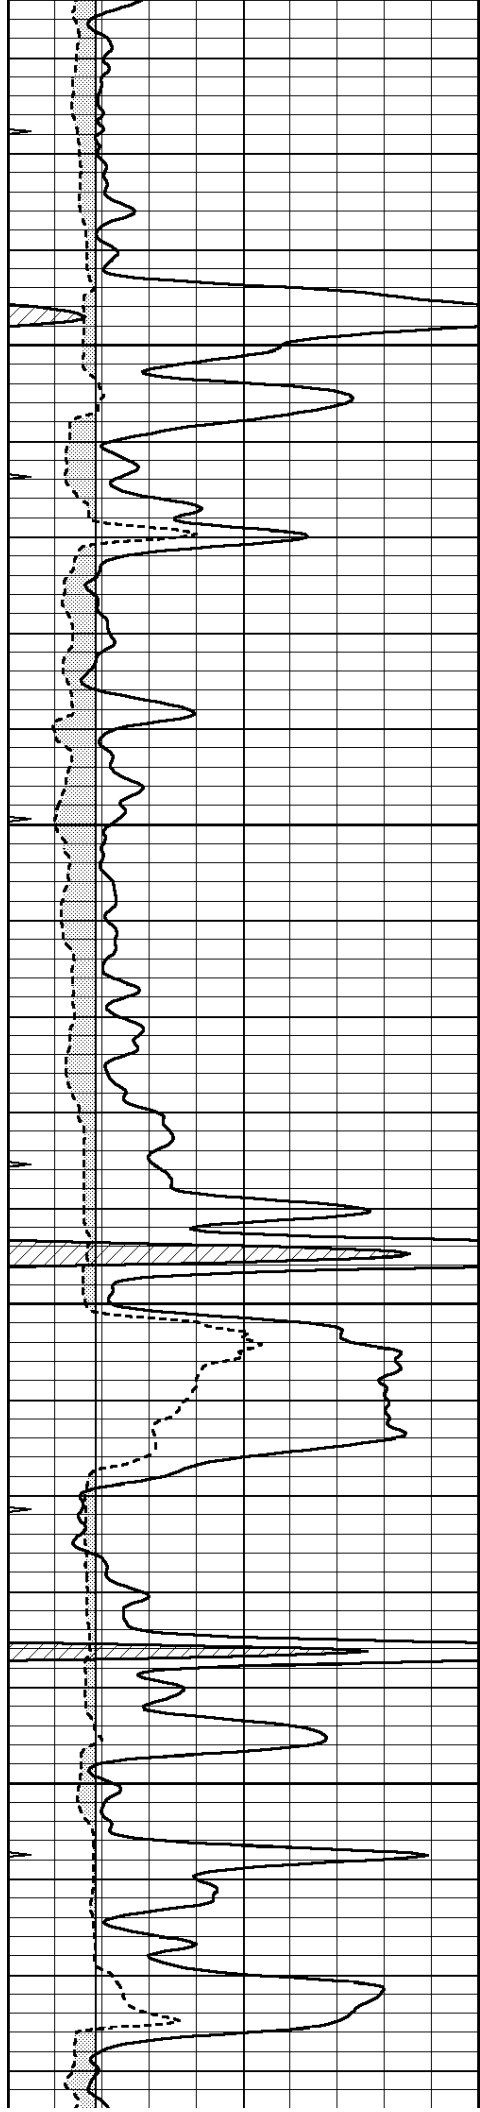



4150

4200

4250

4300

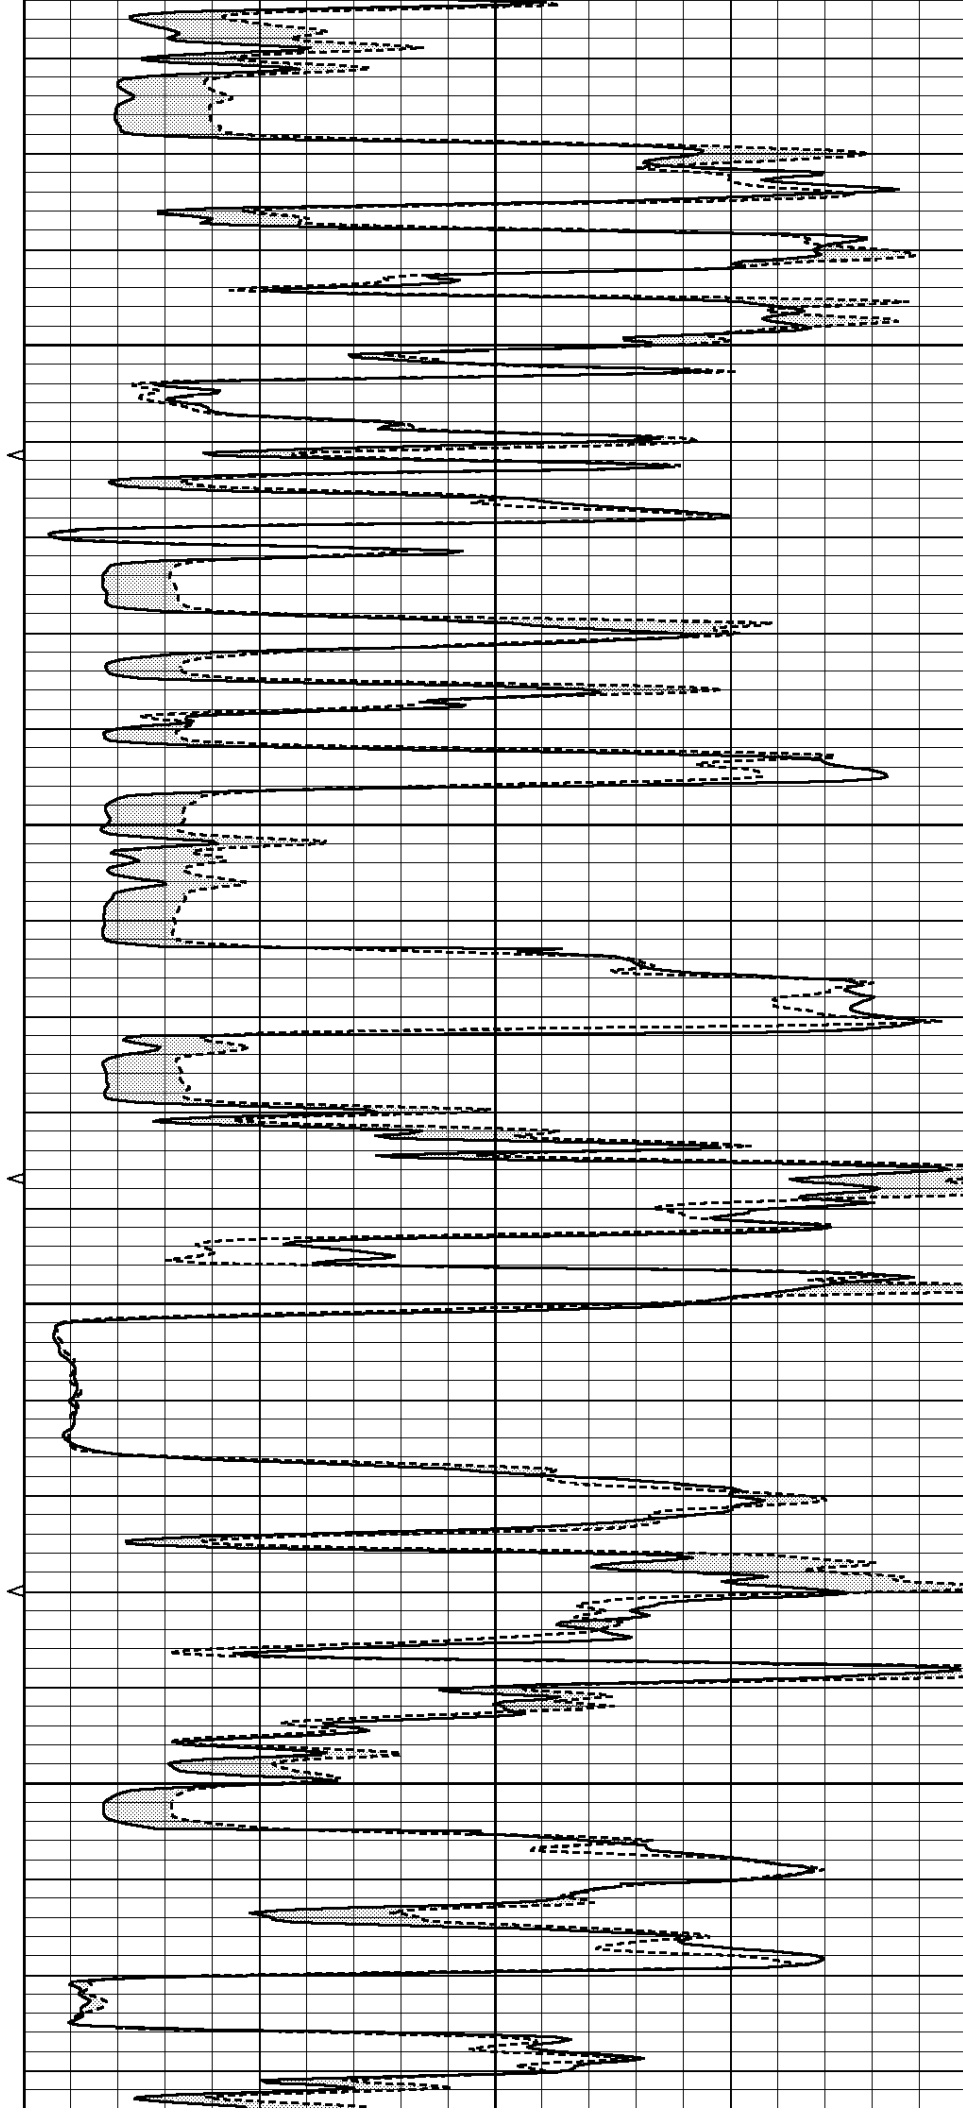

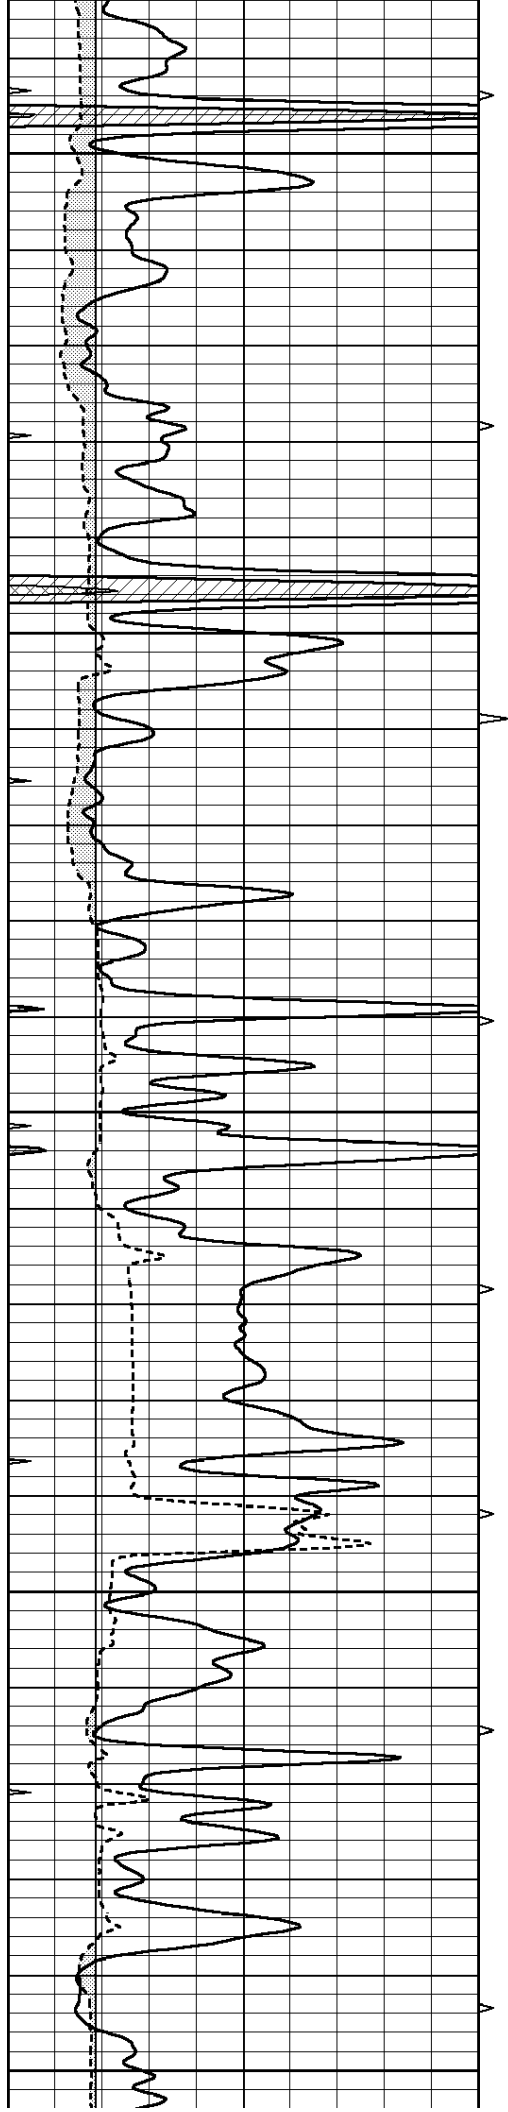


4350


4400

4450

4500

4550

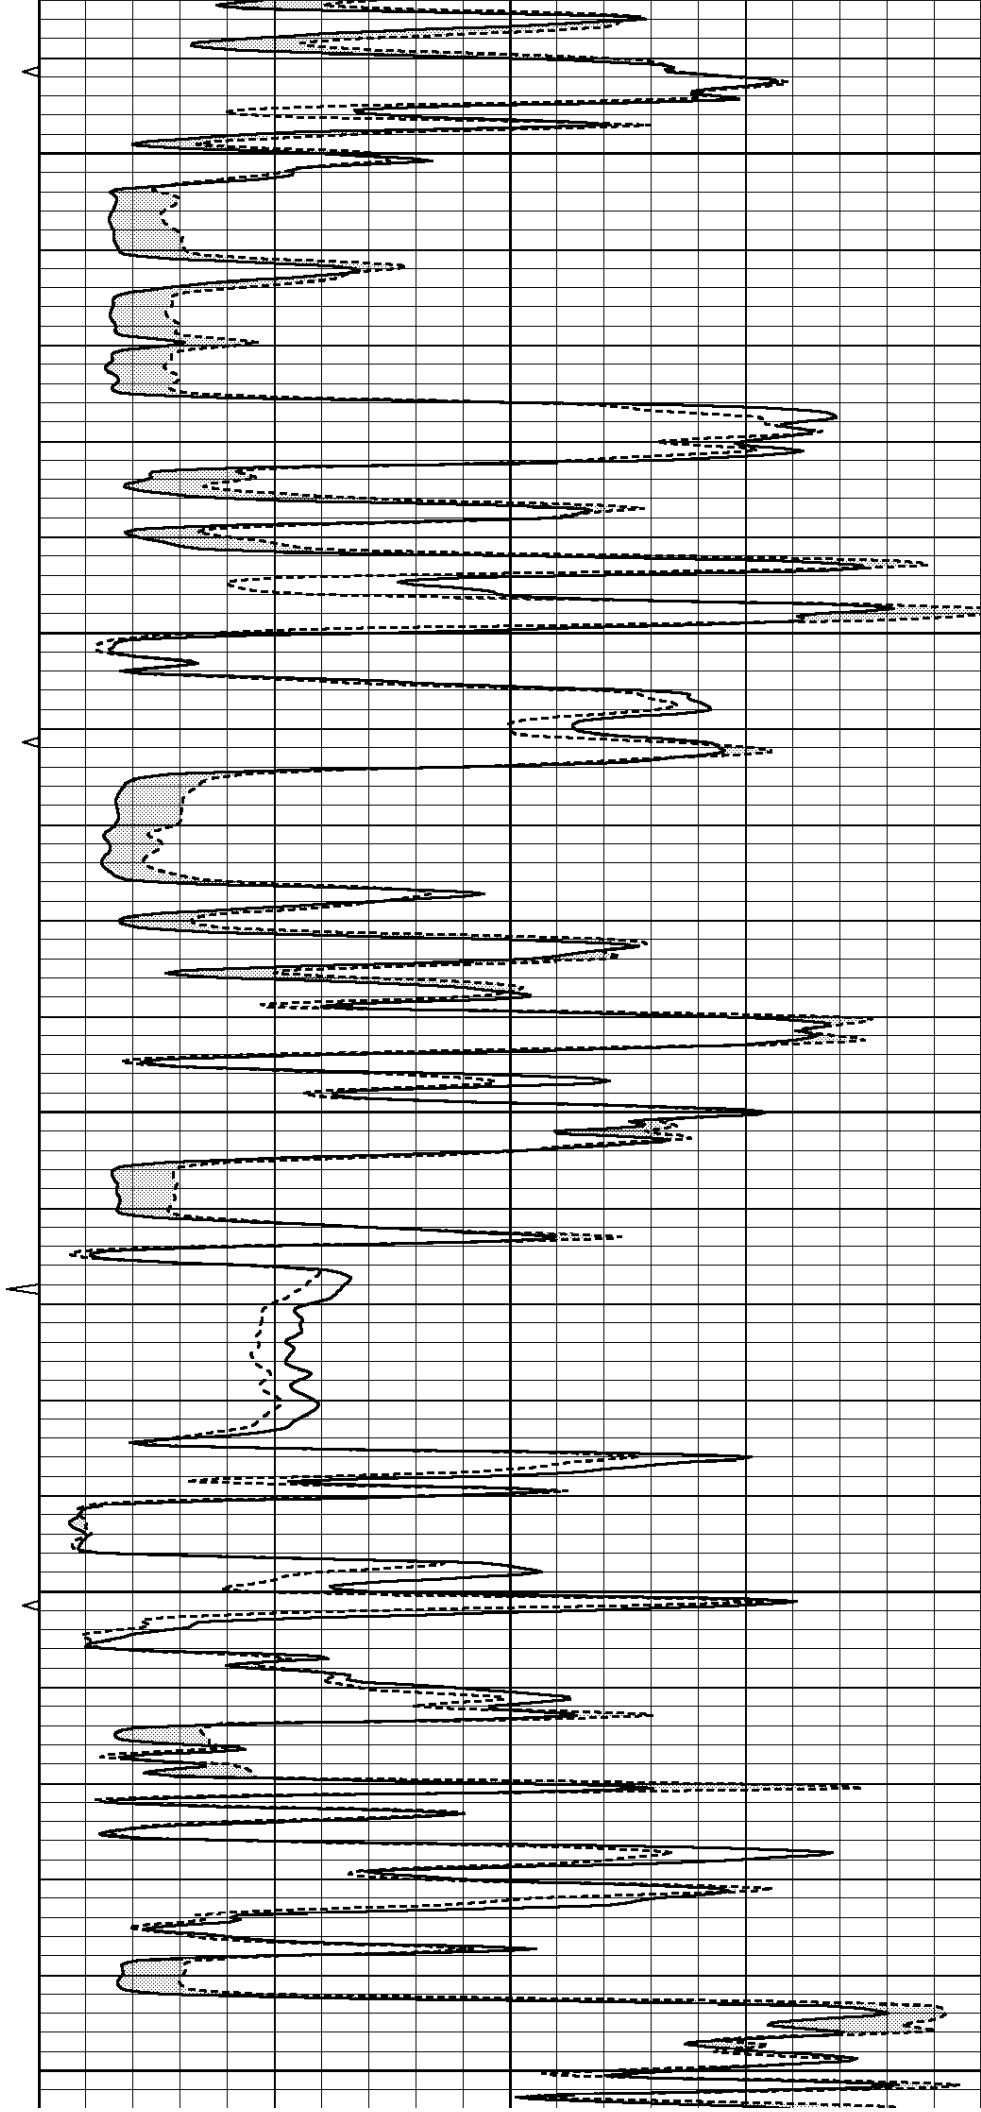

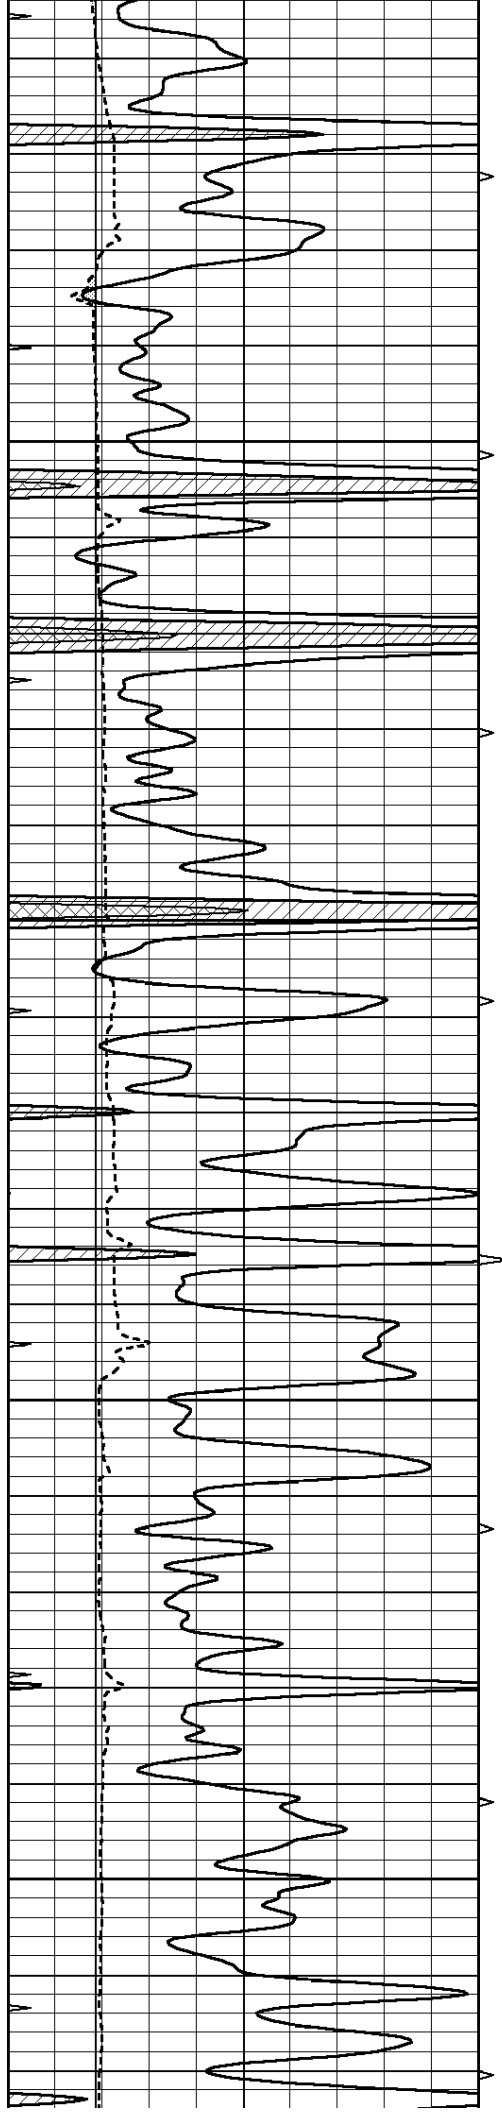




4600

4650


4700

4750

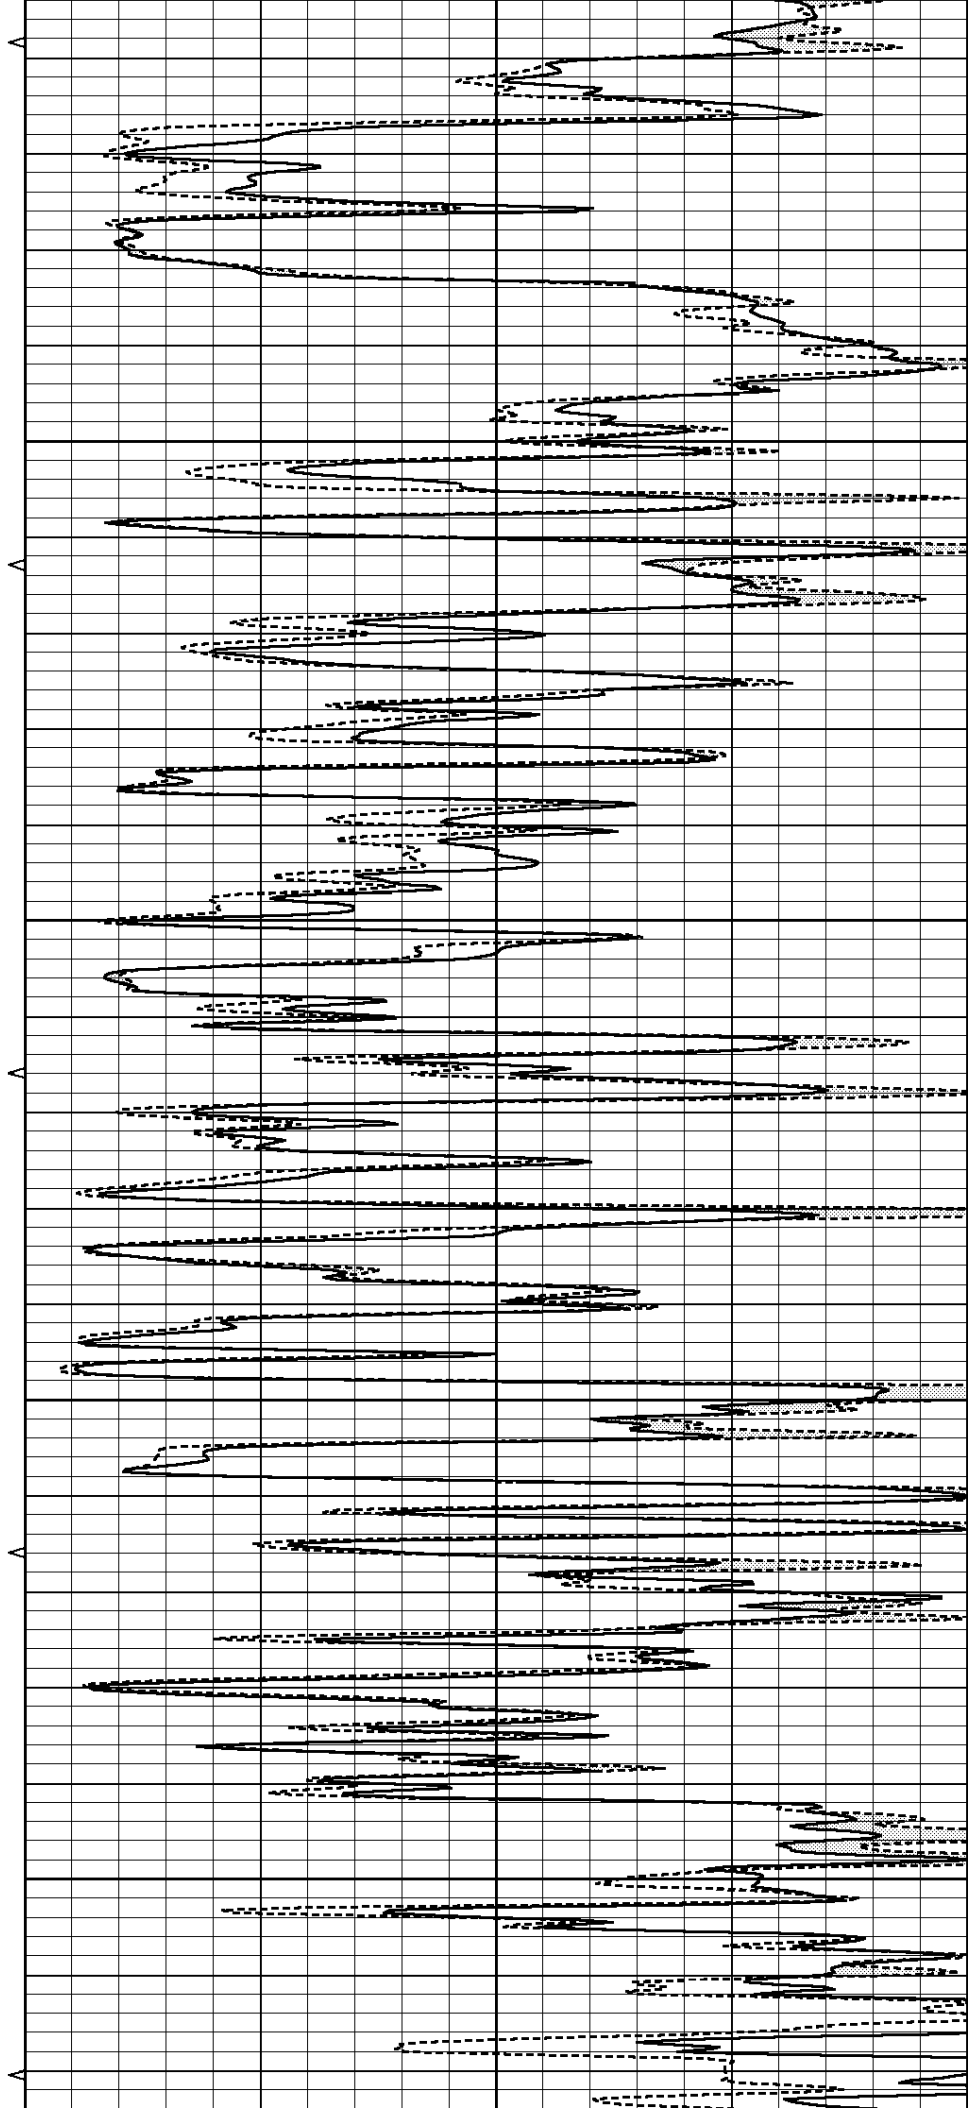

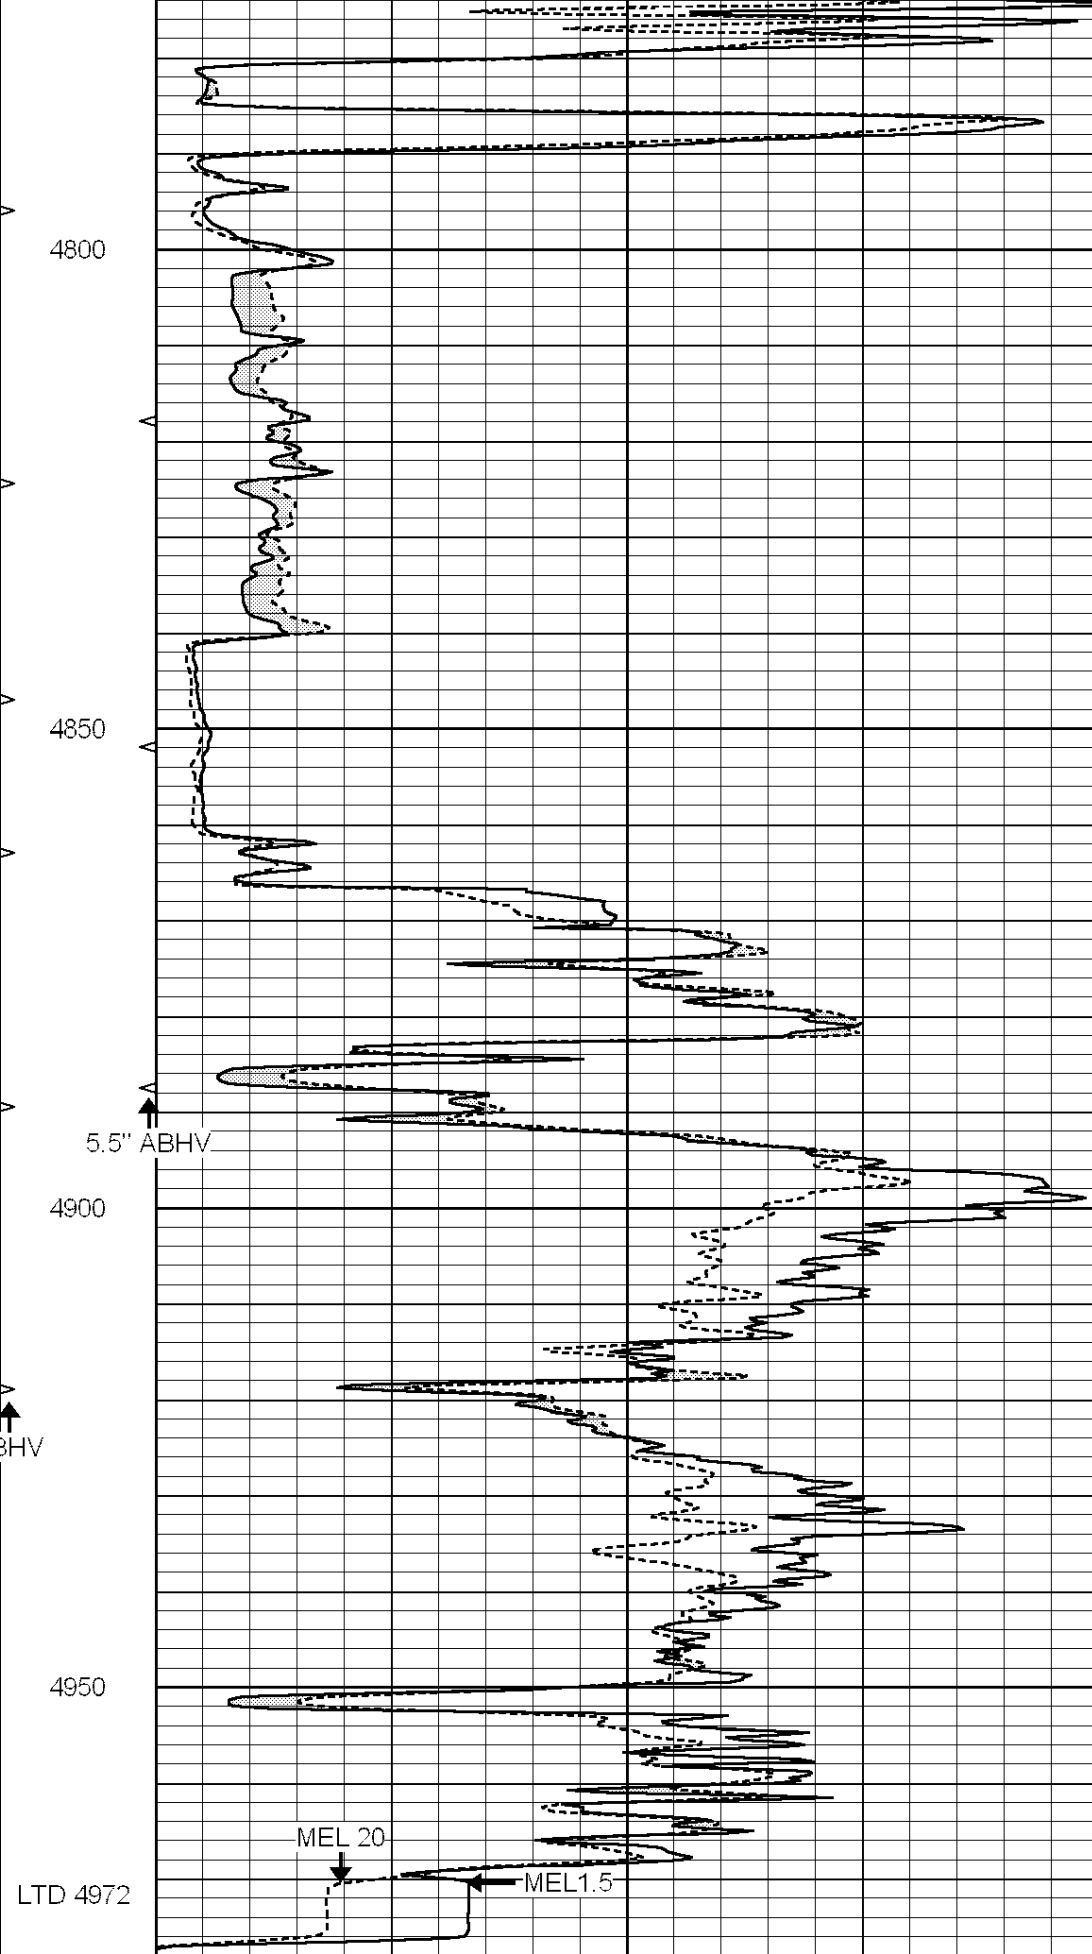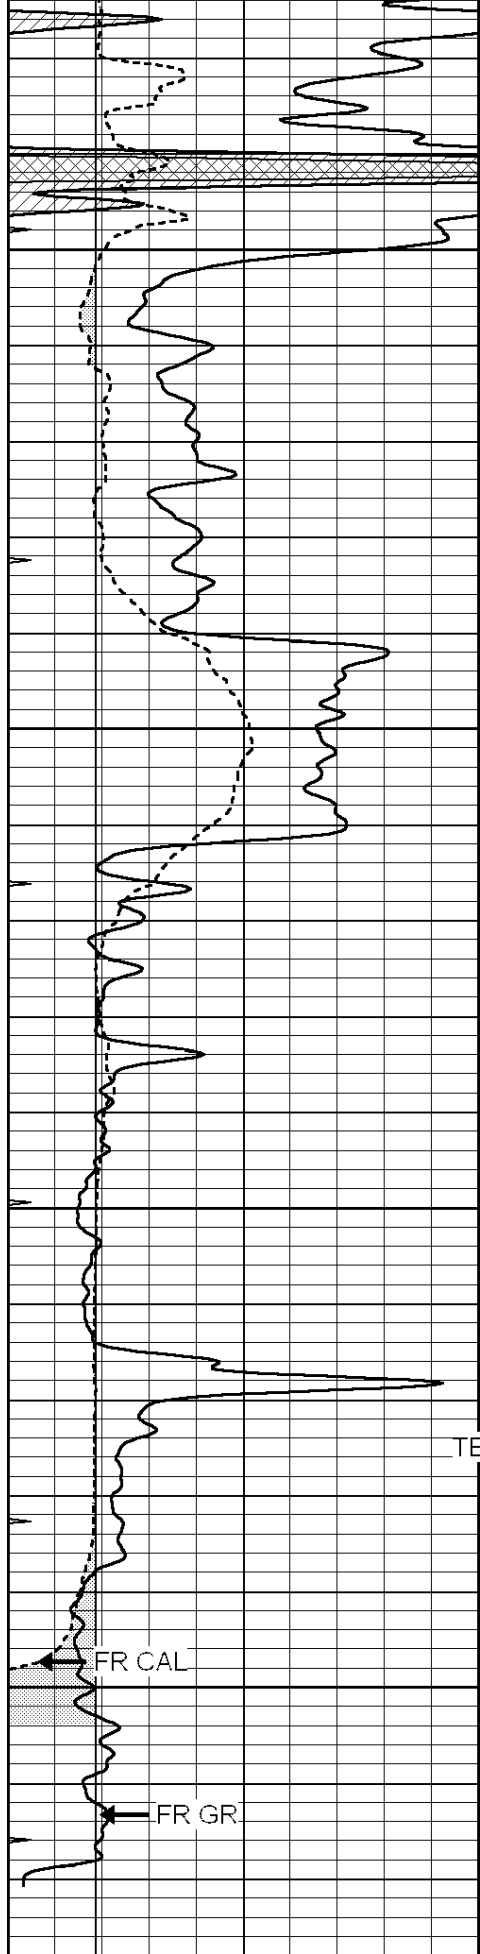


0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			

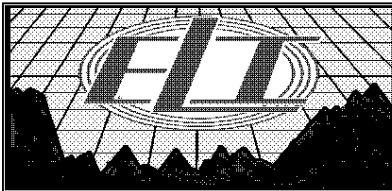


REPEAT SECTION

Database File: 2347pe.db
 Dataset Pathname: pass5.3
 Presentation Format: micro
 Dataset Creation: Tue Mar 13 08:55:51 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

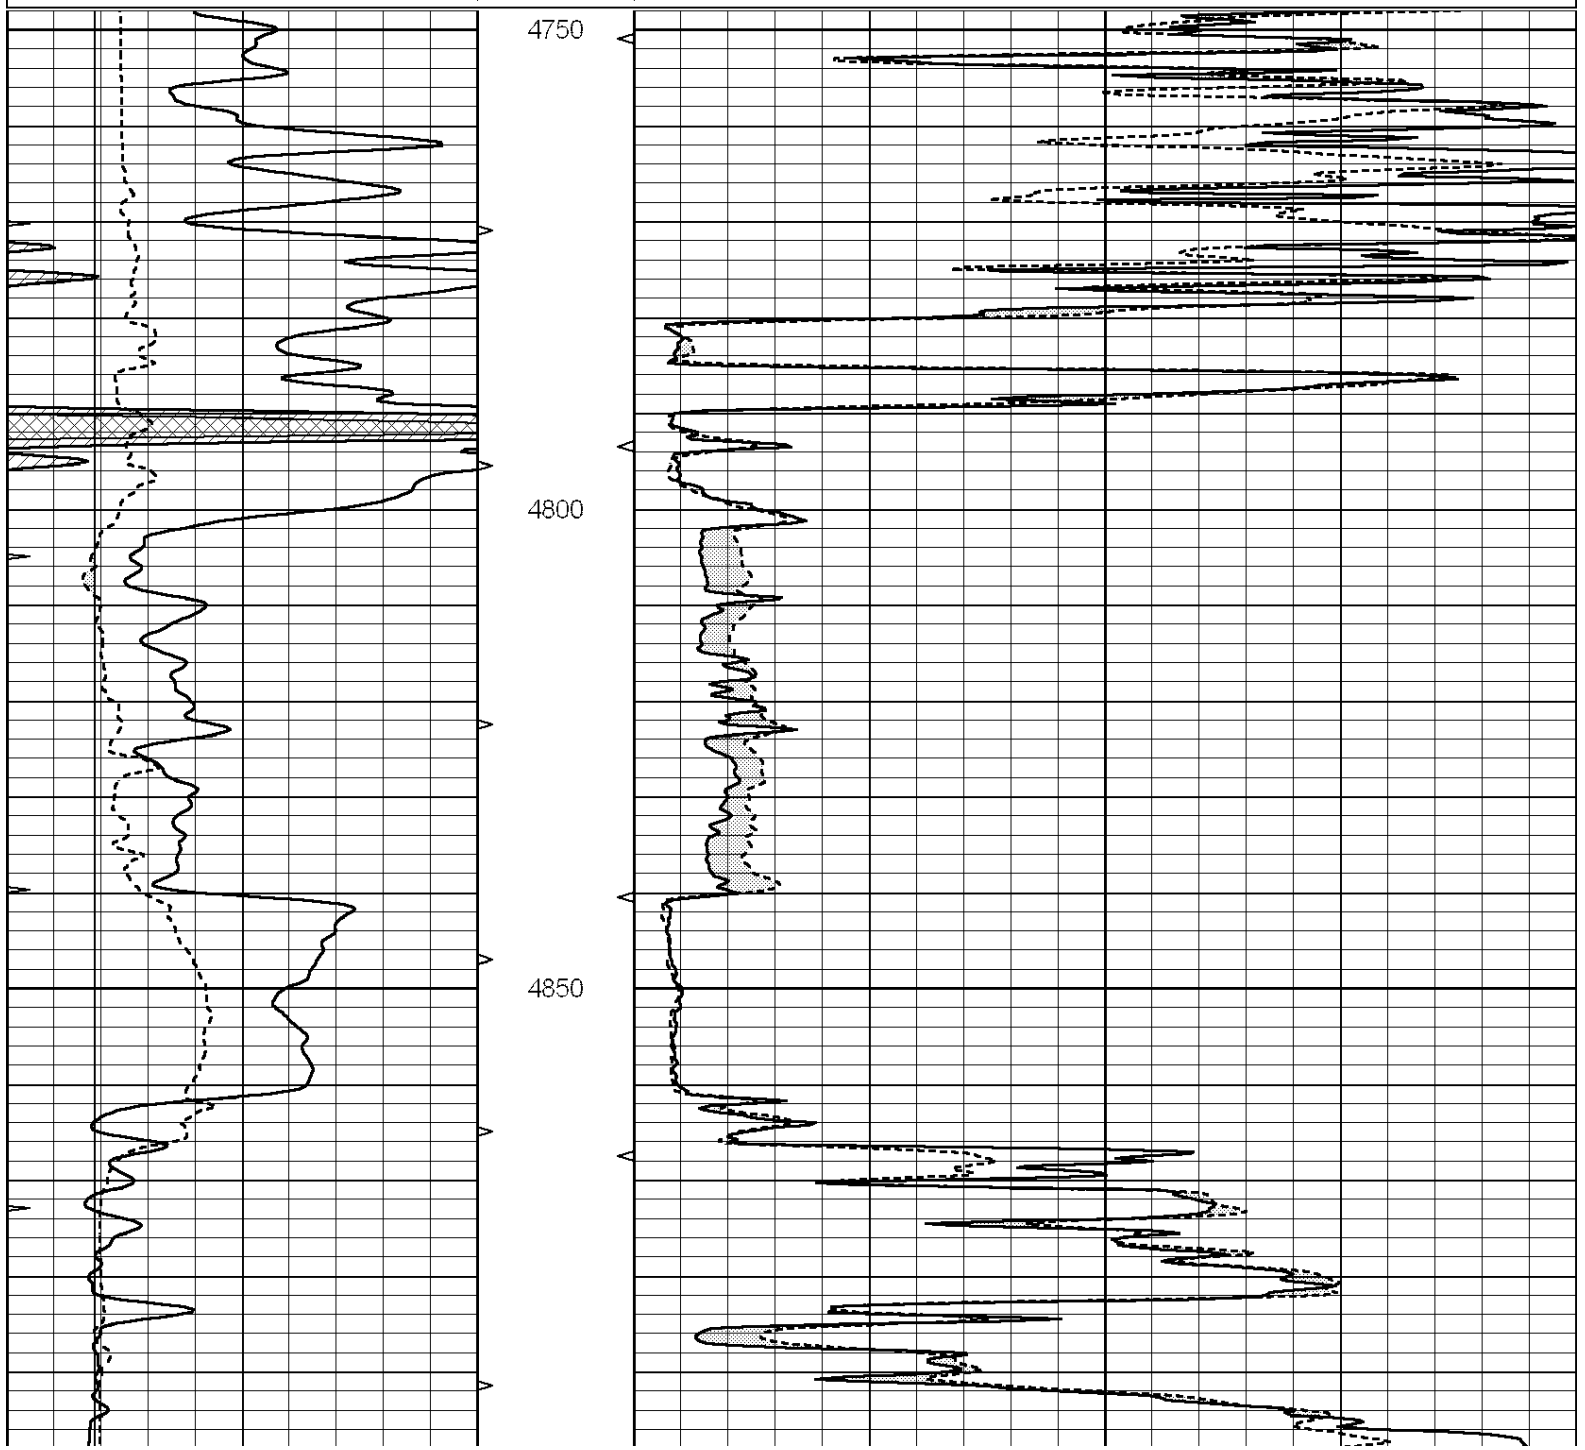

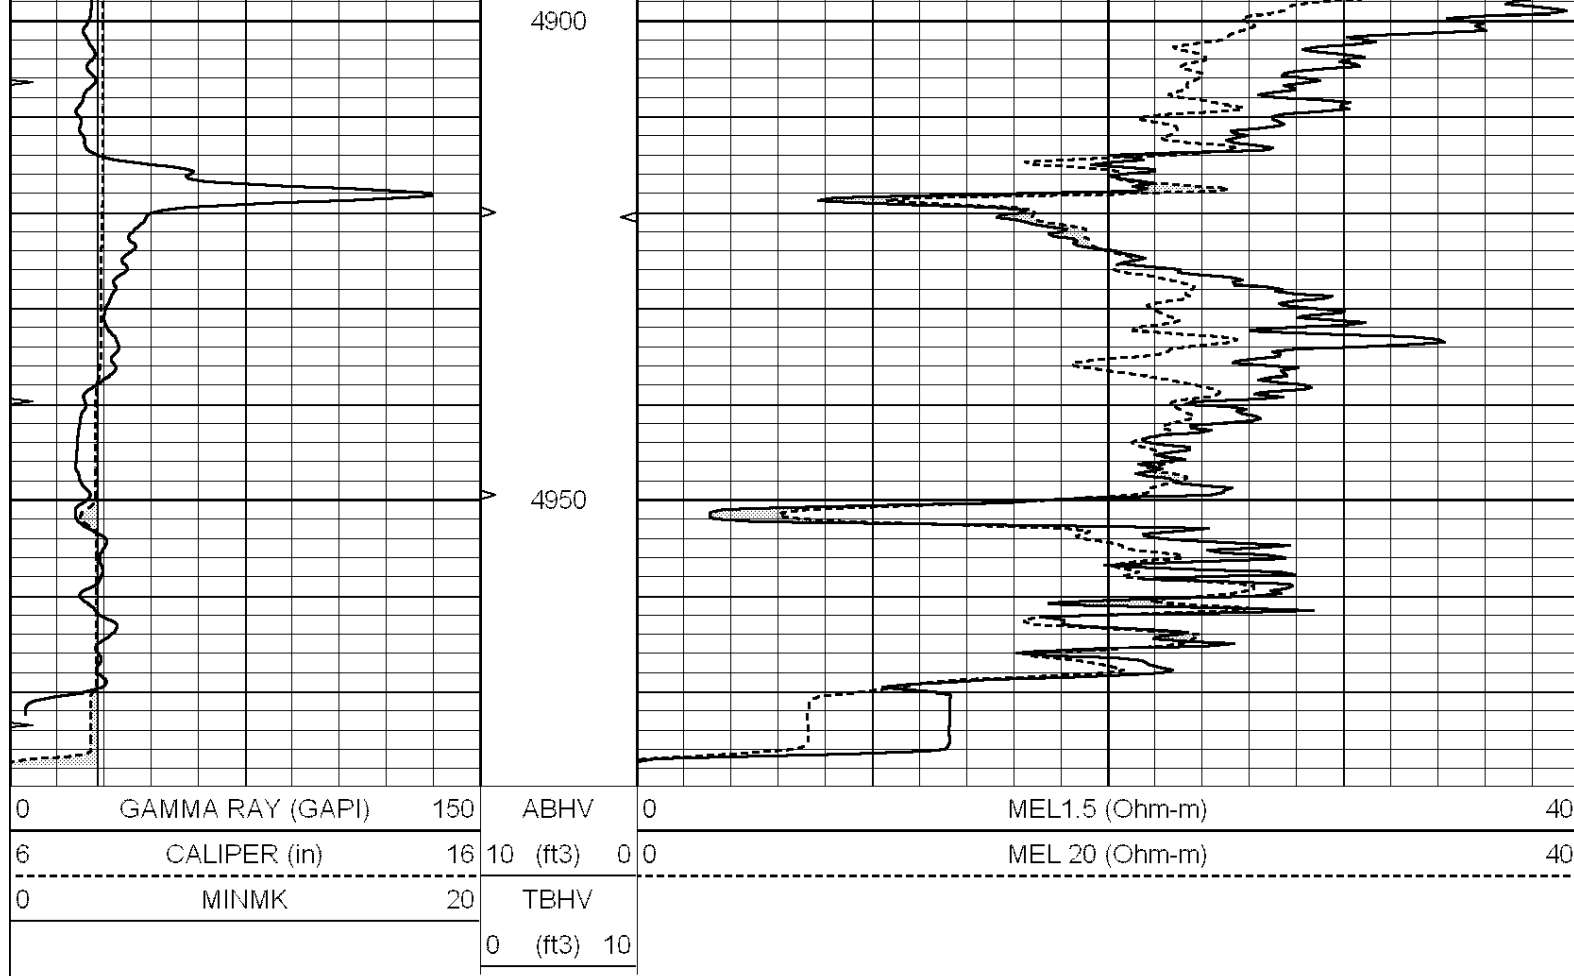

Calibration Report

Database File: 2347pe.db
Dataset Pathname: pass6.5
Dataset Creation: Tue Mar 13 09:47:52 2018

MICRO Calibration Report

Serial Number: 070912
Tool Model: ProbeN
Performed: Tue Mar 13 08:47:25 2018

Caliper Calibration: Gain=2.715 Offset=5.835
References Low Cal High Cal
7.600 18.000
Readings 0.650 4.480

1.5" Calibration: Gain=28.000 Offset=0.000
References Low Cal High Cal
0.000 20.000
Readings 0.002 1.239

2" Calibration: Gain=50.000 Offset=-0.700
References Low Cal High Cal
0.000 20.000
Readings 0.003 1.075

Gamma Ray Calibration Report

Serial Number: 070559
Tool Model: OPEN_GR
Performed: Sat Mar 10 08:27:27 2018

Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2500	GAPI/cps