

DIRECTIONAL INFORMATION

Maximum Deviation @ KOP @

Remarks: ANNULAR HOLE VOLUME CALCULATED FOR 5.5 INCH CASING
 CHLORIDES REPORTED AT 2000 ppm

HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.


HALLIBURTON




Plot Time: 15-Jan-18 20:54:24
 Plot Range: 3795 ft to 5690.75 ft
 Data: JACQUART_3\Well Based\DETAILS1\
 Plot File: \\-LOCAL-JACQUART_3\Well Based\MICROLOG\Microlog_IQ_5_main_lib

5 INCH MAIN LOG


MEASURED DEPTH
 MAIN LOG 5" PER 100'

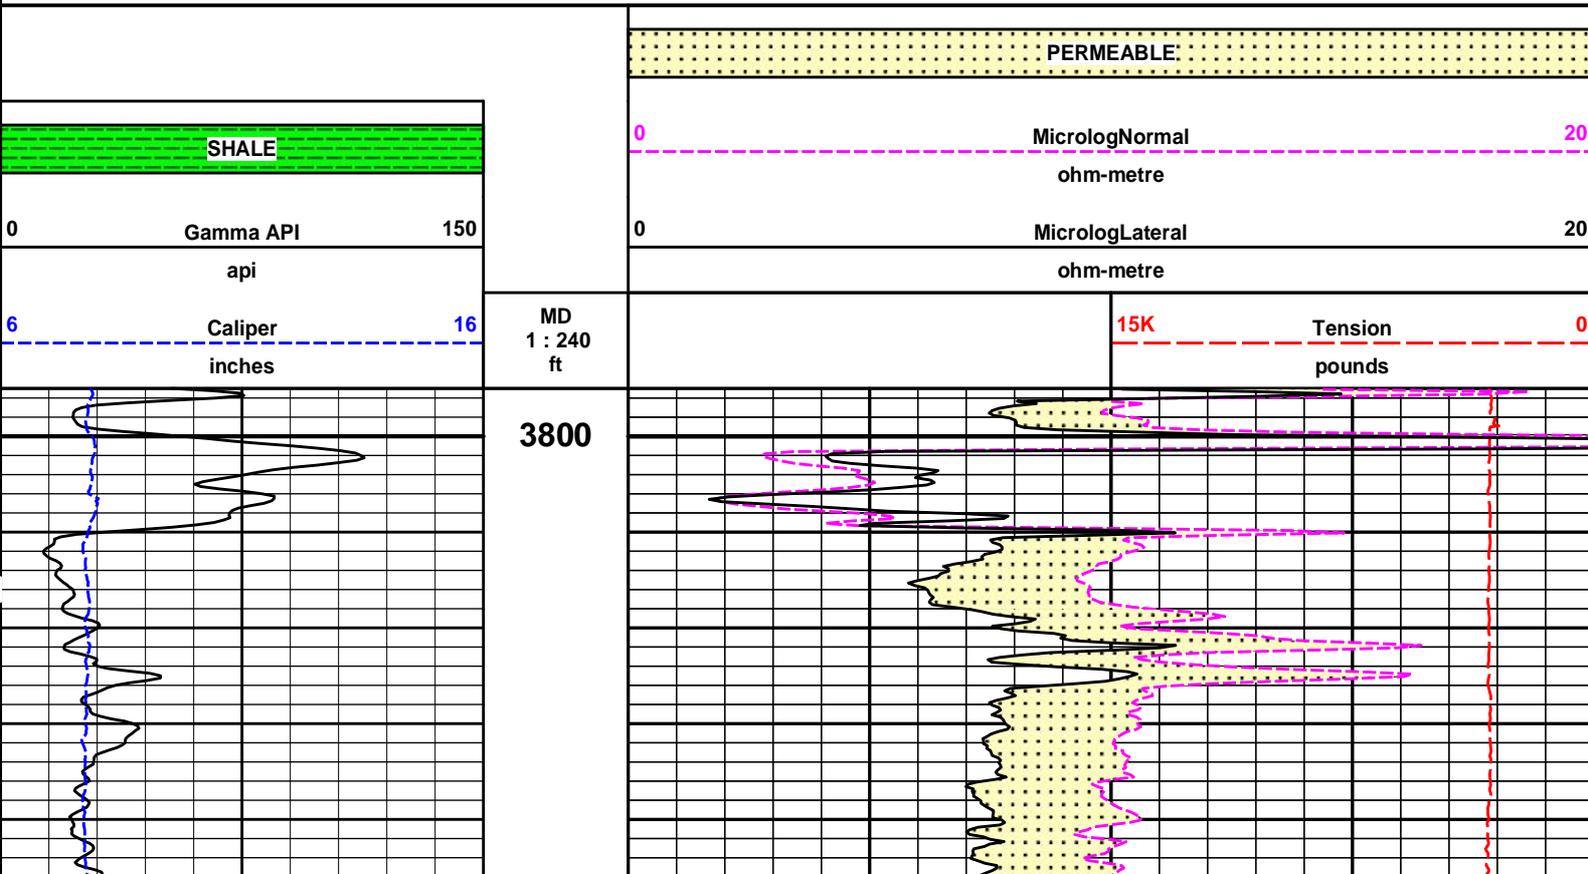


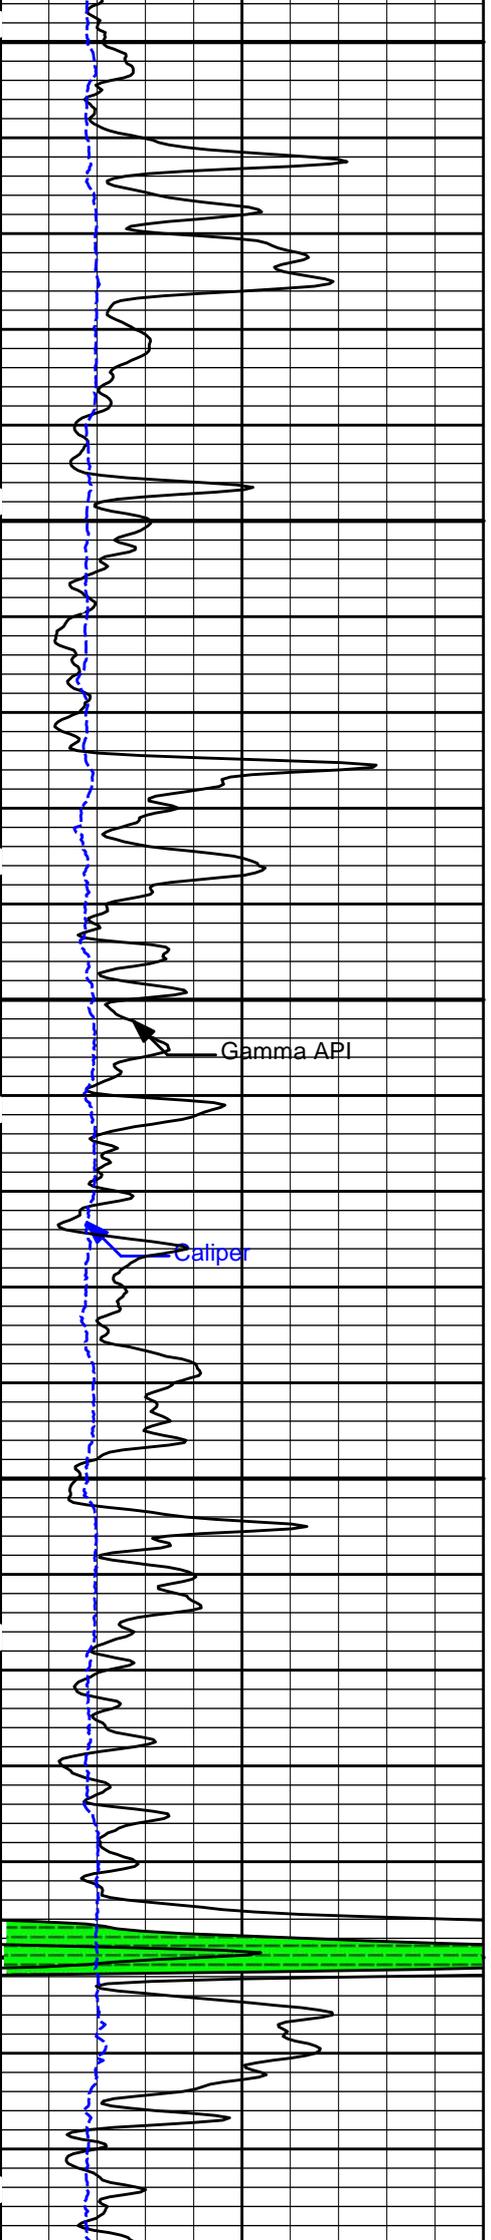

3900

4000

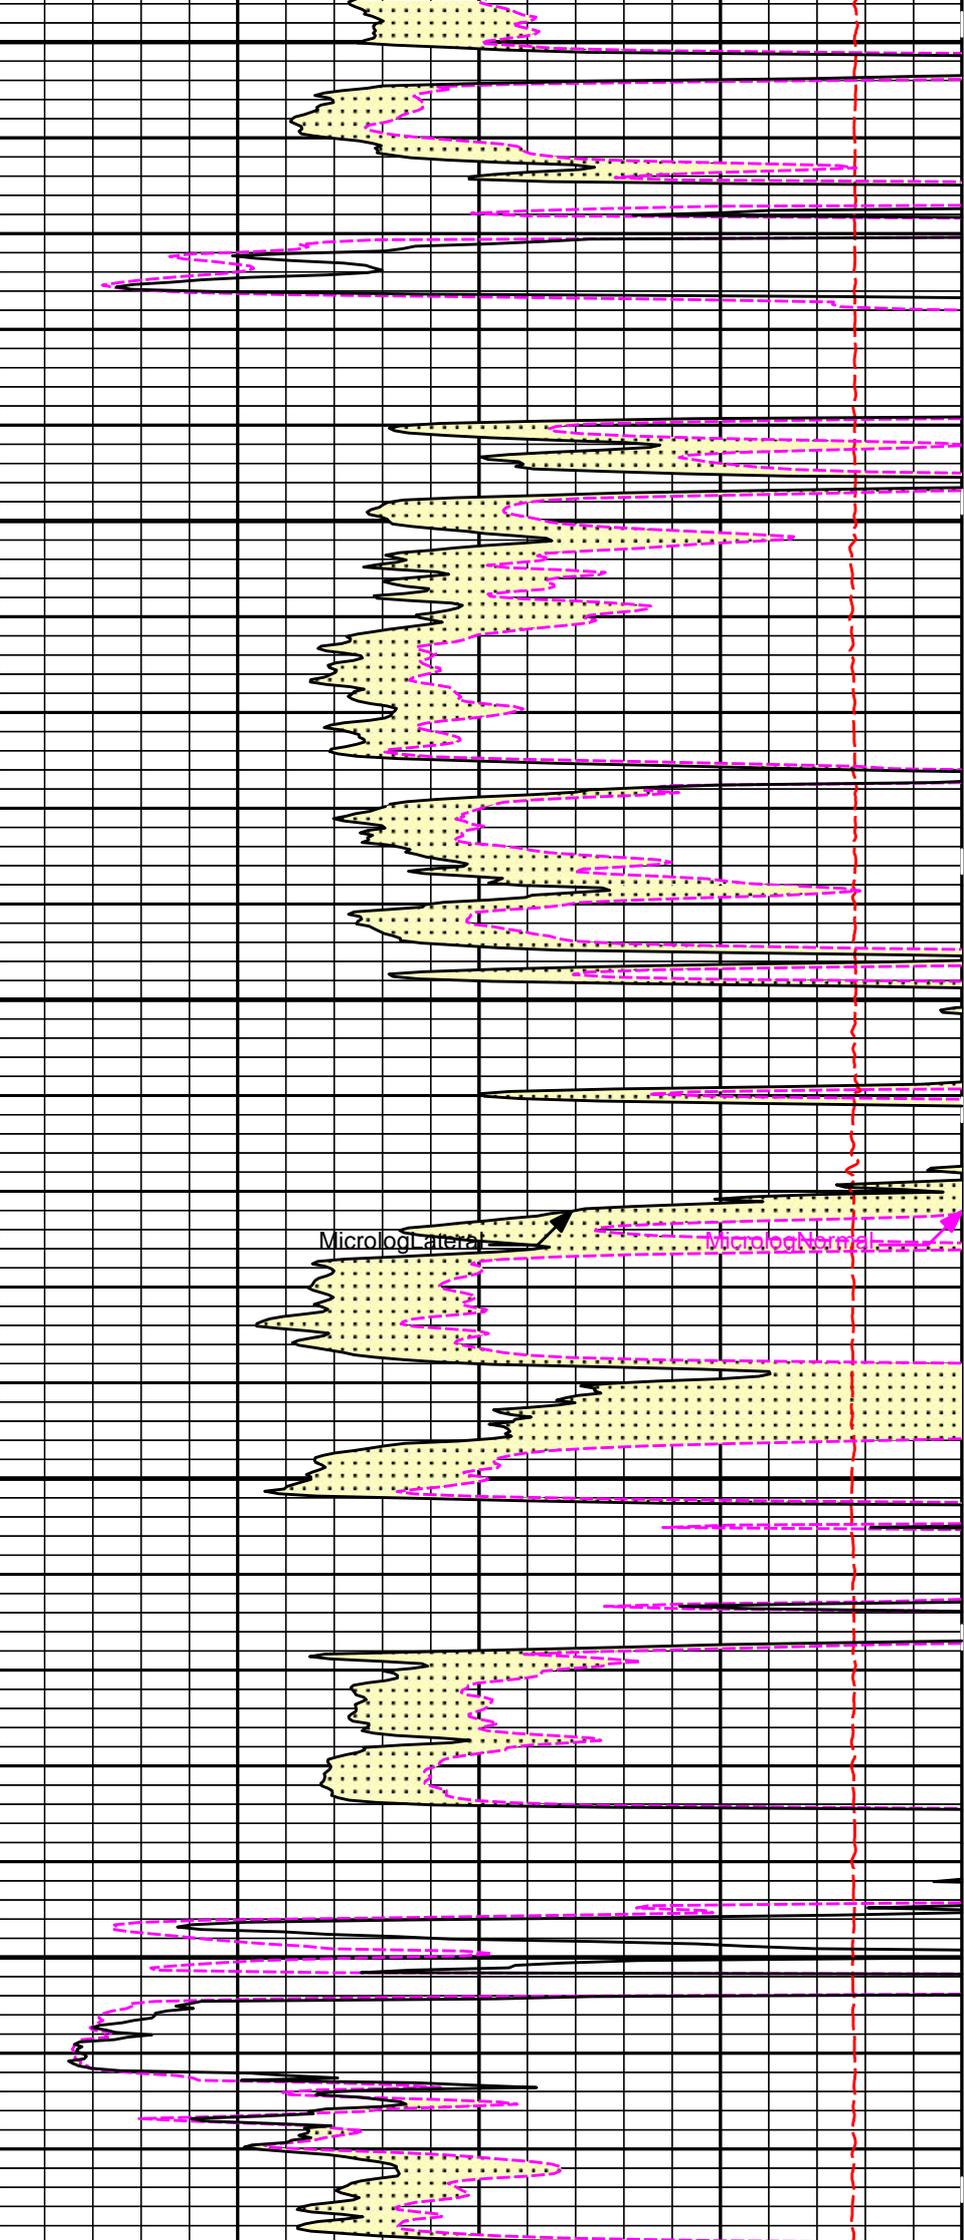

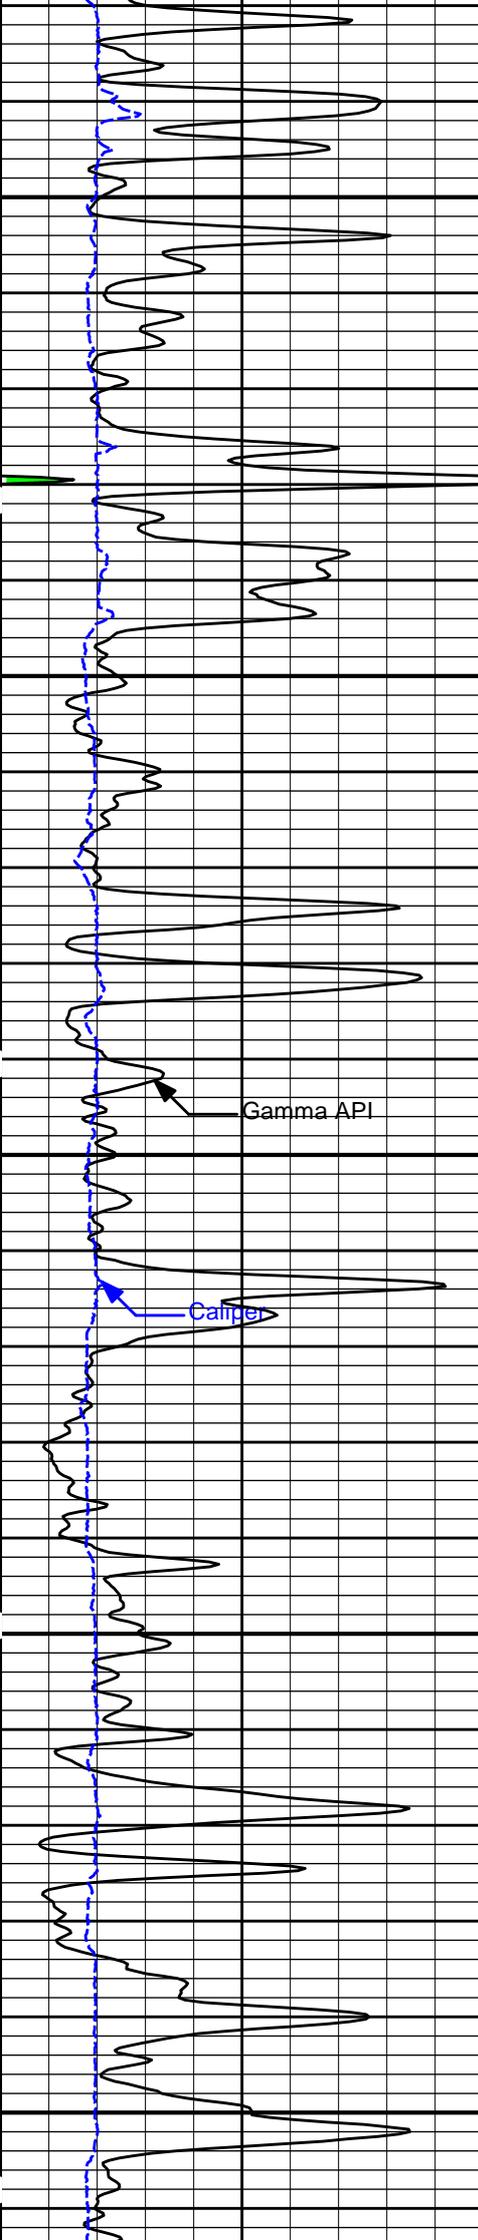


4100

4200

4300


Gamma API

Caliper

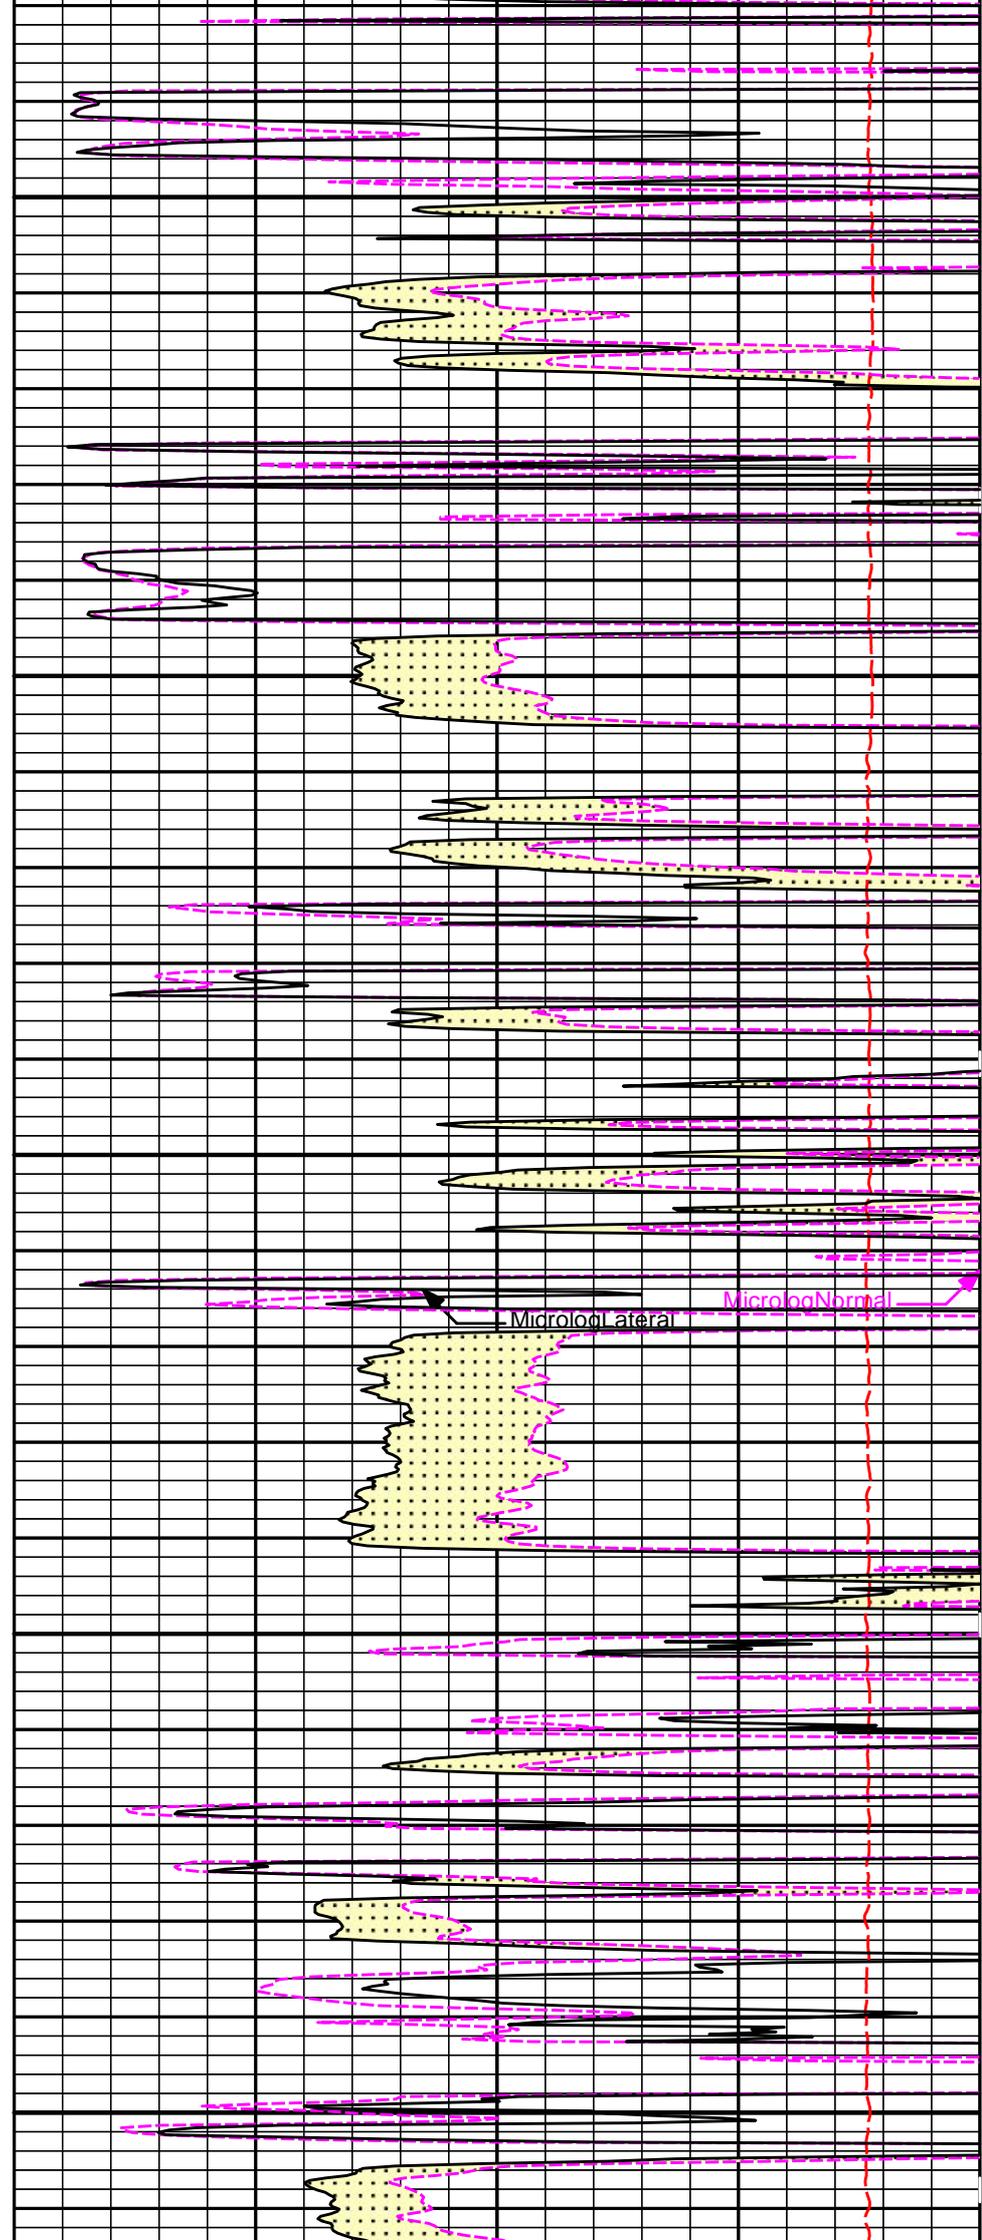


MicrologLateral

MicrologNormal

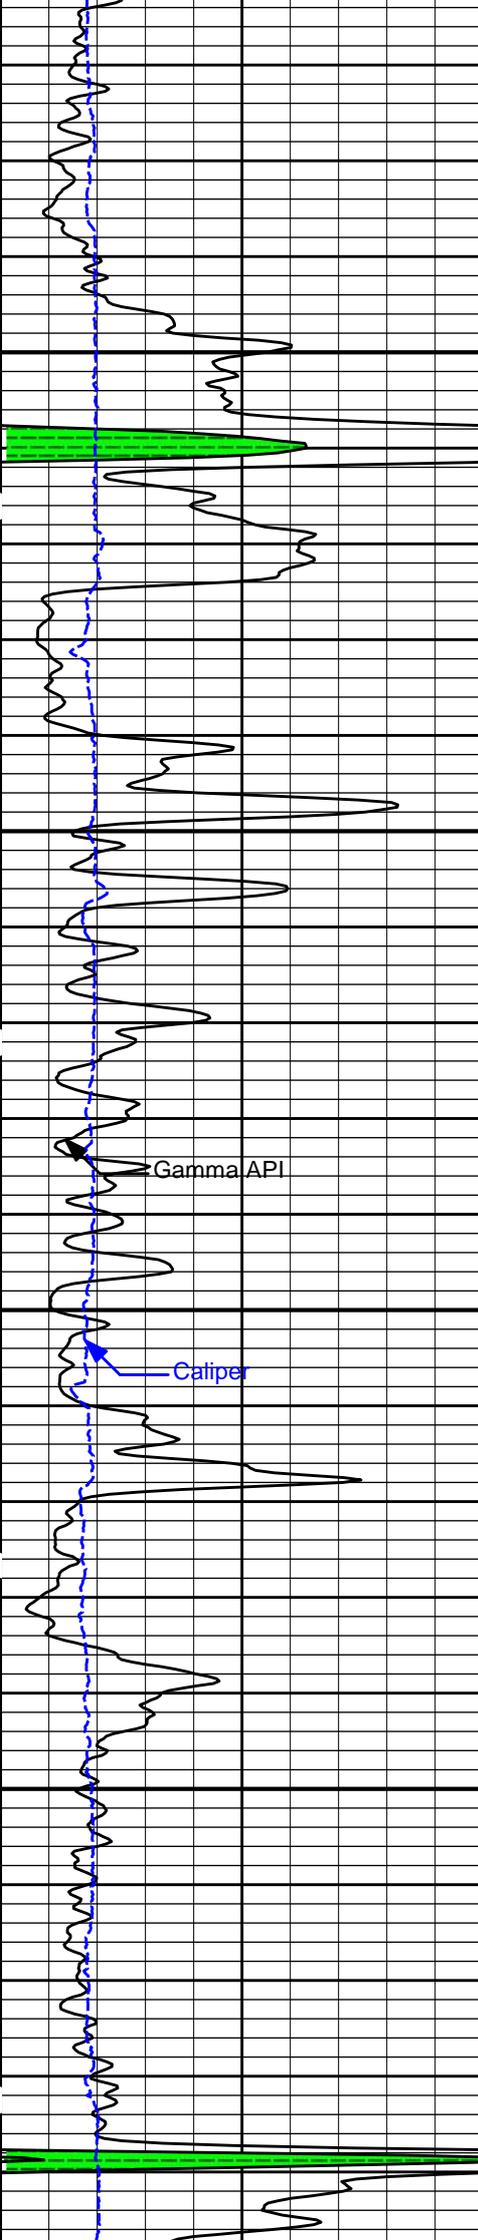

4400

4500

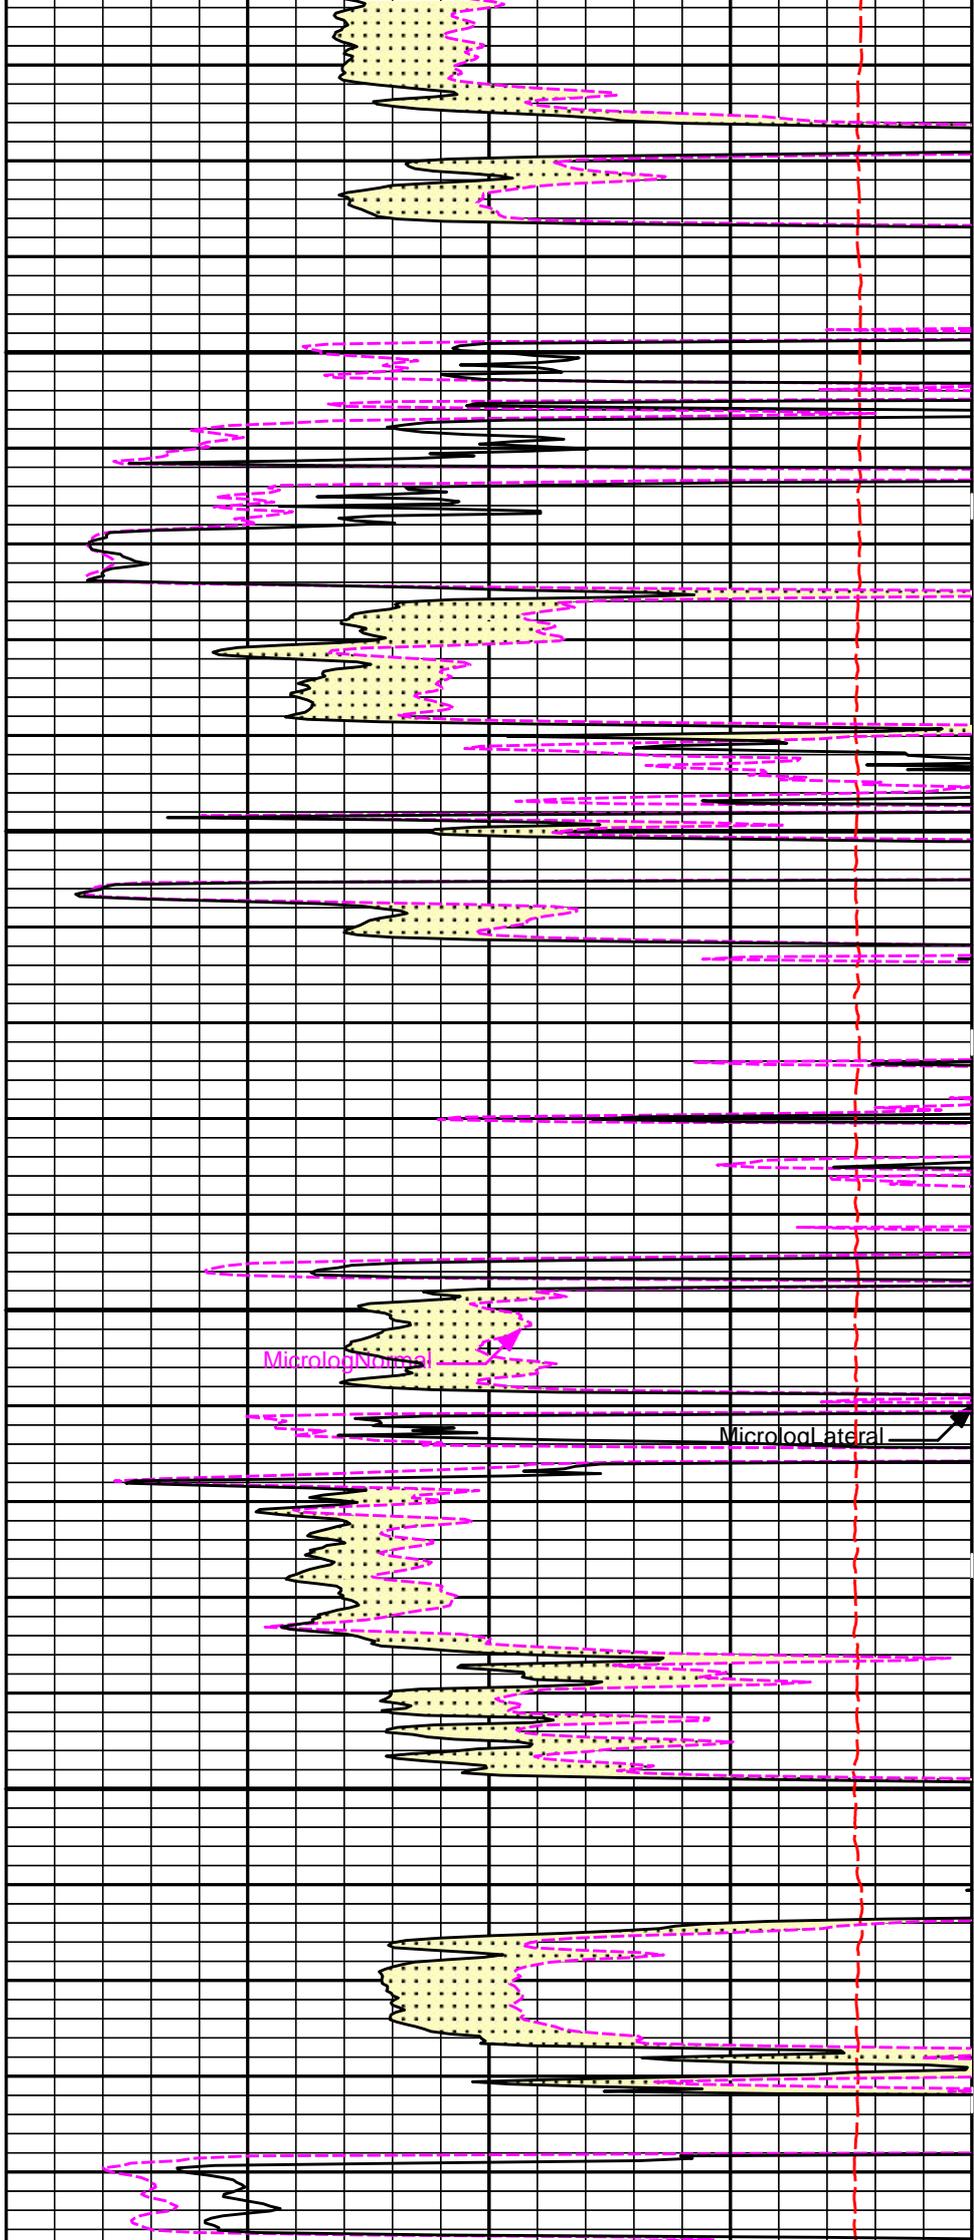


Gamma API

Caliper

Microlog Images

Microlog Lateral

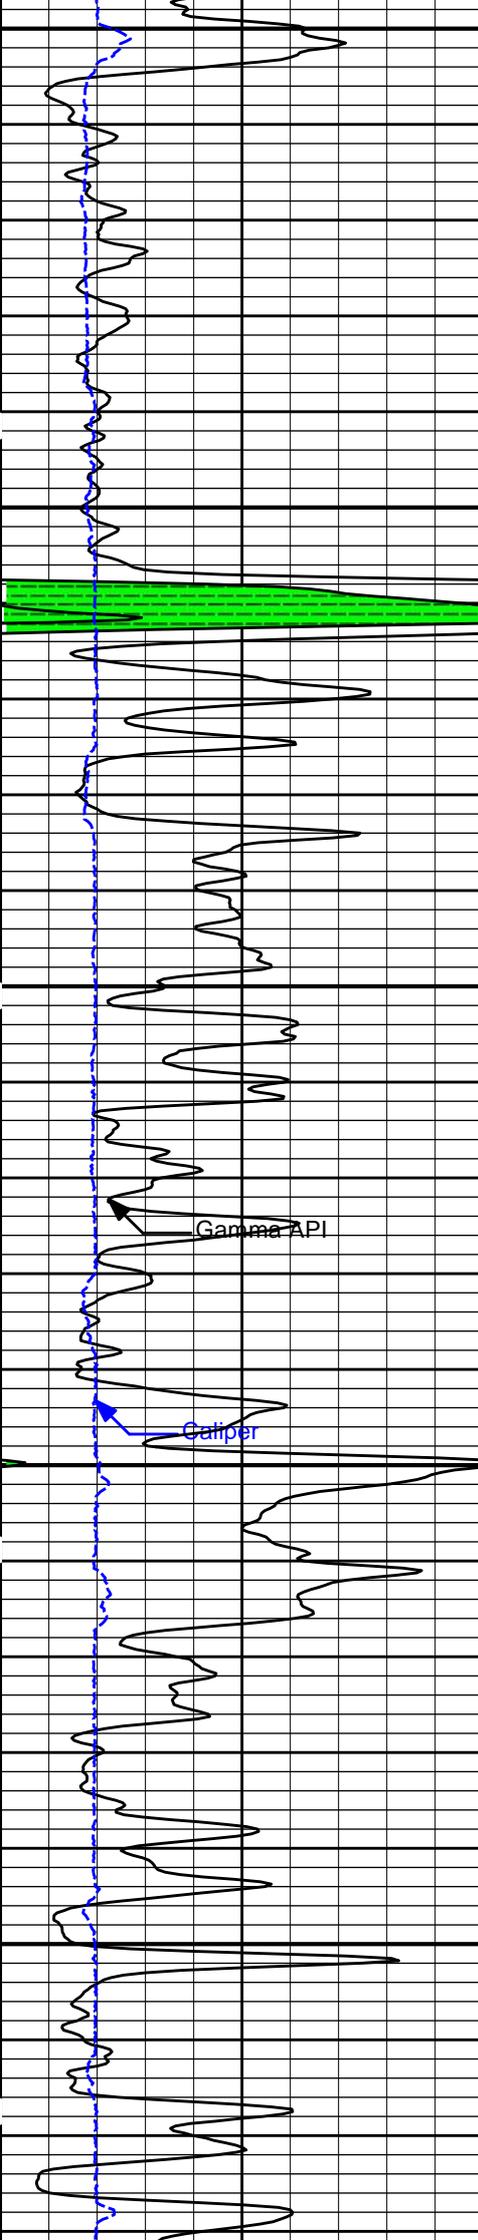


4600

Gamma API


Caliper

4700

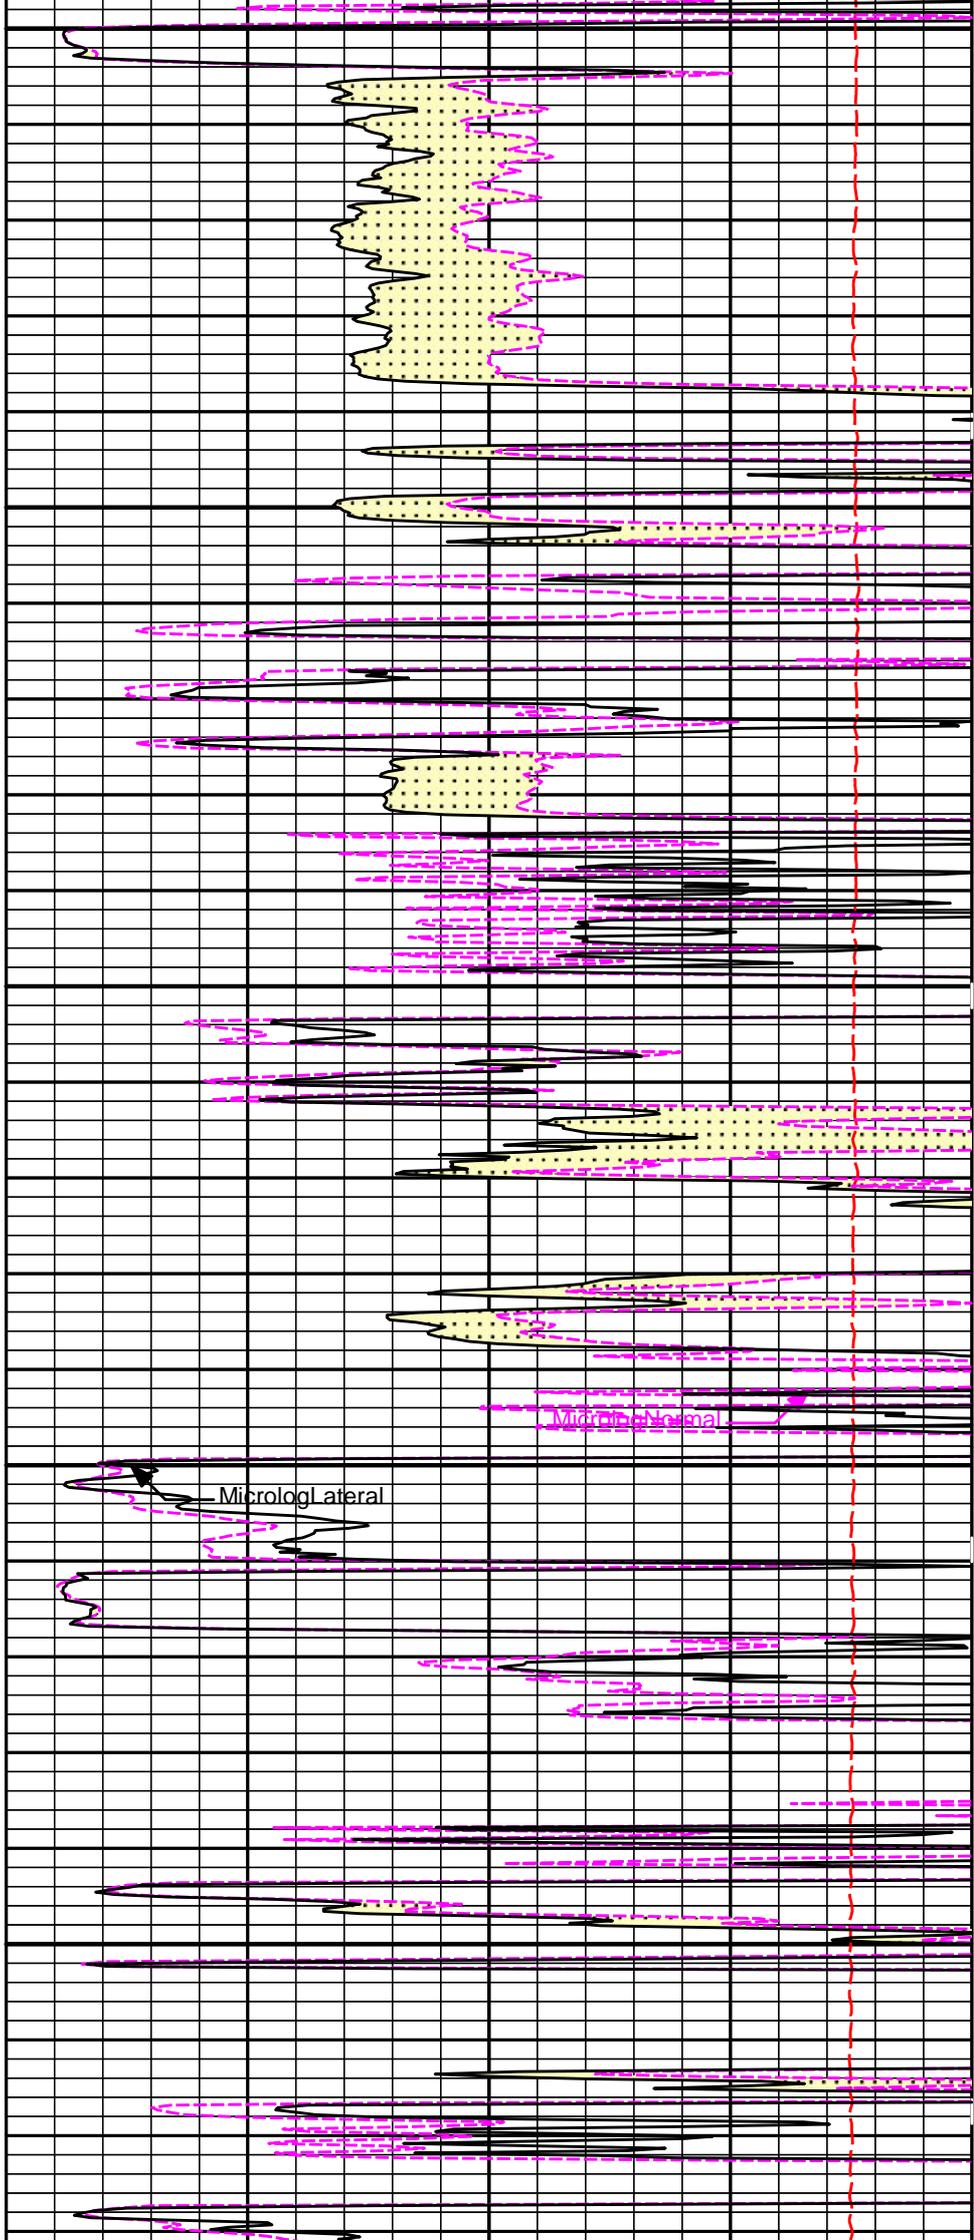

Microlog Lateral

Micro Normal

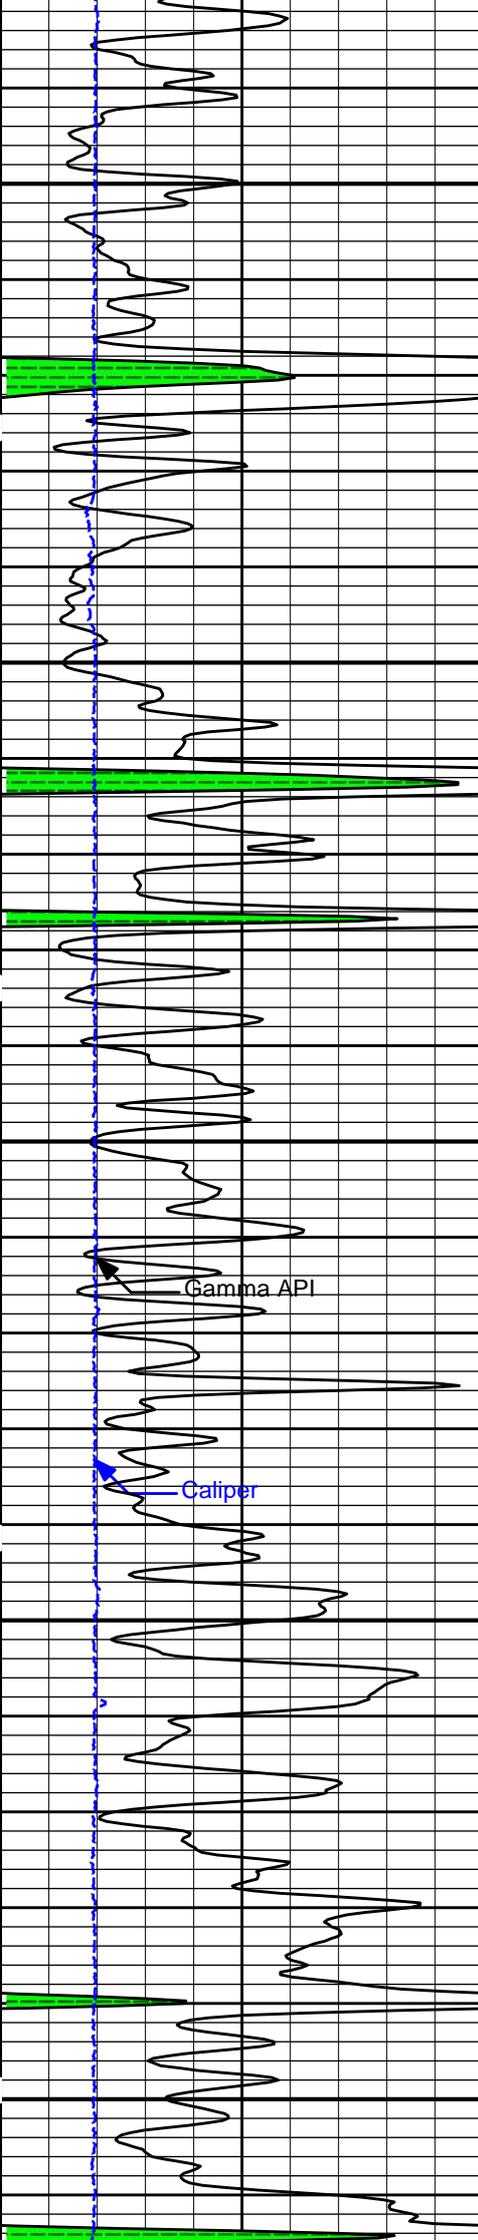


4800

4900

5000


Gamma API

Caliper

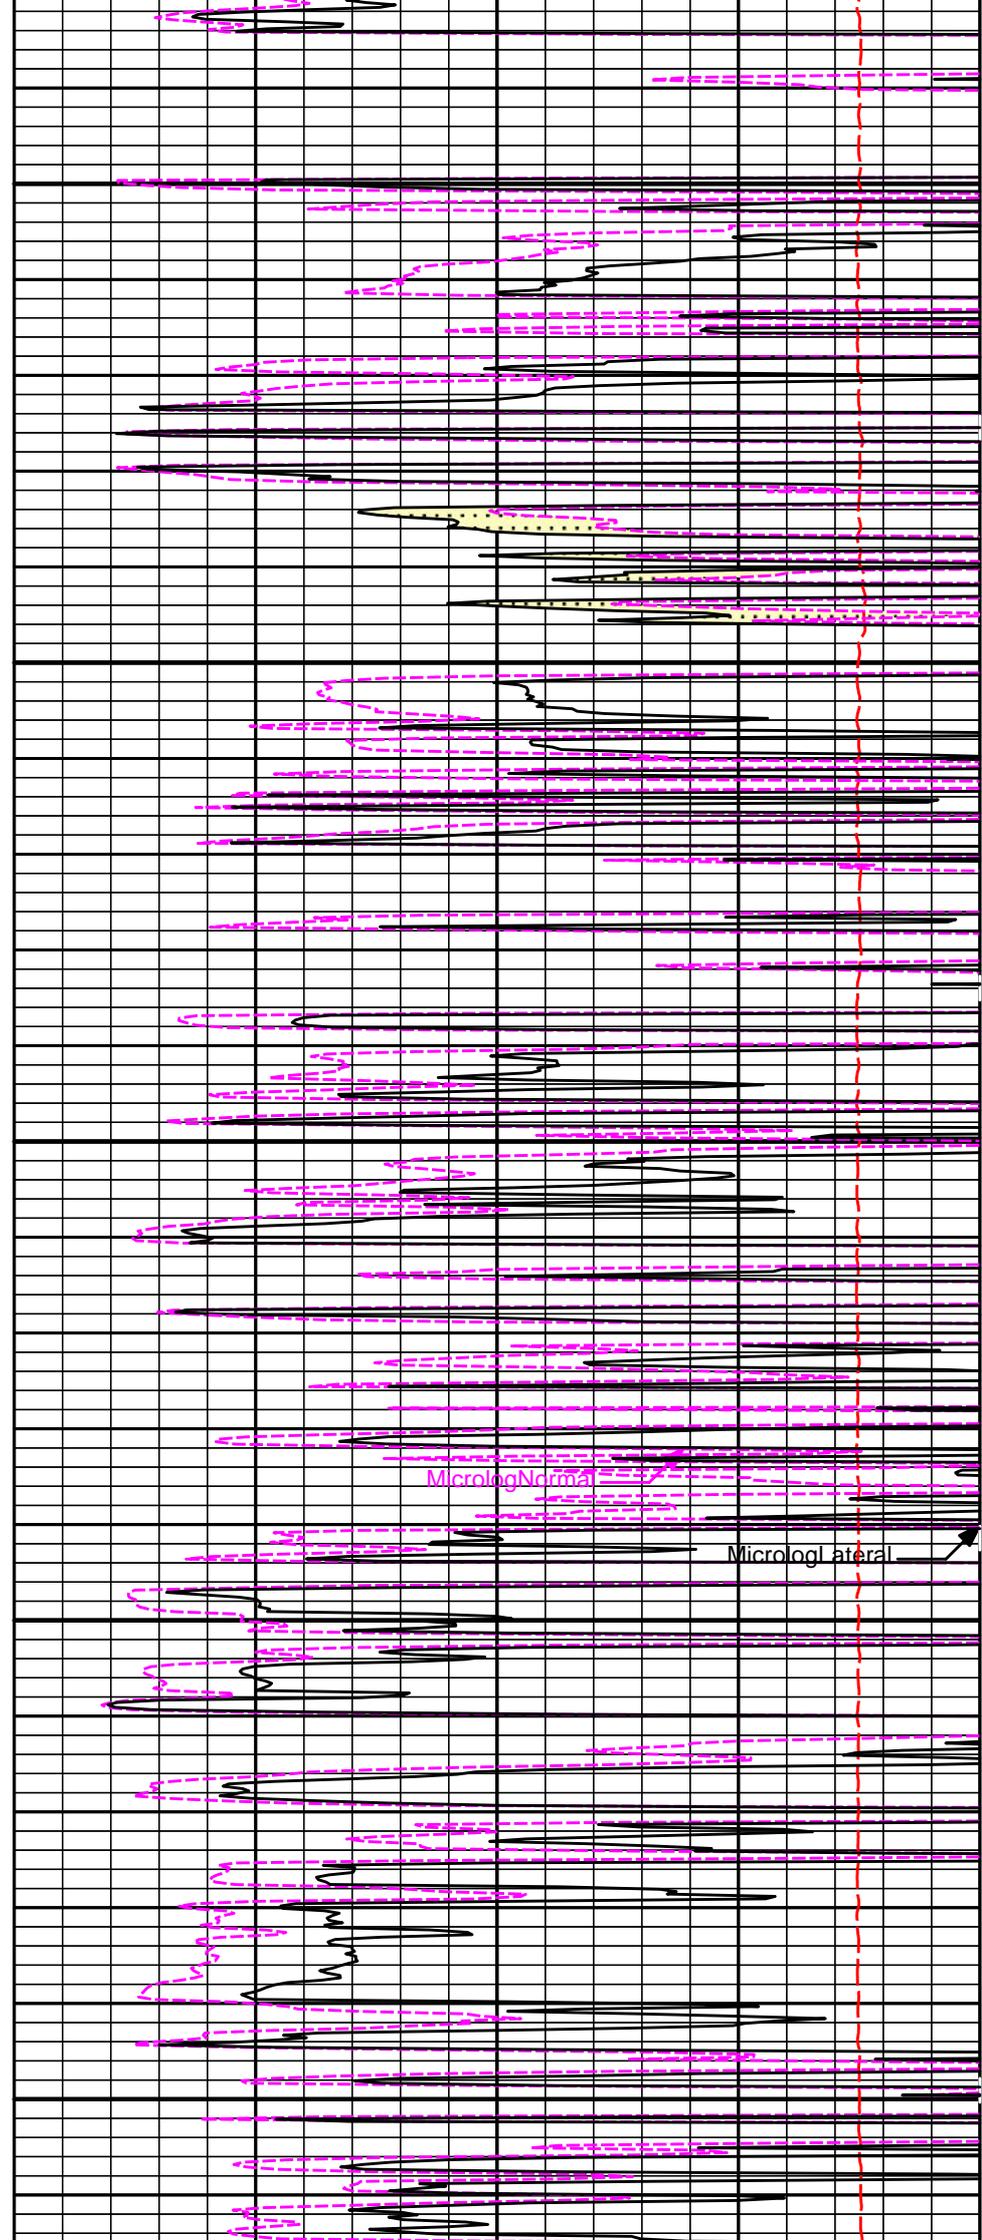


MicrologNormal


MicrologLateral

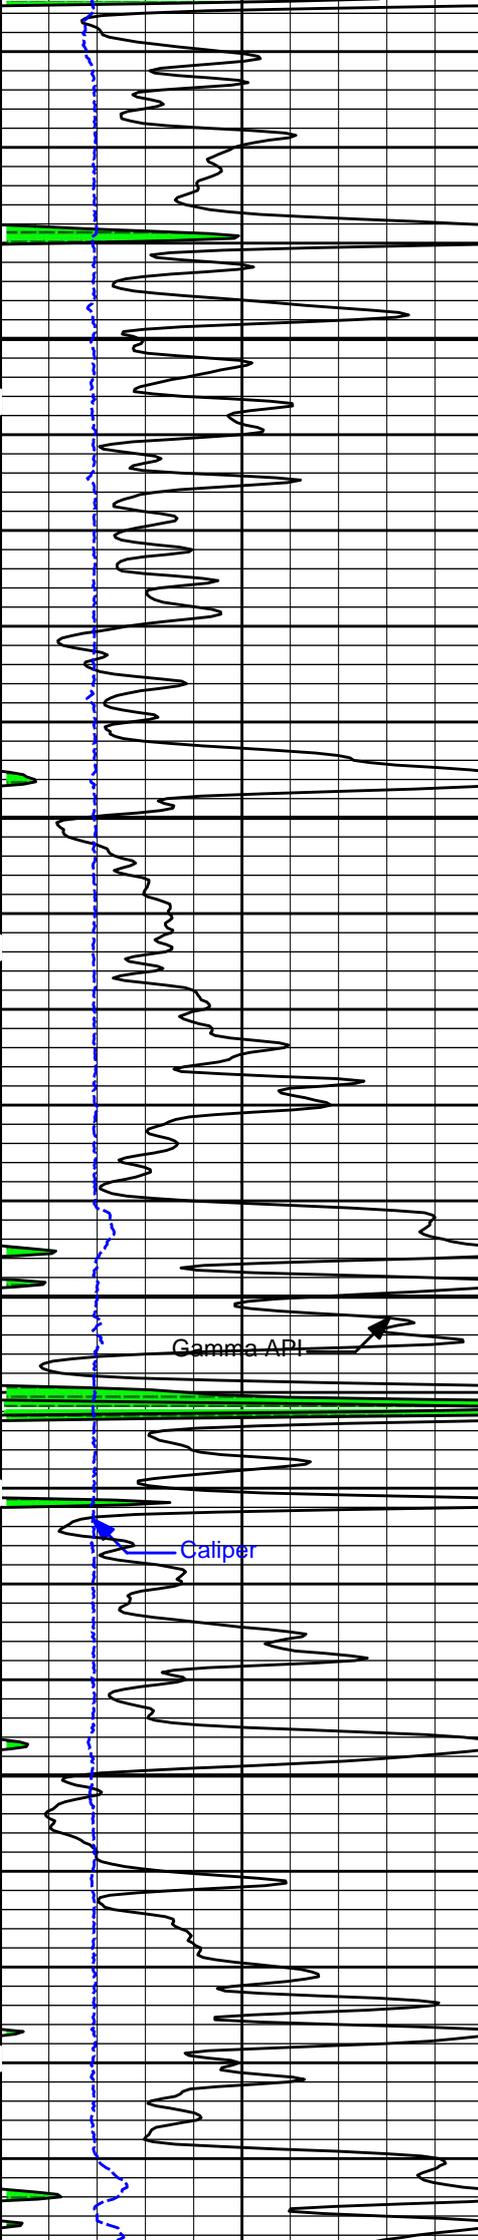

5100

5200

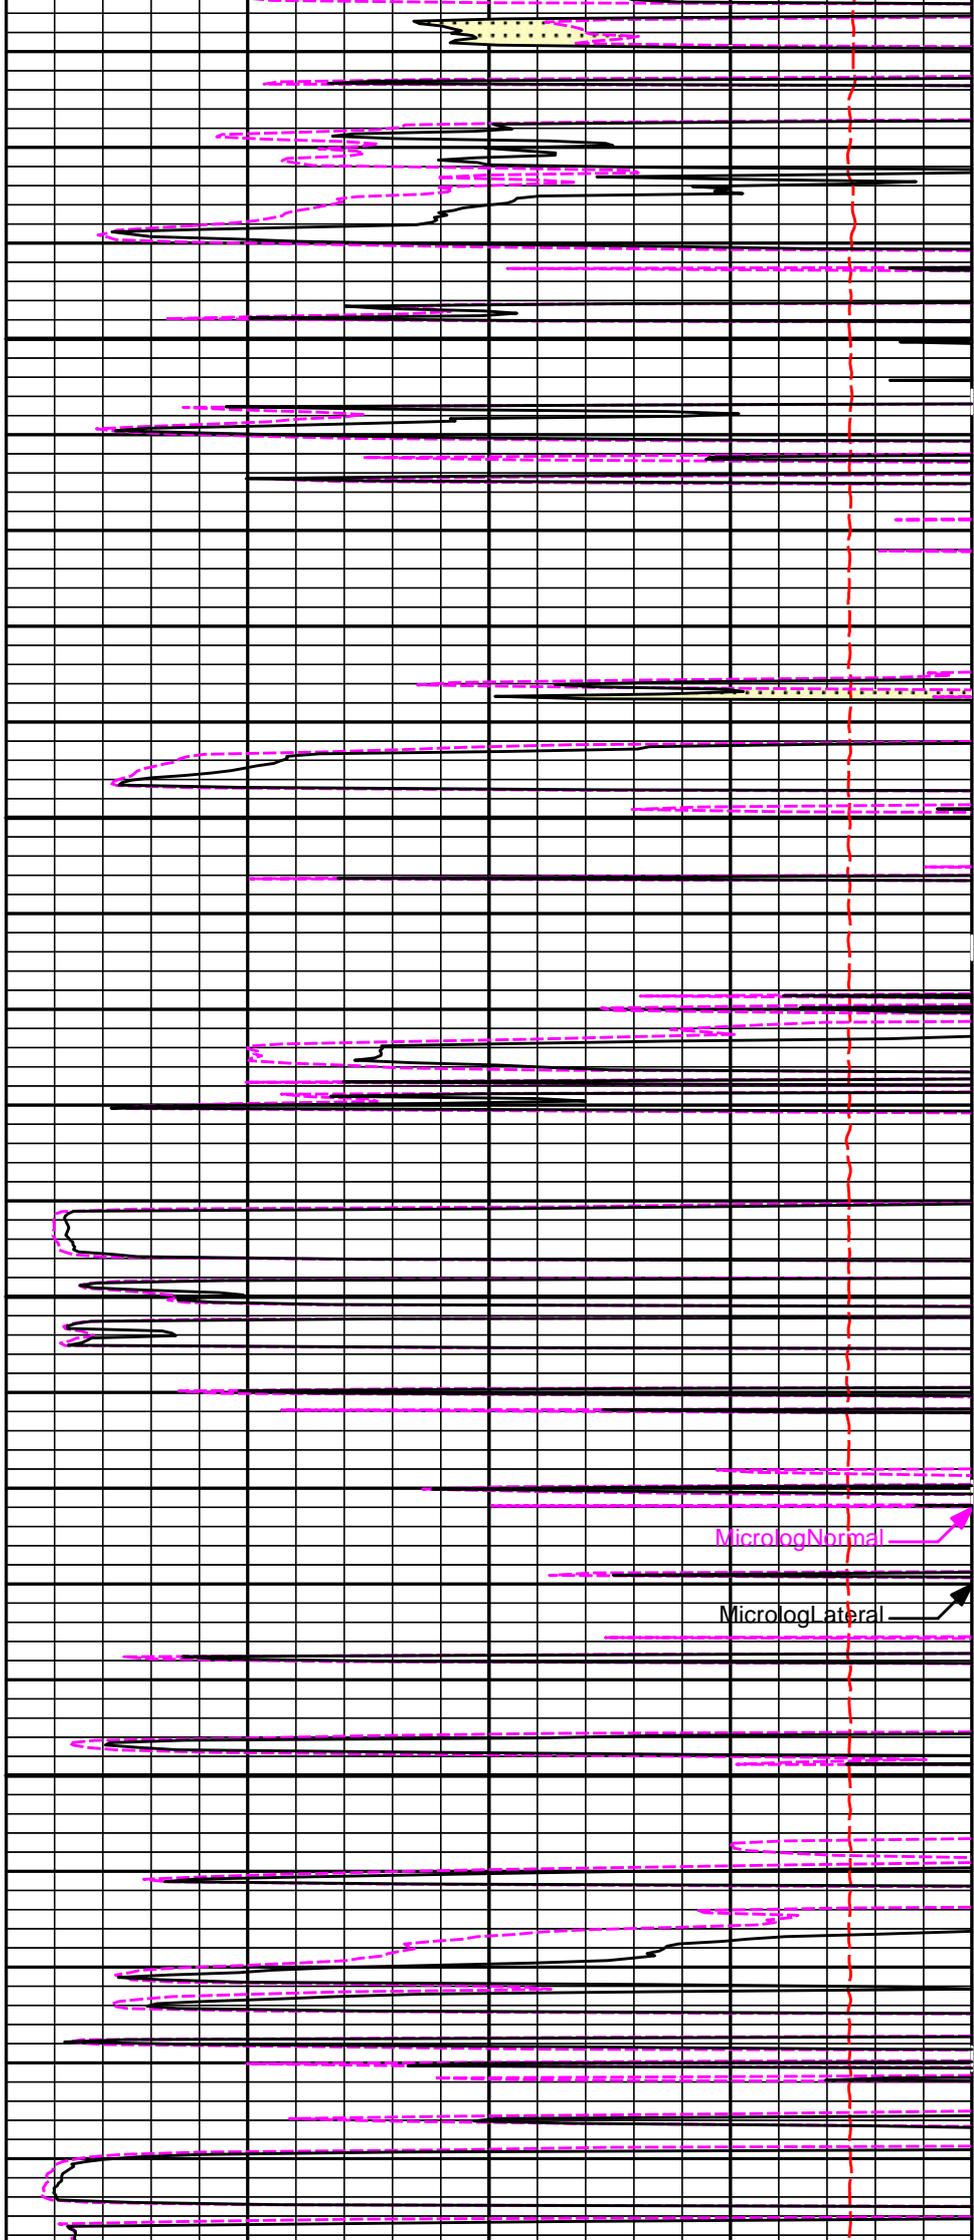

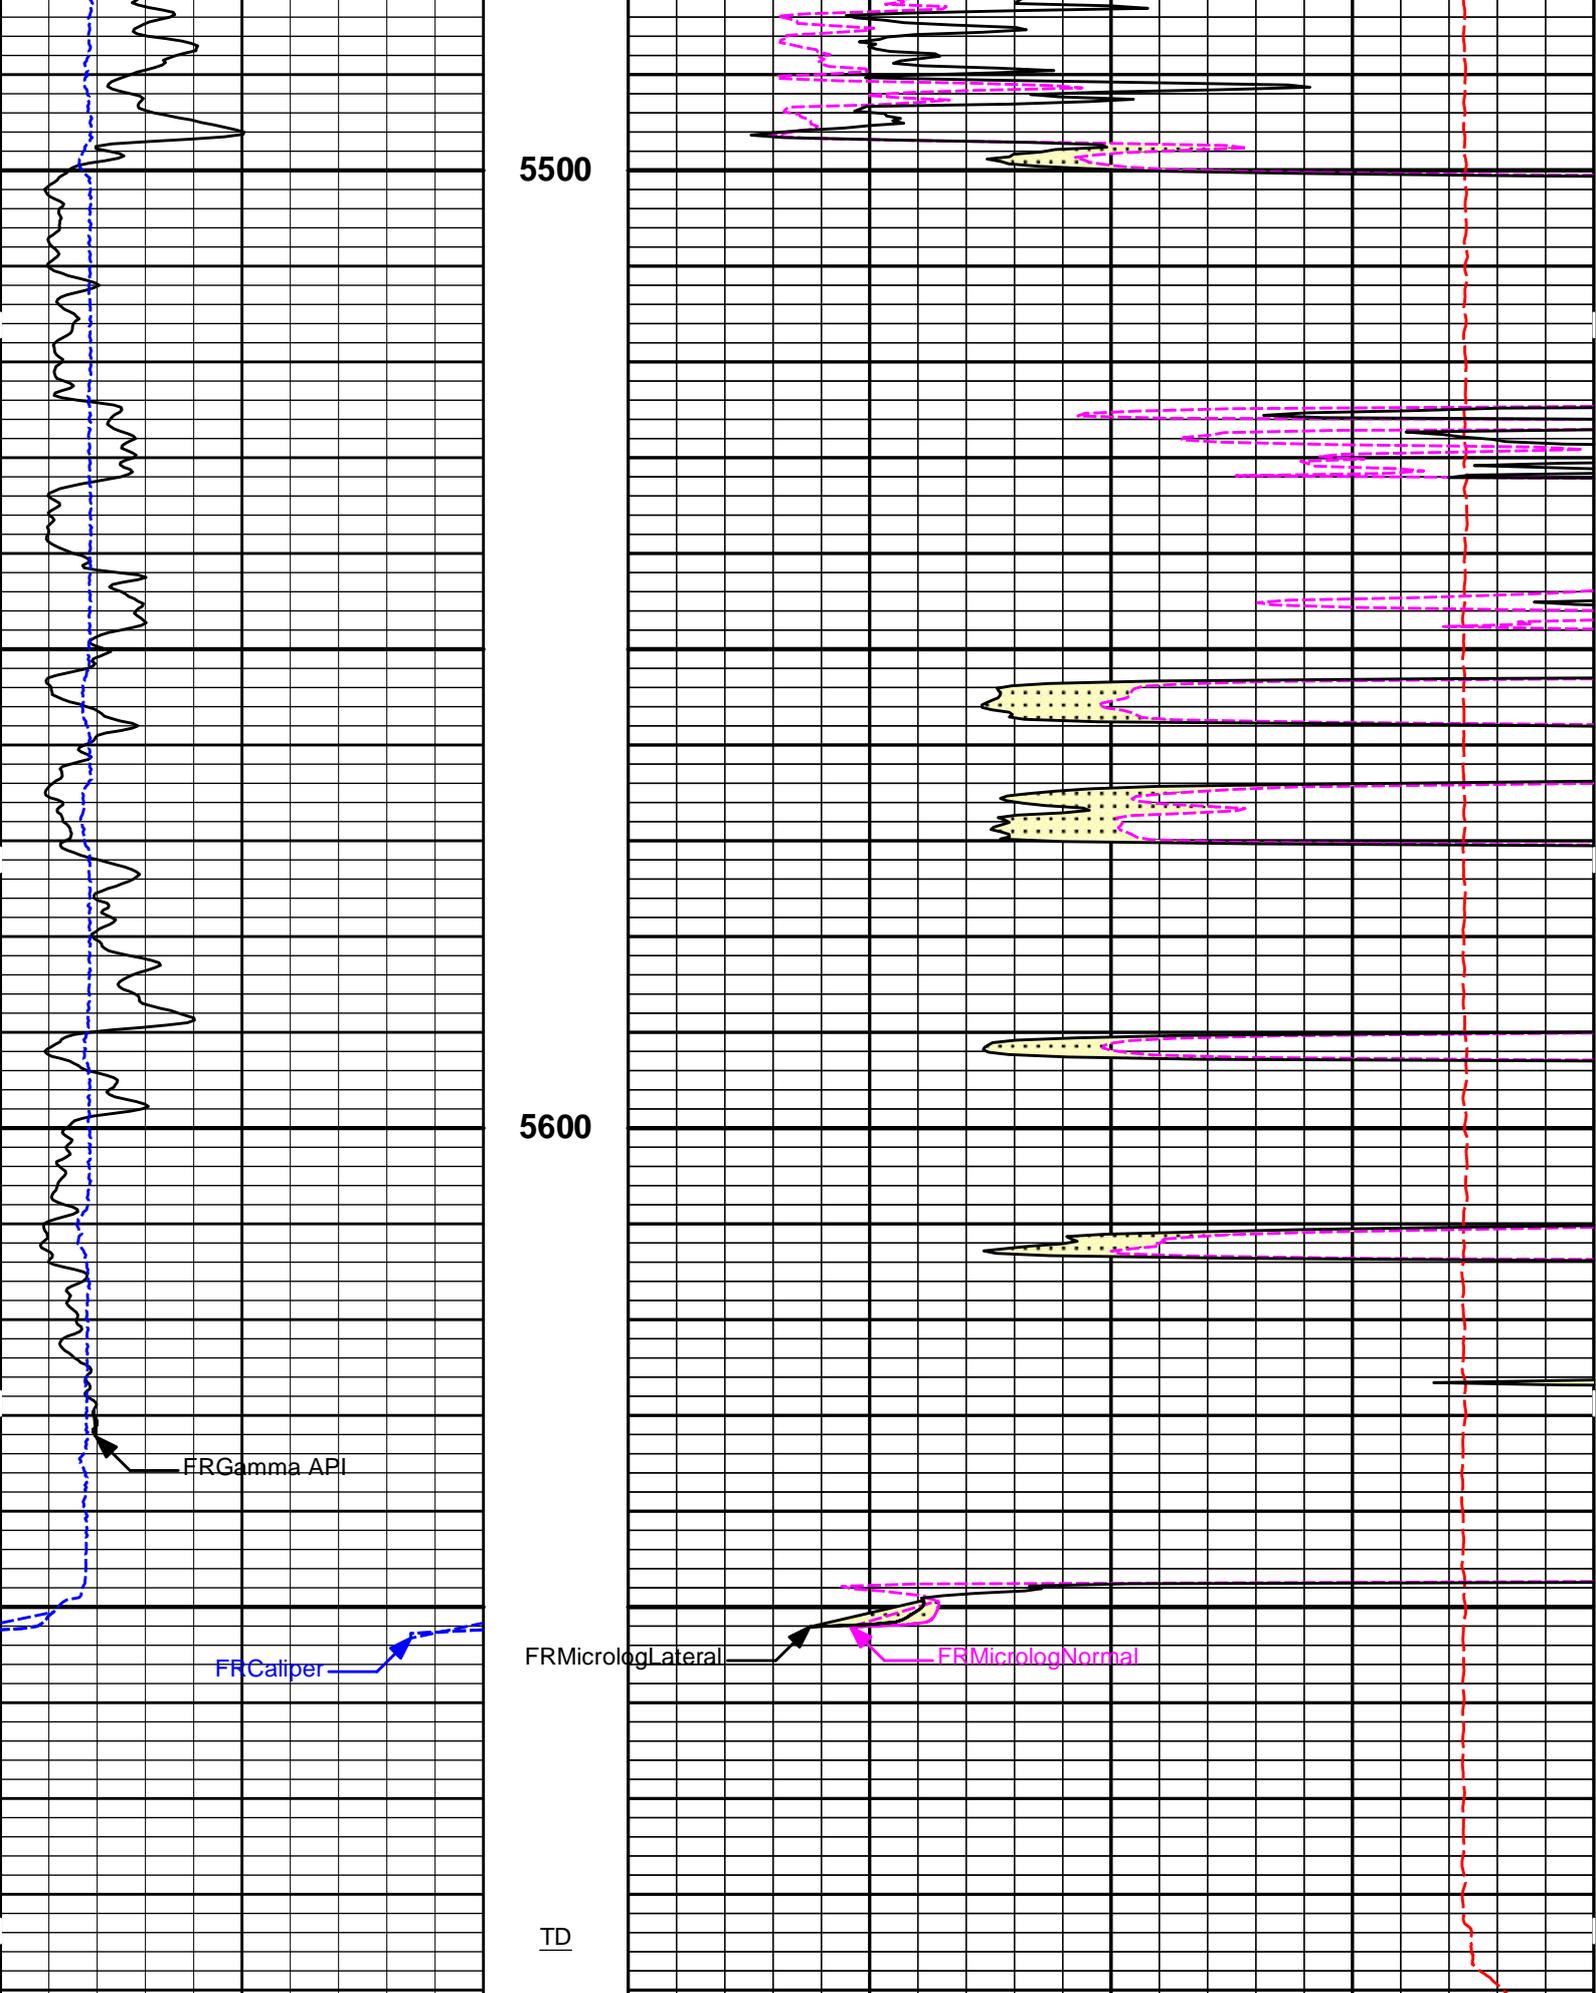

6	Caliper inches	16	MD 1 : 240 ft	15K	Tension pounds	0
0	Gamma API api	150		0	MicrologLateral ohm-metre	20
	SHALE			0	MicrologNormal	20

SHALE

ohm-metre

PERMEABLE

HALLIBURTON

Plot Time: 15-Jan-18 20:54:29
Plot Range: 3795 ft to 5690.75 ft
Data: JACQUART_3\Well Based\DETAILS1\
Plot File: \\-LOCAL-JACQUART_3\Well Based\MICROLOG\Microlog_IQ_5_main_lib


5 INCH MAIN LOG


MEASURED DEPTH
MAIN LOG 5" PER 100'

HALLIBURTON

Plot Time: 15-Jan-18 20:54:30
Plot Range: 5095 ft to 5691.5 ft
Data: JACQUART_3\Well Based\REPEAT\
Plot File: \\-LOCAL-JACQUART_3\Well Based\MICROLOG\Microlog_IQ_5_rep_lib

REPEAT SECTION

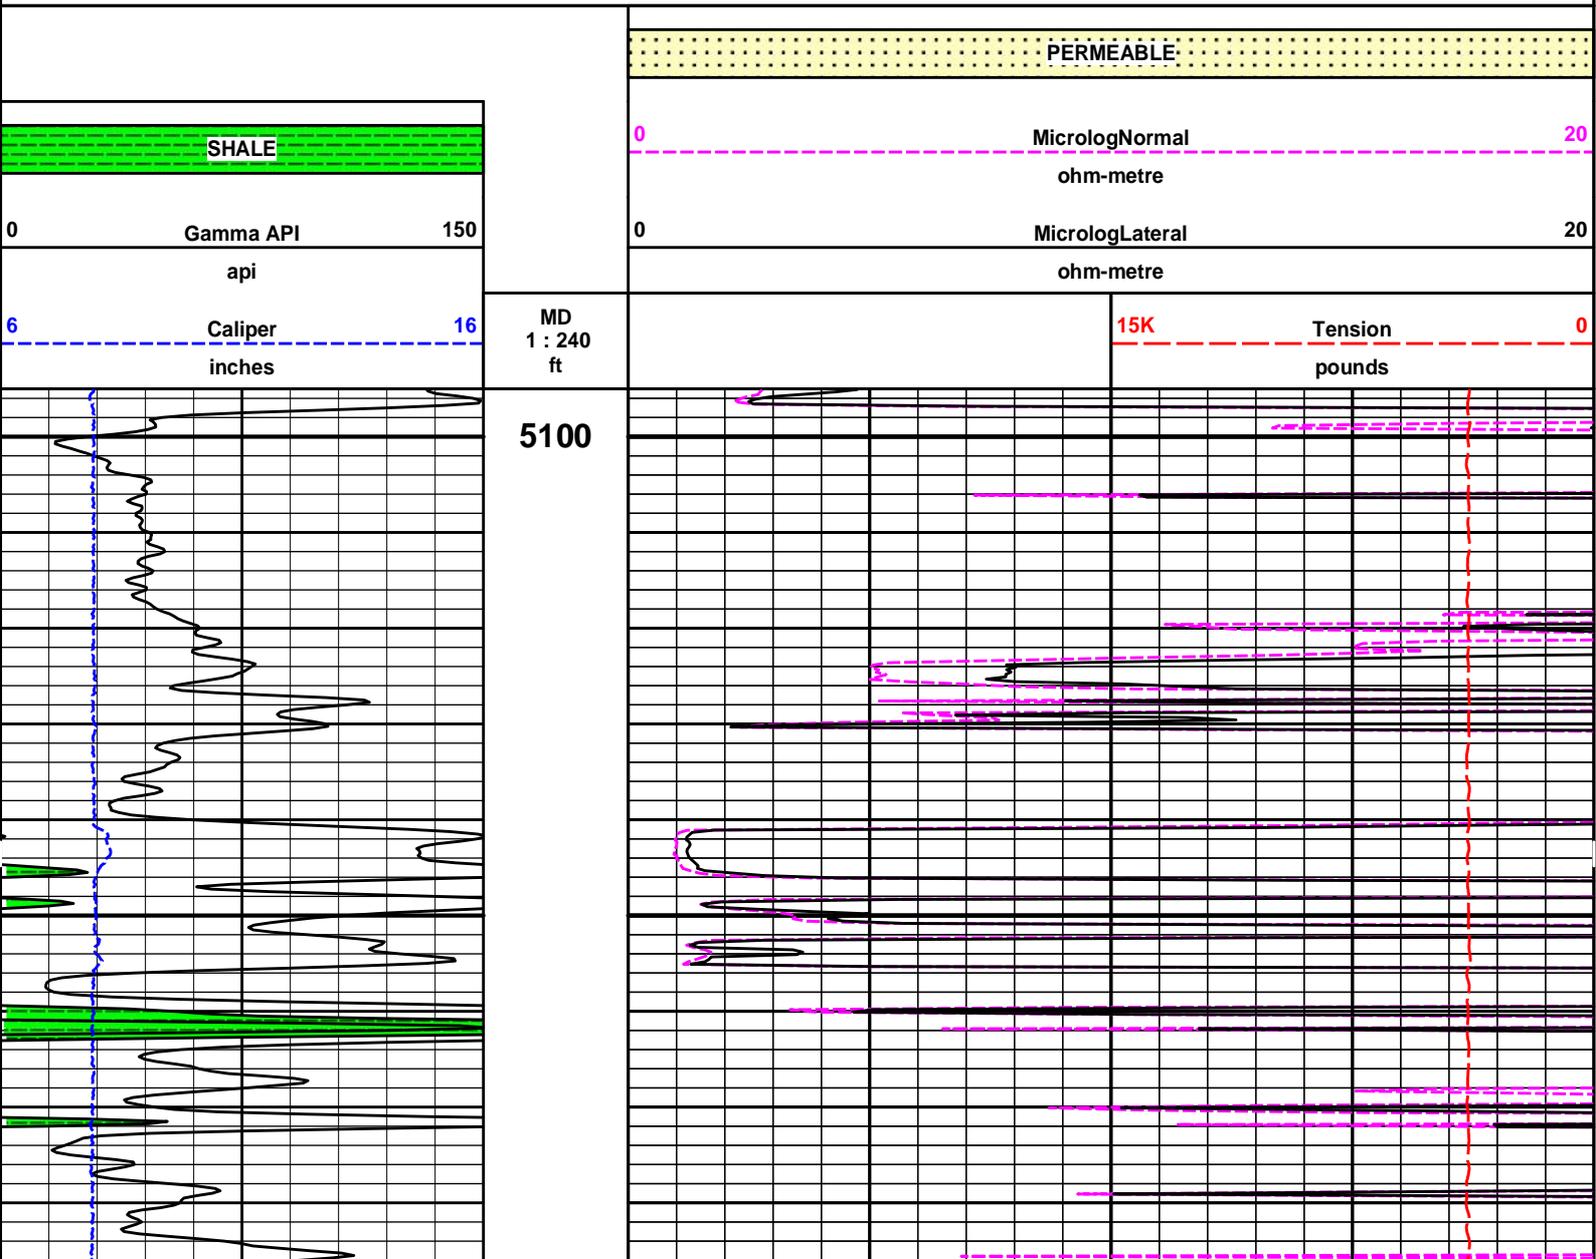


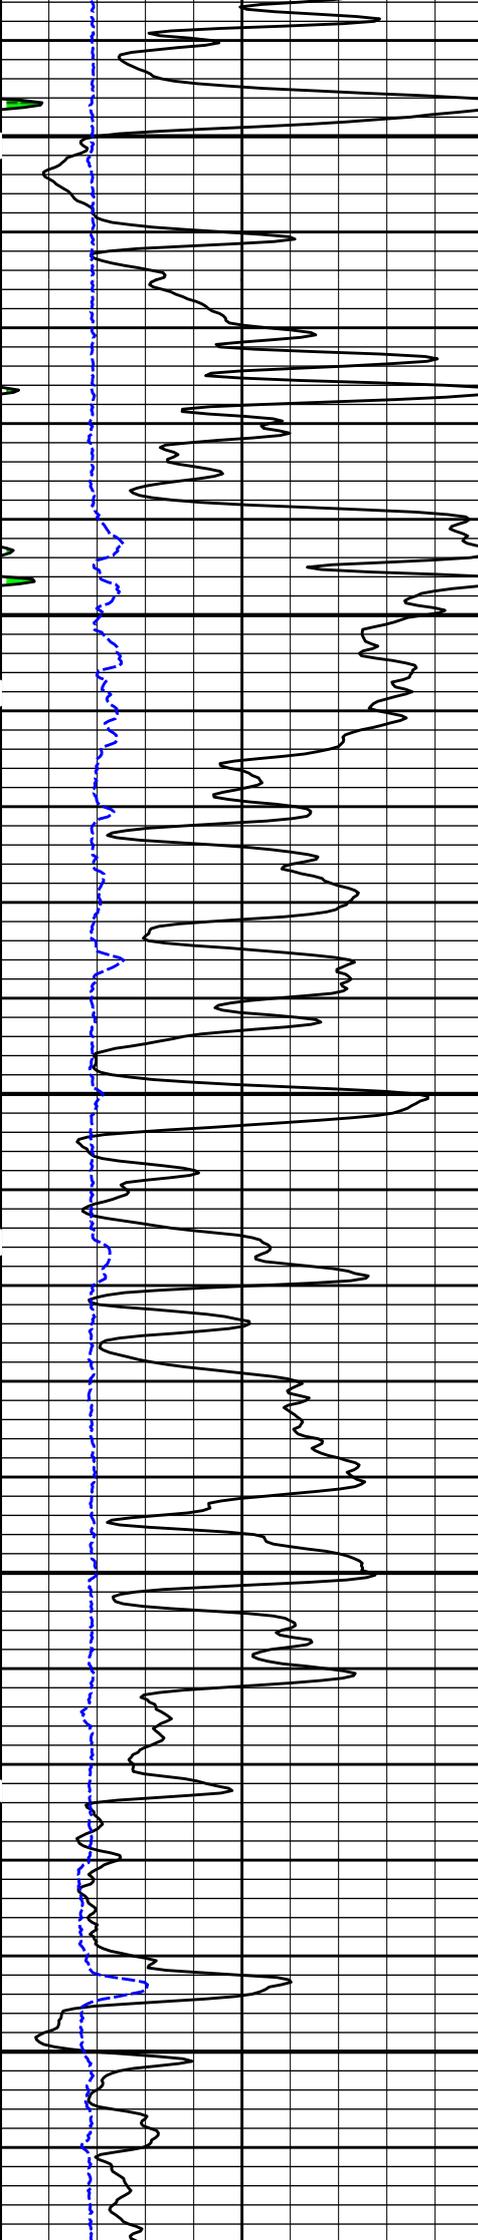


5200

5300


5400

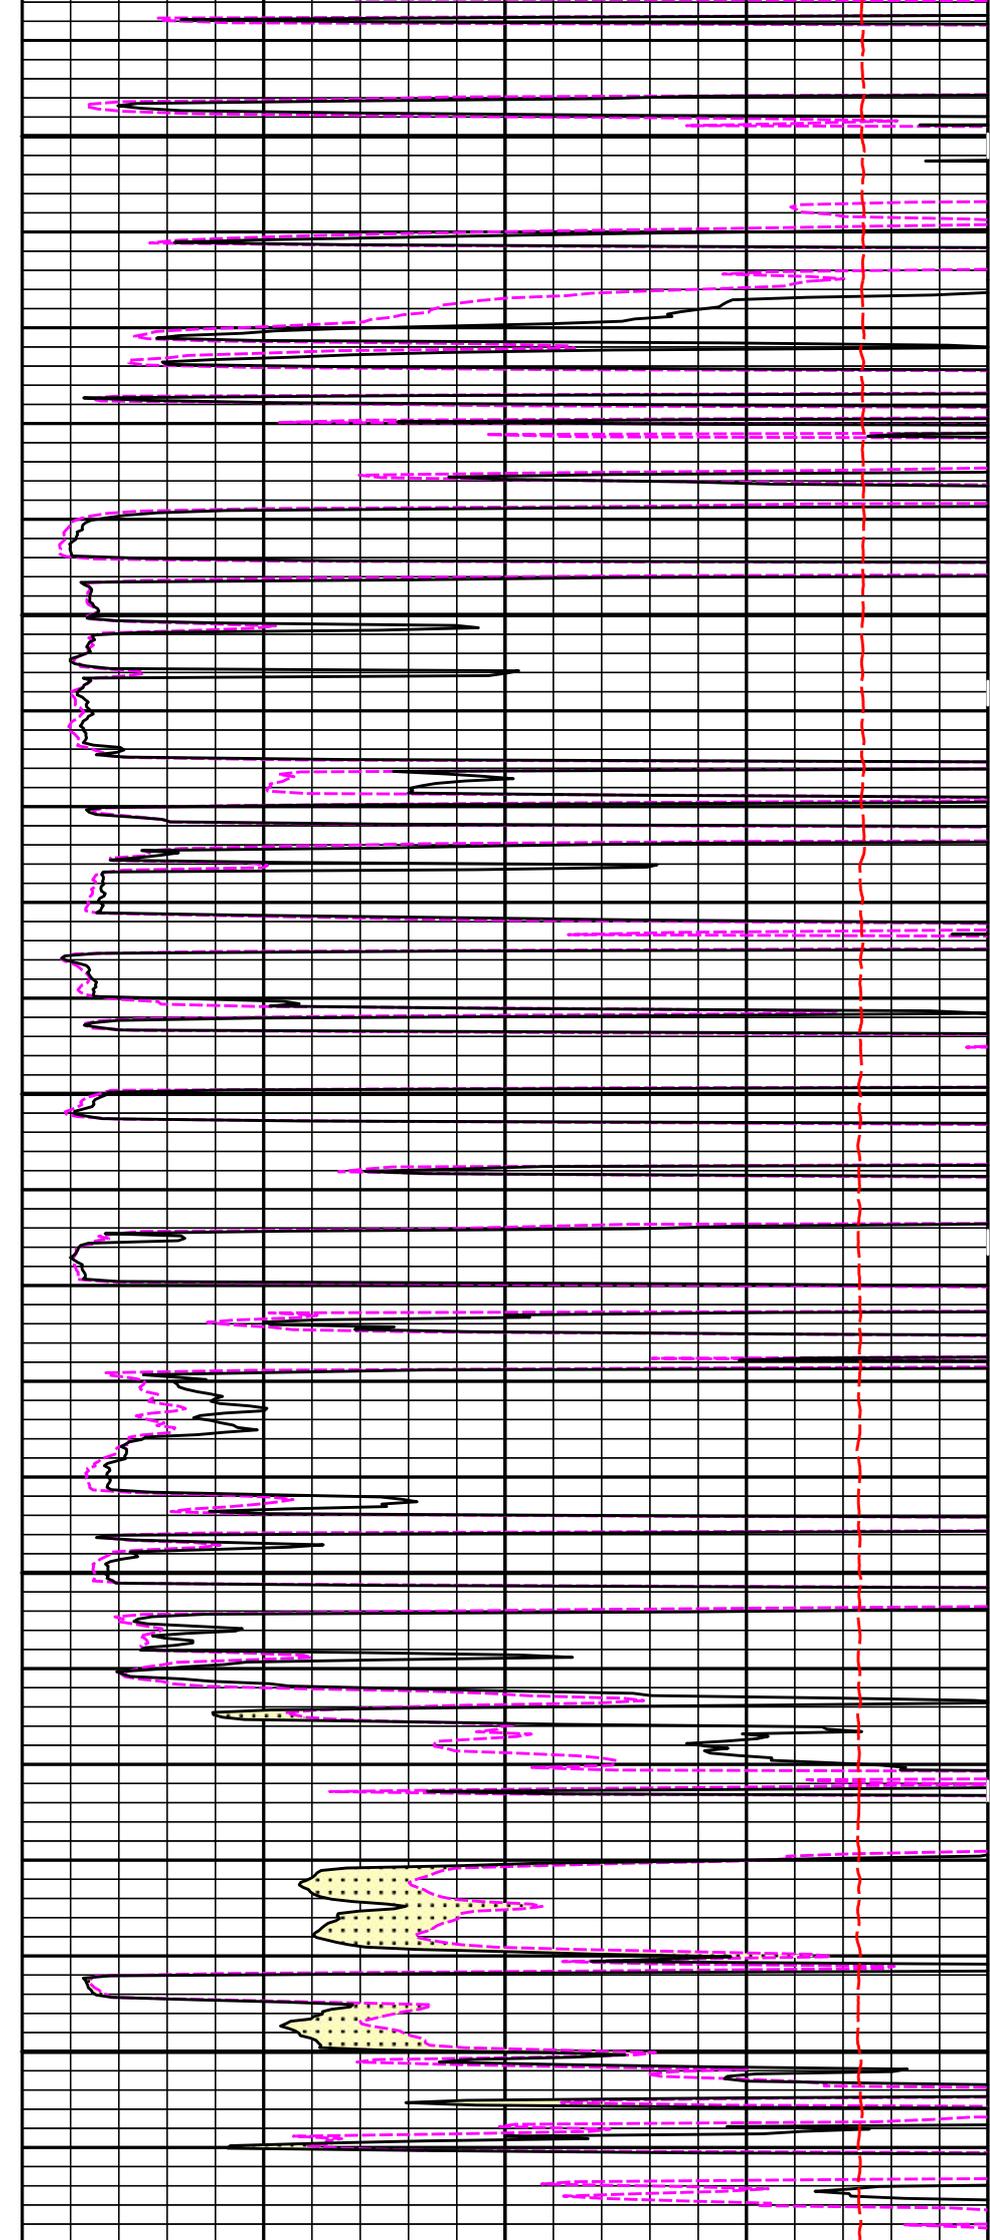


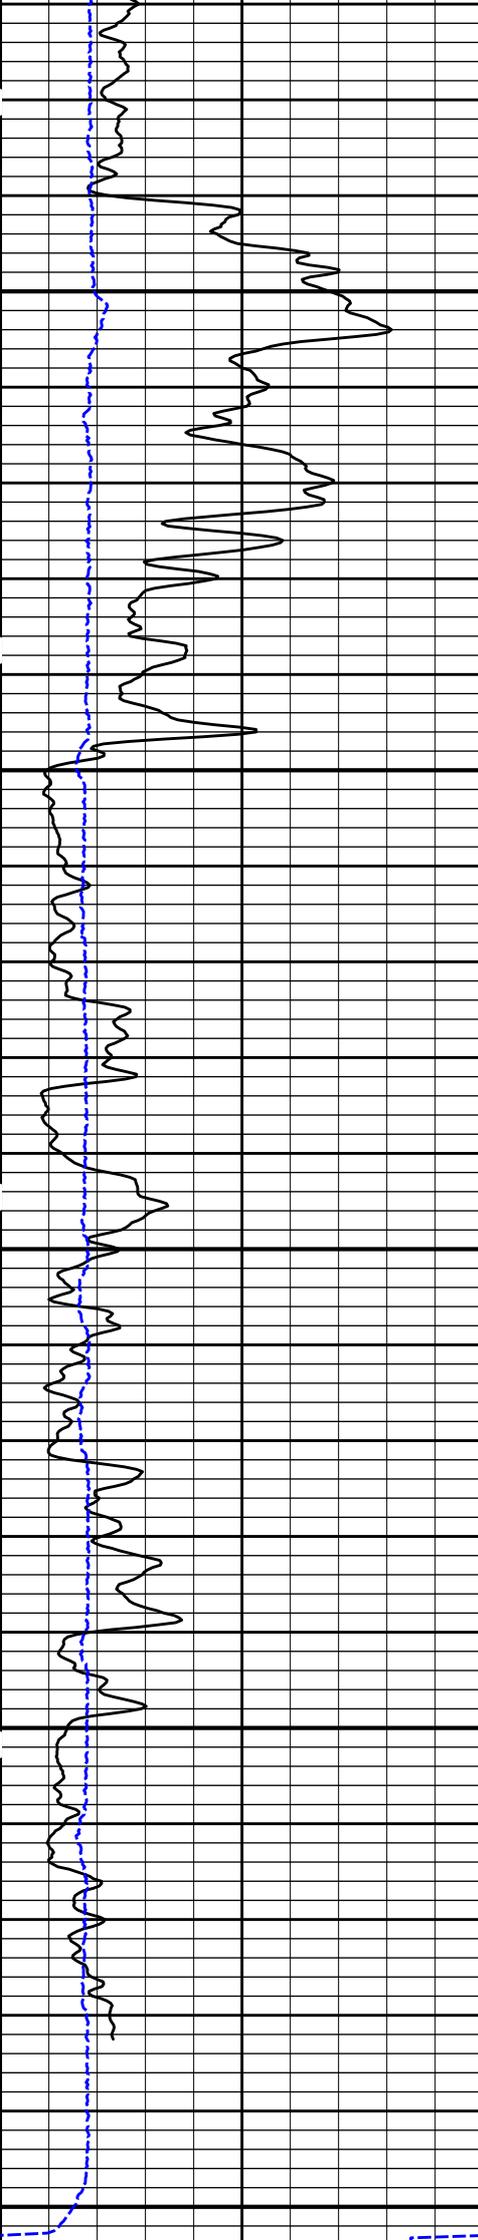

5500

5600

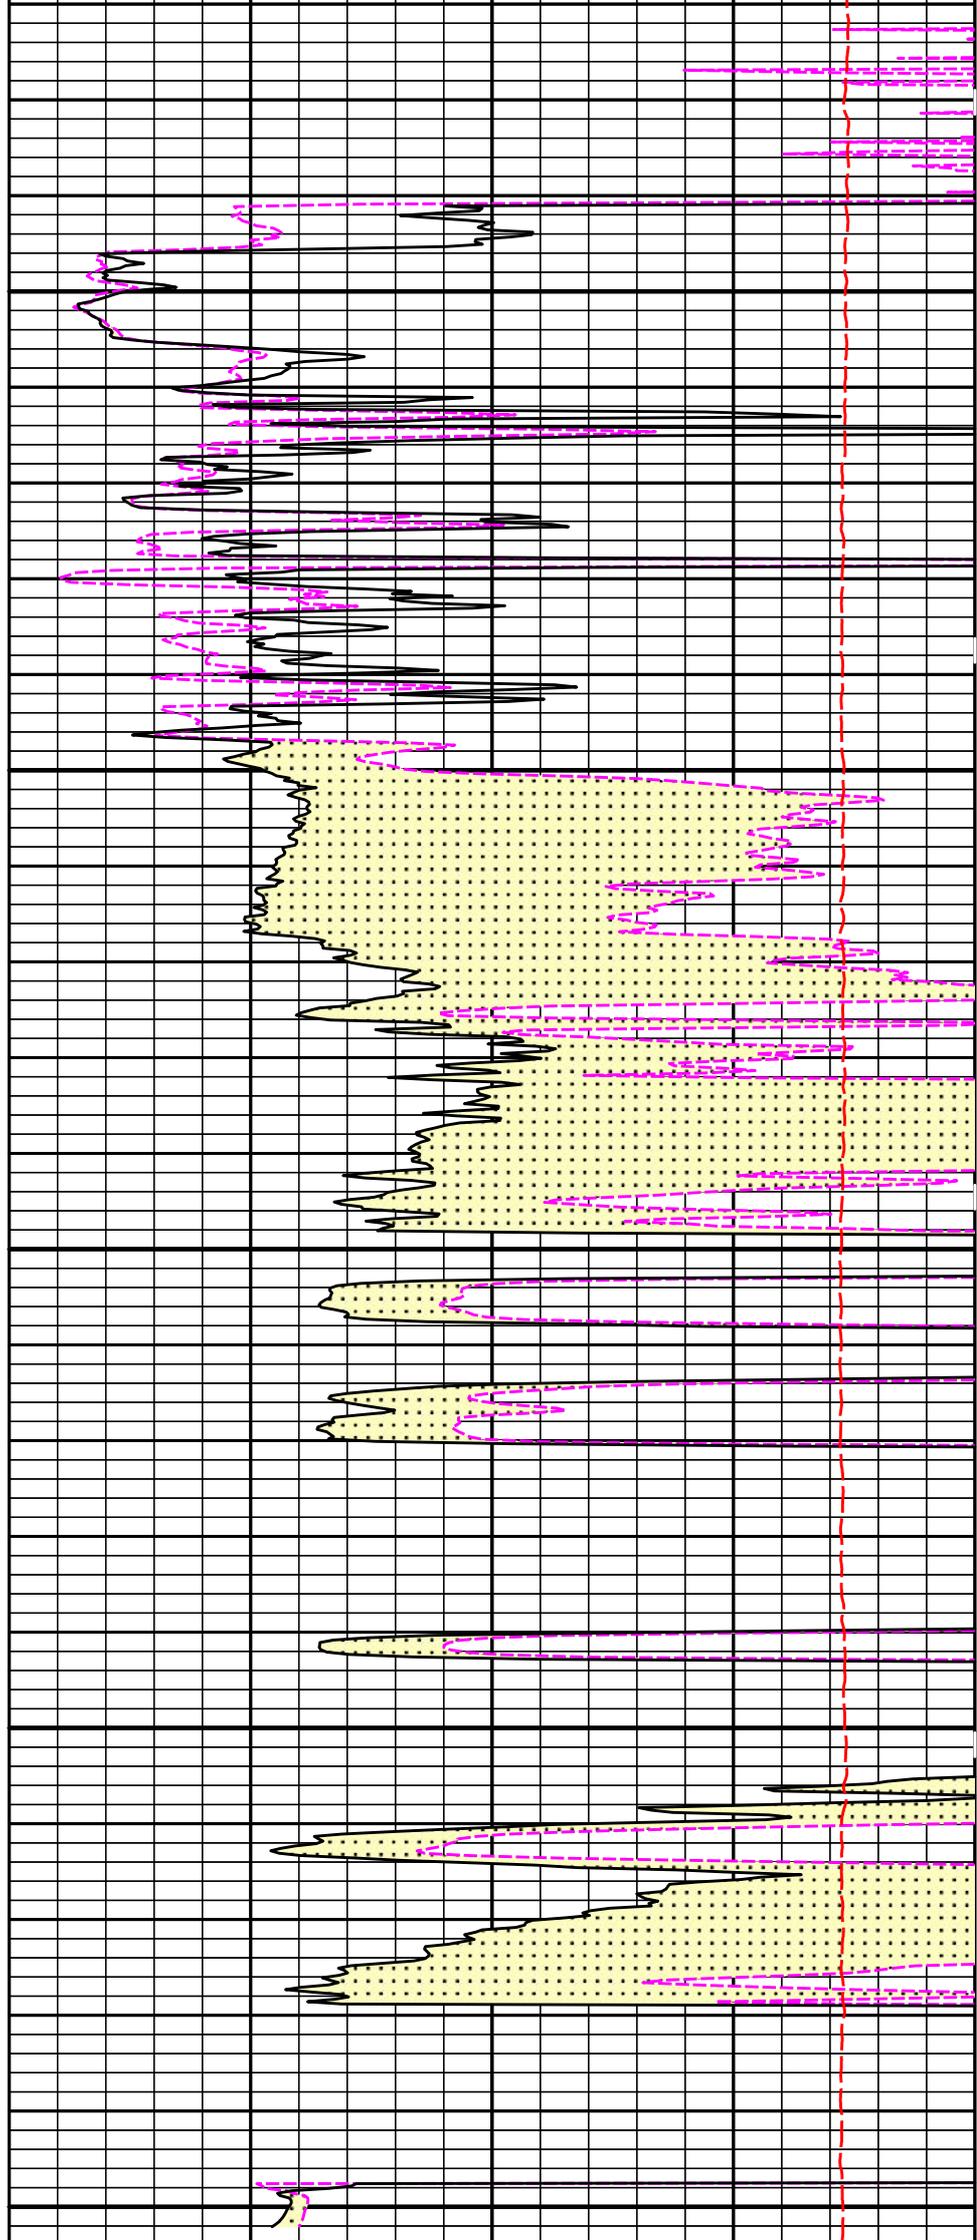

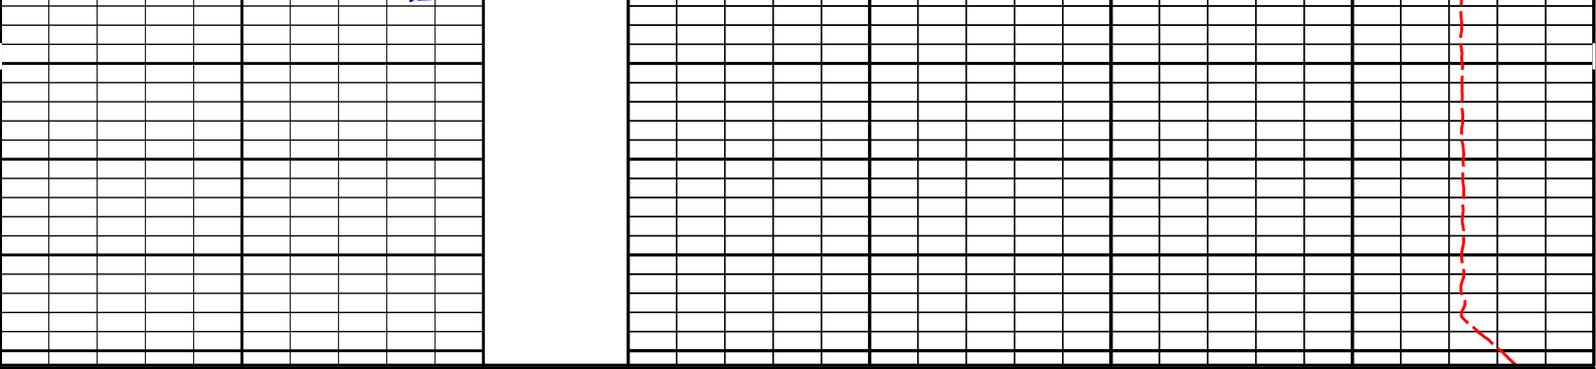

6	Caliper inches	16	MD 1 : 240 ft	15K	Tension pounds	0
0	Gamma API api	150		0	MicrologLateral ohm-metre	20
	SHALE			0	MicrologNormal ohm-metre	20
					PERMEABLE	

HALLIBURTON


Plot Time: 15-Jan-18 20:54:32
 Plot Range: 5095 ft to 5691.5 ft
 Data: JACQUART_3\Well Based\REPEAT\
 Plot File: \\-LOCAL-JACQUART_3\Well Based\MICROLOG\Microlog_IQ_5_rep_lib

REPEAT SECTION

HALLIBURTON

TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
CH_HOS-11459024 37.50 lbs		∅ 2.750 in →		← Temperature @ 67.33 ft	2.50 ft	67.83 ft
XOHD-11572809 20.00 lbs		∅ 2.750 in → ∅ 3.625 in →		← Z-Accelerometer @ 63.93 ft	0.95 ft	65.33 ft 64.38 ft
GTET-11958947 165.00 lbs		∅ 3.625 in →		← GammaRay @ 58.32 ft	8.52 ft	55.86 ft
DSN Decentralizer- 11055304 6.60 lbs		∅ 5.000 in* → ∅ 3.625 in →		← DSN Far @ 48.92 ft ← DSN Near @ 48.17 ft	9.69 ft	46.17 ft
DSNT-11055304 174.00 lbs						

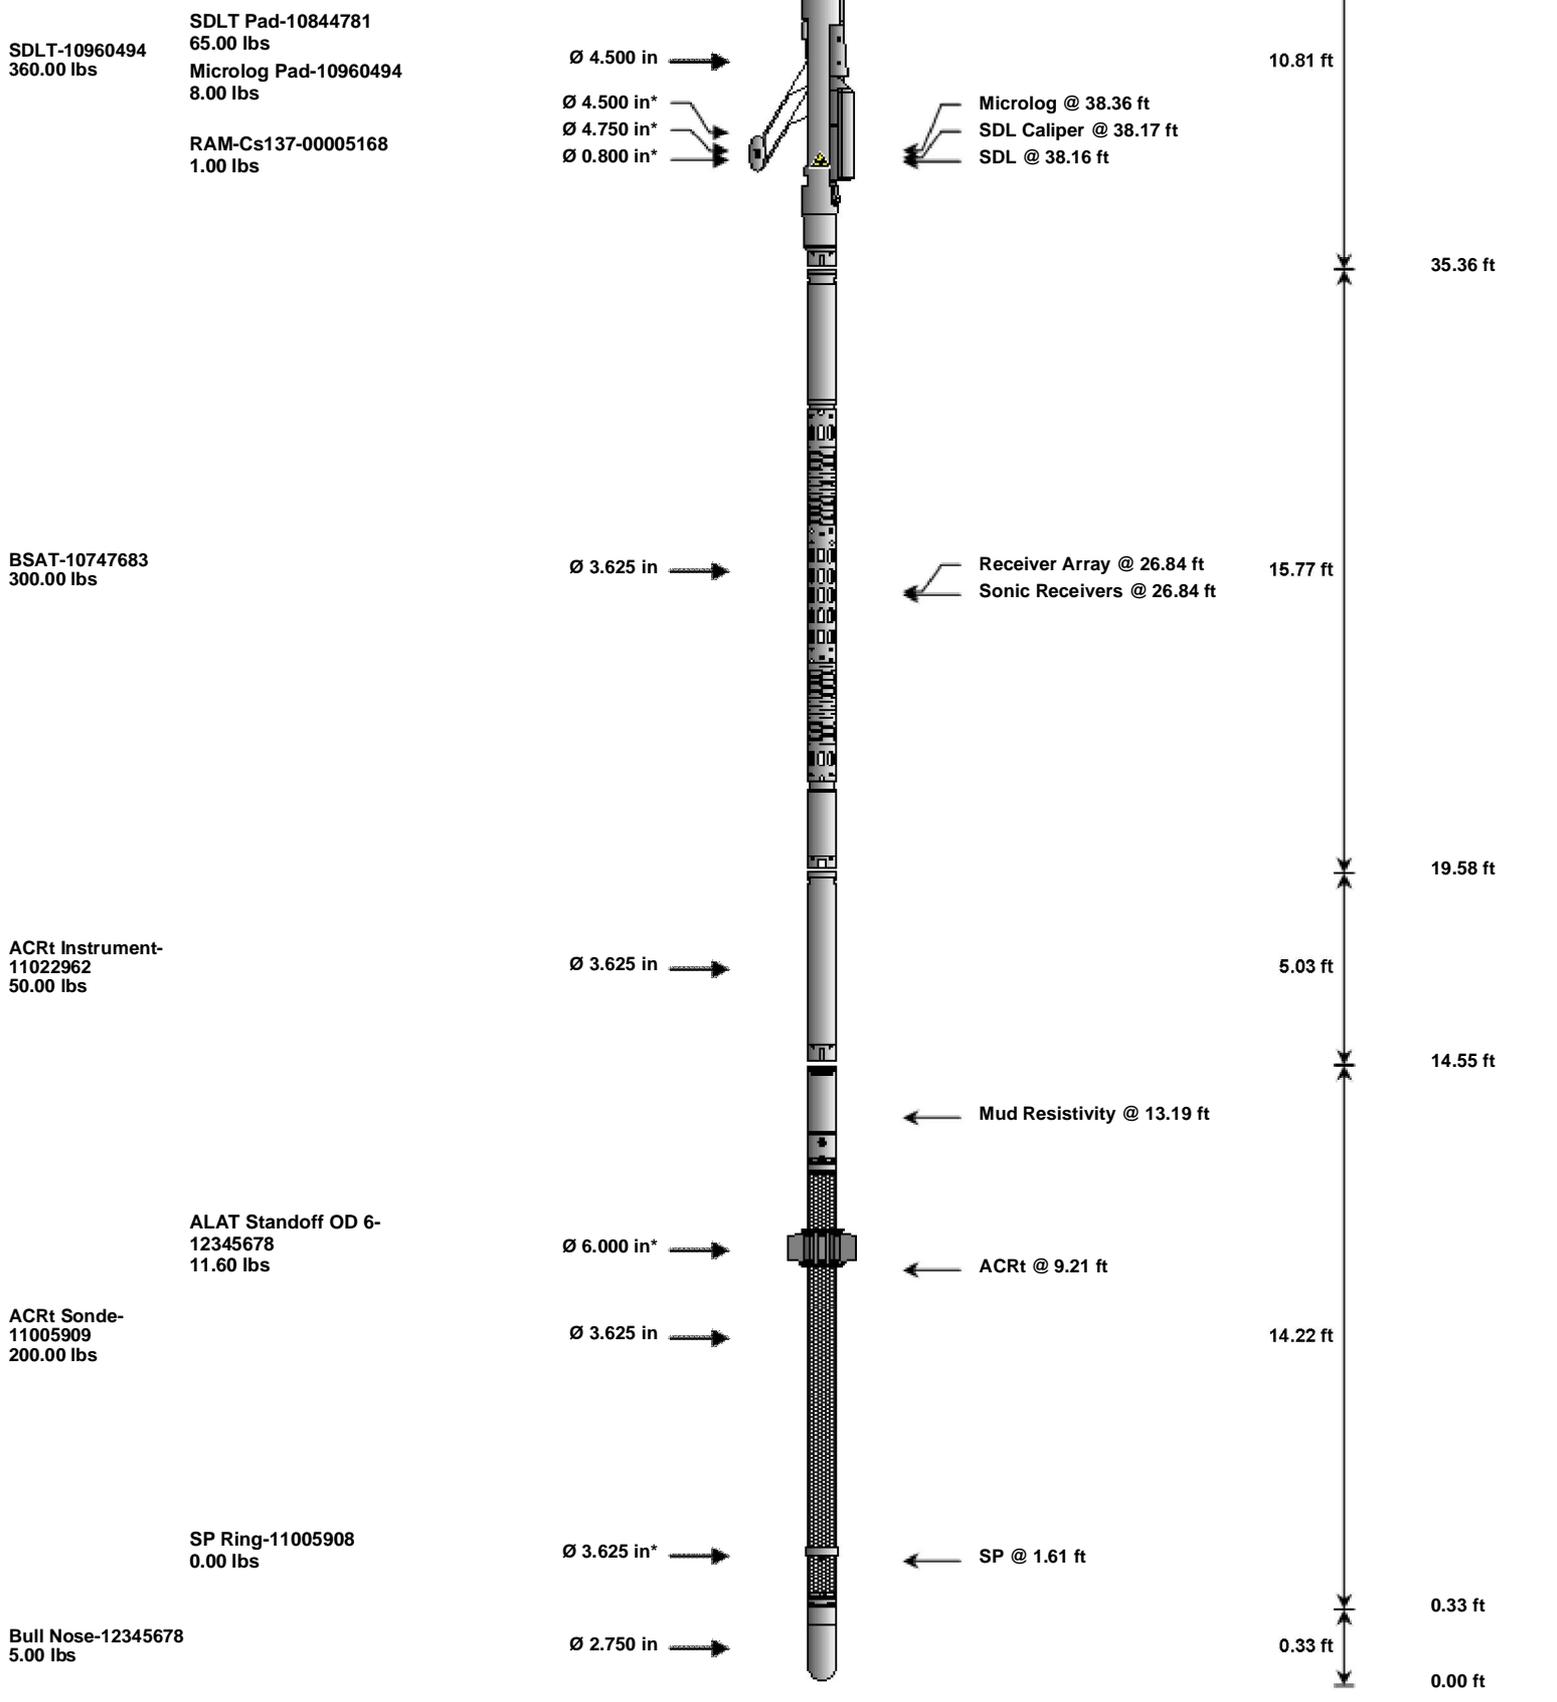

Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max. Log. Speed (fpm)
CH_HOS	Hostile Cable Head with Load Cell	11459024	37.50	2.50	65.33	300.00
XOHD	Hostile to Dits Cross Over	11572809	20.00	0.95	64.38	300.00
GTET	Gamma Telemetry Tool	11958947	165.00	8.52	55.86	60.00
DSNT	Dual Spaced Neutron	11055304	174.00	9.69	46.17	60.00
DCNT	DSN Decentralizer	11055304	6.60	5.13	* 49.50	300.00
SDLT	Spectral Density Tool	10960494	360.00	10.81	35.36	60.00
SDLP	Density Insite Pad	10844781	65.00	2.55	* 37.57	60.00
Cs137	Logging Source, SDLT-I, 1.78 Ci - Cs137	00005168	1.00	0.80	* 37.80	300.00
MICP	Microlog Pad	10960494	8.00	1.00	* 37.86	60.00
BSAT	Borehole Sonic Array Tool	10747683	300.00	15.77	19.58	60.00
ACRt	Array Compensated True Resistivity Instrument Section	11022962	50.00	5.03	14.55	120.00
ACRt	Array Compensated True Resistivity Sonde Section	11005909	200.00	14.22	0.33	120.00

SP	SP Ring	11005908	0.00	0.25	*	1.61	300.00
ALATS	Array Laterolog Tool OD 6 Standoff	12345678	11.60	1.00	*	9.23	60.00
BLNS	Bull Nose	12345678	5.00	0.33		0.00	300.00

Total			1,403.70	67.83			
--------------	--	--	-----------------	--------------	--	--	--

* Not included in Total Length and Length Accumulation.

Data: JACQUART_3\0001 GTET-DSNT-SDLT-BSAT-ACRTIDLE	Date: 15-Jan-18 18:57:22
---	---------------------------------

HALLIBURTON

PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.200	ppg
	SHARED	WAGT	Weighting Agent	Natural	
	SHARED	BSAL	Borehole salinity	0.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	2.000	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	CSTR	Compressive Strength	1000.00	psia
	SHARED	ST	Surface Temperature	75.0	degF
	SHARED	TD	Total Well Depth	5675.00	ft
	SHARED	BHT	Bottom Hole Temperature	147.0	degF
	SHARED	SVTM	Navigation and Survey Master Tool	NONE	
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
	SHARED	TEMM	CBM Temperature Master Tool	GTET	
	Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	
	Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
	Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
	Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
	Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
	Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
	Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
	Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
	Rwa / CrossPlot	BHSM	Borehole Size Source Tool	SDLT	
	Rwa / CrossPlot	ROIN	Input for RO Calculation	Rwa	
	GTET	GROK	Process Gamma Ray?	Yes	
	GTET	GEOK	Process Gamma Ray EVR?	No	
	GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
	GTET	BHSM	Borehole Size Source Tool	SDLT	
	DSNT	DNOK	Process DSN?	Yes	
	DSNT	DEOK	Process DSN EVR?	No	
	DSNT	NLIT	Neutron Lithology	Limestone	
	DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
	DSNT	DNTT	Temperature Correction Type	None	

DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
DSNT	BHSM	Borehole Size Source Tool	SDLT	
SDLT	CLOK	Process Caliper Outputs?	Yes	
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
SDLT Pad	BHSM	Borehole Size Source Tool	SDLT	
BSAT	MBOK	Compute BCAS Results?	Yes	
BSAT	FLLO	Frequency Filter Low Pass Value?	5000	Hz
BSAT	FLHI	Frequency Filter High Pass Value?	27000	Hz
BSAT	DTFL	Delta -T Pore Fluid	189.00	uspf
BSAT	DTMT	Delta -T Matrix Type	Limestone 47.6	
BSAT	DTSH	Delta -T Shale	100.00	uspf
BSAT	SPEQ	Acoustic Porosity Equation	Wylie	
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Upr	
ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMAX	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm
ACRt Sonde	BHSM	Borehole Size Source Tool	SDLT	
ACRt Sonde	MBFL	Apply Corkscrew Effect?	No	

BOTTOM

Data: JACQUART_3\0001 GTET-DSNT-SDLT-BSAT-ACRT004 15-Jan-18 20:05 Up @5692.5f

Date: 15-Jan-18 20:51:11

HALLIBURTON

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name: GTET - 11958947

Reference Calibration Date: 08-Dec-17 09:10:57

Engineer: HARRIS

Calibration Date: 08-Dec-17 09:13:31

Software Version: WL INSITE R5.0.5 (Build 8)

Calibration Version: 1

Calibrator Source S/N: TB-185

Calibrator API Reference:228.00 api

Equivalent Calibrator API Reference:232.0 api

Measurement	Measured	Calibrated	Units
Background	33.1	32.7	api
Background + Calibrator	267.5	264.7	api
Calibrator	234.4	232.0	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION

Tool Name: GTET - 11958947

Reference Calibration Date: 08-Dec-17 09:13:31

Engineer: JORGE ORLANDO PEREZ

Calibration Date: 14-Jan-18 10:40:47

Software Version: WL INSITE R5.0.5 (Build 8)

Calibration Version: 1

Calibrator Source S/N: TB-185

Calibrator API Reference:228.00 api

Equivalent Calibrator API Reference:232.0 api

Field Verification	Shop	Field	Units
Background	32.7	22.9	api
Background + Calibrator	264.7	255.8	api
Calibrator	232.0	232.9	api

Shop	Field	Difference	Tolerance
232.0	232.9	-0.9	+/- 9.00

DENSITY CALIPER SHOP CALIBRATION

Tool Name: SDLT - 10960494

Reference Calibration Date: 20-Aug-17 12:41:21

Engineer: JORGE ORLANDO PEREZ

Calibration Date: 09-Dec-17 12:48:22

Software Version: WL INSITE R5.0.5 (Build 8)

Calibration Version: 1

Host Tool Name: DSNT - 11055304

CALIBRATION COEFFICIENTS

Measurement	Previous Value	New Value	Control Limit On New Value
Pad Offset	-2993.12	-3003.48	-7000.00 - -1000.00
Pad Gain	0.0003799	0.0003806	0.0002000 - 0.0006000
Arm Offset	-746.82	-1647.28	-5000.00 - 3000.00
Arm Gain	0.0004486	0.0005279	0.000300 - 0.000700
Arm Power	-0.000001023	-0.000005848	-0.000010000 - 0.000010000

The ring diameter is computed from: $\text{DIAMETER} = \text{PAD EXTENSION} + \text{ARM EXTENSION} + \text{TOOL DIAMETER}$

Tool Diameter: 4.50 in

CALIBRATION RINGS

Measurement	Current Reading (Previous Coeff.)	Calibrated (New Coeff.)	Change	Control Limit On New Value
PAD EXTENSION:				
Small Ring (in)	2.00	2.00	0.00	+/- 0.20
Medium Ring (in)	3.75	3.75	0.00	+/- 0.20
RING DIAMETER:				
Small Ring (in)	6.64	6.50	-0.14	+/- 0.20
Medium Ring (in)	8.21	8.25	0.04	+/- 0.20
Large Ring (in)	14.95	15.00	0.05	+/- 0.20

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check: Passed
 Ring-Measurement Check: Passed

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check: Passed

SDLT CALIPER FIELD CALIBRATION

Tool Name: SDLT - 10960494

Reference Calibration Date: 09-Dec-17 12:48:22

Engineer: JORGE ORLANDO PEREZ

Calibration Date: 14-Jan-18 09:50:40

Software Version: WL INSITE R5.0.5 (Build 8)

Calibration Version: 1

MEASURED CALIPER VALUES

Measurement	Shop	Field	Change	Control Limit On New Value
Pad Extension	3.75	3.75	-0.00	+/- 0.10
Ring Diameter	8.25	8.25	0.00	+/- 0.15

PASS/FAIL SUMMARY

Pad Extension Check: Passed

MICRO LOG SHOP CALIBRATION

Tool Name: Microlog Pad - 10960494 **Reference Calibration Date:** 24-Nov-17 11:21:38
Engineer: JORGE ORLANDO PEREZ **Calibration Date:** 24-Nov-17 11:23:09
Software Version: WL INSITE R5.0.5 (Build 8) **Calibration Version:** 1
Host Tool Name: DSNT - 11055304

CALIBRATION COEFFICIENT SUMMARY

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Measured	Calibrated	Measured	Calibrated	
Tool Zero	-0.18	-0.17	-0.00	0.00	ohmm
Calibration Point #1	-0.01	0.00	-0.00	0.00	ohmm
Calibration Point #2	20.00	20.00	20.00	20.00	ohmm
Internal Reference	19.83	19.83	19.99	19.99	ohmm

Measurement	Micro Log Normal	Micro Log Lateral	Units
	Tool Value	Tool Value	
Tool Zero	-1.46	0.65	V
Calibration Point #1	44.89	0.58	V
Calibration Point #2	5370.73	6909.13	V
Internal Reference	5324.87	6905.27	V

MICRO LOG FIELD CHECK

Tool Name: Microlog Pad - 10960494 **Reference Calibration Date:** 24-Nov-17 11:23:09
Engineer: JORGE ORLANDO PEREZ **Calibration Date:** 14-Jan-18 10:36:41
Software Version: WL INSITE R5.0.5 (Build 8) **Calibration Version:** 1

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Shop	Field	Shop	Field	
Tool Zero	-0.17	-0.17	0.00	-0.00	ohmm
Internal Reference	19.83	19.77	19.99	19.93	ohmm

Summary				
Signal	Shop	Field	Difference	Tolerance
Microlog Normal	19.83	19.77	0.06	+/- 0.80
Microlog Lateral	19.99	19.93	0.06	+/- 0.80

CALIBRATION SUMMARY

Sensor	Shop	Field	Post	Difference	Tolerance	Units
GTET-11958947						
Gamma Ray Calibrator	232.0	232.9	-----	-0.9	+/- 9.00	api
SDLT-10960494						
Pad Extension	3.75	3.75	-----	0.00	+/-0.10	in
Ring Diameter	8.25	8.25	-----	0.00	+/-0.15	in
Microlog Pad-10960494						
MicroLog Normal	19.83	19.77	-----	0.06	+/-0.80	ohmm
MicroLog Lateral	19.99	19.93	-----	0.06	+/-0.80	ohmm

Data: JACQUART_3\0001 GTET-DSNT-SDLT-BSAT-ACRTIDLE

Date: 15-Jan-18 18:58:53

HALLIBURTON**INPUTS, DELAYS AND FILTERS TABLE**

Mnemonic	Input Description	Delay (ft)	Filter Type	Filter Length (ft)
	Depth Panel			

TENS	Tension	0.00	NO	
Rwa / CrossPlot				
TPUL	Tension Pull	67.83	NO	
BS	Bit Size	67.83	NO	
HDIA	Measured Hole Diameter	0.00	NO	
CH_HOS				
DHTN	DownholeTension	0.00	BLK	0.000
GTET				
TPUL	Tension Pull	58.32	NO	
GR	Natural Gamma Ray API	58.32	TRI	1.750
GRU	Unfiltered Natural Gamma Ray API	58.32	NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution	58.32	W	1.416 , 0.750
HDIA	Measured Hole Diameter	0.00	NO	
ACCZ	Accelerometer Z	0.00	BLK	0.083
DEVI	Inclination	0.00	NO	
DSNT				
TPUL	Tension Pull	48.07	NO	
RNDS	Near Detector Telemetry Counts	48.17	BLK	1.417
RFDS	Far Detector Telemetry Counts	48.92	TRI	0.583
DNTT	DSN Tool Temperature	48.17	NO	
DSNS	DSN Tool Status	48.07	NO	
ERNR	Near Detector Telemetry Counts EVR	48.17	BLK	0.000
ERFD	Far Detector Telemetry Counts EVR	48.92	BLK	0.000
ENTM	DSN Tool Temperature EVR	48.17	NO	
HDIA	Measured Hole Diameter	0.00	NO	
SDLT				
TPUL	Tension Pull	38.17	NO	
PCAL	Pad Caliper	38.17	TRI	0.250
ACAL	Arm Caliper	38.17	TRI	0.250
BSAT				
TPUL	Tension Pull	26.84	NO	
STAT	Status	26.84	NO	
DLYT	Delay Time	26.84	NO	
SI	Sample Interval	26.84	NO	
TXRX	Raw Telemetry 10 Receivers	26.84	NO	
FRMC	Tool Frame Count	26.84	NO	
GMOD	Gain processing mode	19.58	NO	
ACRt Sonde				
TPUL	Tension Pull	2.73	NO	
F1R1	ACRT 12KHz - 80in R value	8.98	BLK	0.000
F1X1	ACRT 12KHz - 80in X value	8.98	BLK	0.000
F1R2	ACRT 12KHz - 50in R value	6.48	BLK	0.000
F1X2	ACRT 12KHz - 50in X value	6.48	BLK	0.000
F1R3	ACRT 12KHz - 29in R value	4.98	BLK	0.000
F1X3	ACRT 12KHz - 29in X value	4.98	BLK	0.000
F1R4	ACRT 12KHz - 17in R value	3.98	BLK	0.000
F1X4	ACRT 12KHz - 17in X value	3.98	BLK	0.000
F1R5	ACRT 12KHz - 10in R value	3.48	BLK	0.000
F1X5	ACRT 12KHz - 10in X value	3.48	BLK	0.000
F1R6	ACRT 12KHz - 6in R value	3.23	BLK	0.000
F1X6	ACRT 12KHz - 6in X value	3.23	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	8.98	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	8.98	BLK	0.000

F2R2	ACRT 36KHz - 50in R value	6.48	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.48	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	4.98	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	4.98	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	3.98	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	3.98	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.48	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.48	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.23	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.23	BLK	0.000
F3R1	ACRT 72KHz - 80in R value	8.98	BLK	0.000
F3X1	ACRT 72KHz - 80in X value	8.98	BLK	0.000
F3R2	ACRT 72KHz - 50in R value	6.48	BLK	0.000
F3X2	ACRT 72KHz - 50in X value	6.48	BLK	0.000
F3R3	ACRT 72KHz - 29in R value	4.98	BLK	0.000
F3X3	ACRT 72KHz - 29in X value	4.98	BLK	0.000
F3R4	ACRT 72KHz - 17in R value	3.98	BLK	0.000
F3X4	ACRT 72KHz - 17in X value	3.98	BLK	0.000
F3R5	ACRT 72KHz - 10in R value	3.48	BLK	0.000
F3X5	ACRT 72KHz - 10in X value	3.48	BLK	0.000
F3R6	ACRT 72KHz - 6in R value	3.23	BLK	0.000
F3X6	ACRT 72KHz - 6in X value	3.23	BLK	0.000
RMUD	Mud Resistivity	12.52	BLK	0.000
F1RT	Transmitter Reference 12 KHz Real Signal	2.73	BLK	0.000
F1XT	Transmitter Reference 12 KHz Imaginary Signal	2.73	BLK	0.000
F2RT	Transmitter Reference 36 KHz Real Signal	2.73	BLK	0.000
F2XT	Transmitter Reference 36 KHz Imaginary Signal	2.73	BLK	0.000
F3RT	Transmitter Reference 72 KHz Real Signal	2.73	BLK	0.000
F3XT	Transmitter Reference 72 KHz Imaginary Signal	2.73	BLK	0.000
TFPU	Upper Feedpipe Temperature Calculated	2.73	BLK	0.000
TFPL	Lower Feedpipe Temperature Calculated	2.73	BLK	0.000
ITMP	Instrument Temperature	2.73	BLK	0.000
TCVA	Temperature Correction Values Loop Off	2.73	NO	
TIDV	Instrument Temperature Derivative	2.73	NO	
TUDV	Upper Temperature Derivative	2.73	NO	
TLDV	Lower Temperature Derivative	2.73	NO	
TRBD	Receiver Board Temperature	2.73	NO	
HDIA	Measured Hole Diameter	0.00	NO	
Microlog Pad				
TPUL	Tension Pull	38.36	NO	
MINV	Microlog Lateral	38.36	BLK	0.750
MNOR	Microlog Normal	38.36	BLK	0.750
SDLT Pad				
TPUL	Tension Pull	38.16	NO	
NAB	Near Above	37.99	BLK	0.920
NHI	Near Cesium High	37.99	BLK	0.920
NLO	Near Cesium Low	37.99	BLK	0.920
NVA	Near Valley	37.99	BLK	0.920
NBA	Near Barite	37.99	BLK	0.920
NDE	Near Density	37.99	BLK	0.920
NPK	Near Peak	37.99	BLK	0.920
NLI	Near Lithology	37.99	BLK	0.920
NBAU	Near Barite Unfiltered	37.99	BLK	0.250
NLIU	Near Lithology Unfiltered	37.99	BLK	0.250
FAB	Far Above	38.34	BLK	0.250
FHI	Far Cesium High	38.34	BLK	0.250
FLO	Far Cesium Low	38.34	BLK	0.250

FVA	Far Valley	38.34	BLK	0.250
FBA	Far Barite	38.34	BLK	0.250
FDE	Far Density	38.34	BLK	0.250
FPK	Far Peak	38.34	BLK	0.250
FLI	Far Lithology	38.34	BLK	0.250
PTMP	Pad Temperature	38.17	BLK	0.920
NHV	Near Detector High Voltage	37.57	NO	
FHV	Far Detector High Voltage	37.57	NO	
ITMP	Instrument Temperature	37.57	NO	
DDHV	Detector High Voltage	37.57	NO	
HDIA	Measured Hole Diameter	0.00	NO	

SP Ring

PLTC	Plot Control Mask	1.61	NO	
SP	Spontaneous Potential	1.61	BLK	1.250
SPR	Raw Spontaneous Potential	1.61	NO	
SPO	Spontaneous Potential Offset	1.61	NO	

Data: JACQUART_3\0001 GTET-DSNT-SDLT-BSAT-ACRTVDLE

Date: 15-Jan-18 18:59:31

COMPANY	MERIT ENERGY COMPANY		
WELL	JACQUART 3		
FIELD	EUBANK		
COUNTY	HASKELL	STATE	KANSAS
HALLIBURTON		MICROLOG	