

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-071-20691-00-00
Spot: NWNWNW Sec/Twnshp/Rge: 23-20S-42W
490 feet from N Section Line, 540 feet from W Section Line
Lease Name: SIVERSON Well #: 1-X
County: GREELEY Total Vertical Depth: 5300 feet

Operator License No.: 32283
Op Name: WESTERN OPERATING COMPANY
Address: 518 - 17TH ST., STE 1680
DENVER, CO 80202

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		5050		WITH 2 SX CMT
II	8.625	2432		WITH 1000 SX CMT
PROD	4.5	5297	3218	WITH 645 SX CMT
SURF	13.38	506		WITH 375 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 05/09/2006 1:00 PM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: DALE HART Company: WESTERN OPERATING Phone: (303) 893-2438

Proposed Plugging Method: TIE ONTO 4 1/2" CASING & PUMP 300#-400# OF HULLS & 40 SX CMT. FOLLOW WITH GEL SPACER. FILL WITH CMT FROM 1500' TO SURFACE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 05/10/2006 5:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

CIBP @ 5050' WITH 2 SX CMT. 1ST PLUG 4 1/2' CASING STUB AT 3215' WITH 200# HULLS FOLLOWED BY 20 SX CMT. 2ND PLUG AT 2460' WITH 50 SX CMT. 3RD PLUG AT 1496' WITH 50 SX CMT. 4TH PLUG AT 561' WITH 30 SX CMT. 5TH PLUG AT 60' WITH 15 SX CMT. THE 2ND THROUGH THE 5TH PLUG WERE PUMPED IN 8 5/8" CASING. DUG OUT 8 5/8" X 13 3/8" ANNULUS. FOUND CUT OFF 13 3/8". NO BRADEN HEAD. CMT WAS 18" BELOW THE TOP OF THE 13 3/8".

Perfs:


Top	Bot	Thru	Comments
5124	5134		

Remarks: USED CLASS A +3% CC CMT BY ALLIED.

Plugged through: TBG

INVOICED
5-24-06
2006061709

District: 01

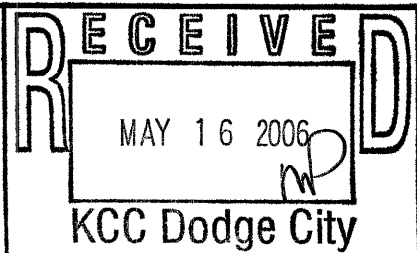

Signed

Ken Jehlik

(TECHNICIAN)

RECEIVED
MAY 24 2006
KCC WICHITA

Form CR-2/3

PLG