

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-025-21352-00-00  
Spot: NWSESW Sec/Twnshp/Rge: 14-34S-23W  
990 feet from S Section Line, 1650 feet from W Section Line  
Lease Name: OREILLY Well #: 14-2  
County: CLARK Total Vertical Depth: 5795 feet

Operator License No.: 33392  
Op Name: KEITH F. WALKER OIL & GAS CO., LLC  
Address: P.O. BOX 1725 219 STANLEY STREET  
ARDMORE, OK 73402

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		4900		WITH 2 SX CMT
CIBP		5520		
CIBP		5660		WITH 10 SX CMT
COND	20	100		
PROD	4.5	5795	3120	WITH 200 SX CMT
SURF	8.625	1196		WITH 480 SX CMT

# 188.34

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 05/15/2006 3:30 PM  
Plug Co. License No.: 31646 Plug Co. Name: JET WELL SERVICE CO.  
Proposal Rcvd. from: DANNY PUCKETT Company: KEITH WALKER OIL & GAS Phone: (580) 223-1575

Proposed Plugging Method: CIBP @ 4900' WITH 2 SX CMT. PLUG AT 1230' WITH MUD SPACER & 50 SX CMT. PLUG AT 660' WITH 50 SX CMT. PLUG AT 60' WITH 25 SX CMT.

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 05/15/2006 7:30 PM KCC Agent: JERRY W. STAPLETON

Actual Plugging Report:

CIBP @ 4900' WITH 2 SX CMT. 1ST PLUG AT 1258' WITH MUD SPACER & 50 SX CMT. 2ND PLUG AT 660' WITH 50 SX CMT. 3RD PLUG AT 60' WITH 25 SX CMT. CMT TO SURFACE.


Perfs:

Top	Bot	Thru	Comments
5711	5714		
5530	5542		
4947	4952		

Remarks: USED 60/40 POZMIX 6% GEL BY HALLIBURTON.

Plugged through: TBC

District: 01

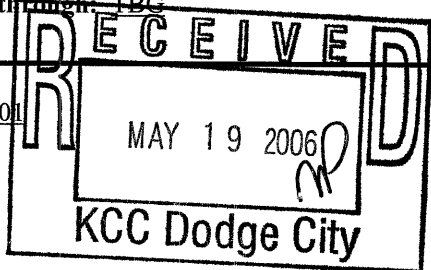

Signed

Jerry W. Stapleton PIRT JT  
RECEIVED (TECHNICIAN)

MAY 24 2006  
KCC WICHITA

Form 02-24