



# DUAL INDUCTION LOG

Company WOOLSEY OPERATING COMPANY, LLC.  
 Well DARGEL #1  
 Field URSULA SE  
 County KIOWA  
 State KANSAS

Company WOOLSEY OPERATING COMPANY, LLC.  
 Well DARGEL #1  
 Field URSULA SE  
 County KIOWA  
 State KANSAS

Location: API # : 15-097-21831-00-00  
 2010' FNL & 330' FEL  
 SEC 15 TWP 29S RGE 18W  
 Permanent Datum GROUND LEVEL Elevation 2171'  
 Log Measured From KELLY BUSHING 12' A.G.L.  
 Drilling Measured From KELLY BUSHING  
 Other Services CDL/CNL SONIC  
 Elevation K.B. 2183'  
 D.F. 2182  
 G.L. 2171

Date	12/17/17
Run Number	ONE
Depth Driller	5250
Depth Logger	5254
Bottom Logged Interval	5252
Top Log Interval	00
Casing Driller	8 5/8" @ 355
Casing Logger	355
Bit Size	7 7/8"
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.4/49
pH / Fluid Loss	10.5/10.0
Source of Sample	FLOWLINE
Rm @ Meas. Temp	.50@54
Rmt @ Meas. Temp	.38@54
Rmc @ Meas. Temp	.60@54
Source of Rmt / Rmc	MEASURED
Rm @ BHT	21@127
Time Circulation Stopped	2 HOURS
Time Logger on Bottom	///
Maximum Recorded Temperature	127F
Equipment Number	4010
Location	HAYS, KANSAS
Recorded By	GUS PFANENSTIEL
Witnessed By	BILLY KLAVER

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

### Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

DIRECTIONS  
 INTERSECTION OF HIGHWAY 183 AND HIGHWAY 54,  
 SOUTH TO N RD, 3 MILES EAST, 1 1/2 SOUTH,  
 WEST INTO.



# MAIN PASS

Database File: 2120pe.db  
 Dataset Pathname: pass3MAIN  
 Presentation Format: \_dil2  
 Dataset Creation: Mon Dec 18 01:21:52 2017  
 Charted by: Depth in Feet scaled 1:600

0 Gamma Ray (GAPI) 150  
 -100 SP (mV) 100


0 RLL3 (Ohm-m) 50



0 RILD (Ohm-m) 50



1000 CILD (mmho/m) 0



50 RILD X10 (Ohm-m) 500


50 RLL3 X10 (Ohm-m) 500

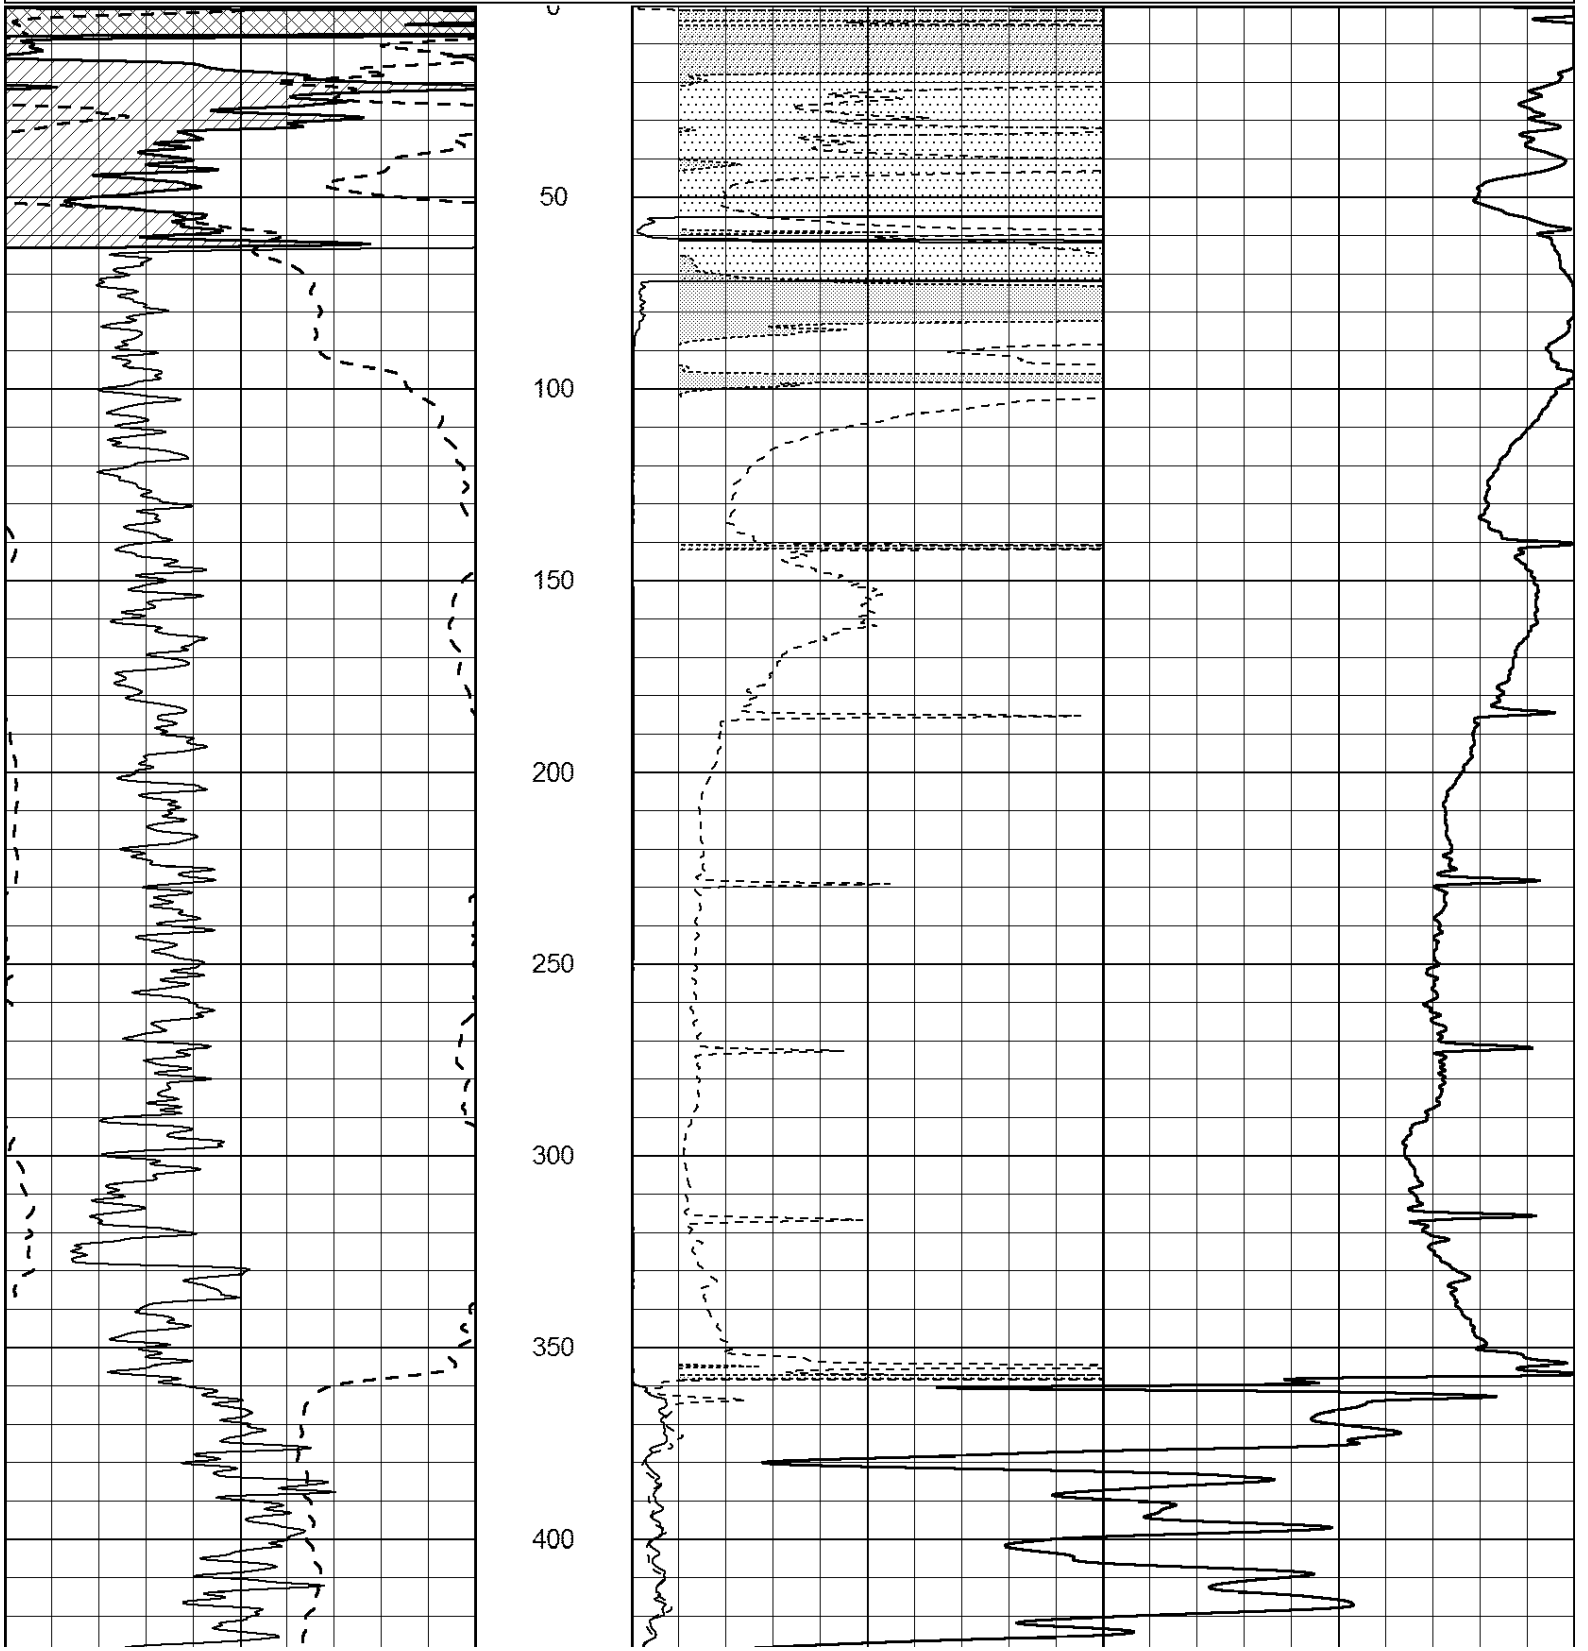

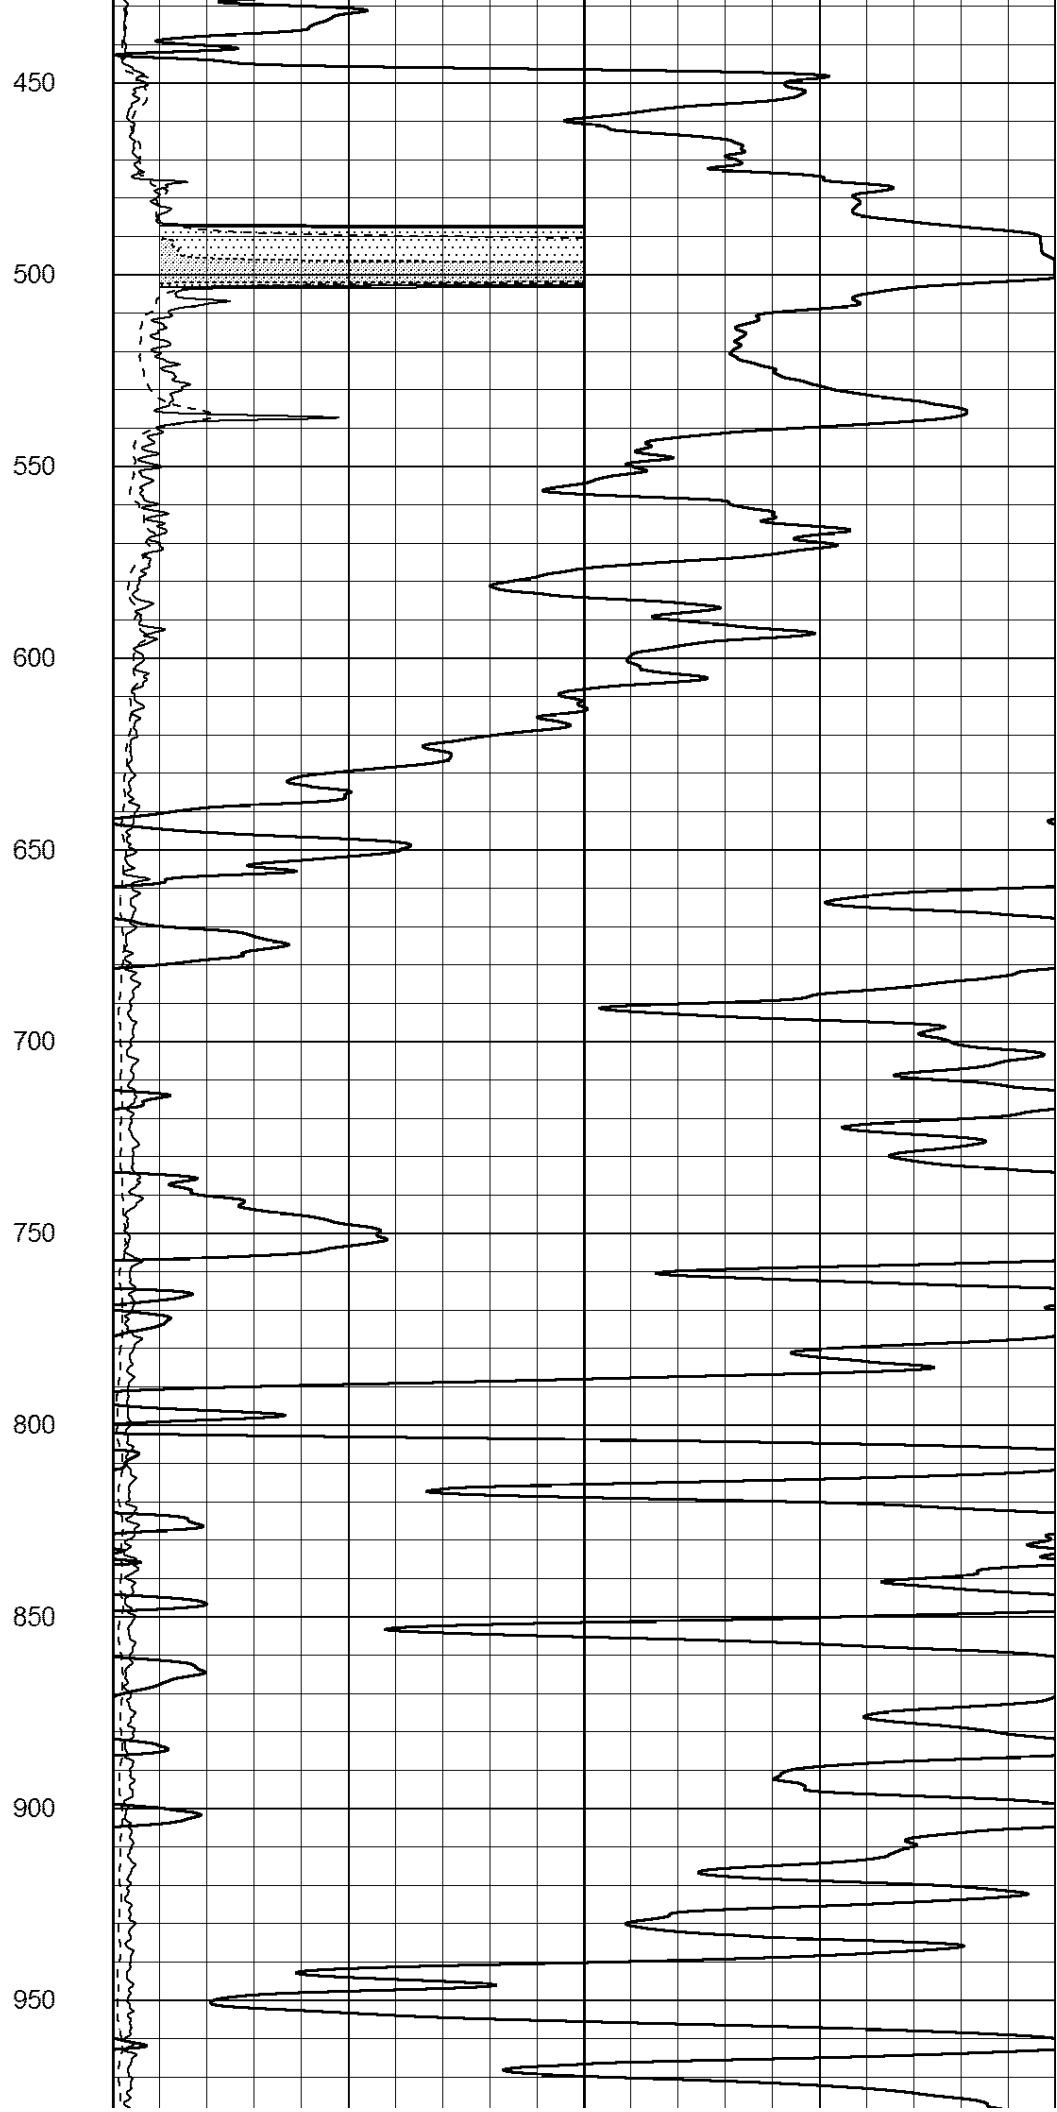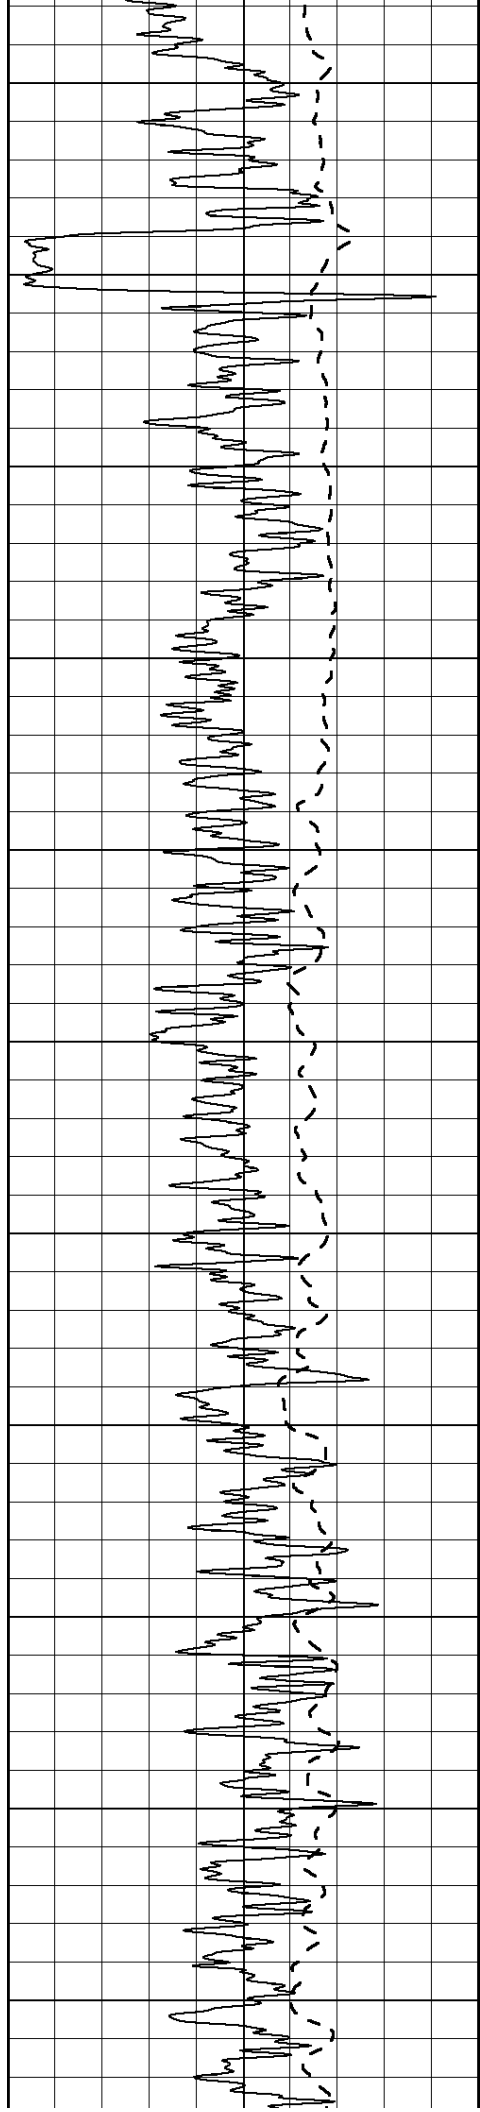

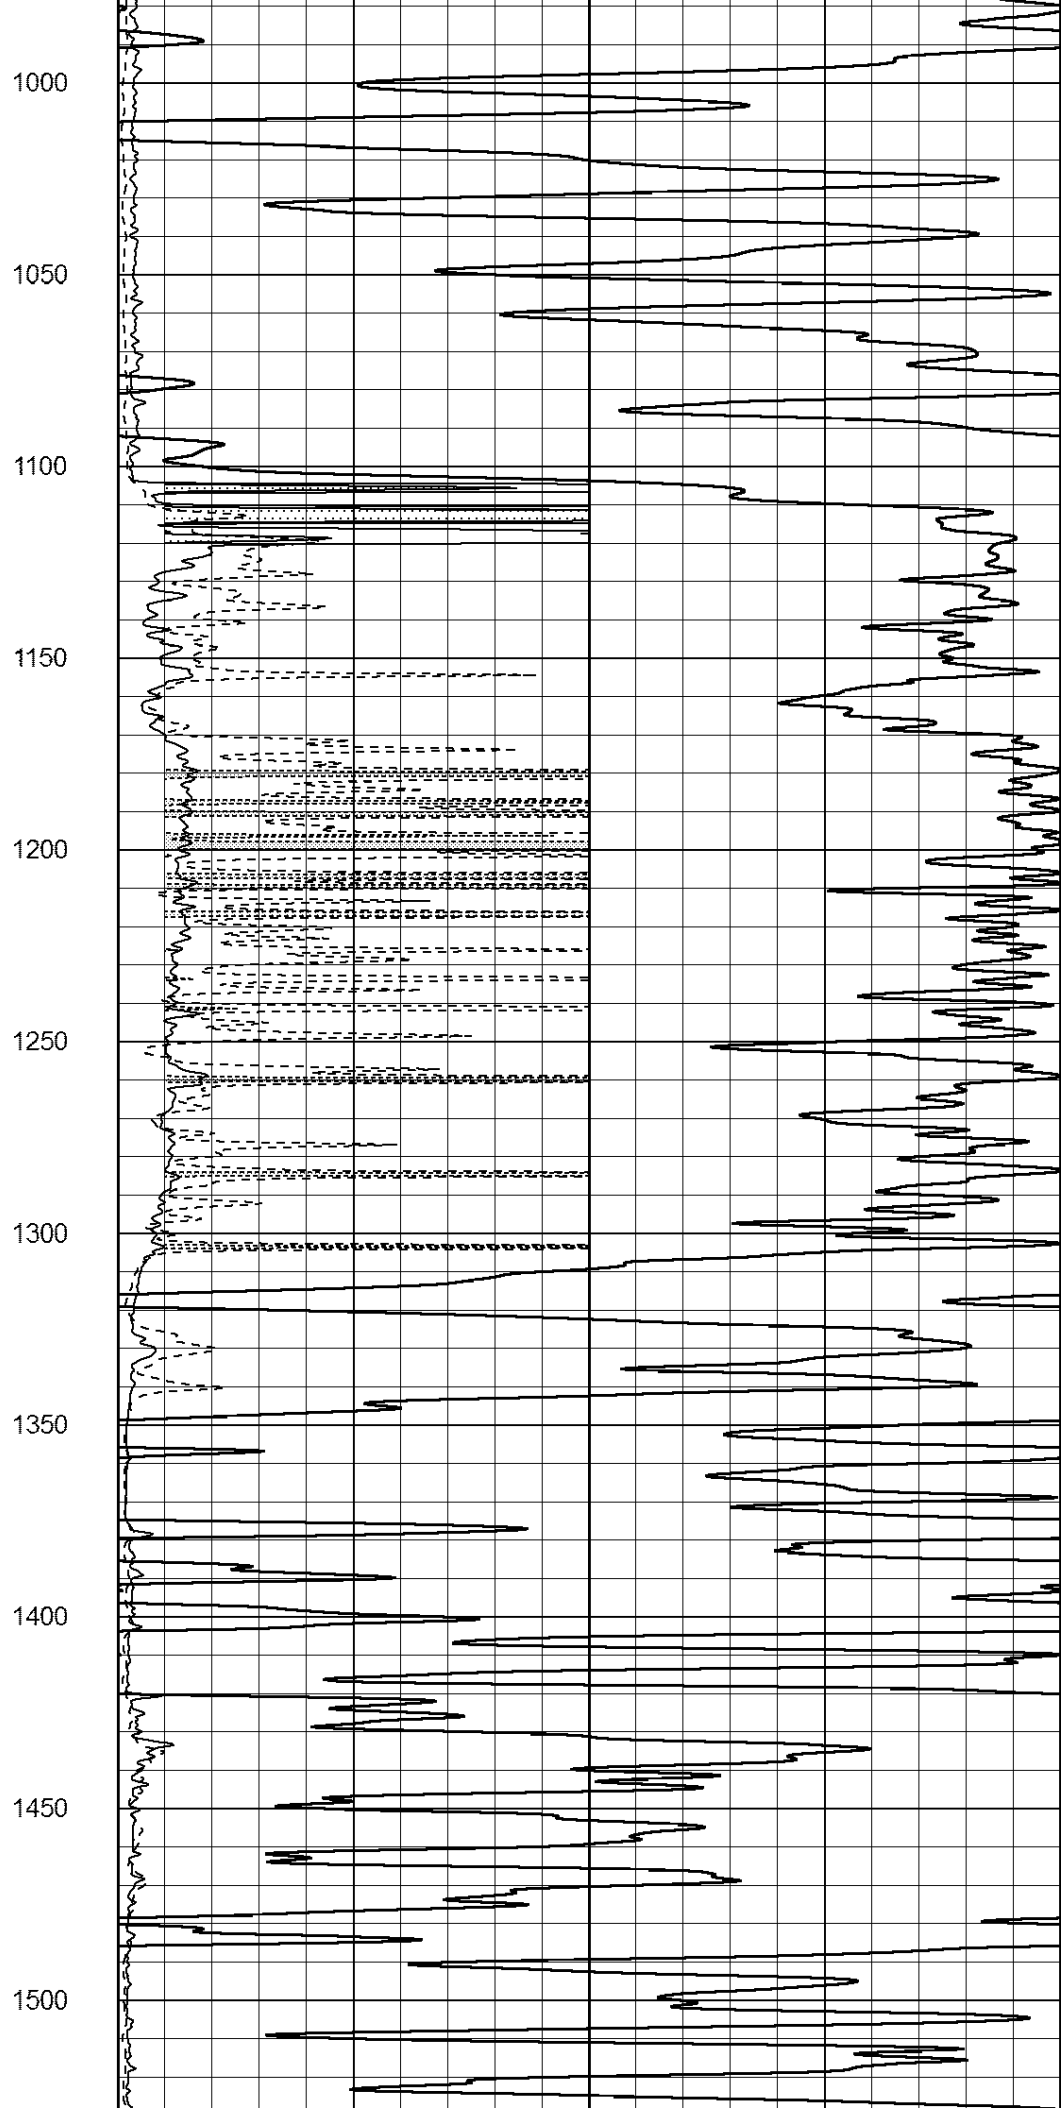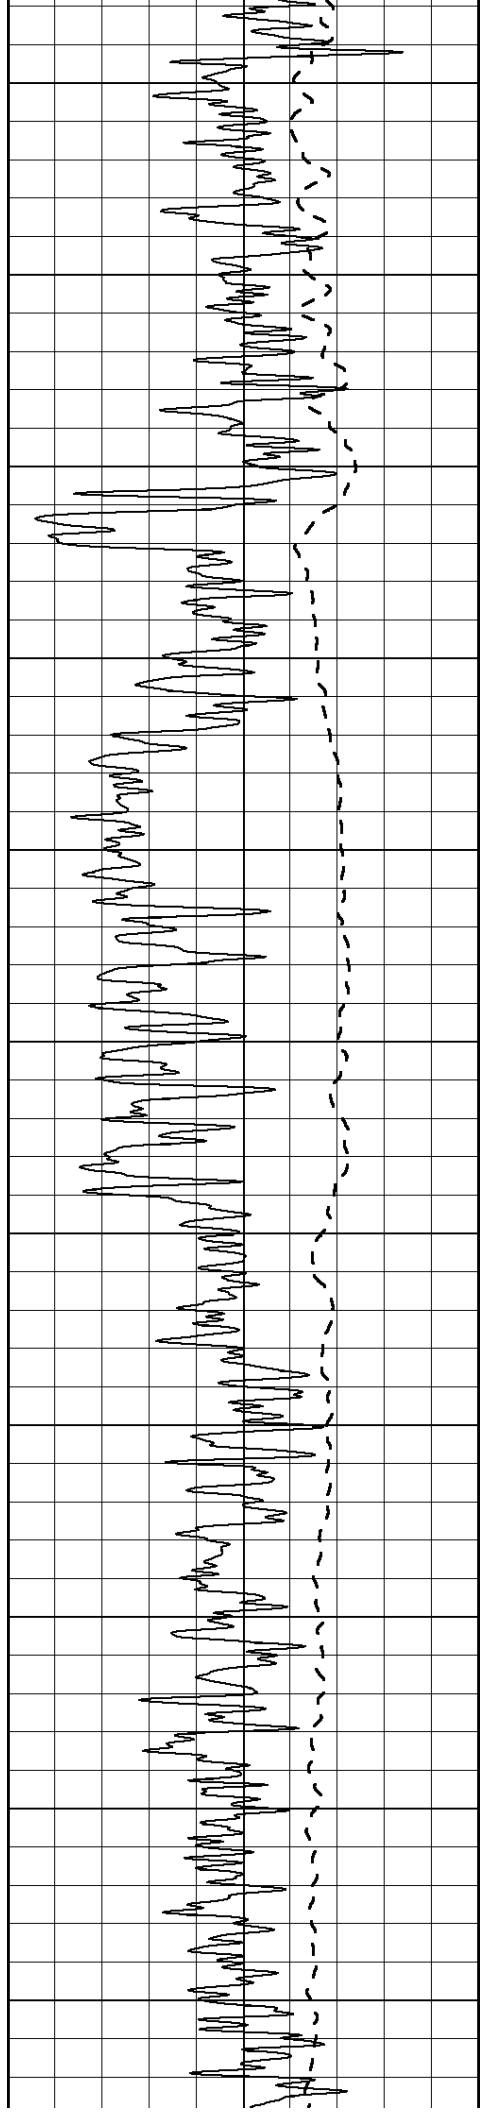

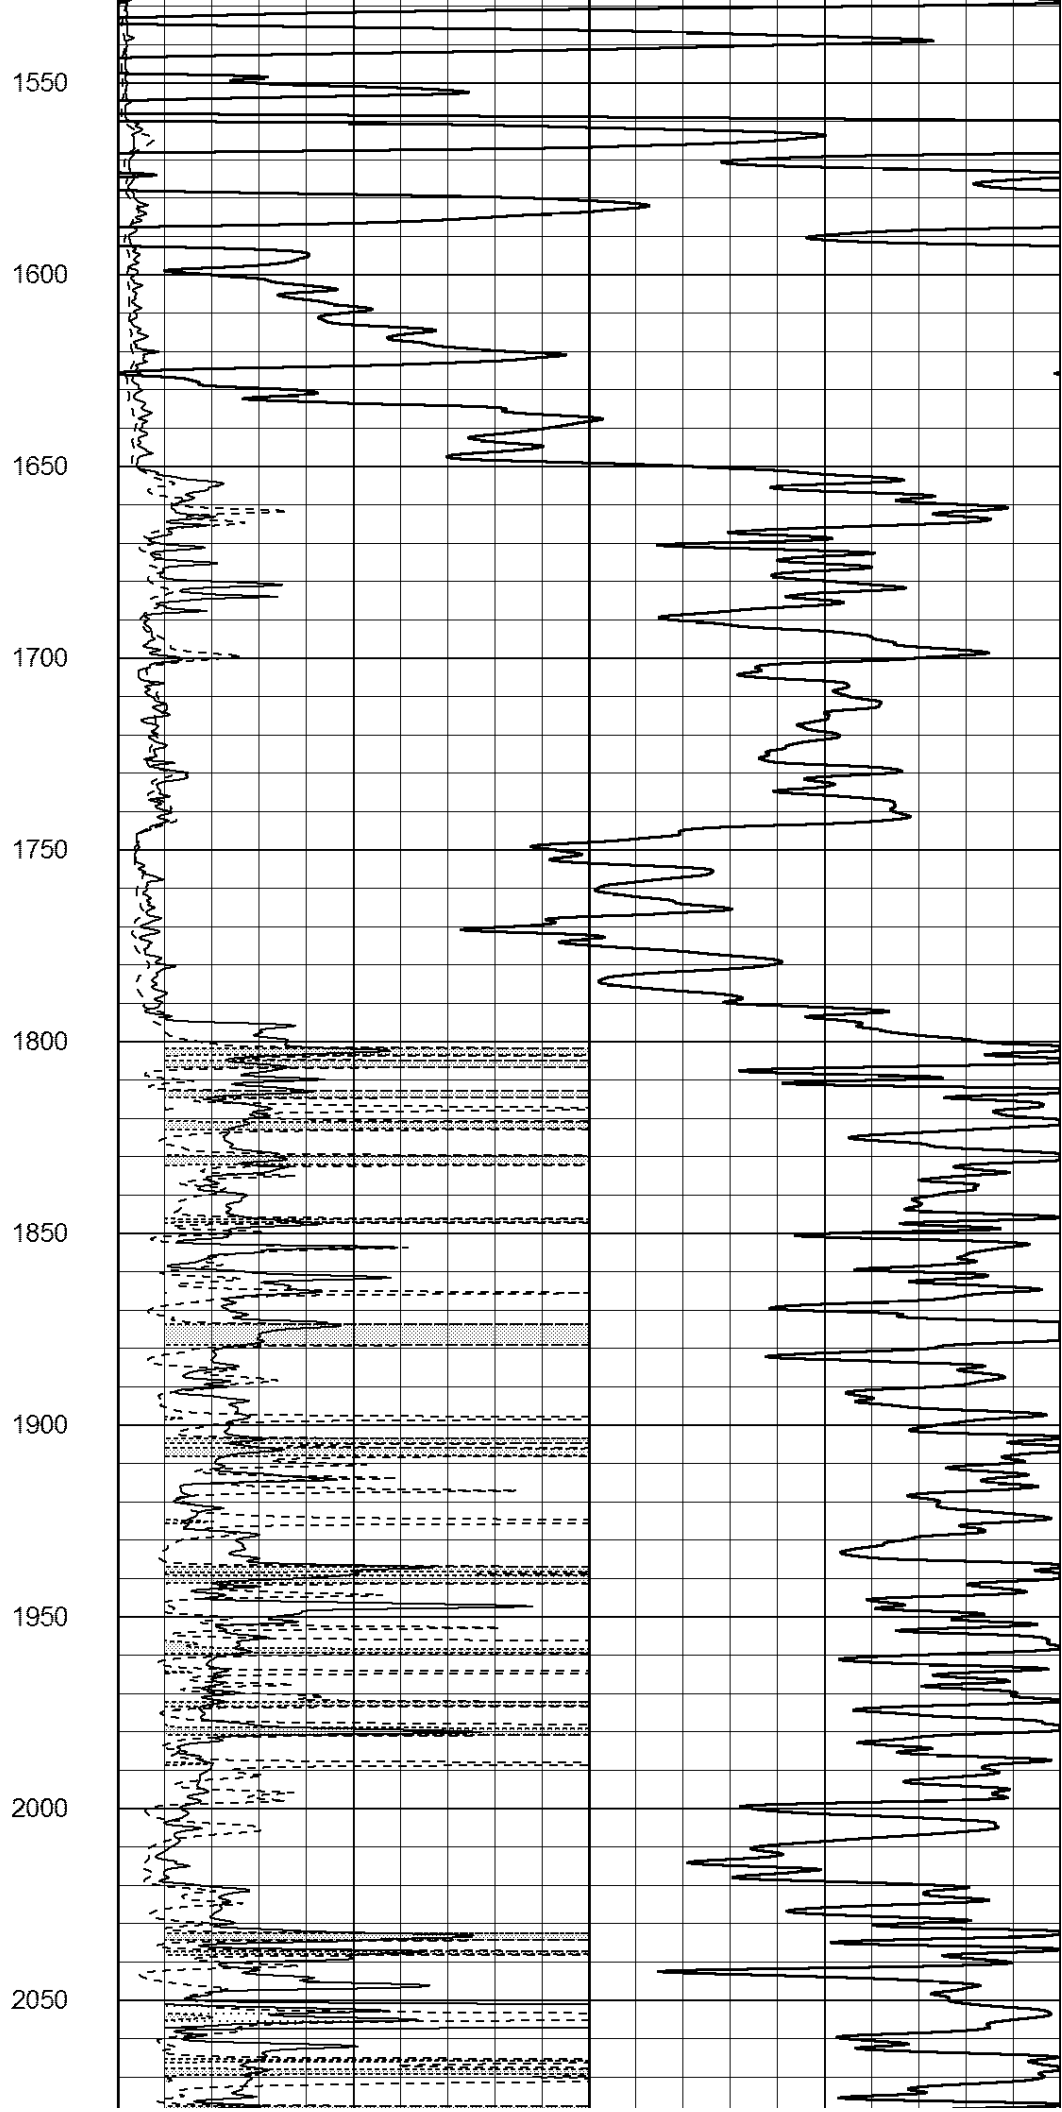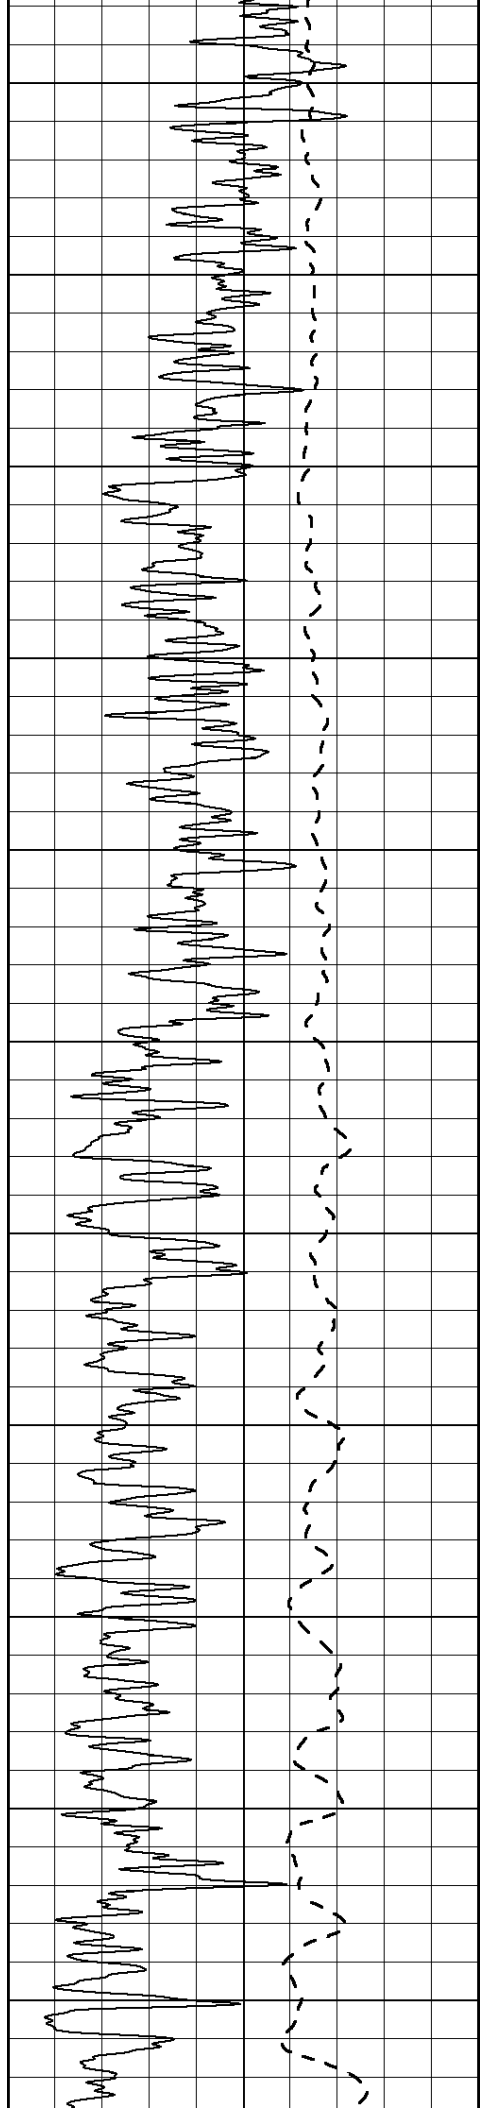

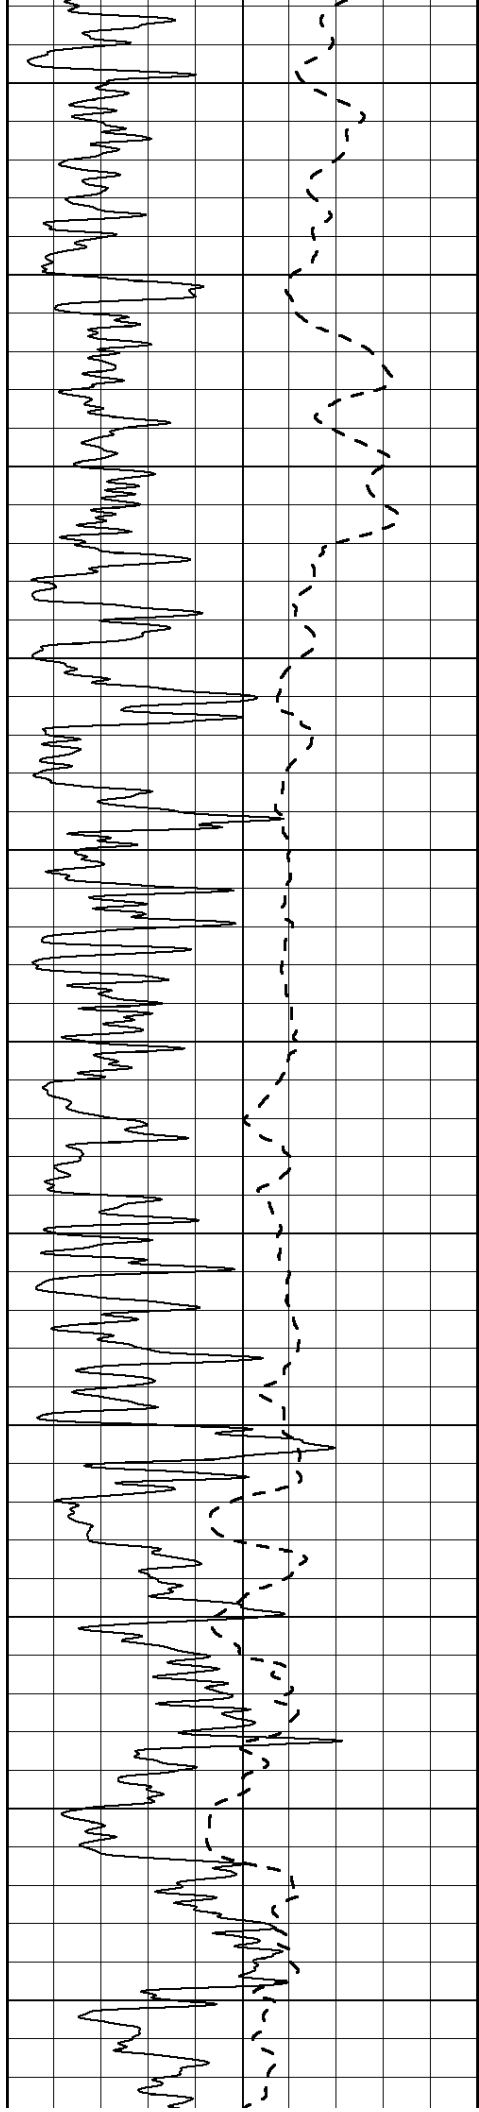

2100

2150

2200

2250

2300

2350


2400



2450



2500



2550


2600

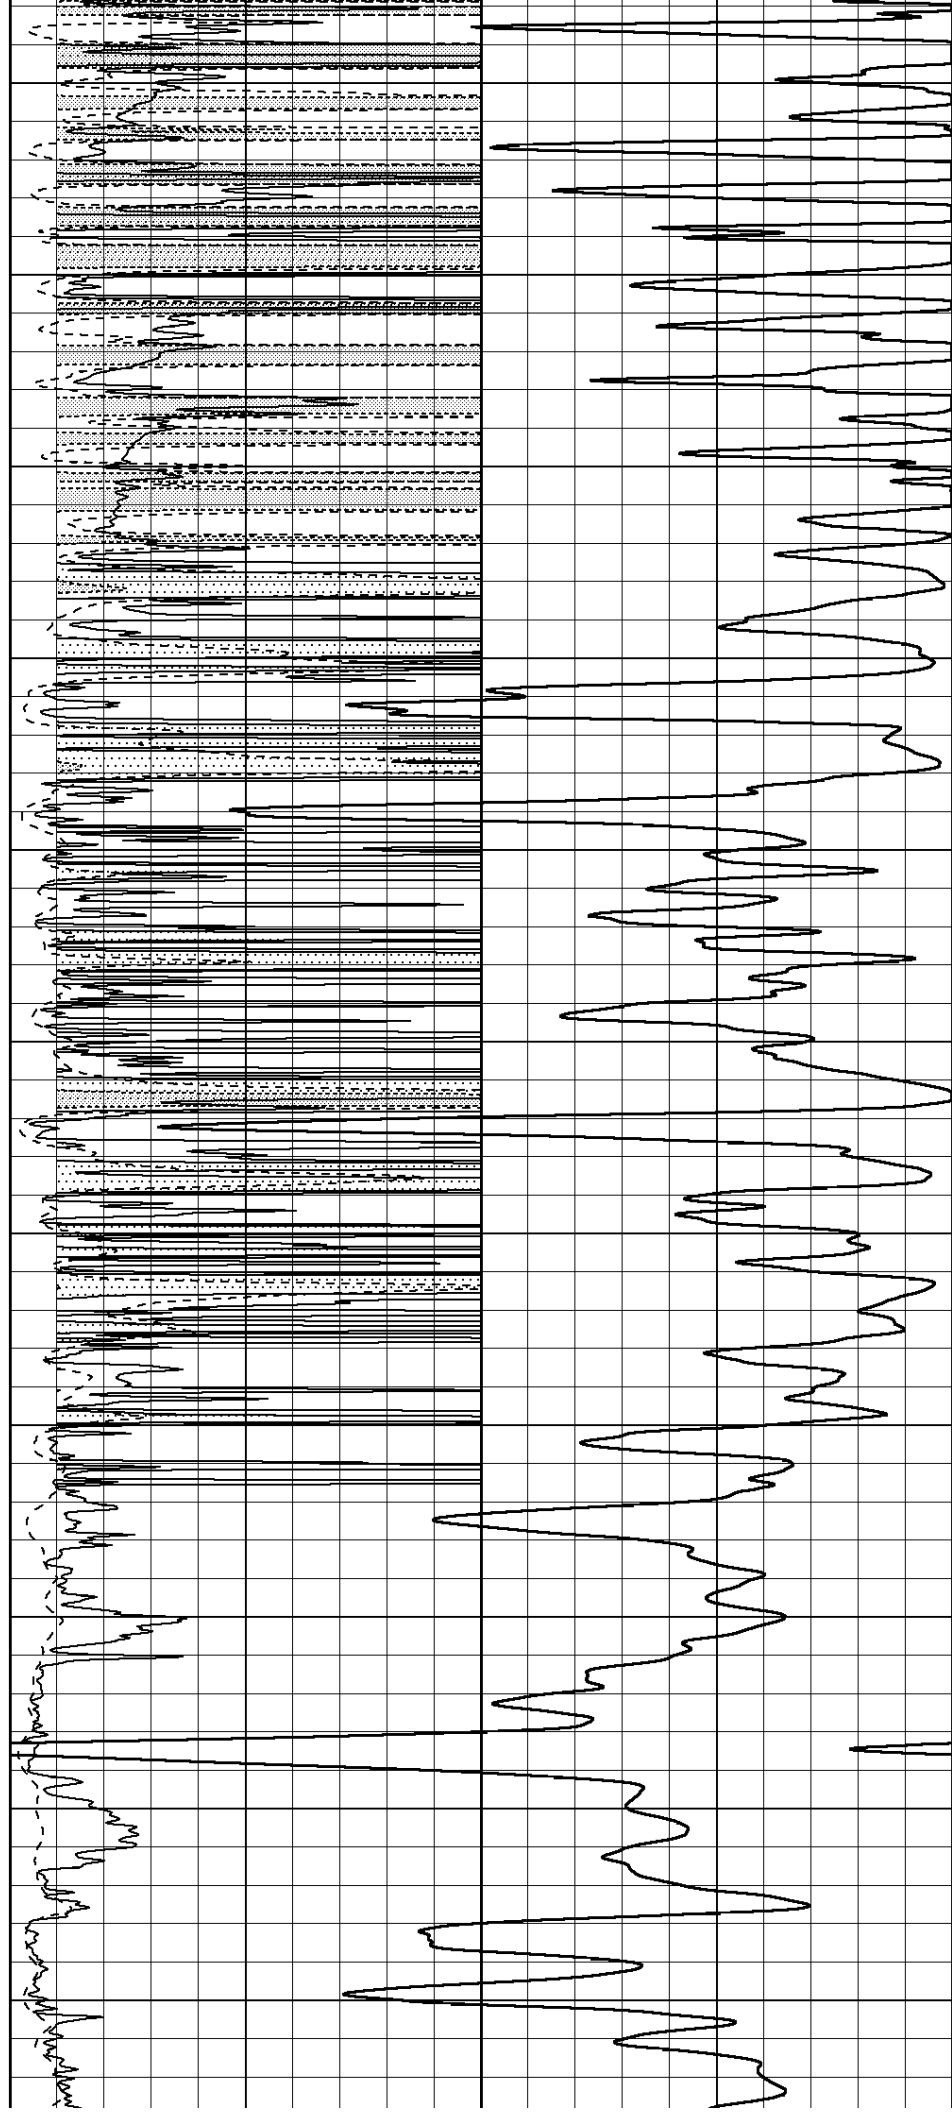

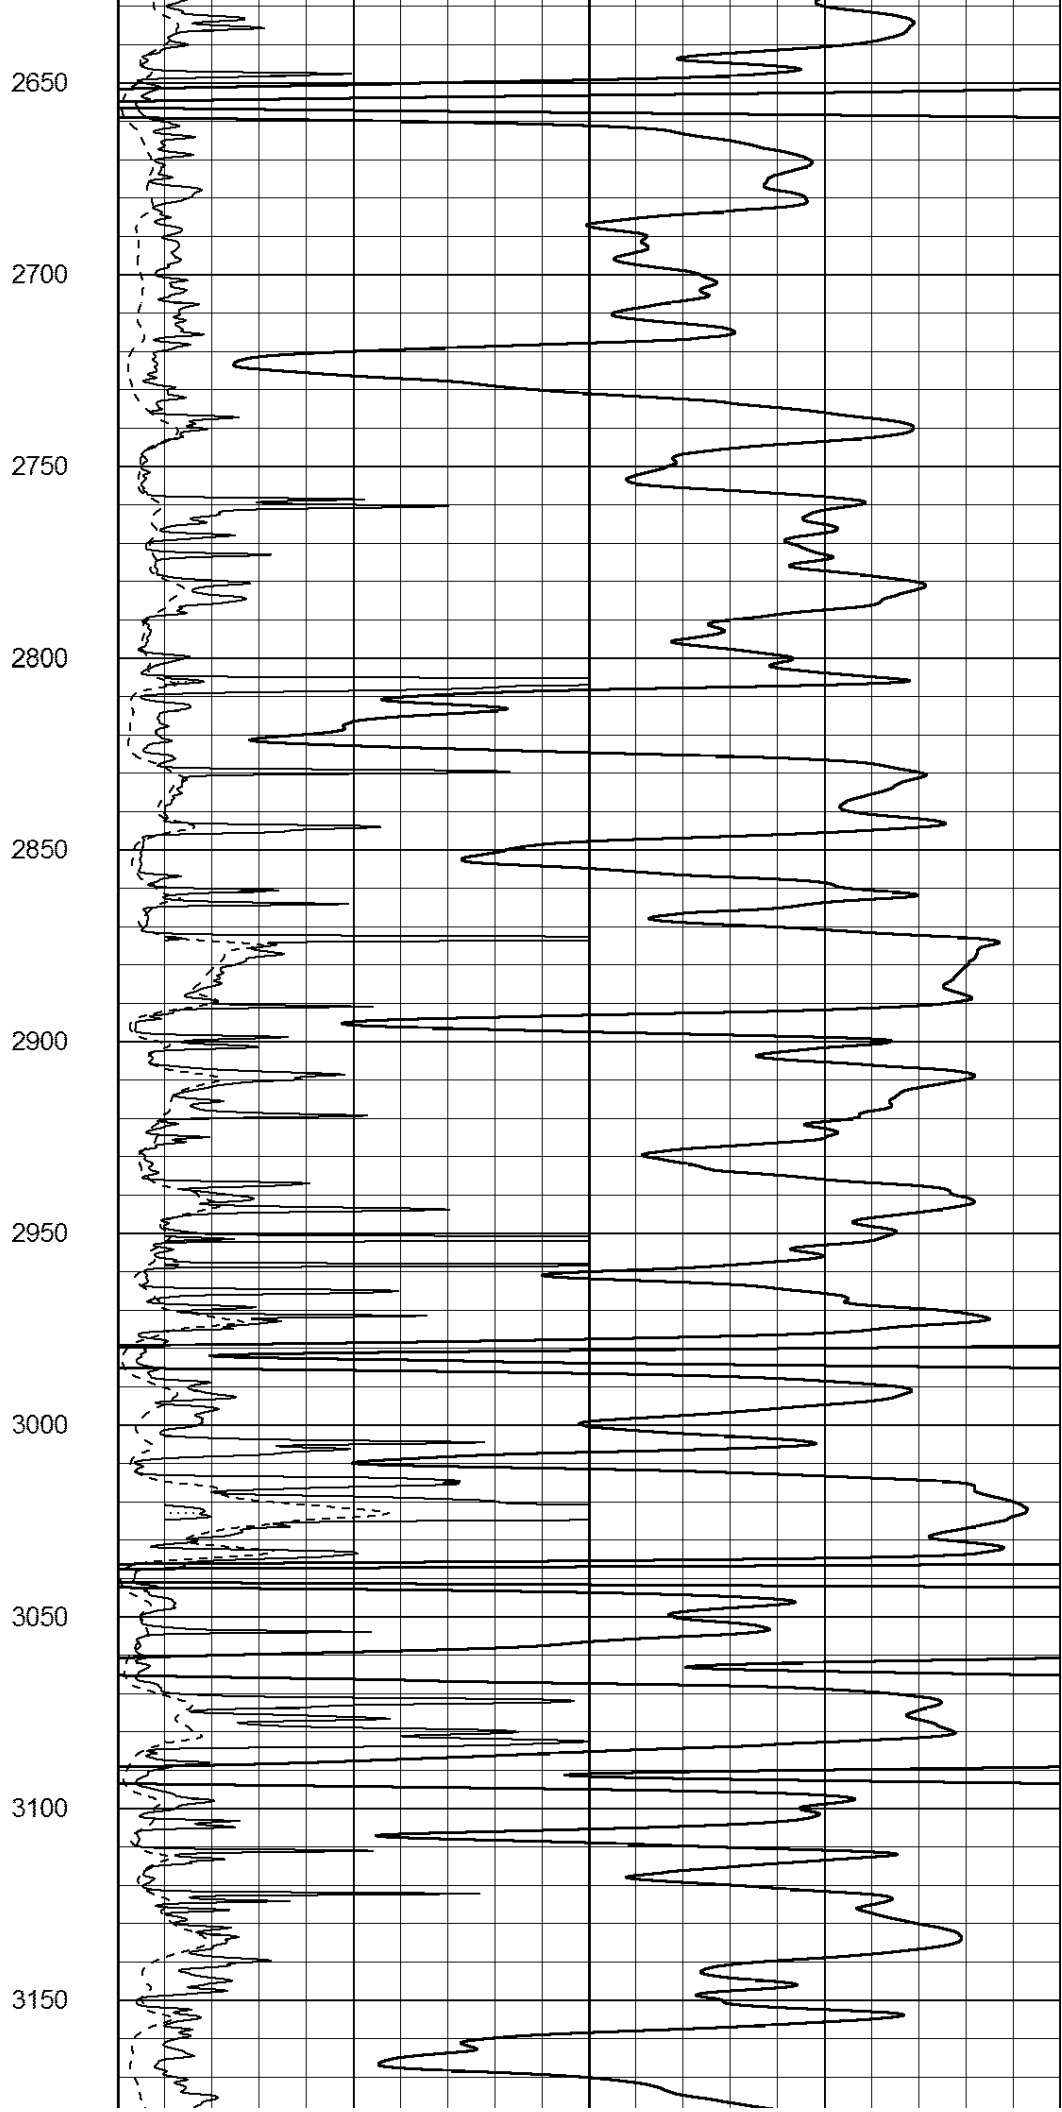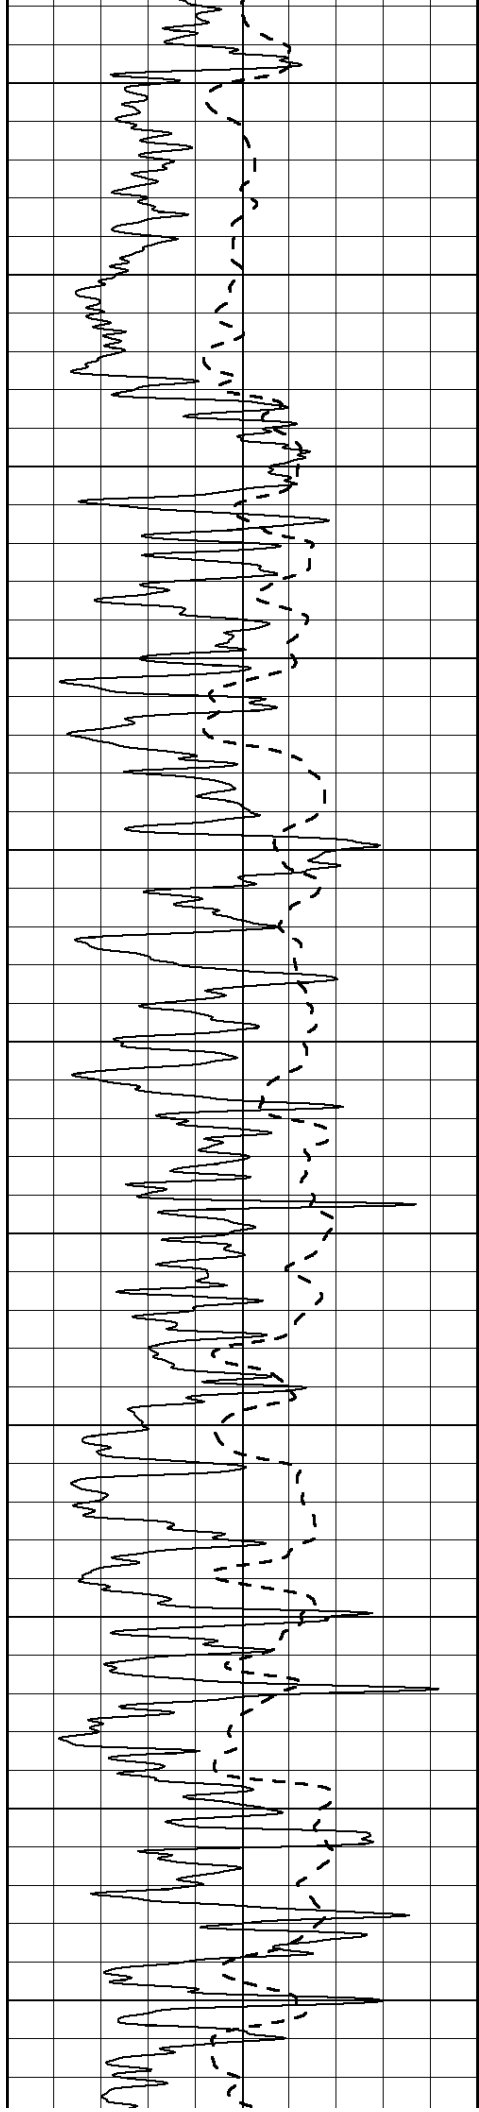

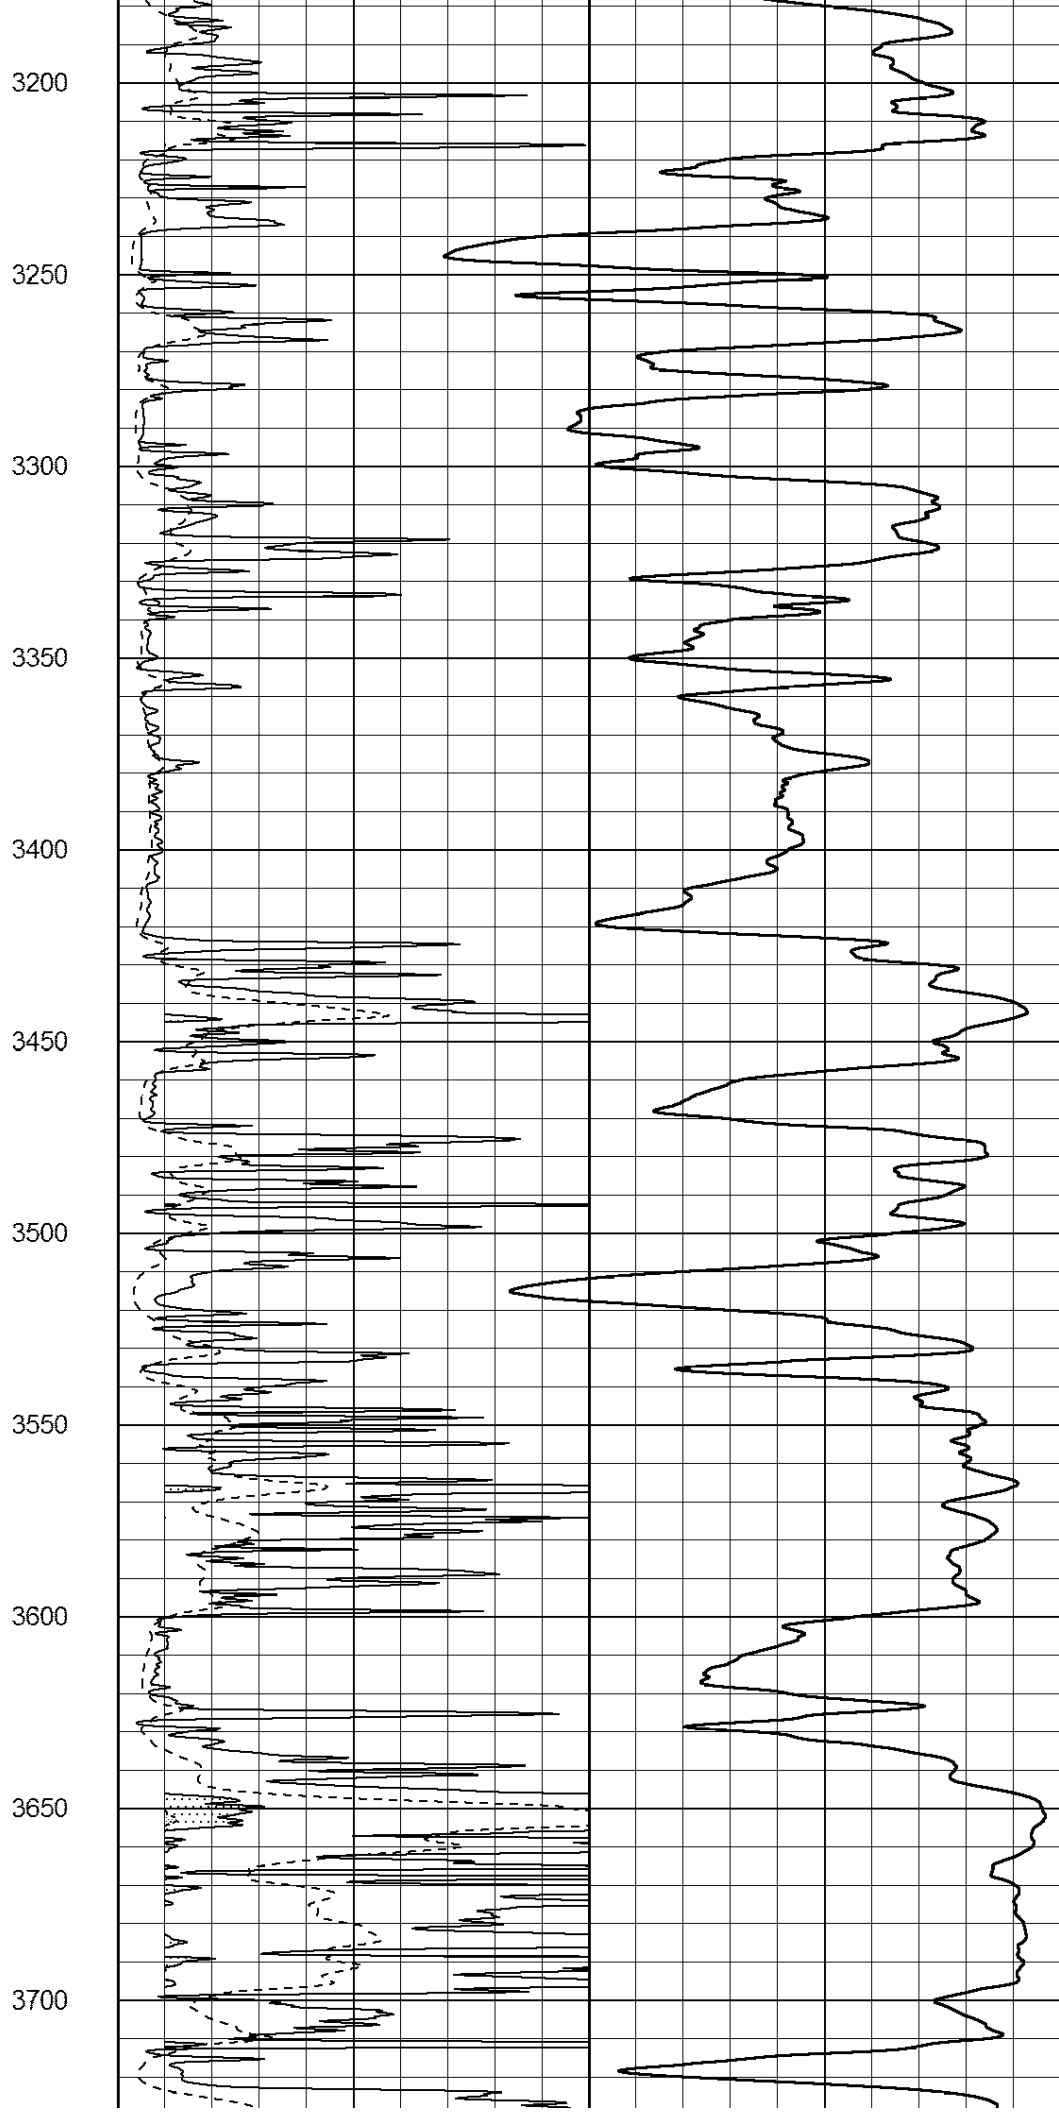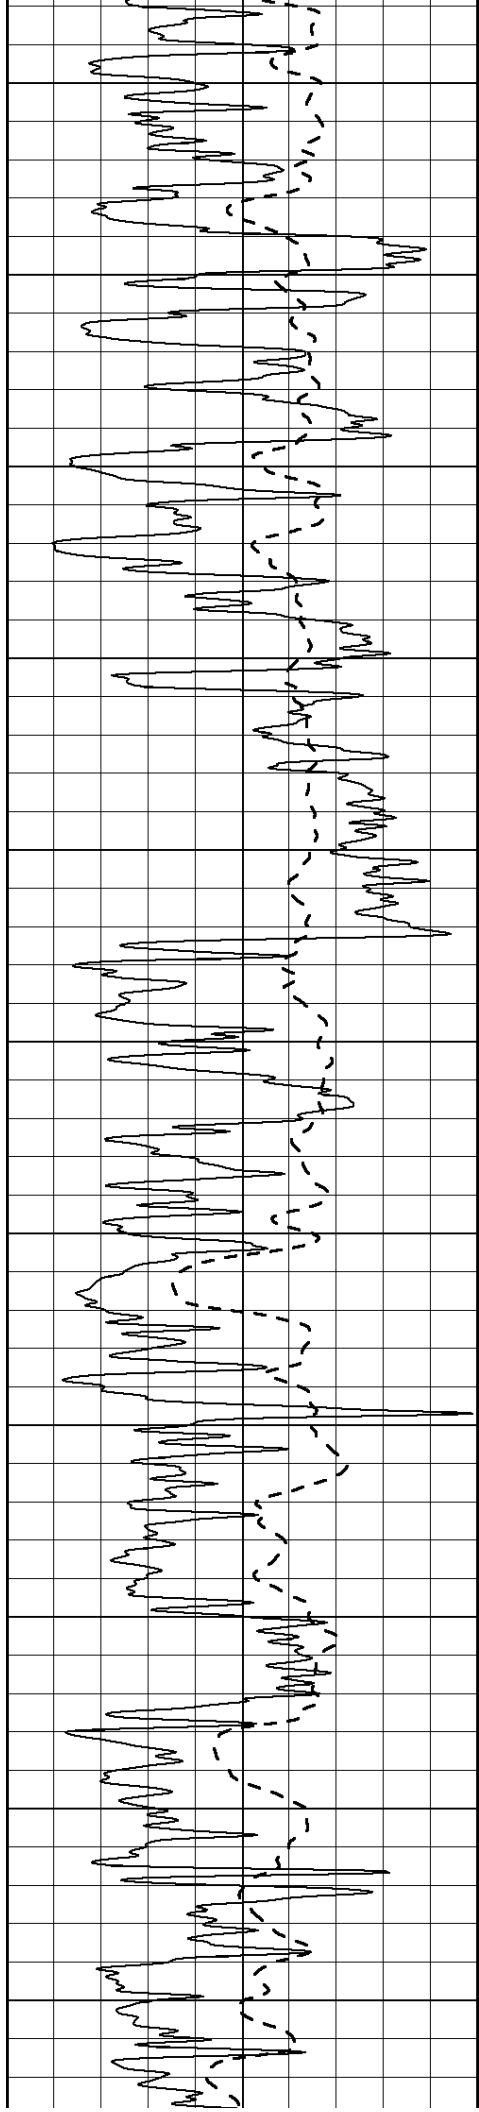

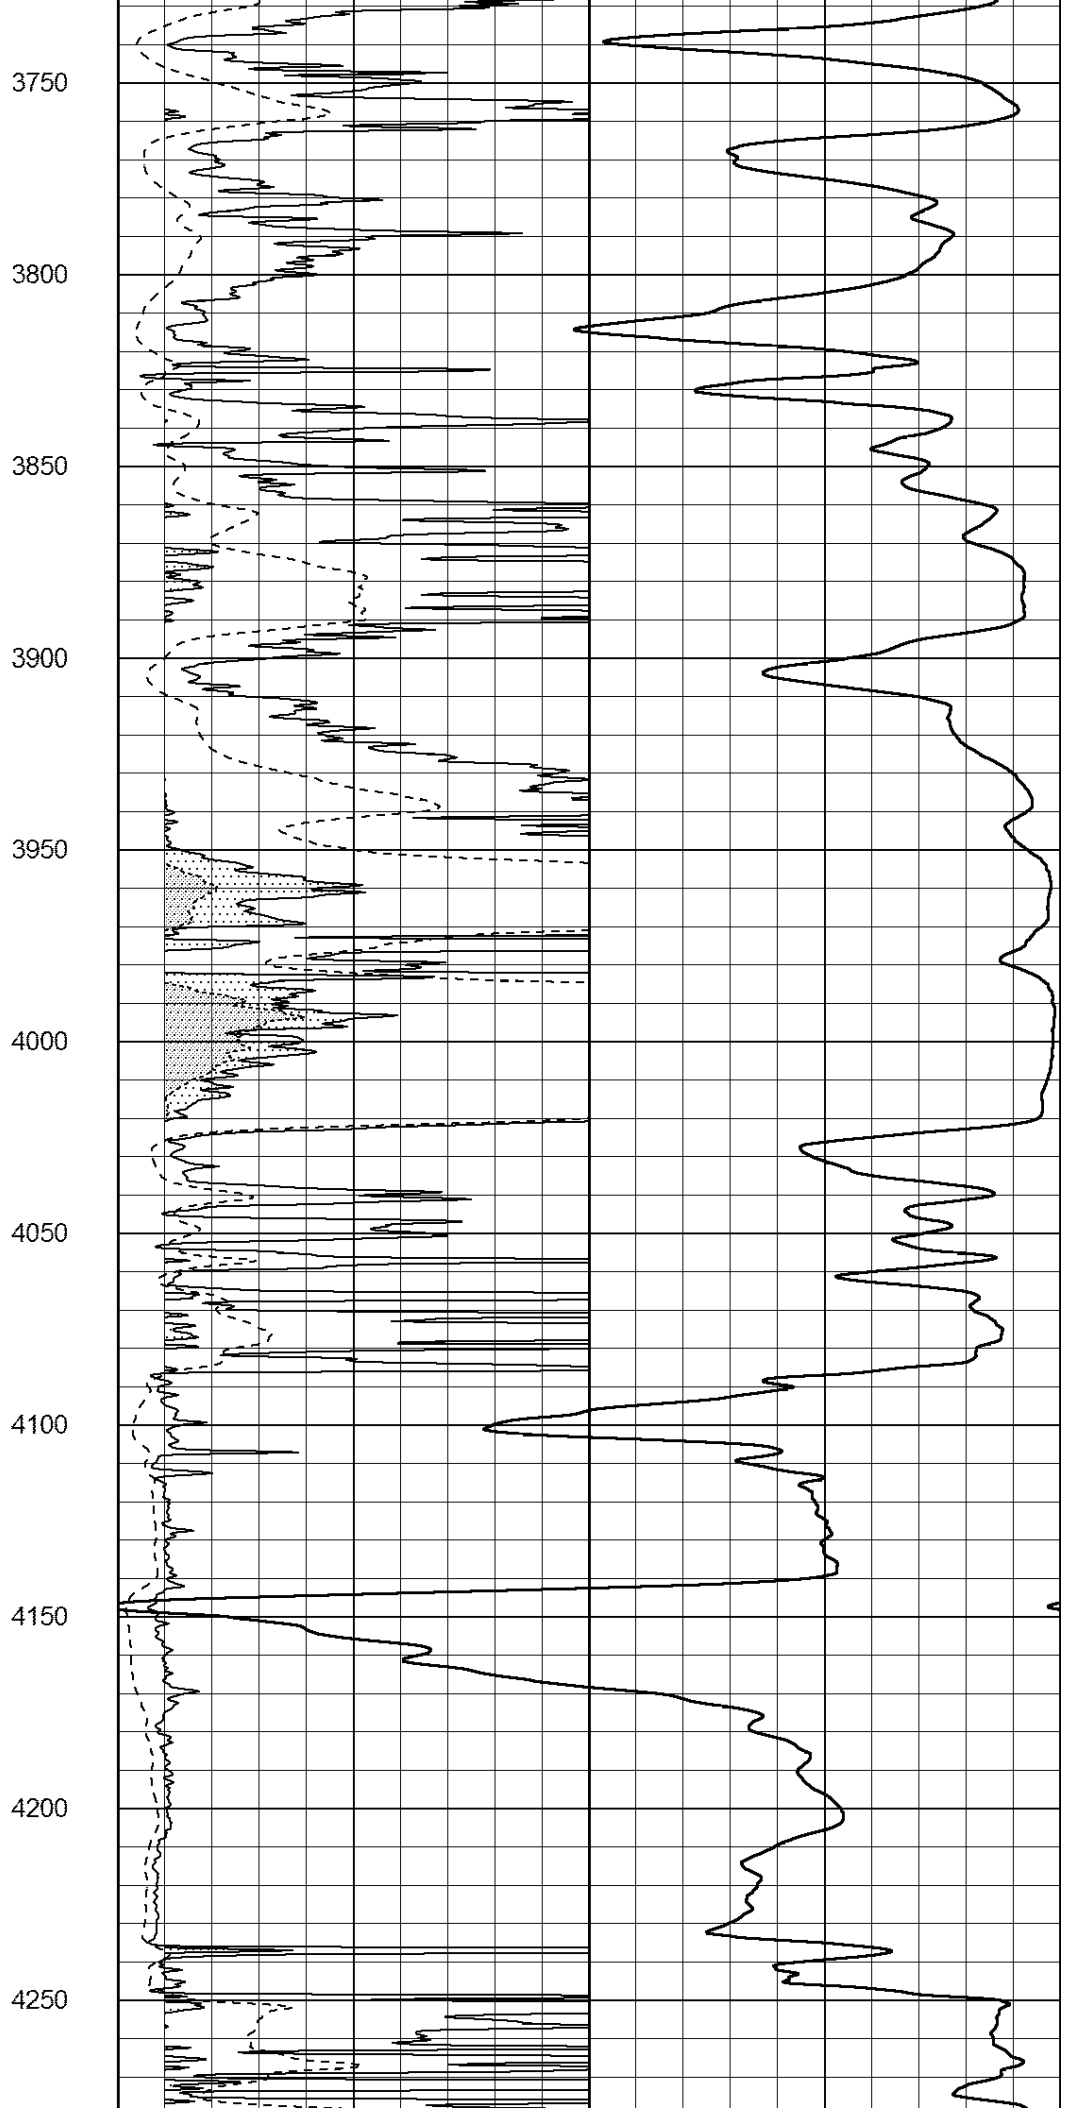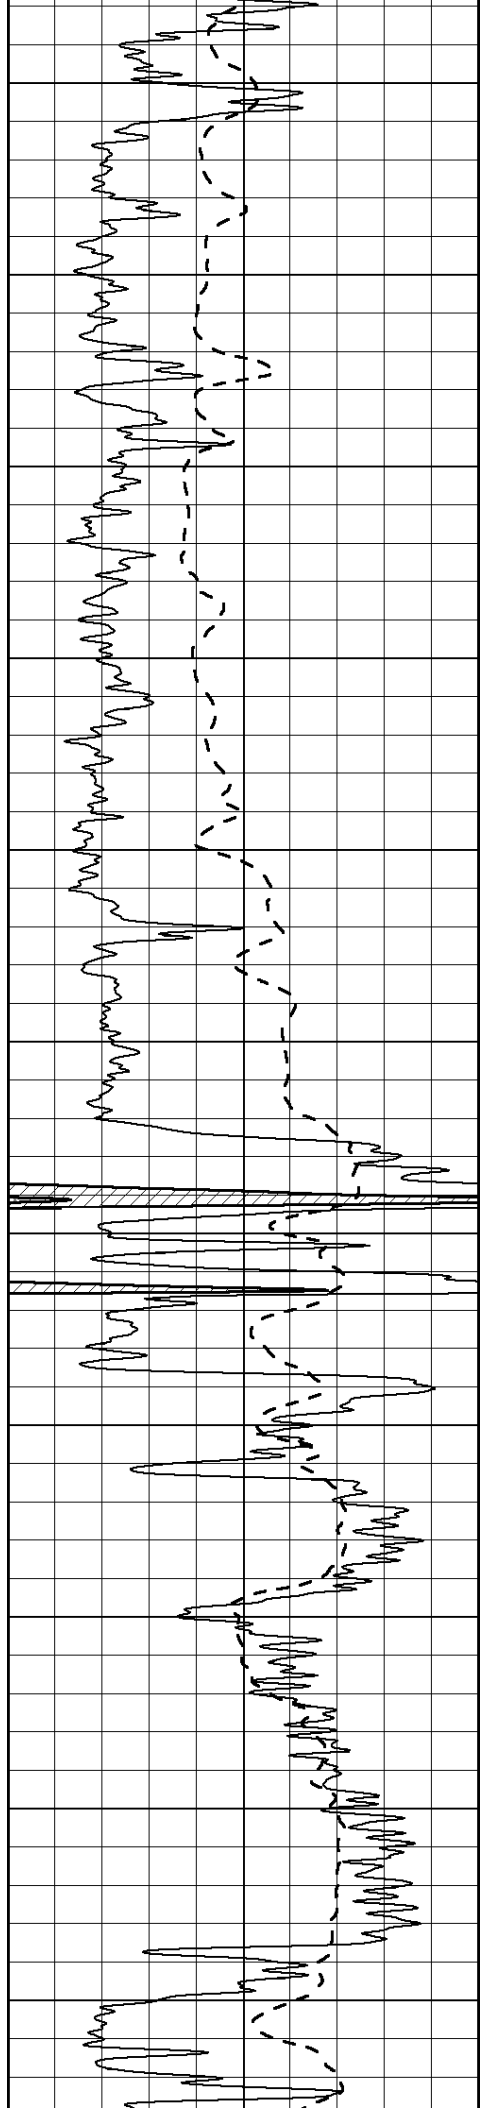

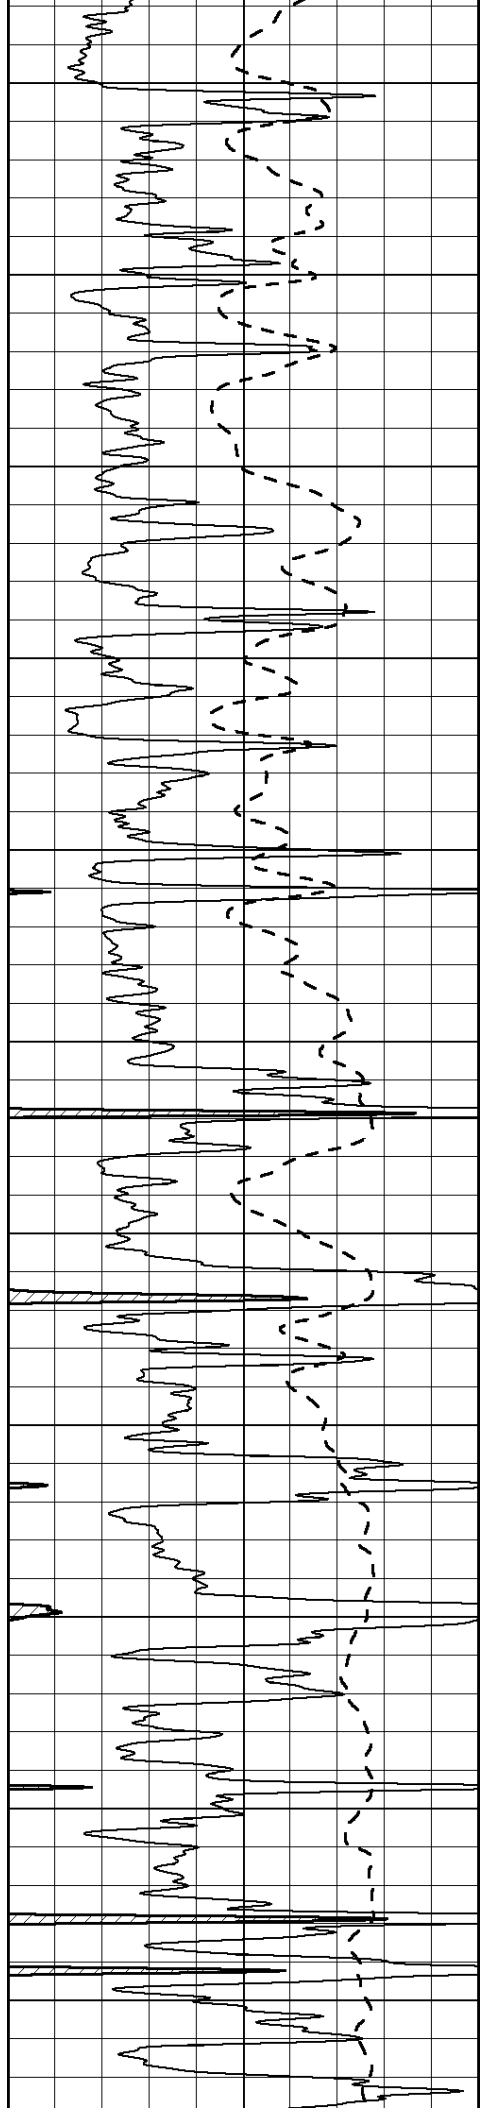

4300

4350

4400

4450

4500

4550



4600


4650

4700


4750

4800

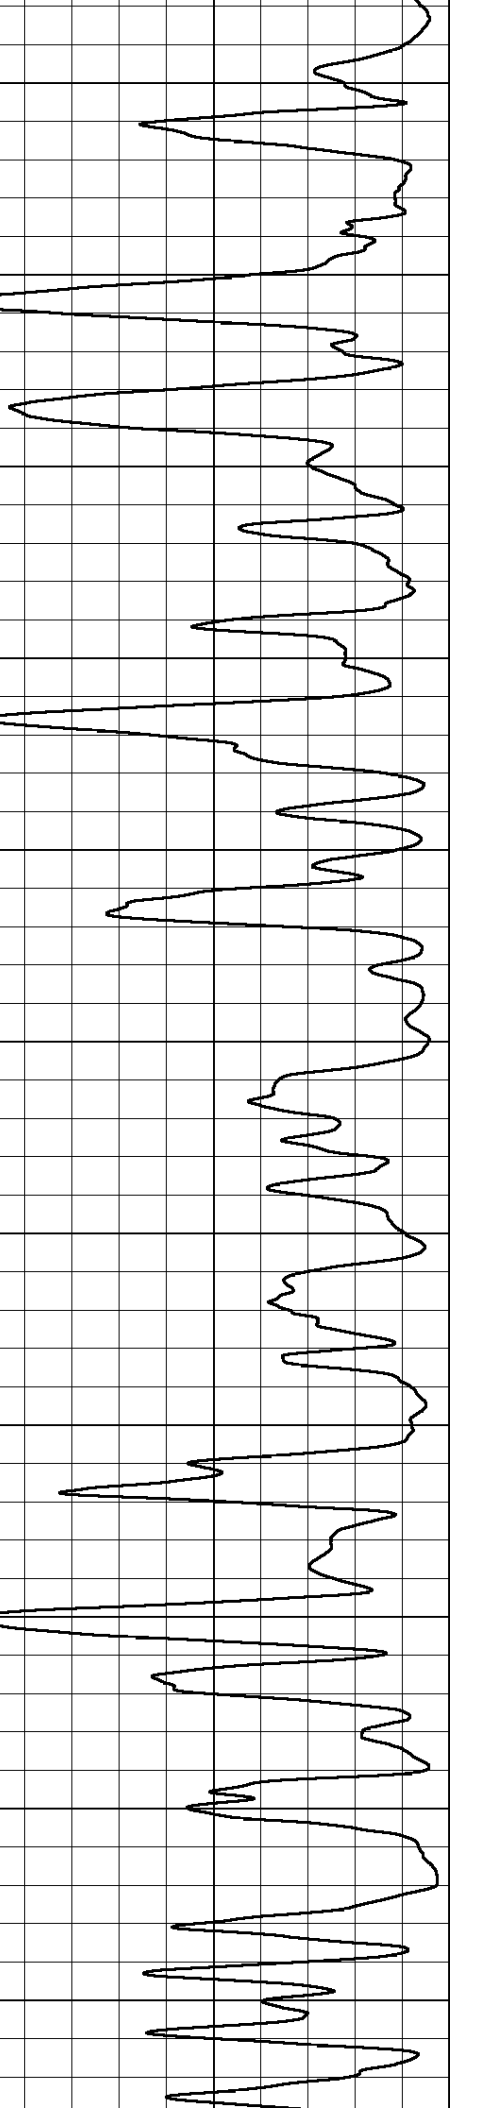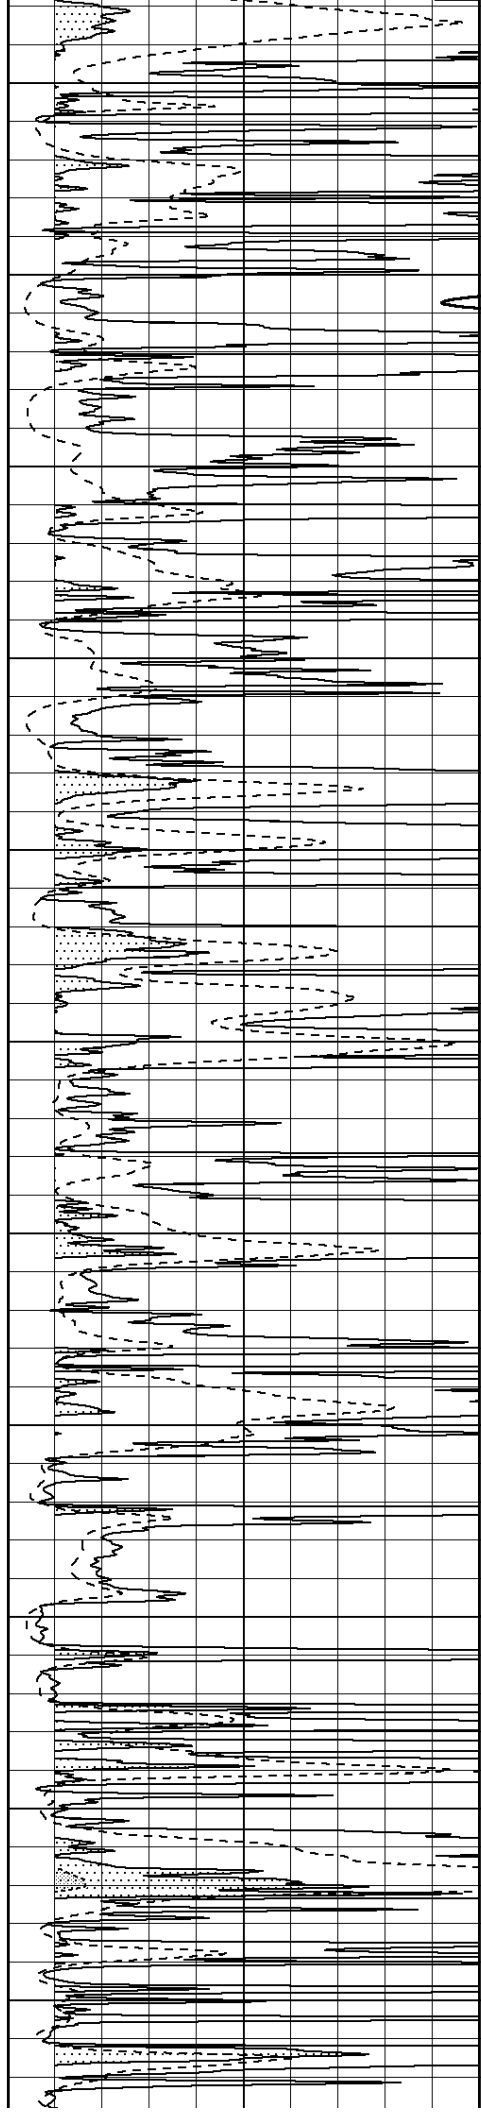

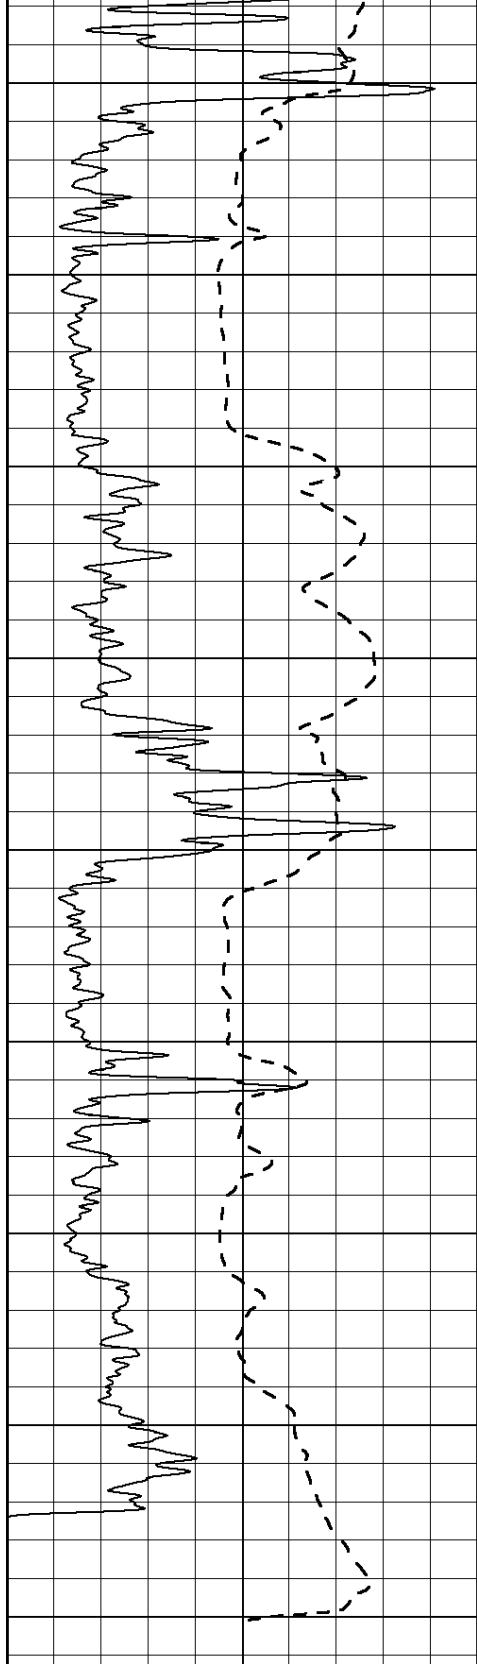


0      Gamma Ray (GAPI)      150  
 -100      SP (mV)      100

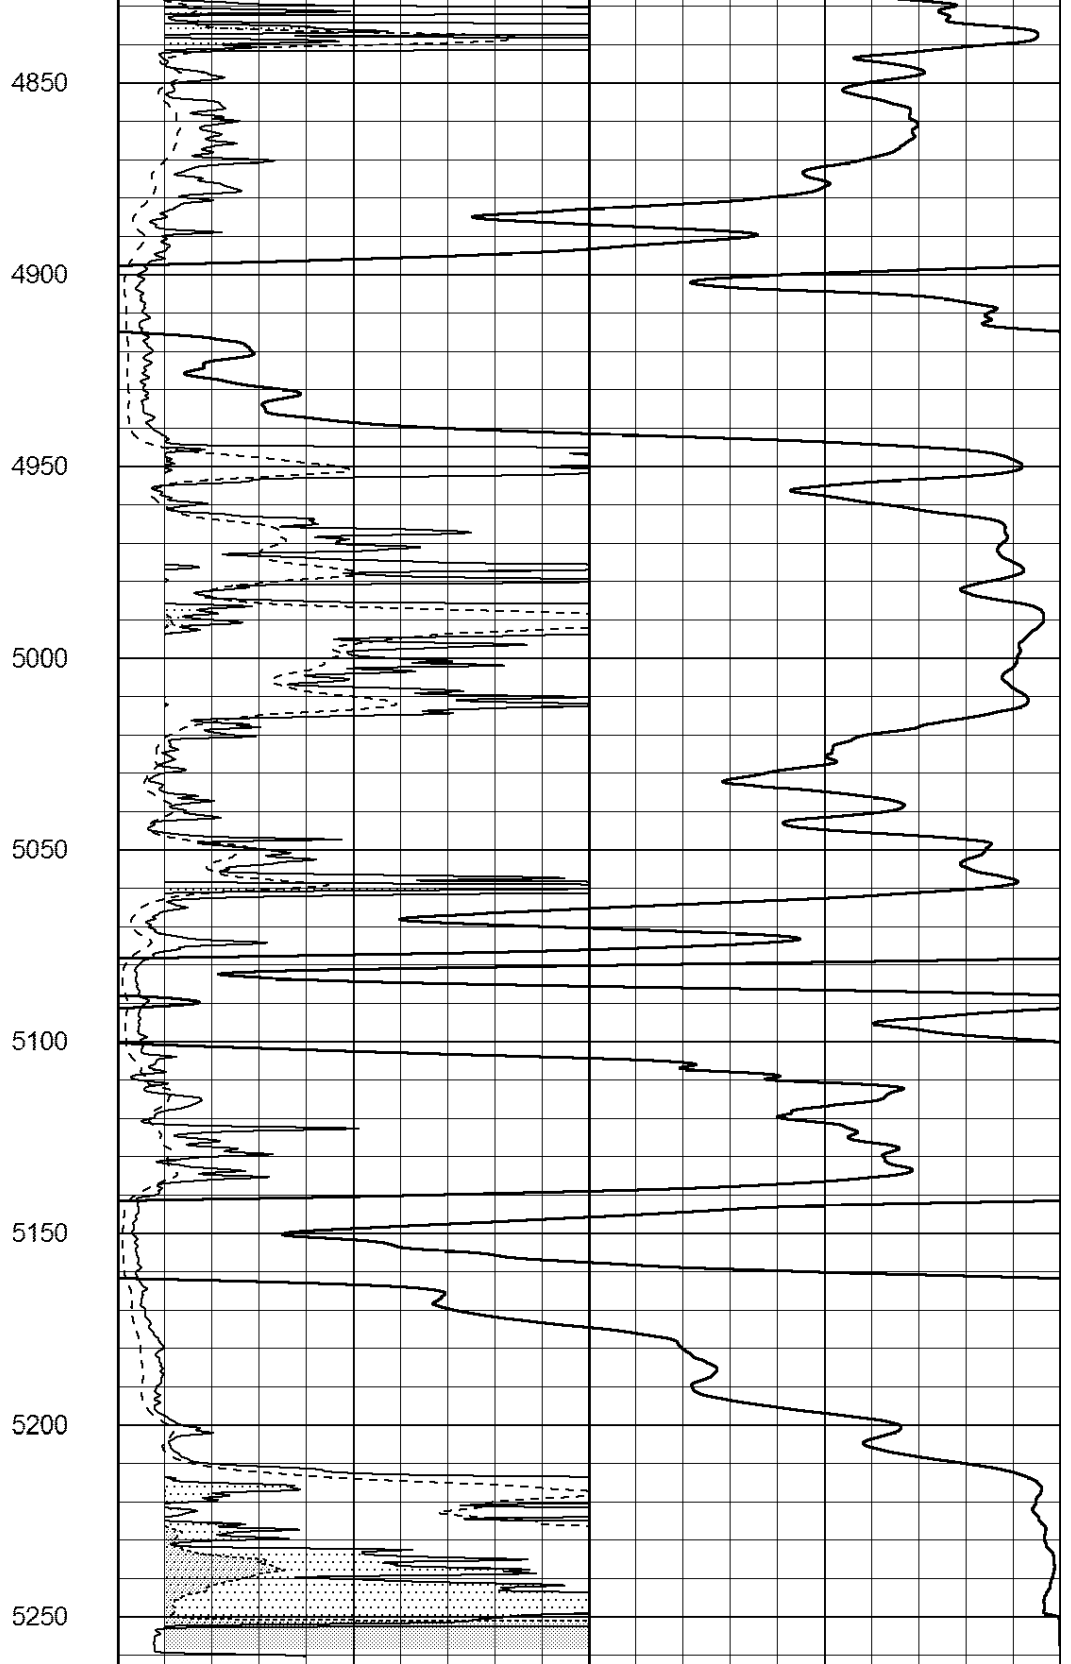

0      RLL3 (Ohm-m)      50  
 0      RILD (Ohm-m)      50  
 1000      CILD (mmho/m)      0

50      RILD X10 (Ohm-m)      500  
 50      RLL3 X10 (Ohm-m)      500

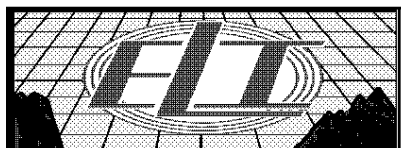


# MAIN PASS

Database File: 2120pe.db  
 Dataset Pathname: pass3MAIN  
 Presentation Format: \_dil  
 Dataset Creation: Mon Dec 18 01:21:52 2017  
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

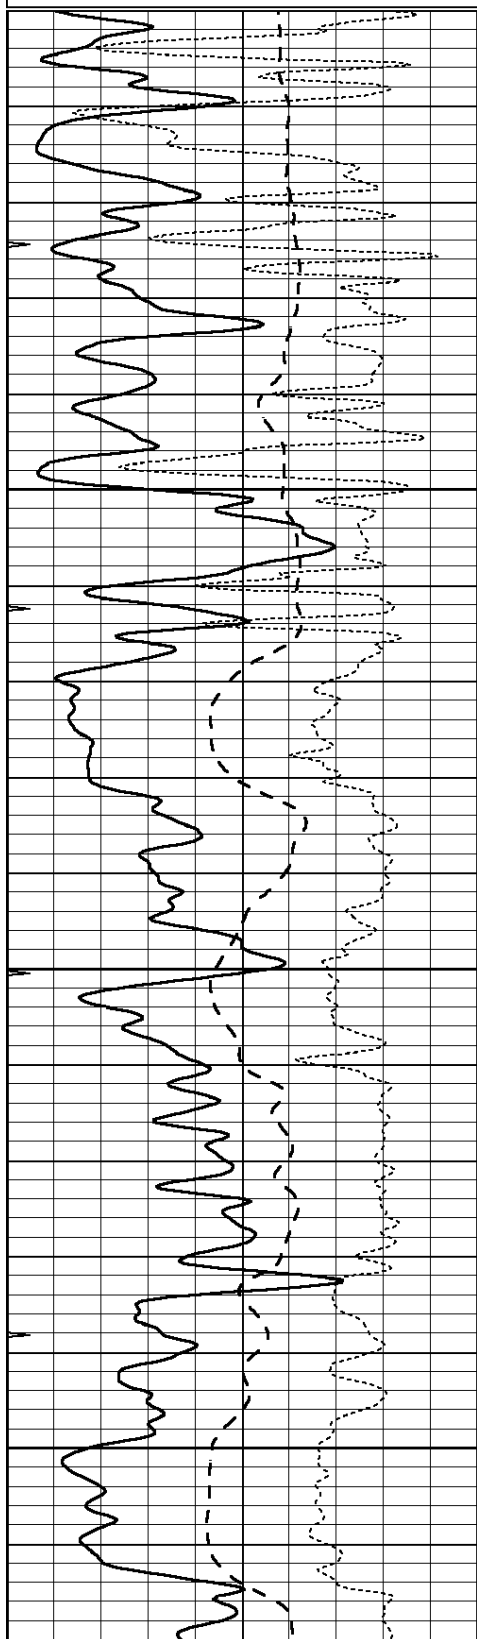



2400

2450

2500

2550

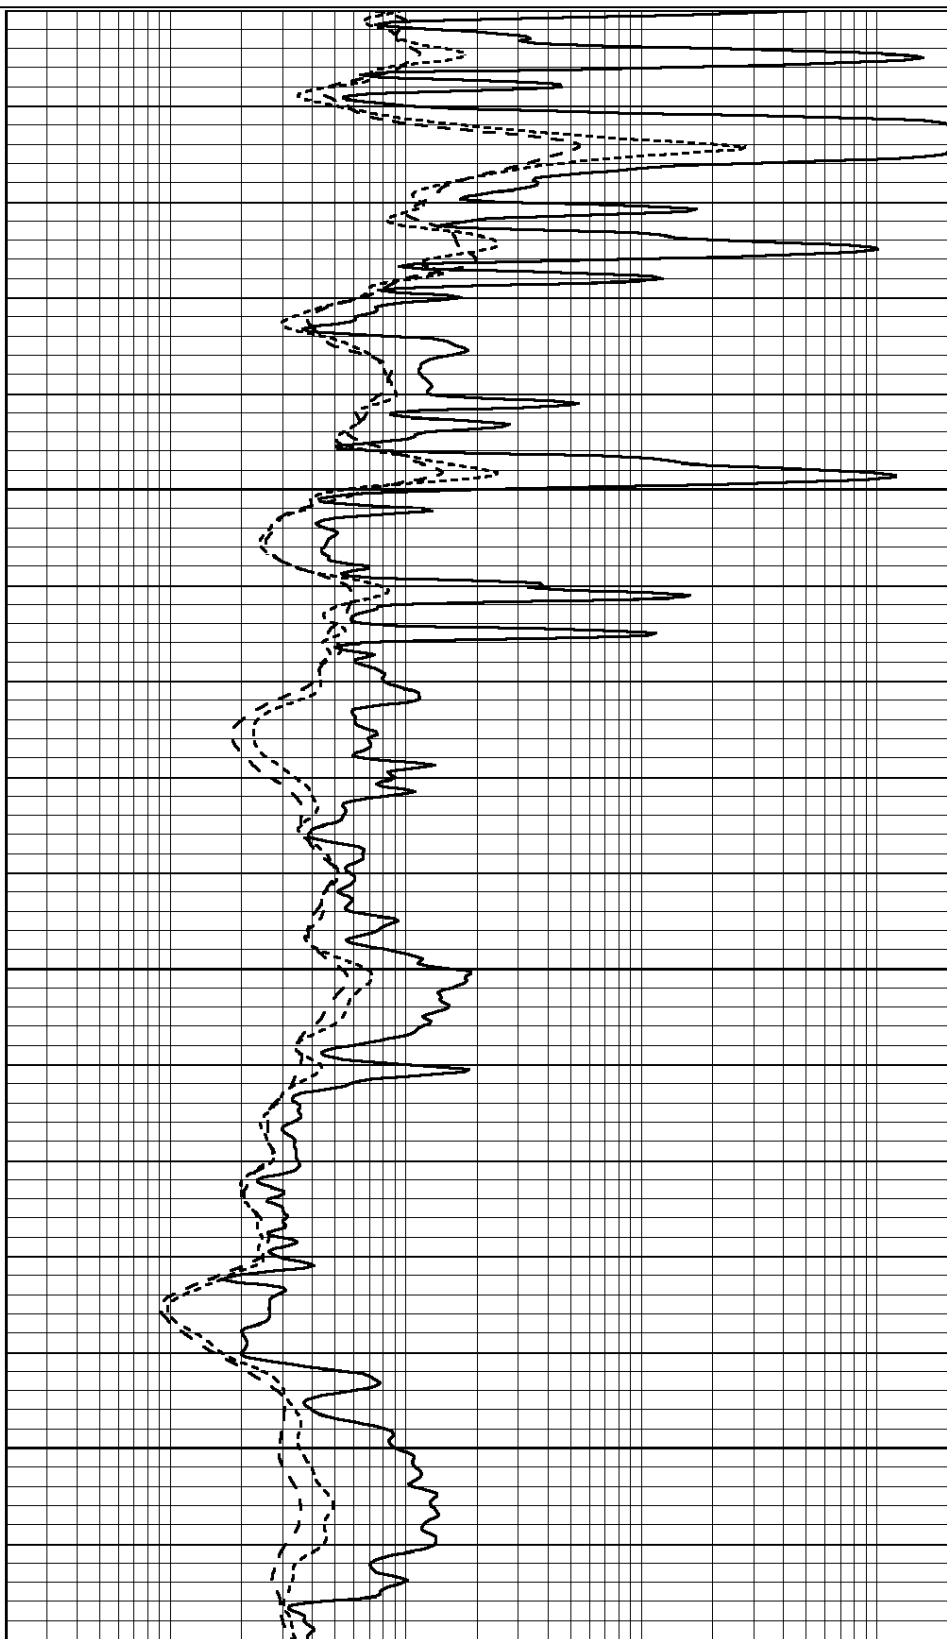

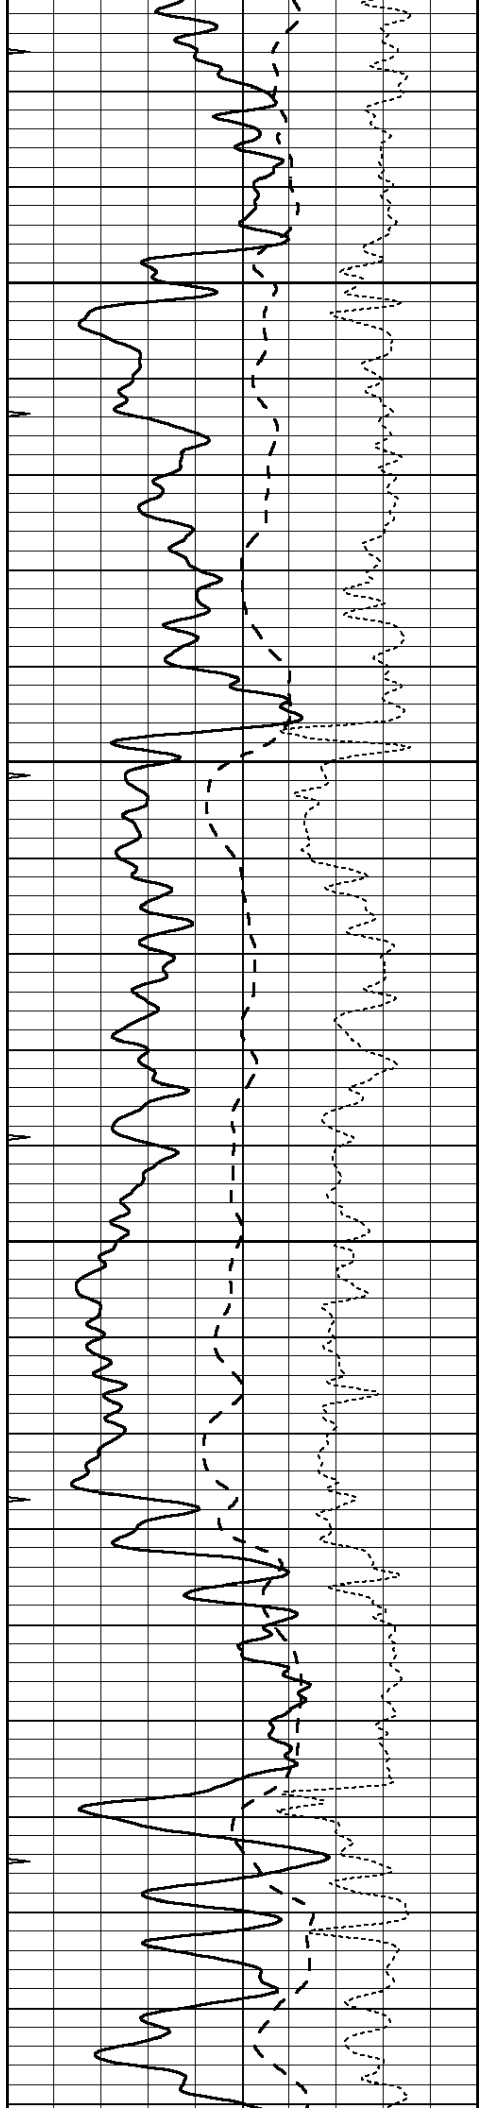




2600


2650

2700

2750

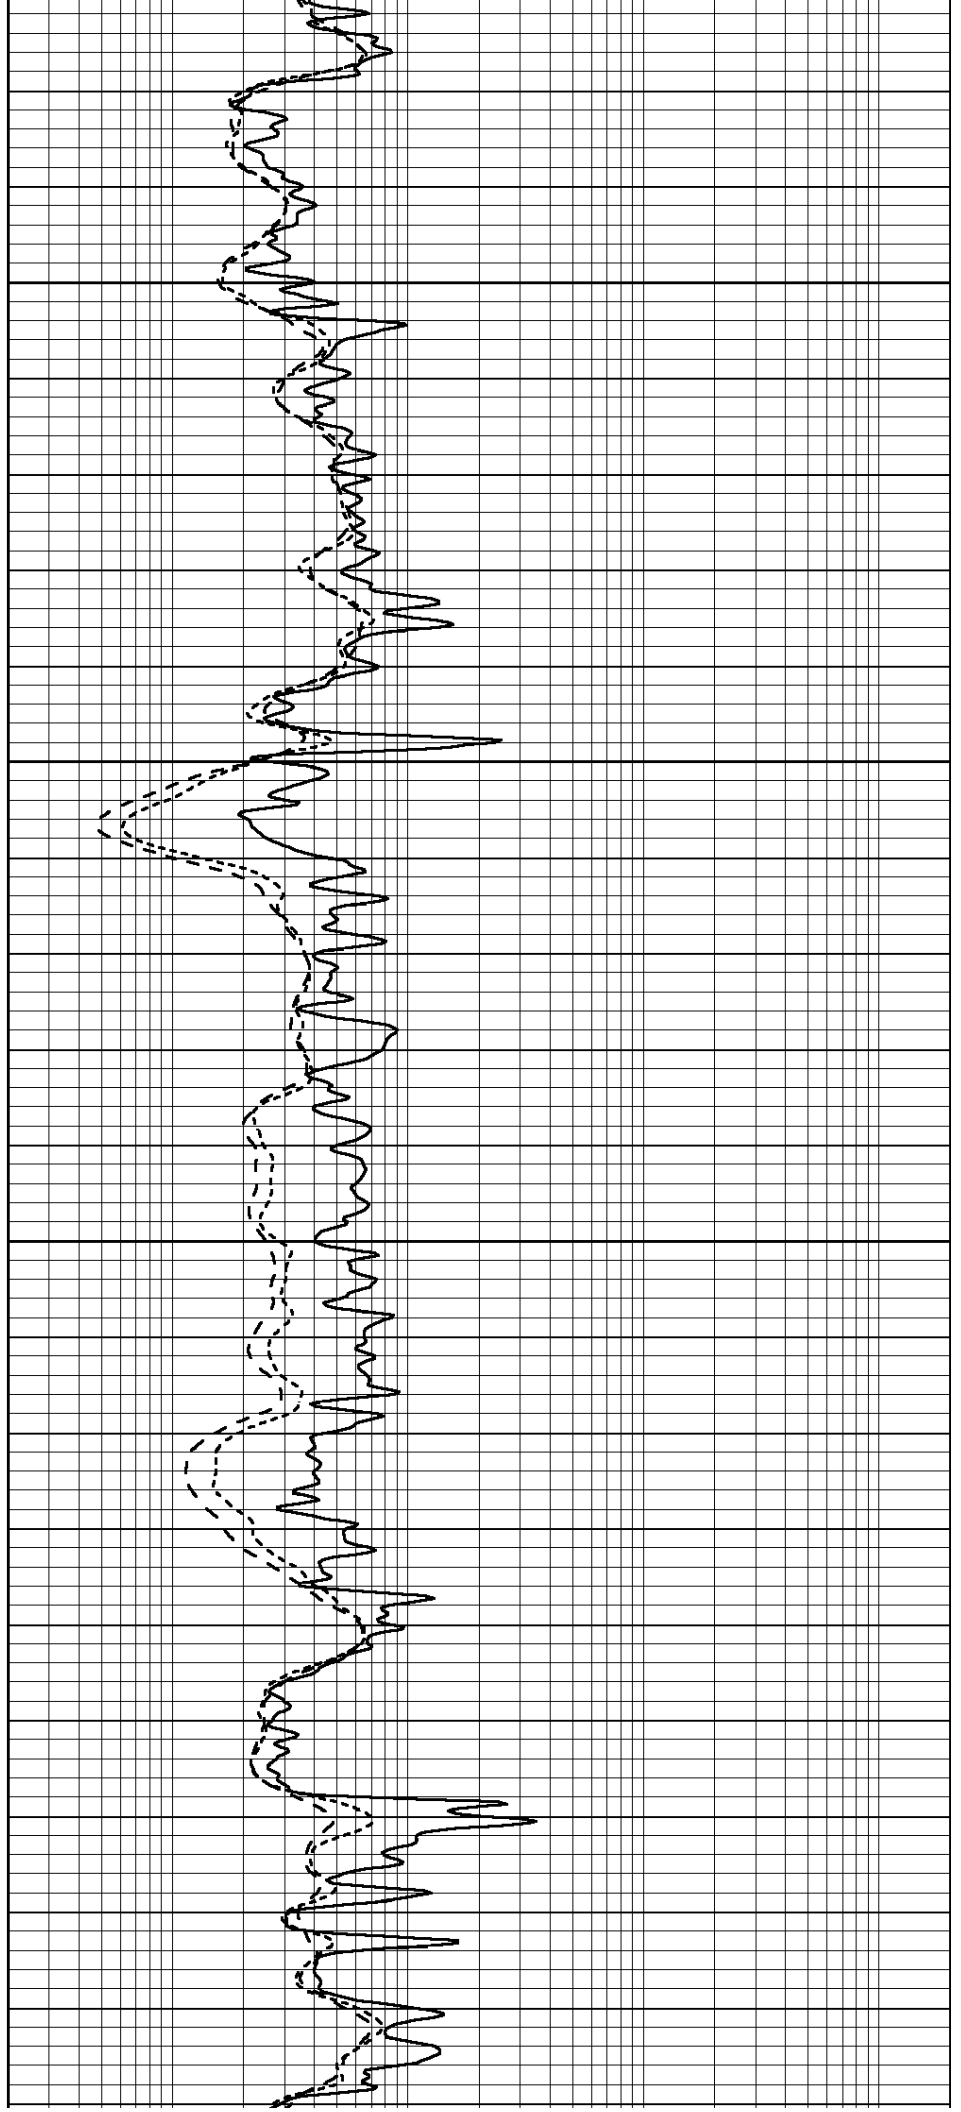

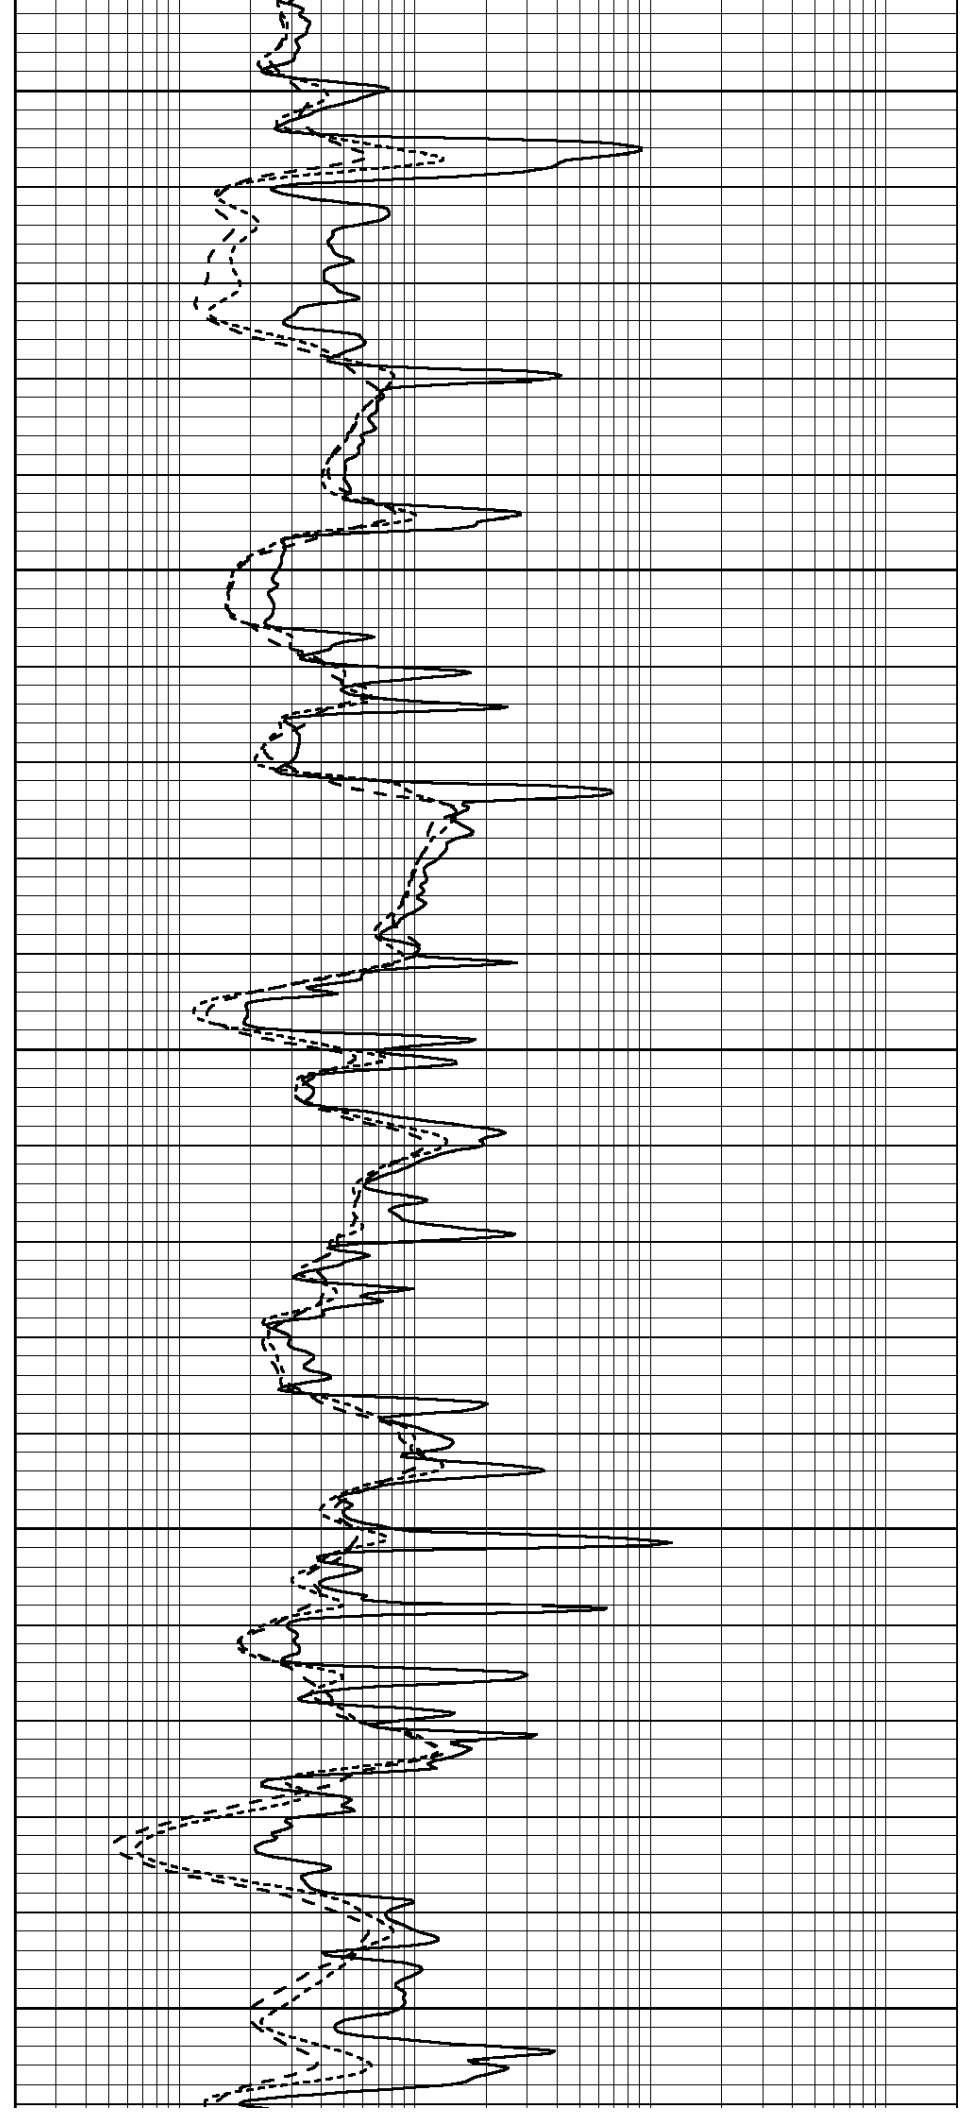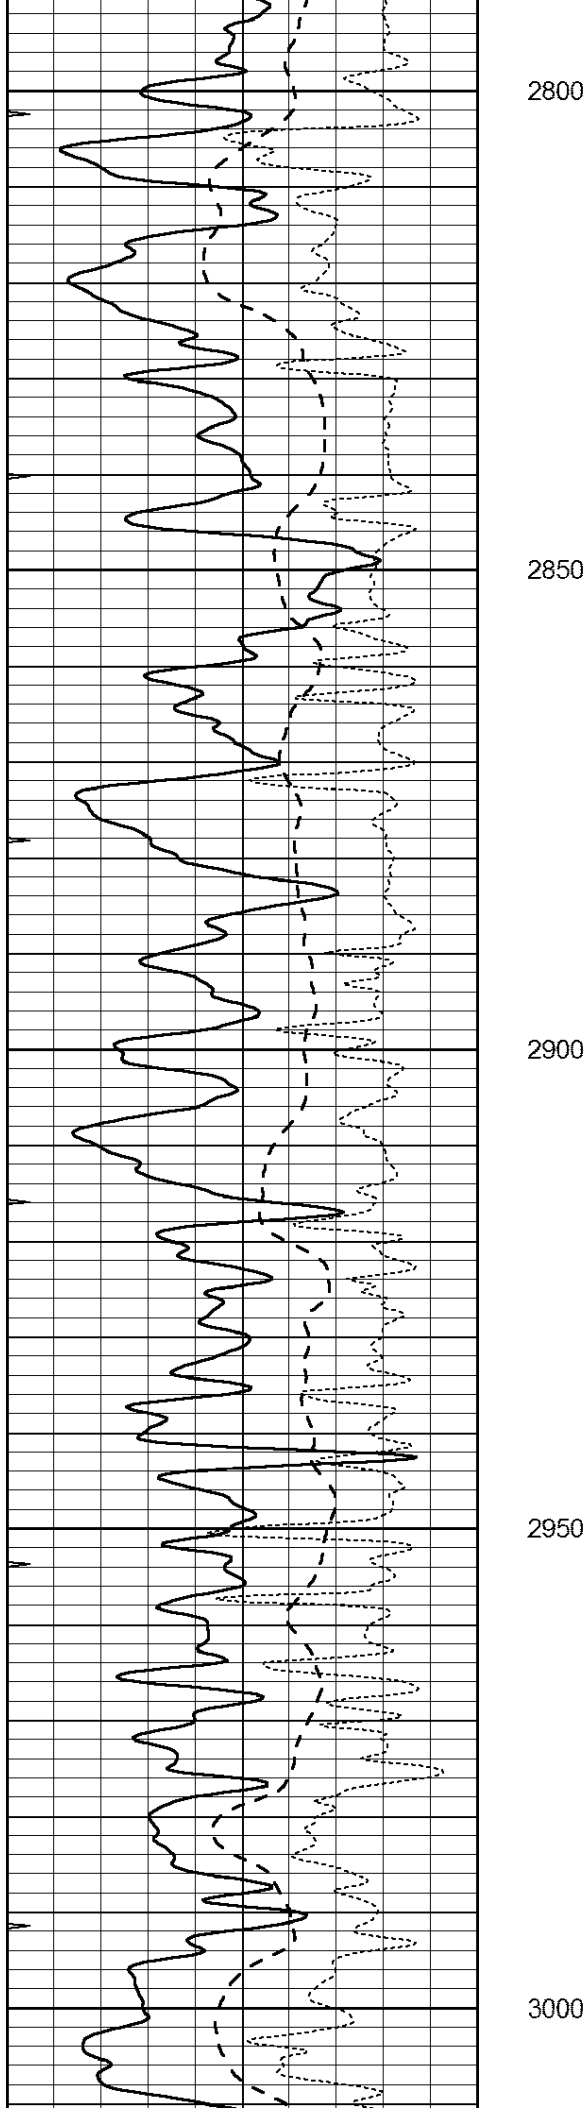

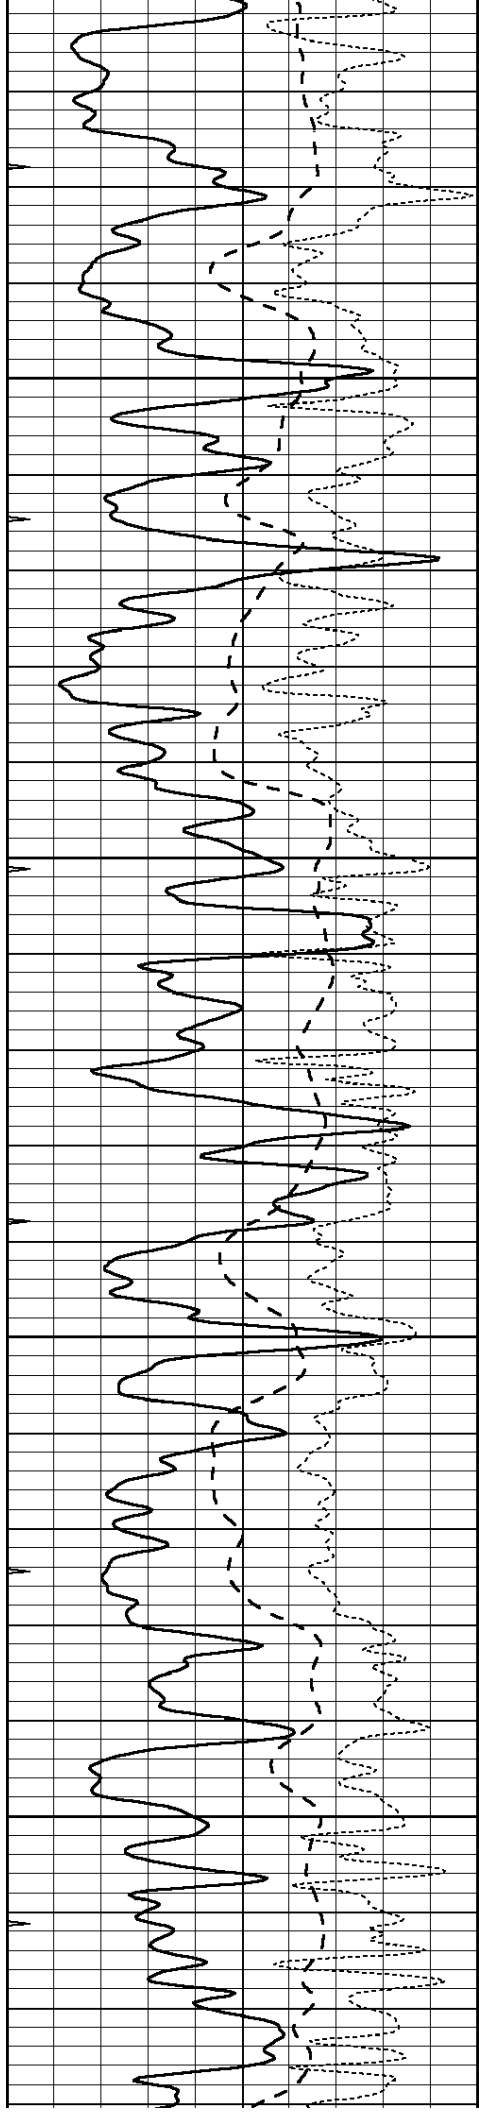



3050

3100

3150

3200

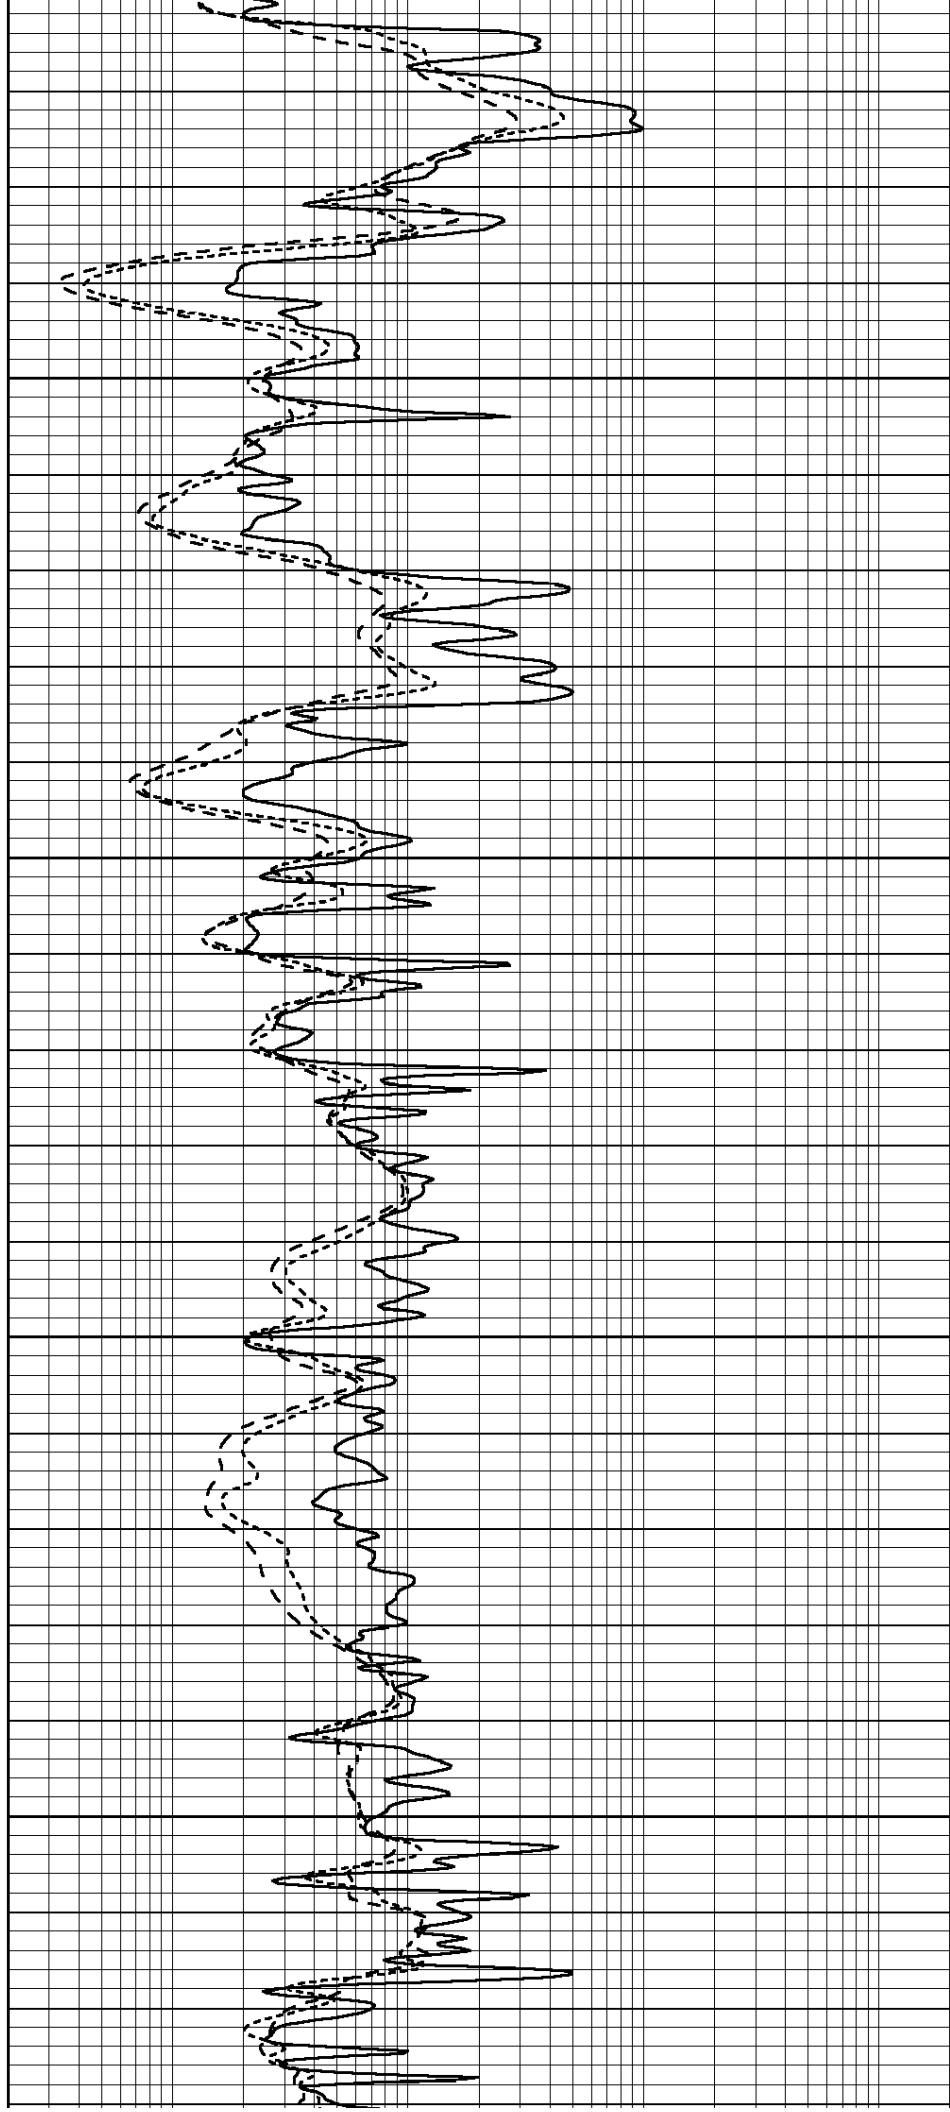

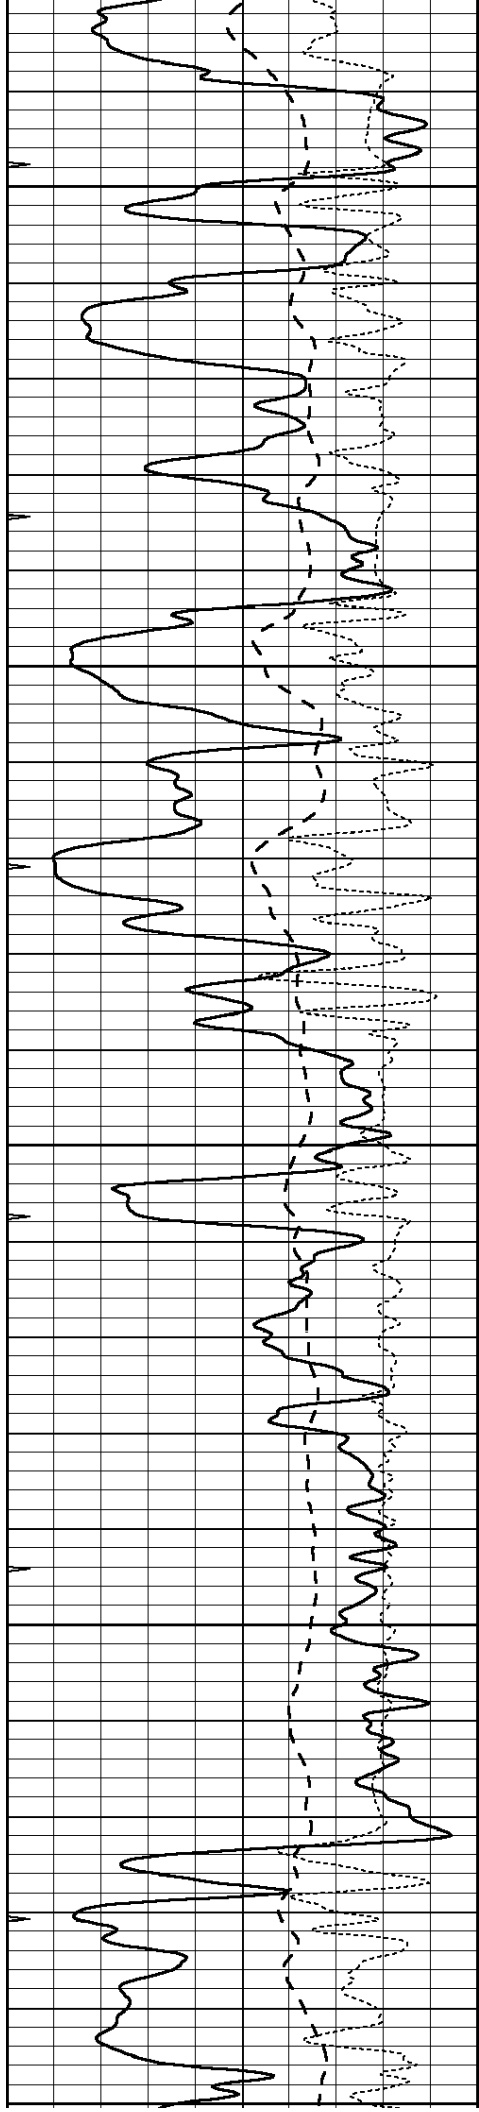


3250


3300

3350

3400

3450

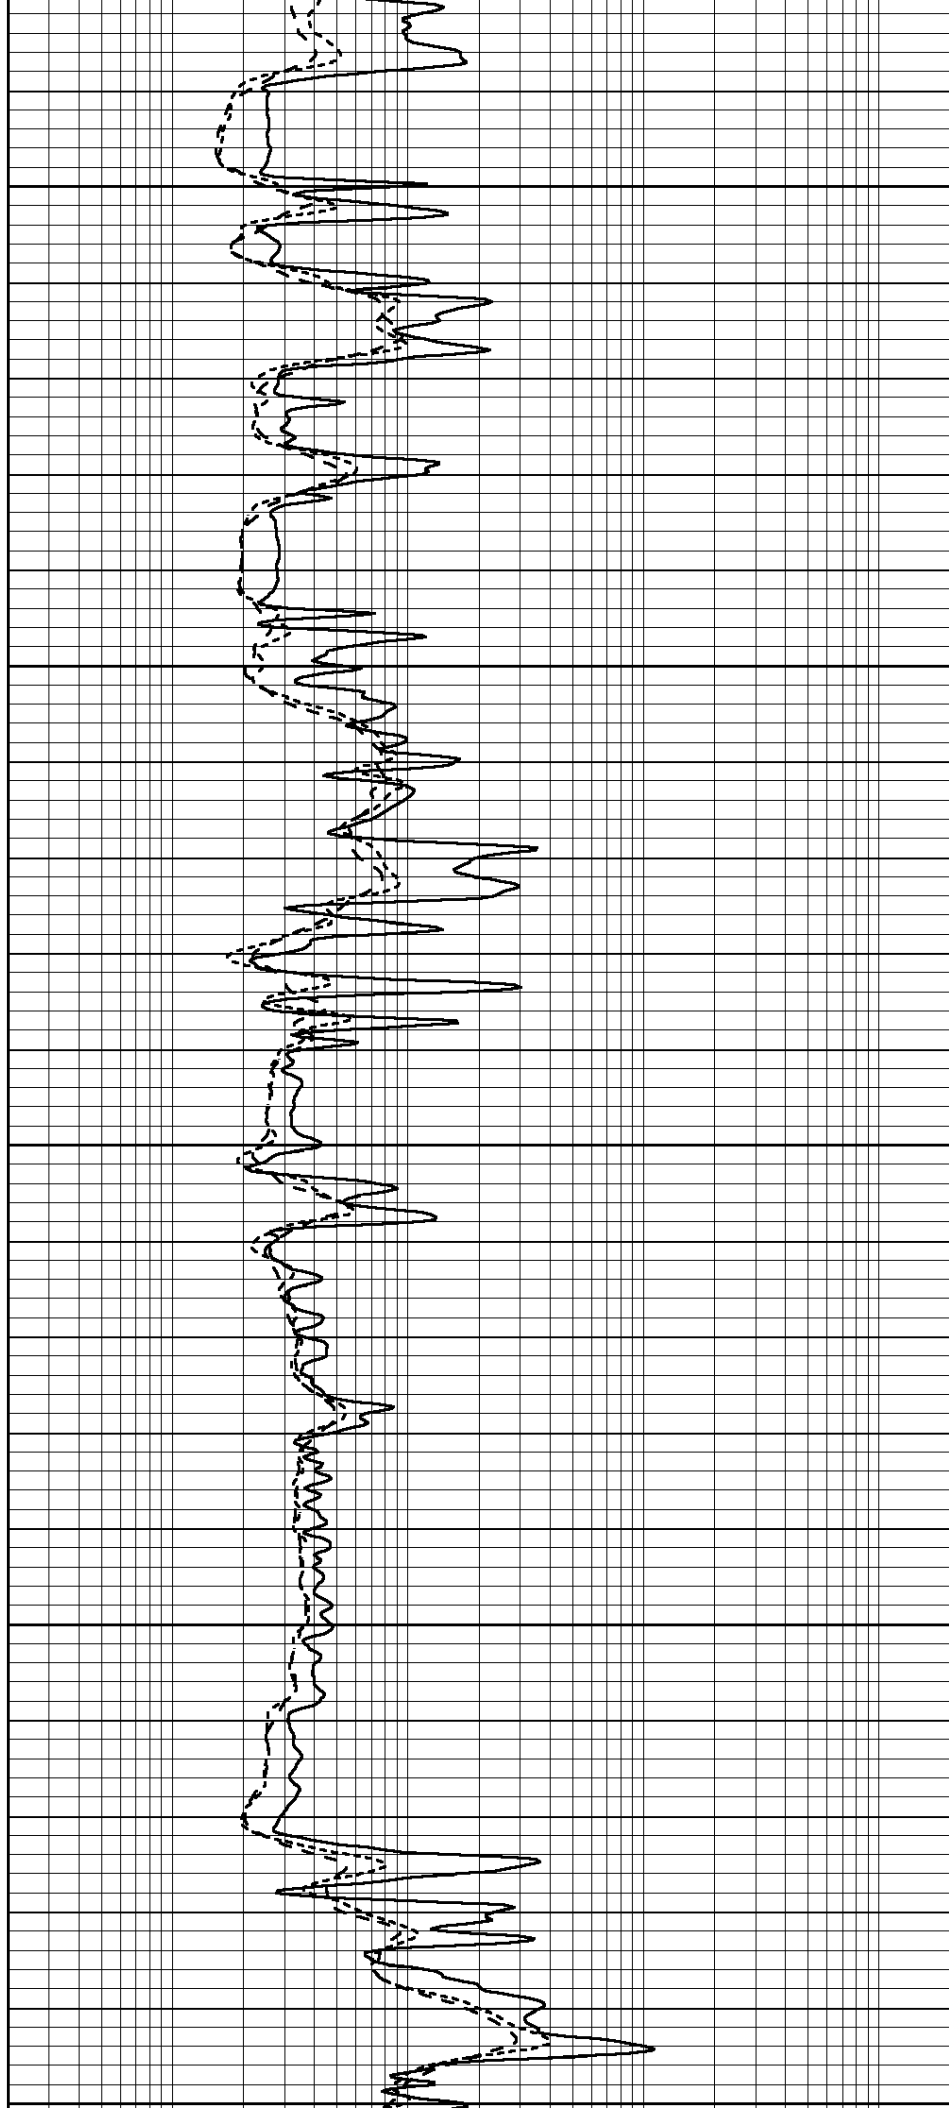

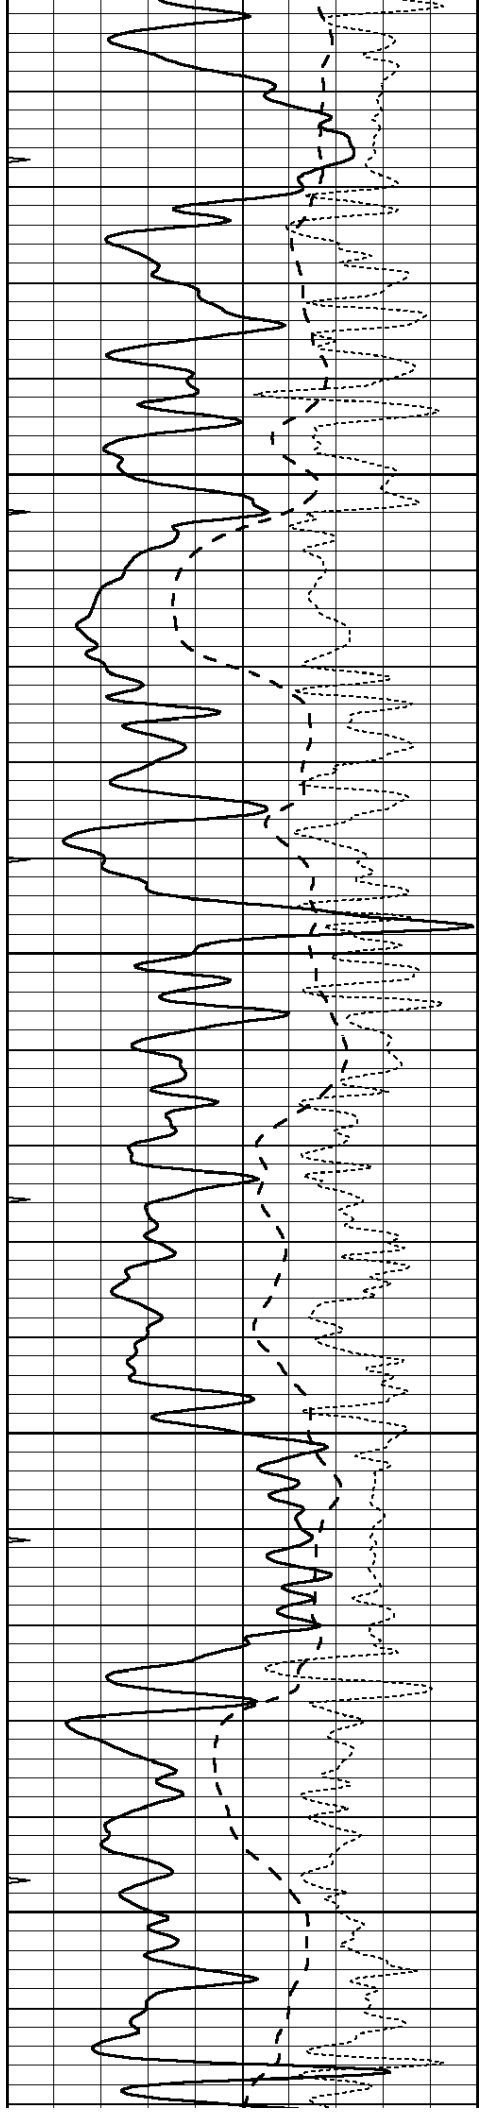


3700


3500

3550

3600

3650

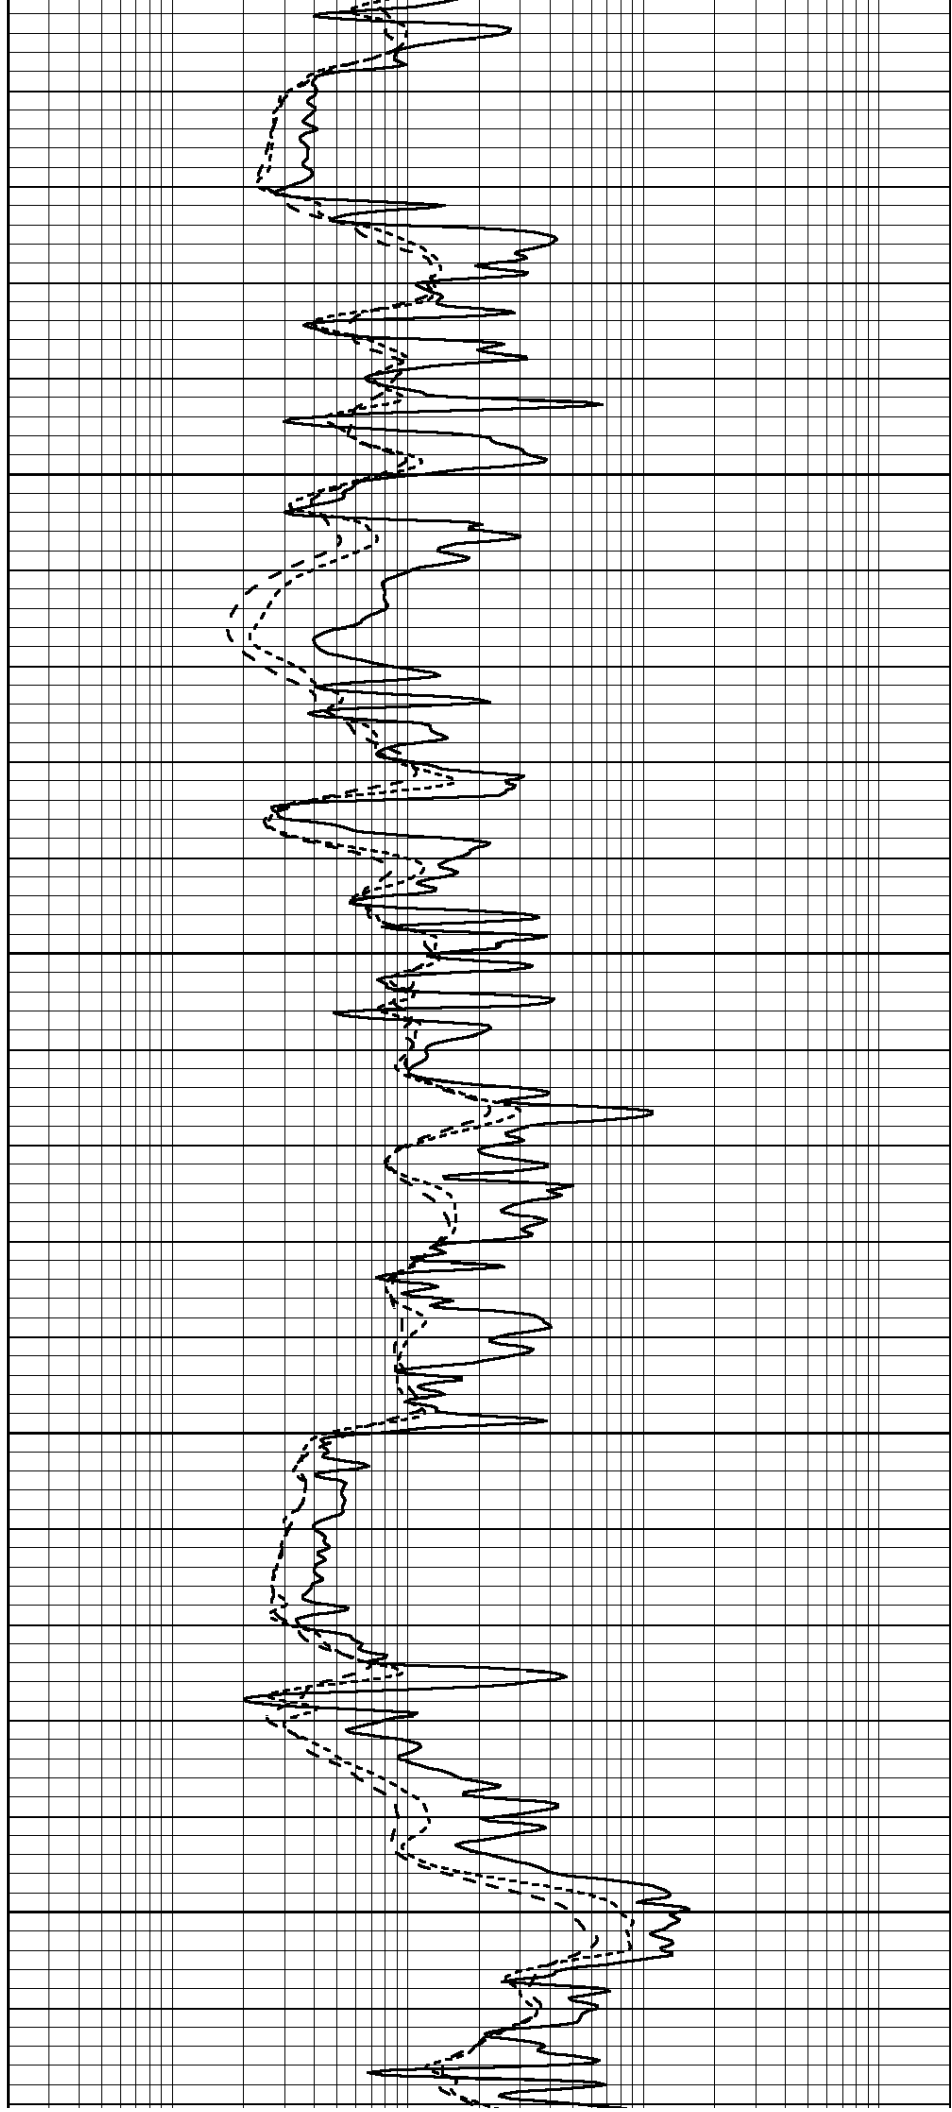

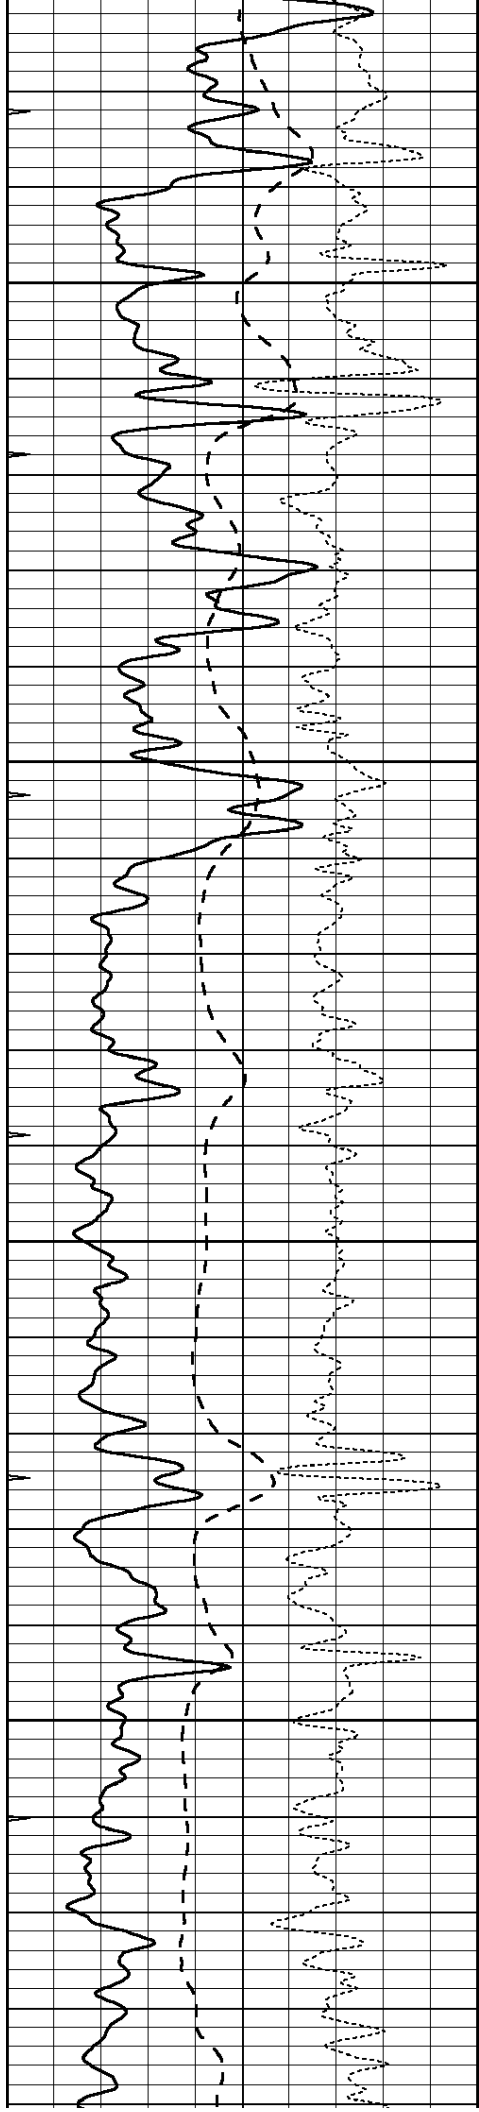



3700

3750

3800

3850

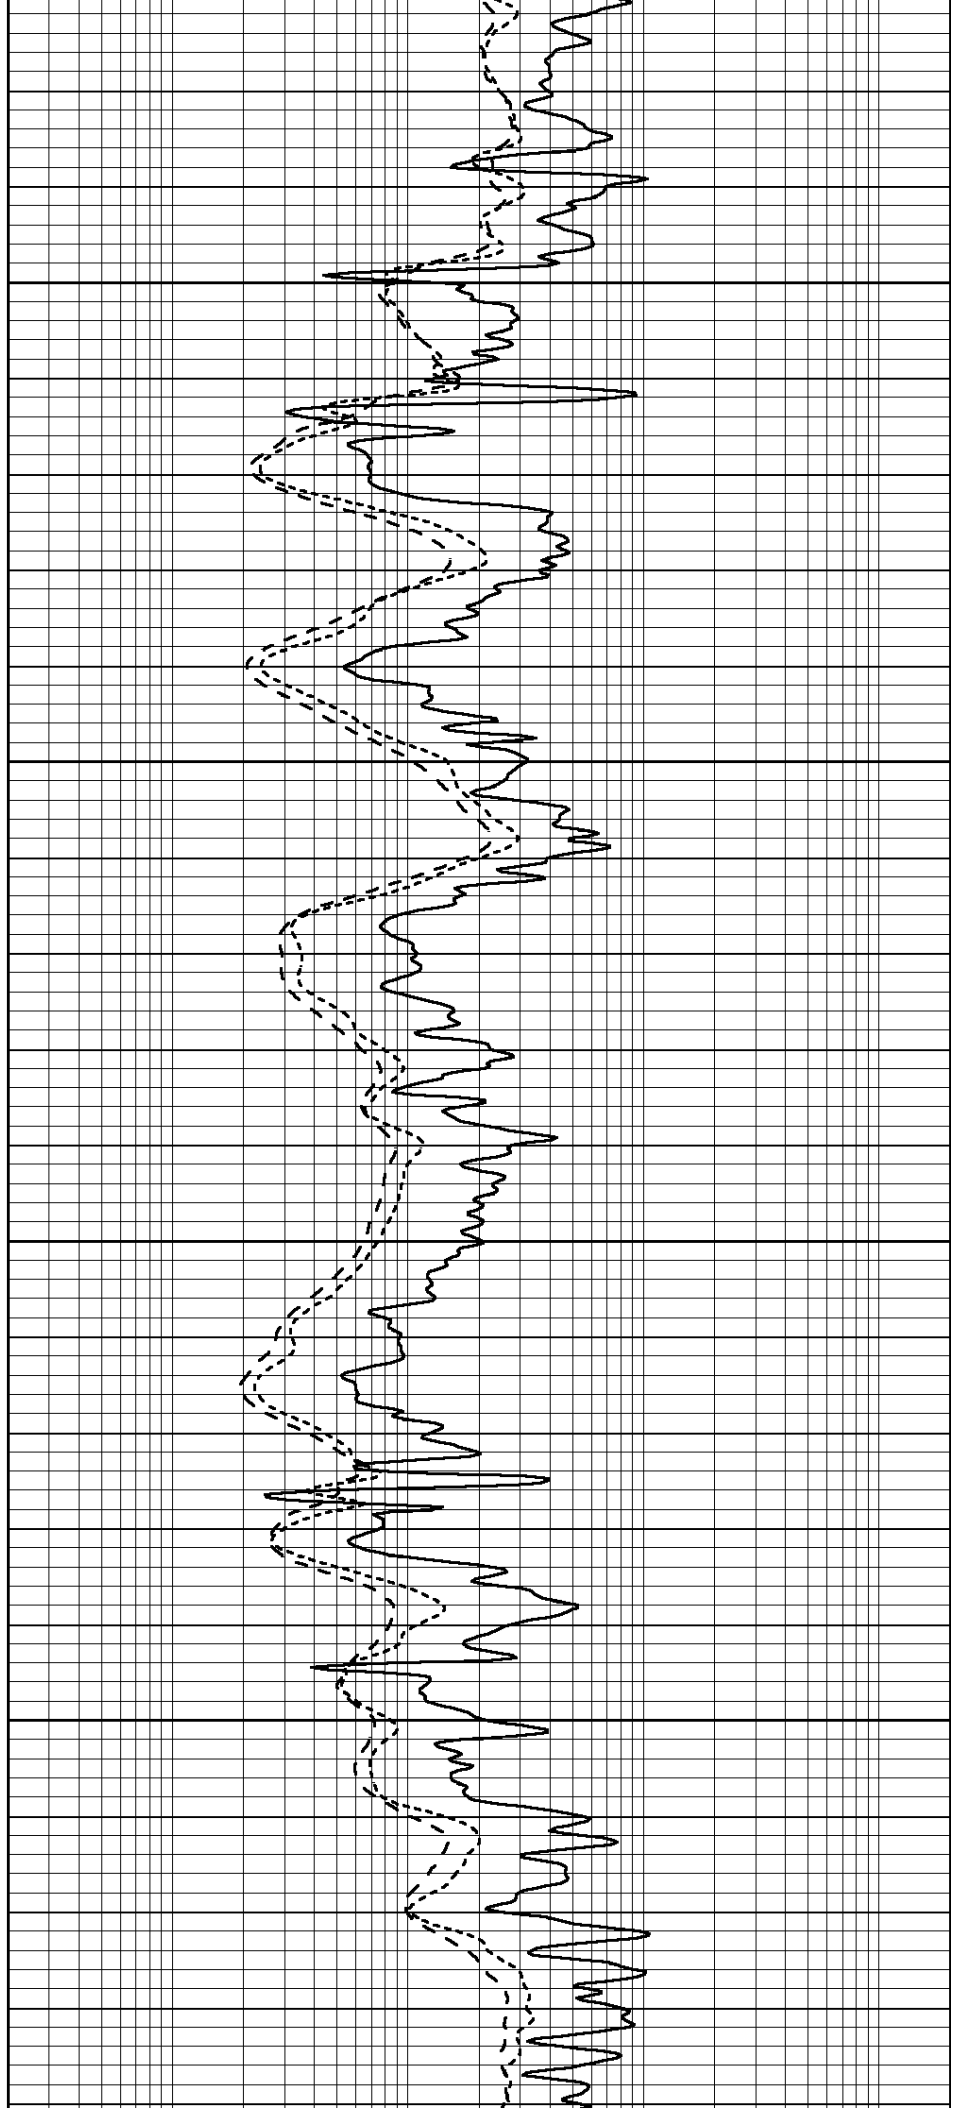

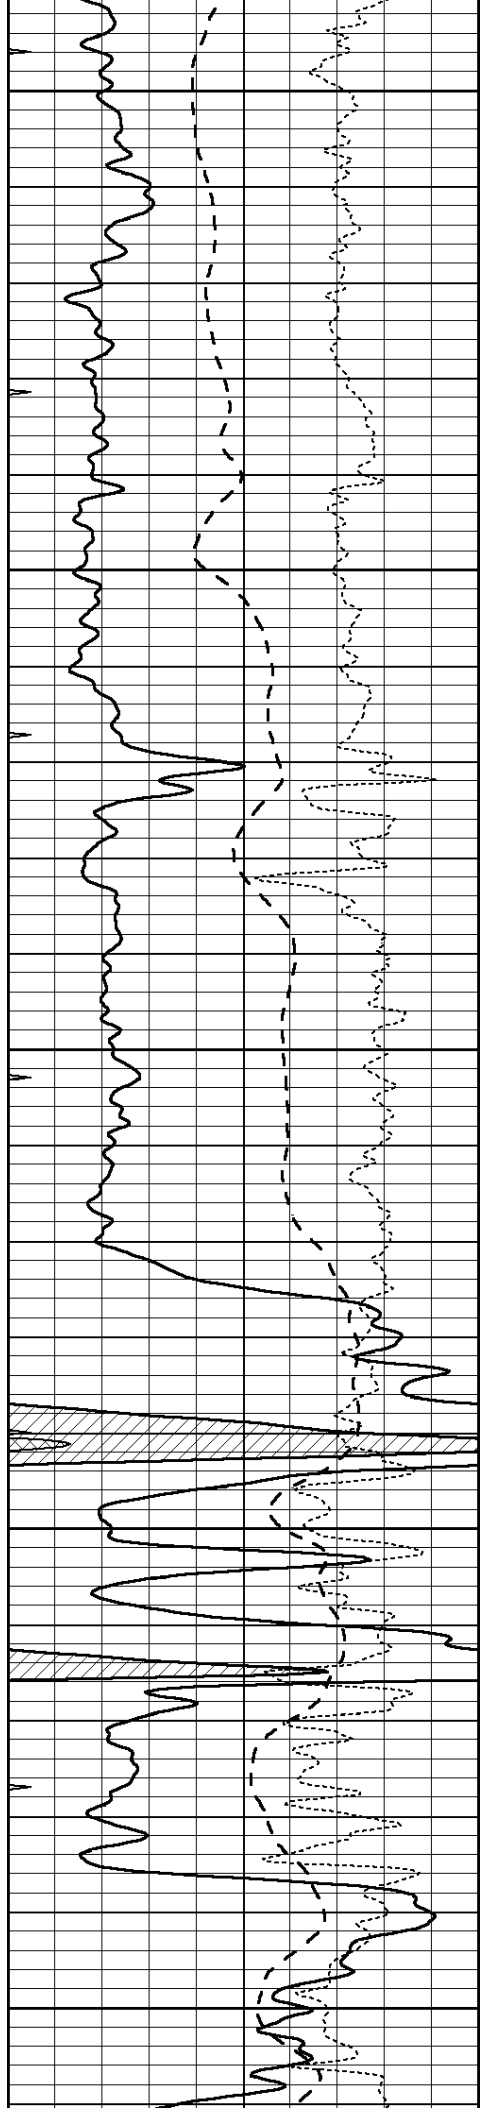


3900


3950

4000

4050

4100

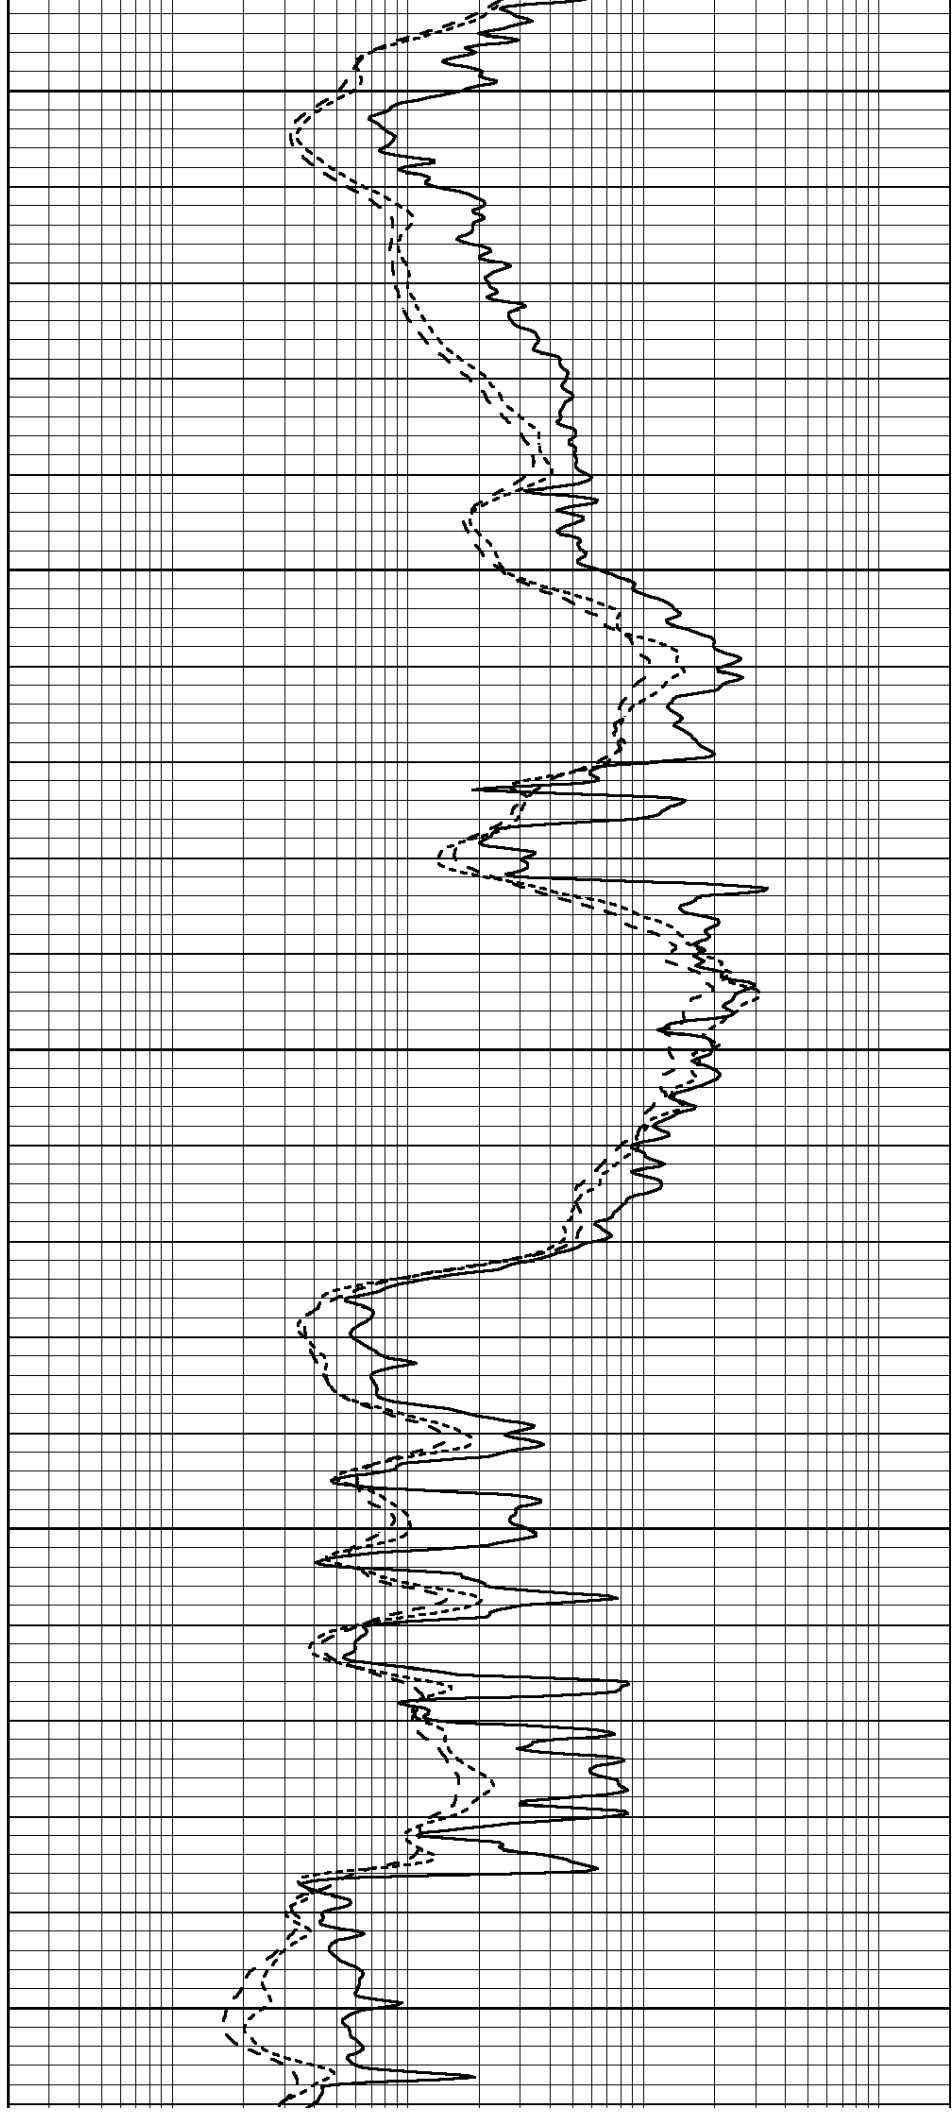

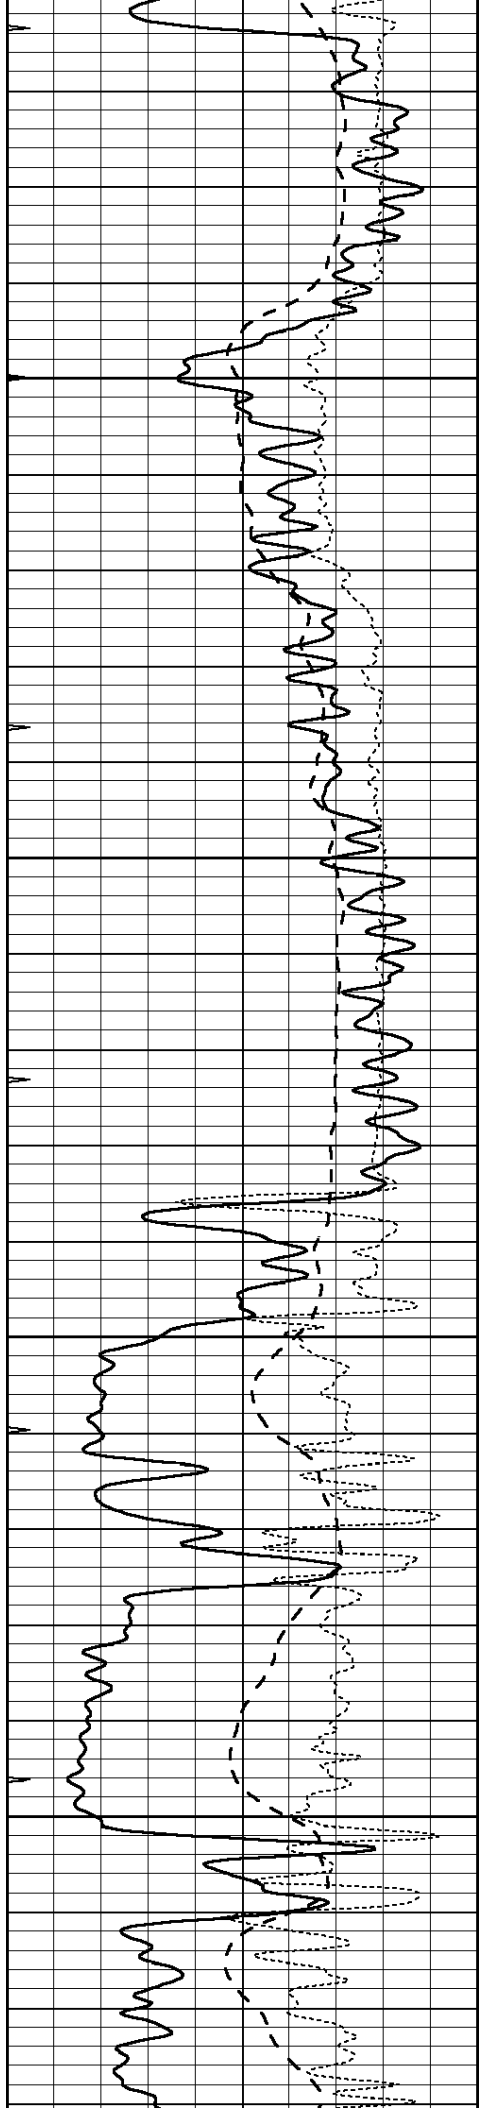



4150

4200

4250

4300

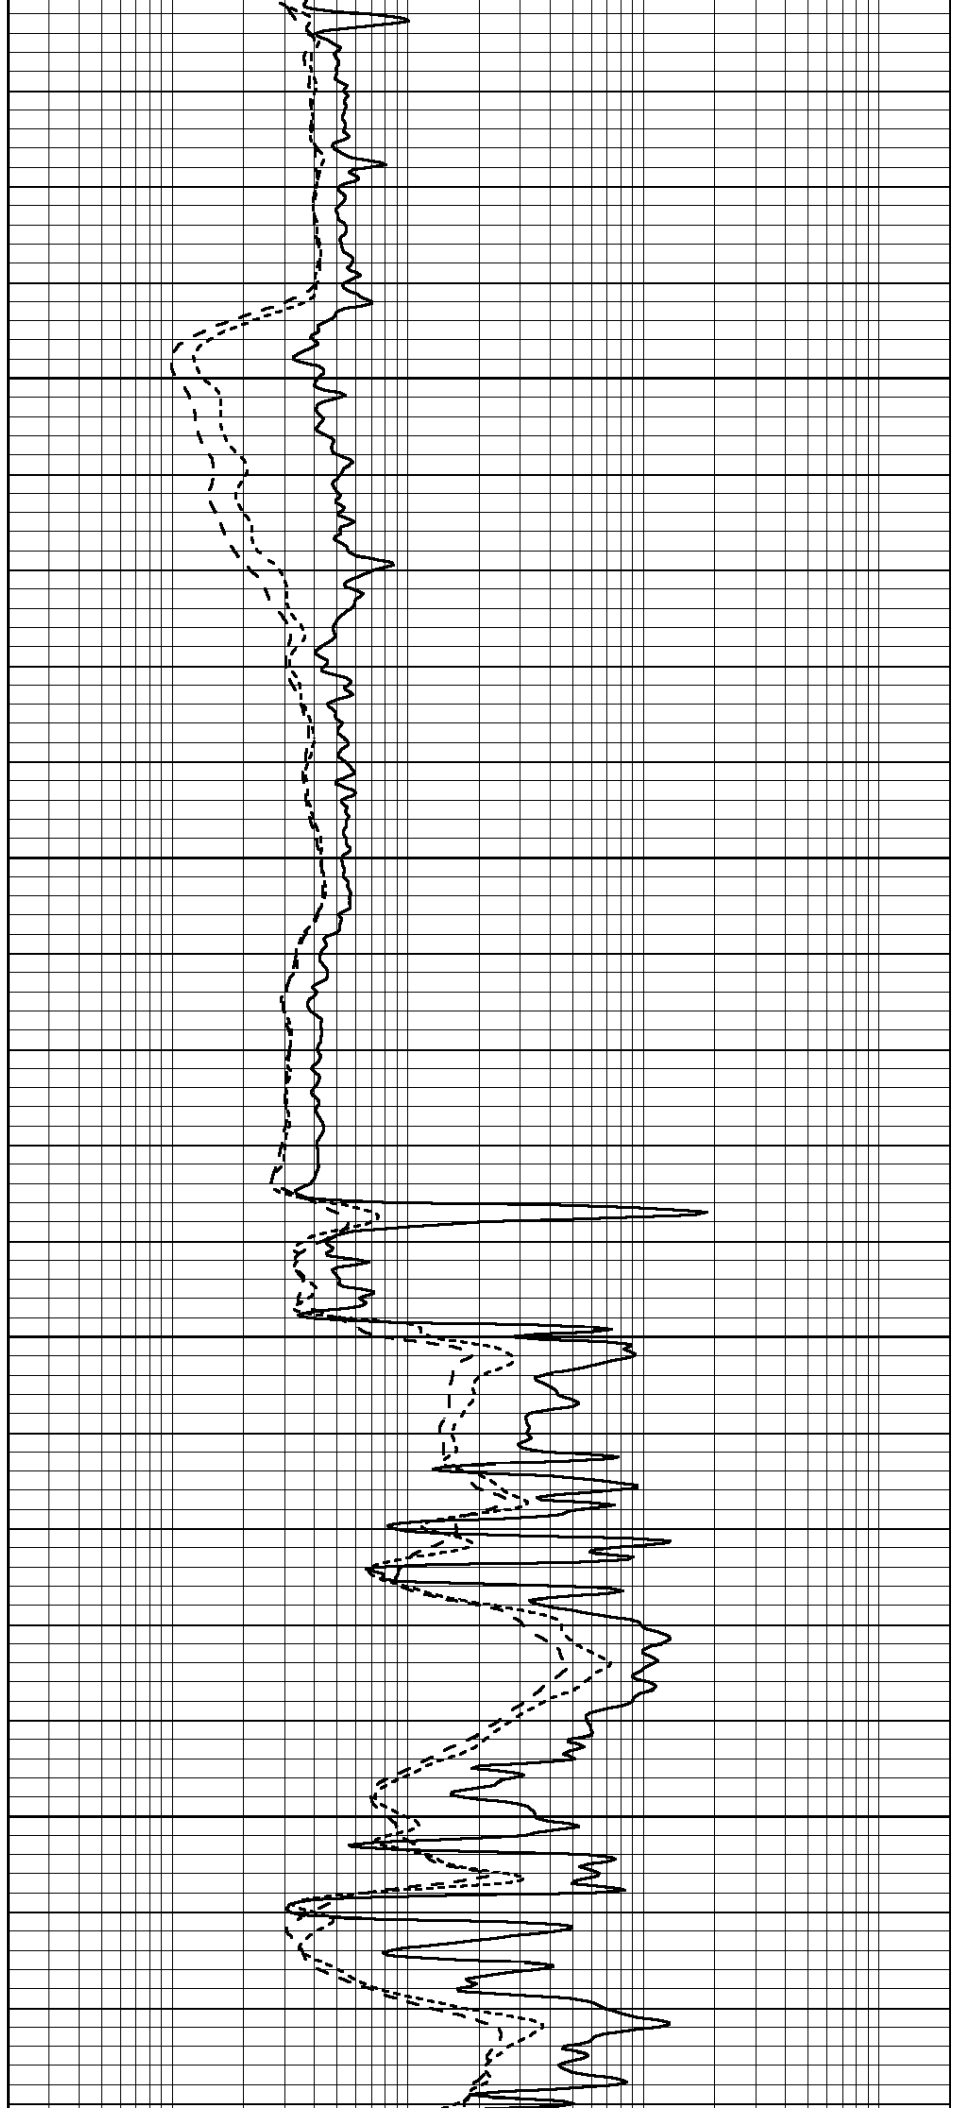

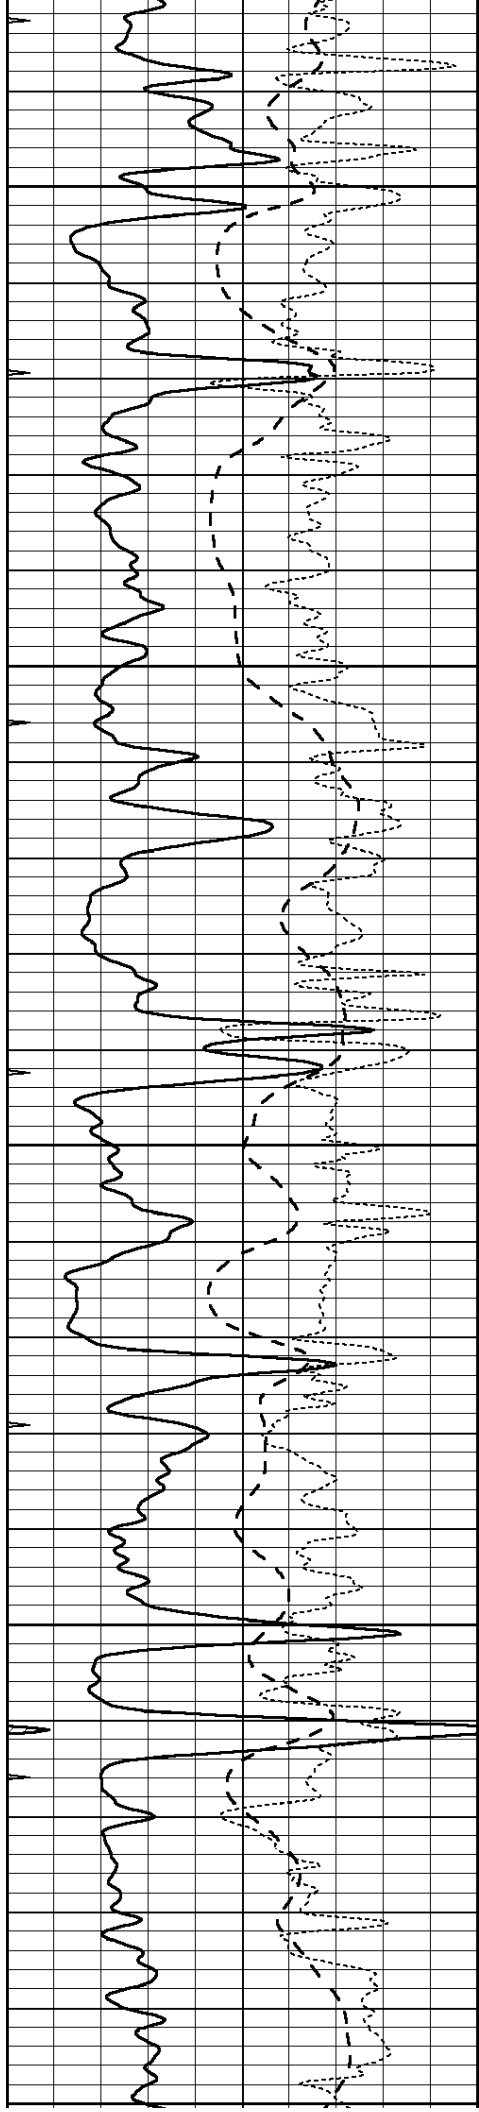


4350


4400

4450

4500

4550

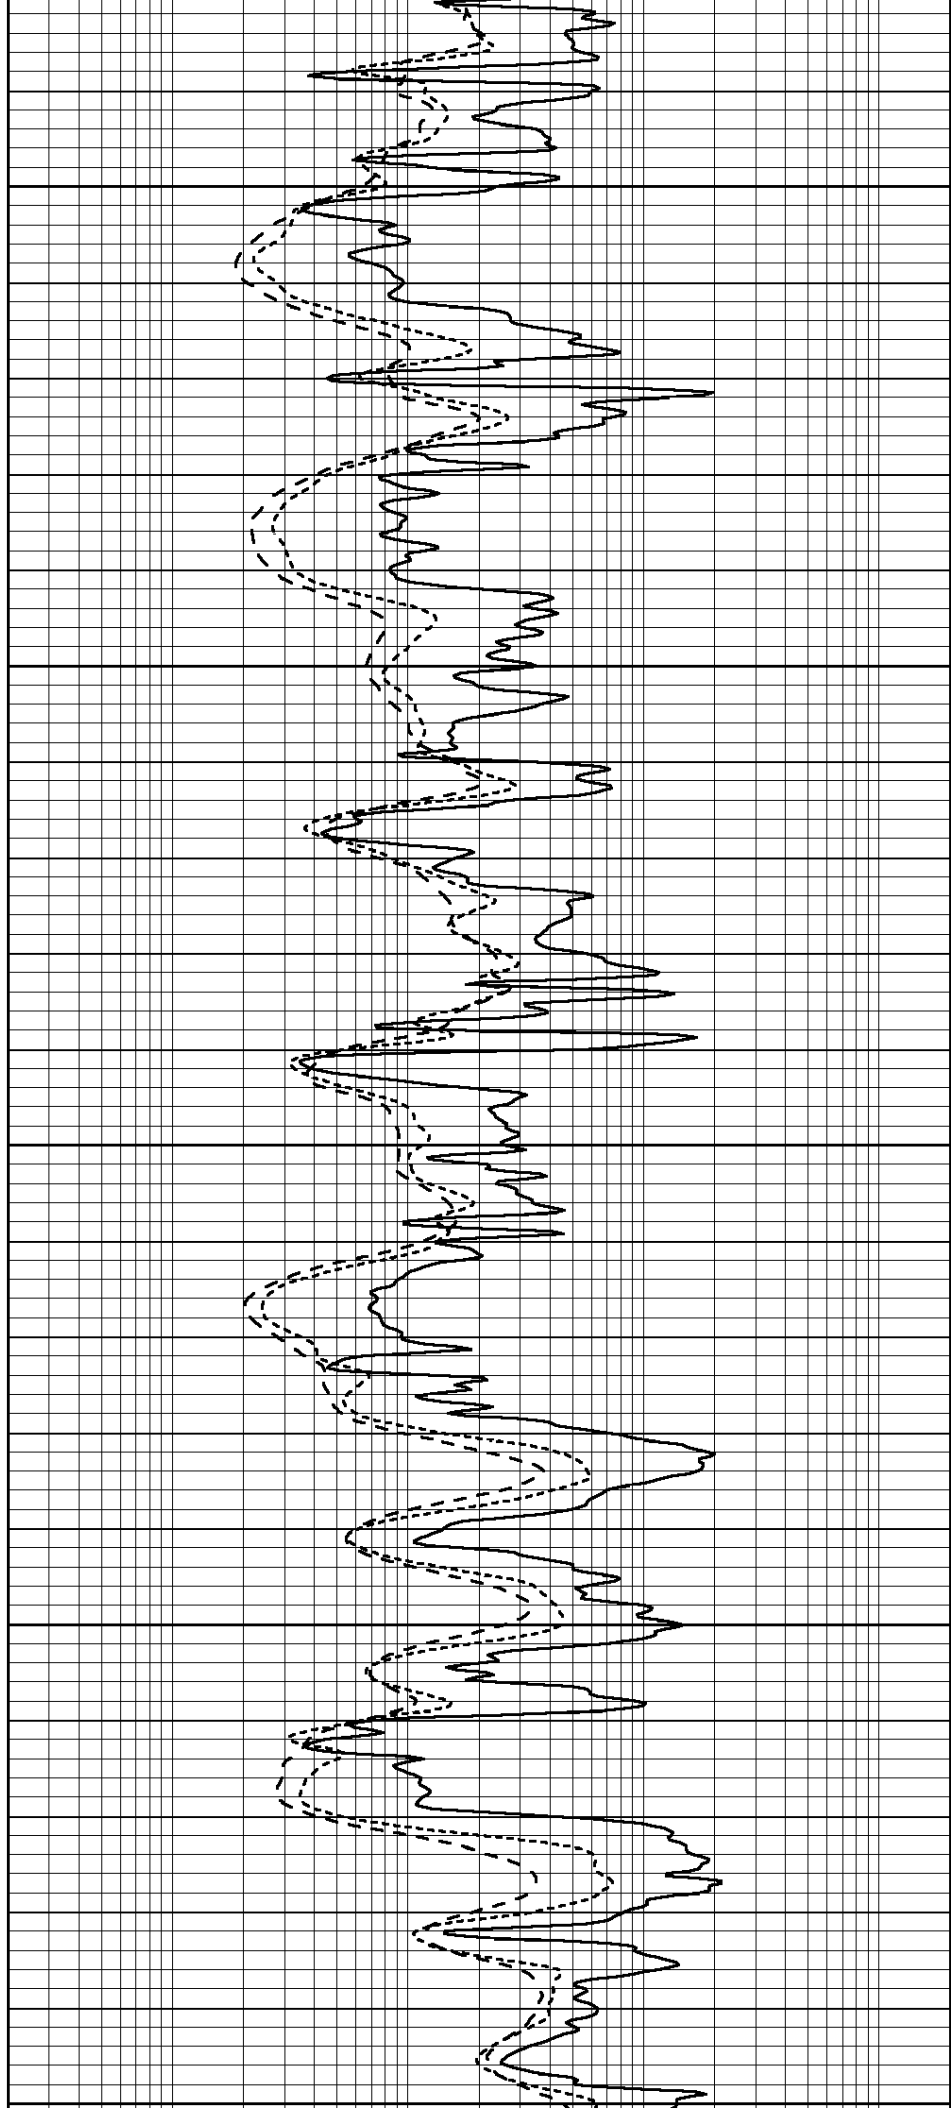

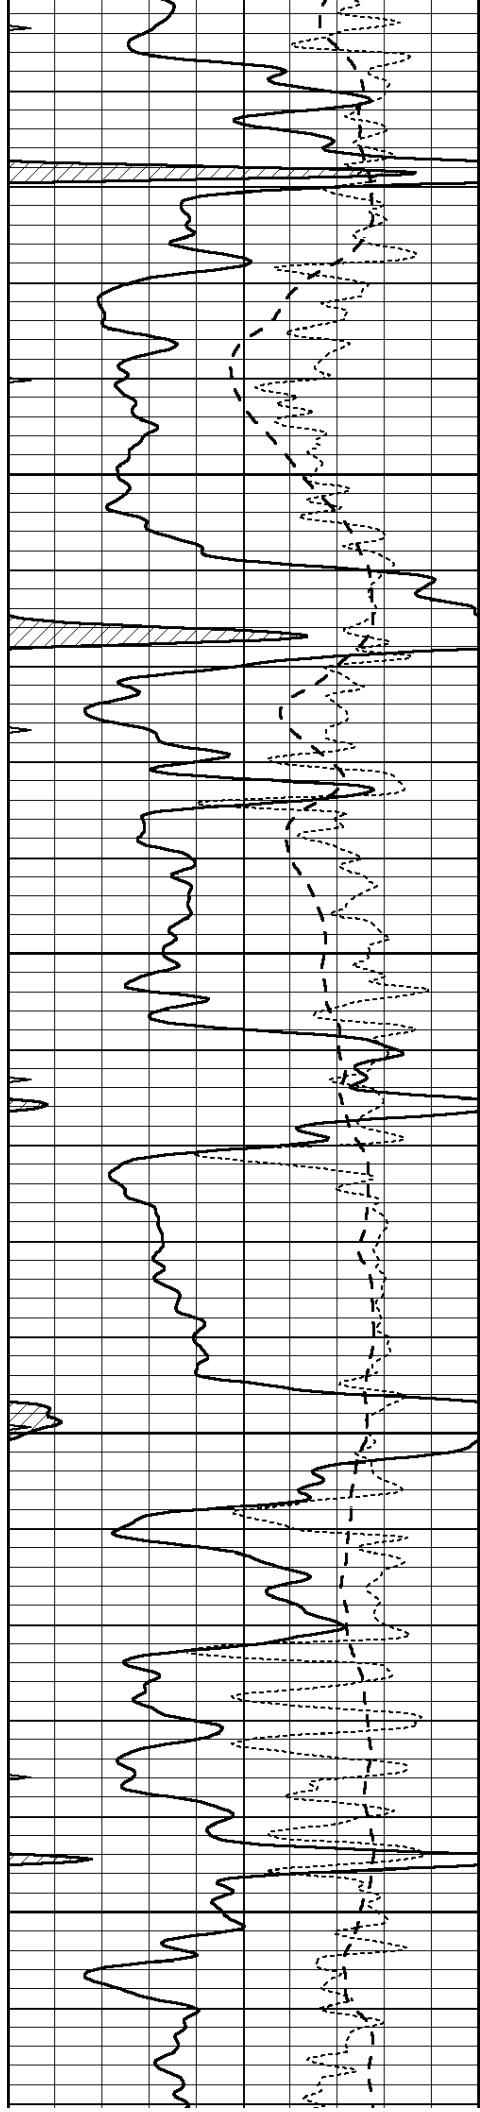


4550


4600

4650

4700

4750

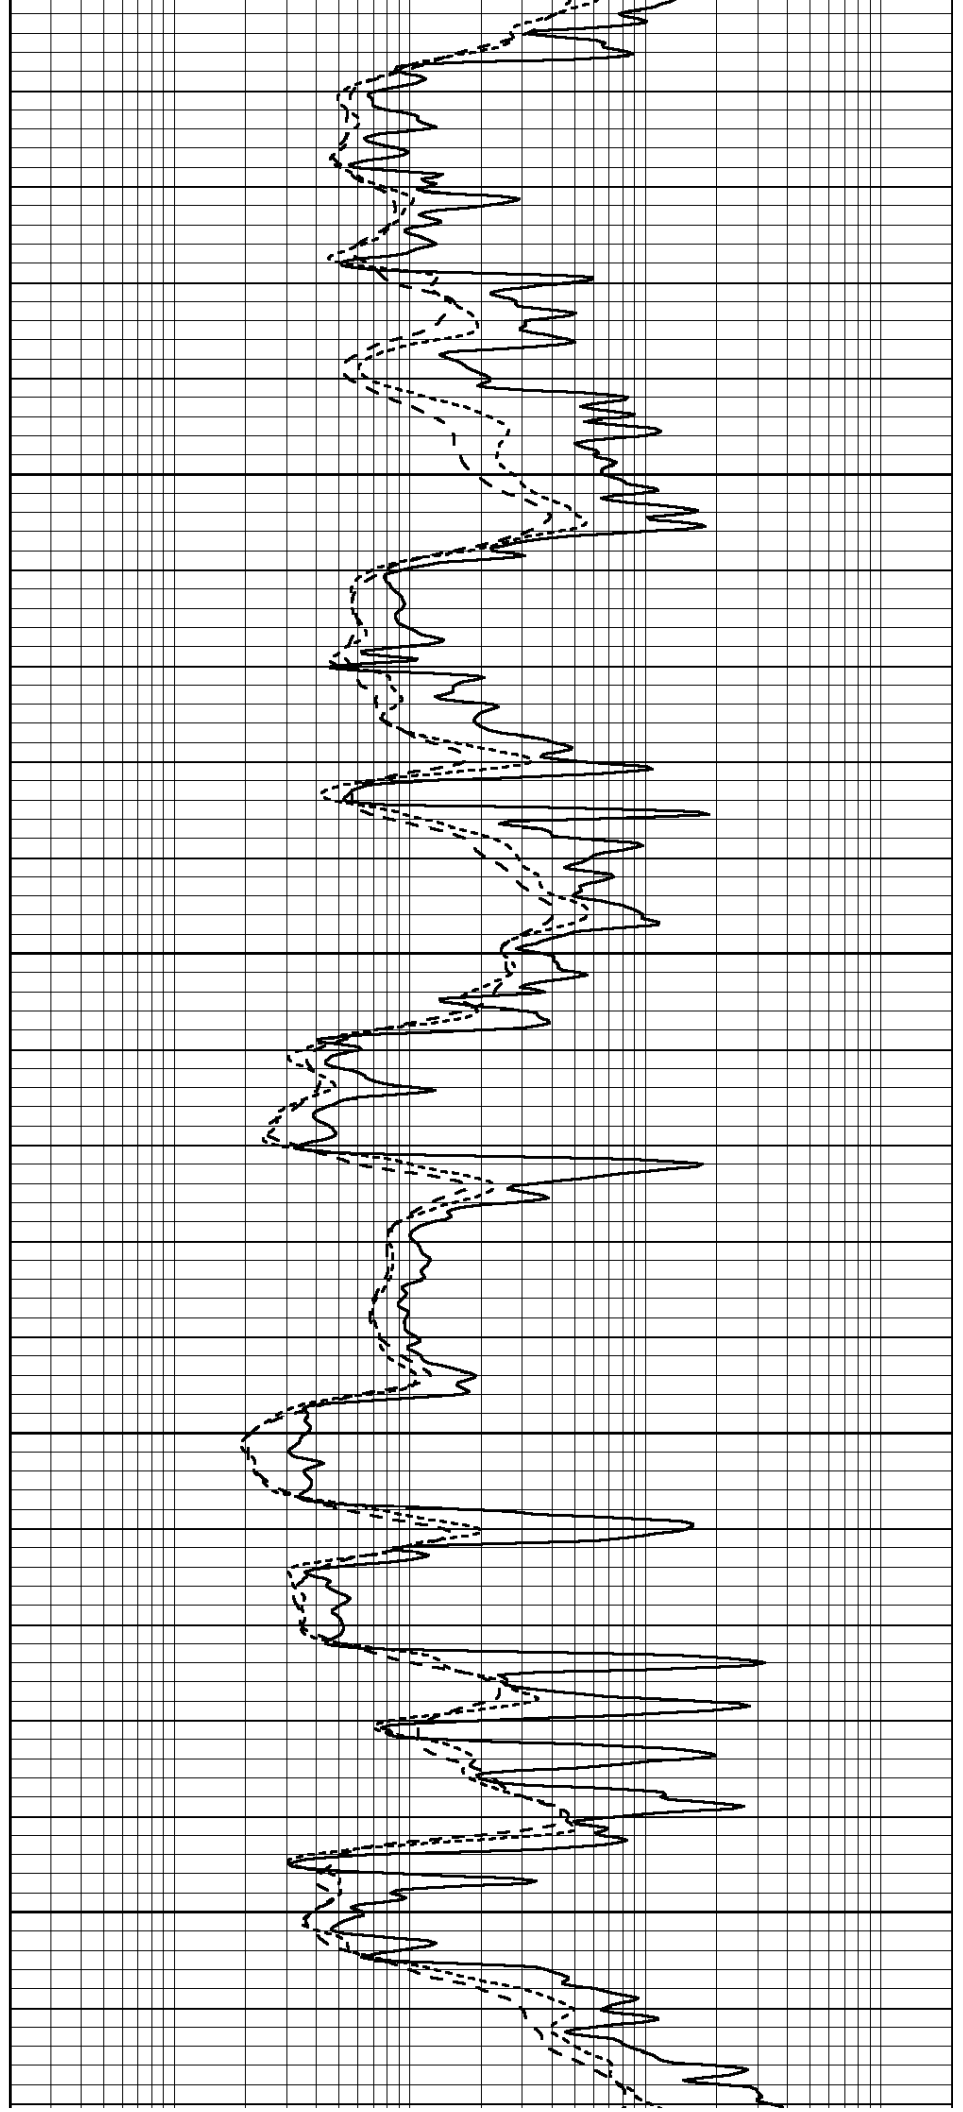

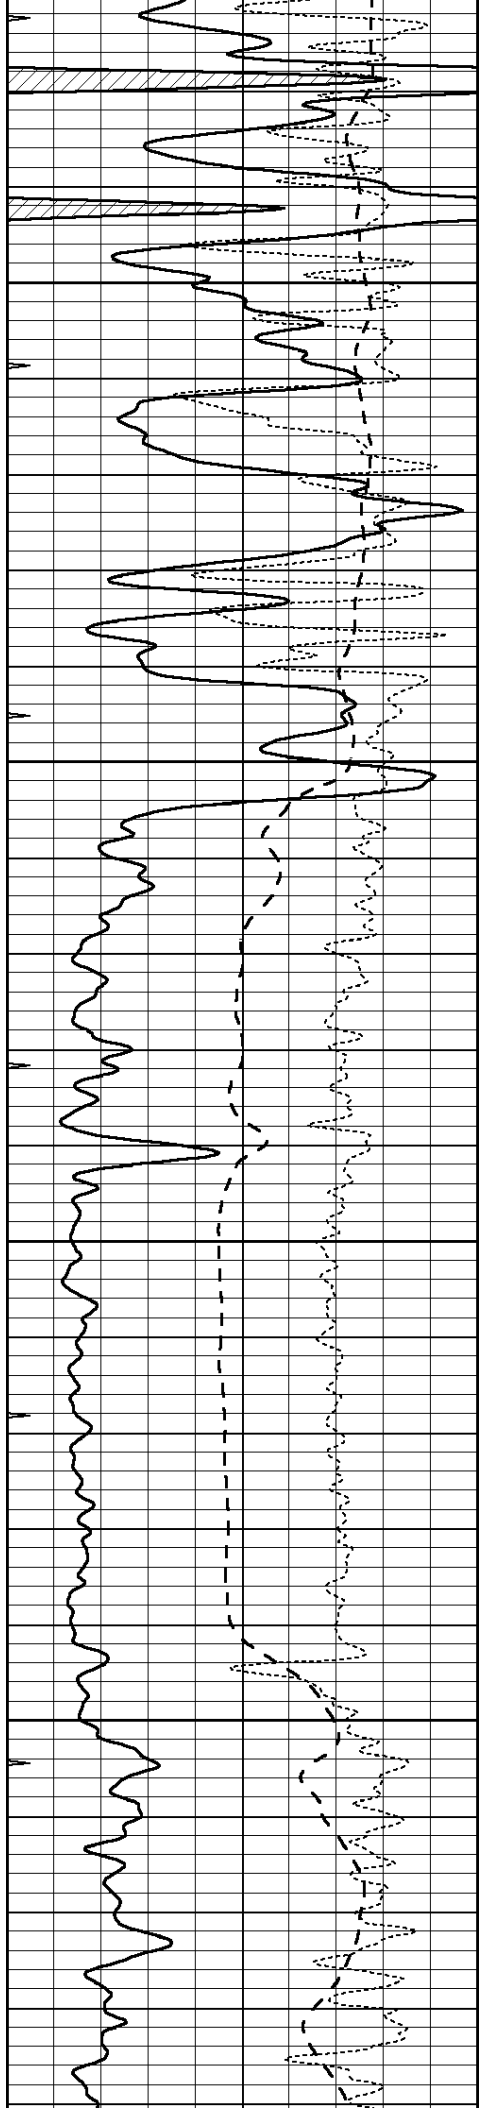



4800

4850

4900

4950

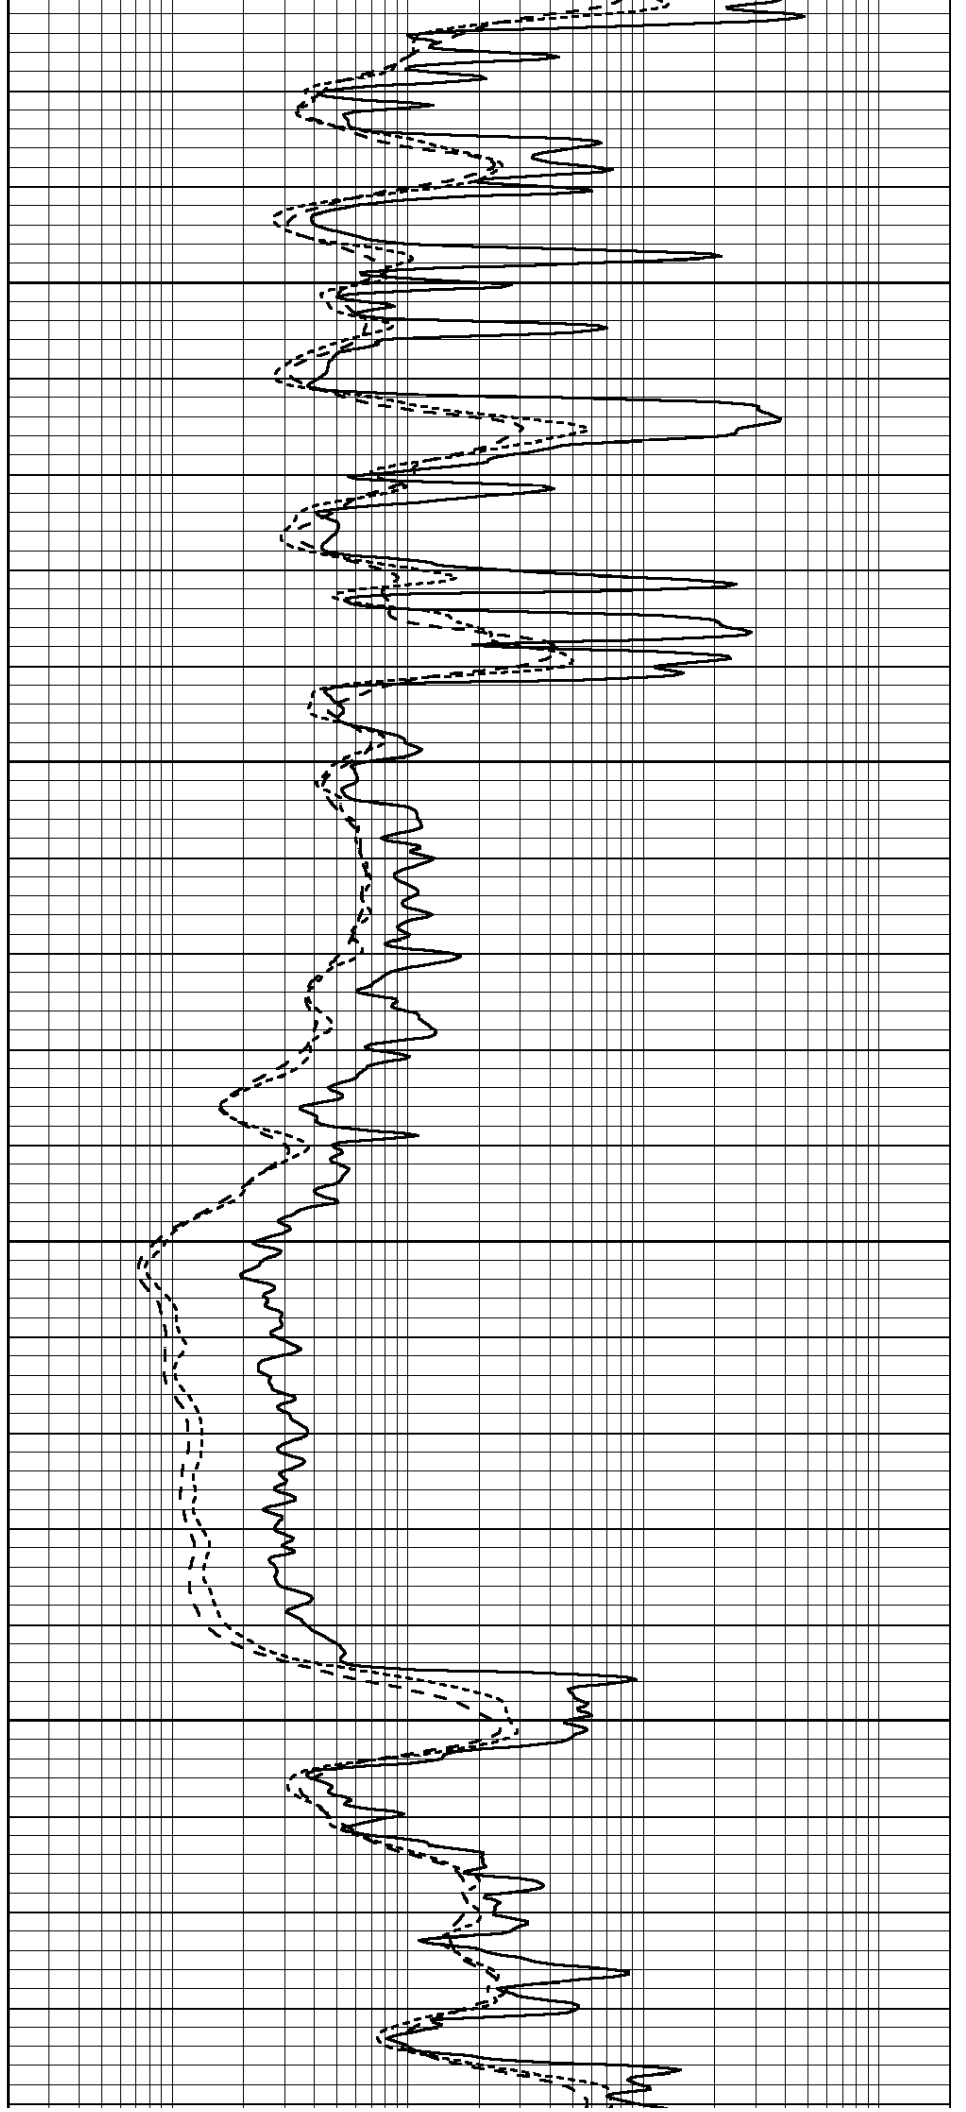

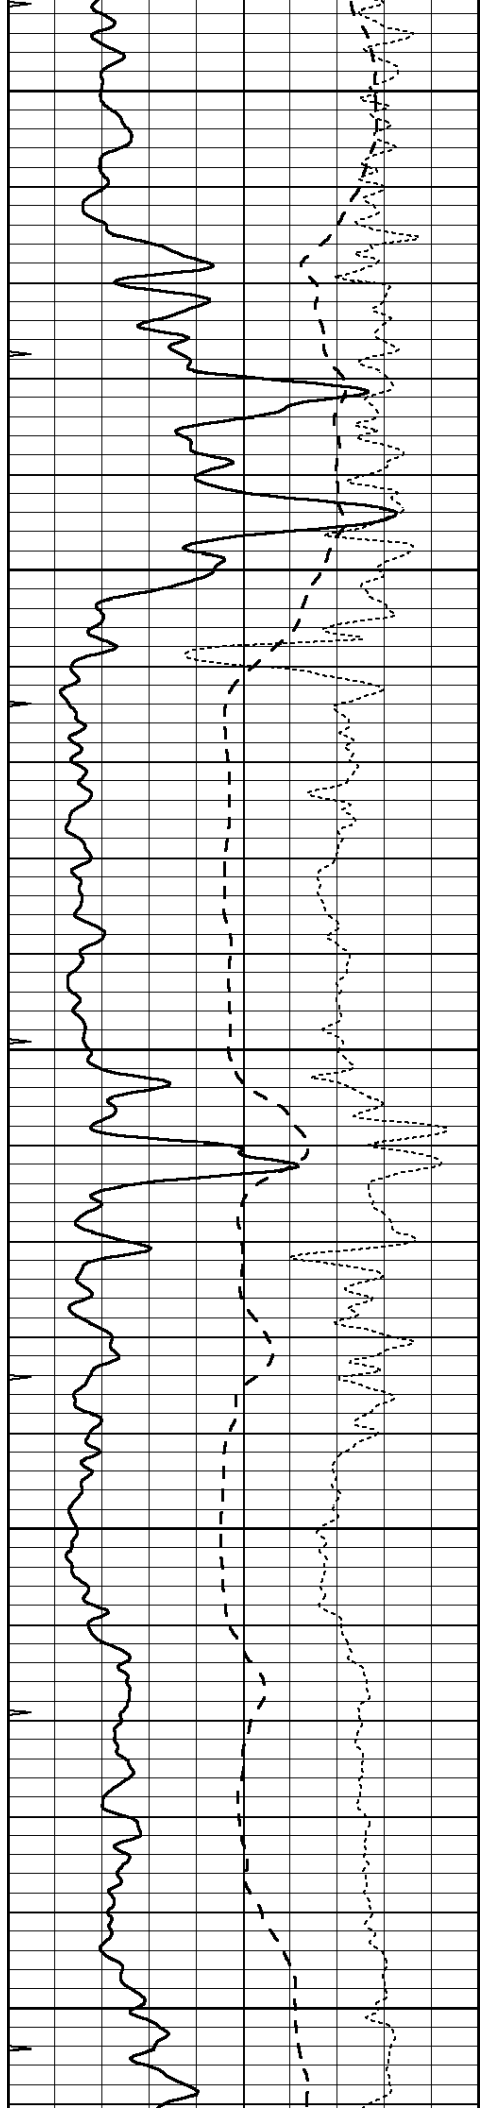


5000


5050

5100

5150


5200

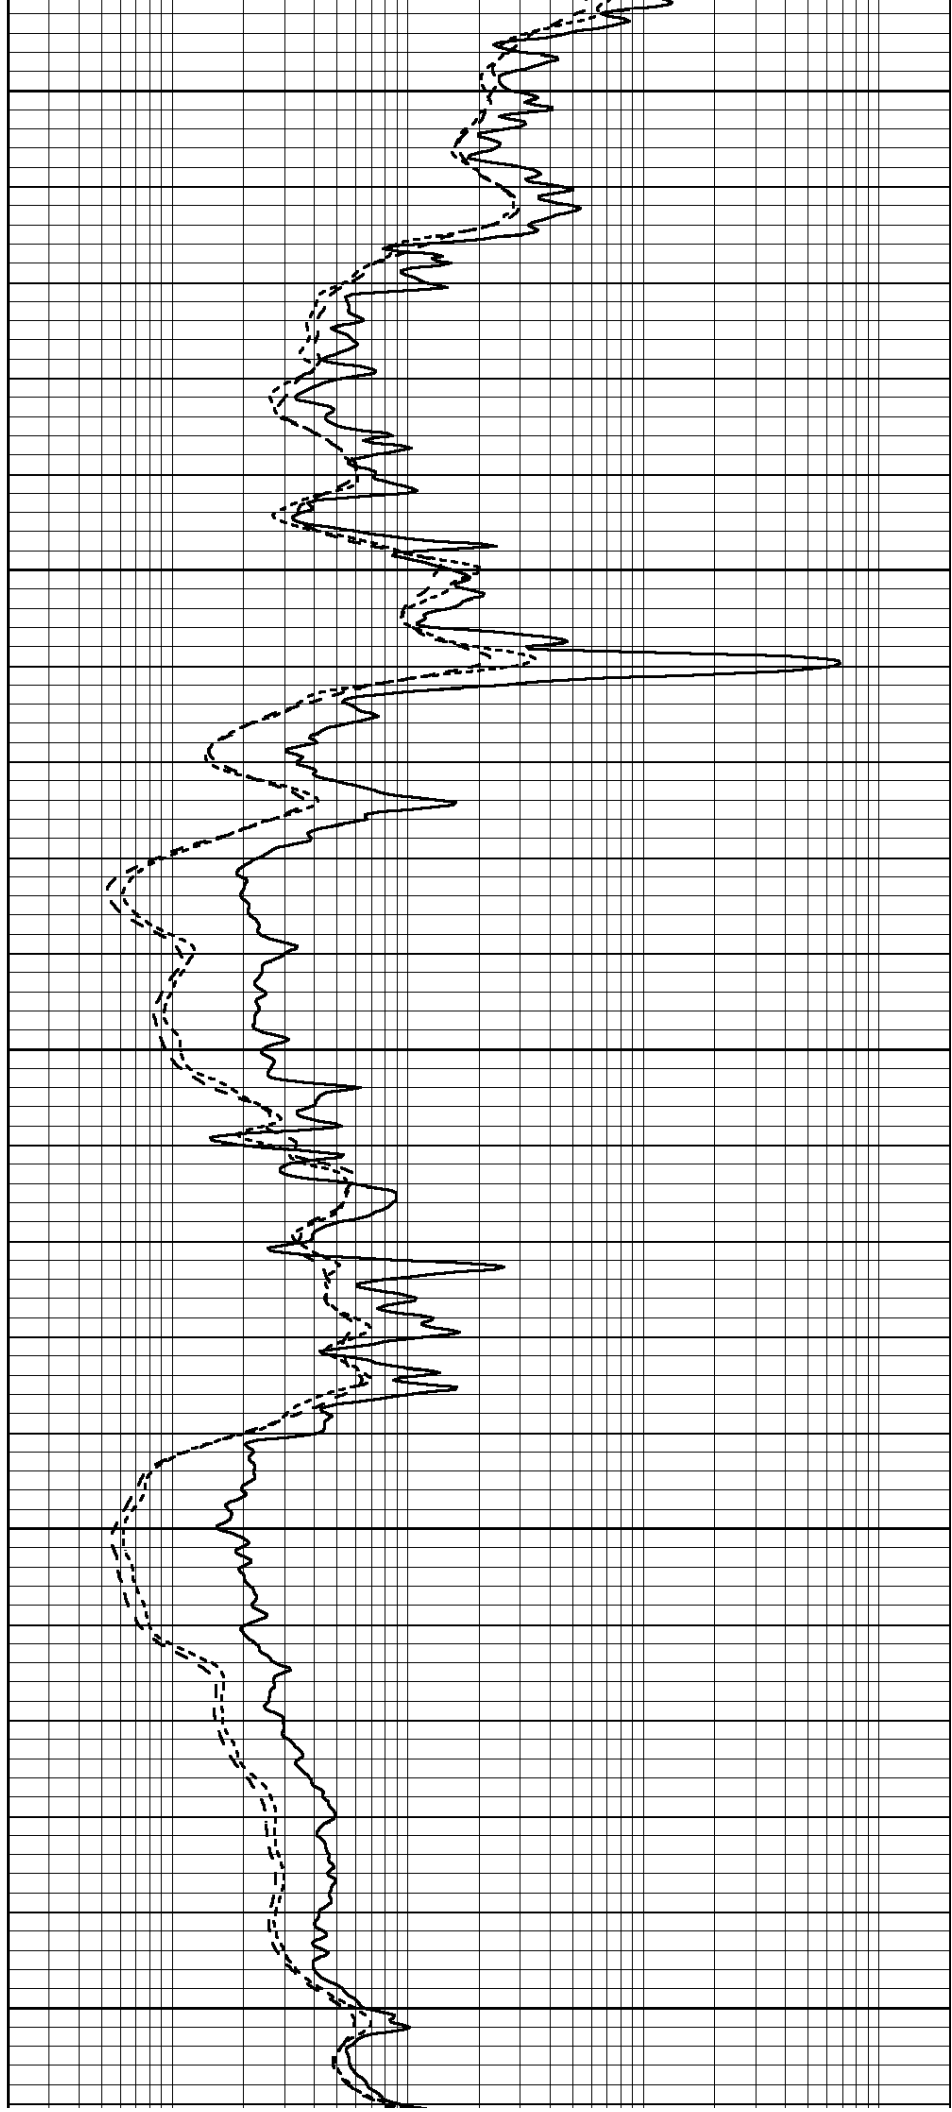

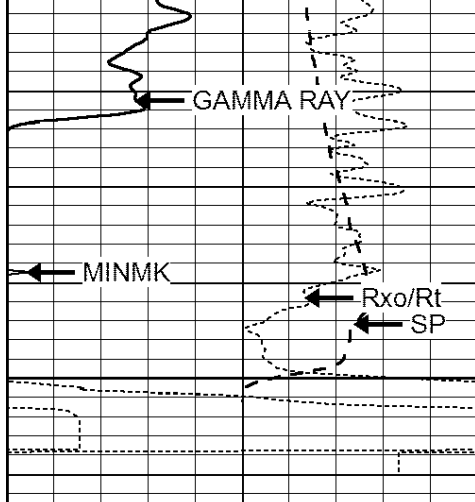


5250  
LTD 5254

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

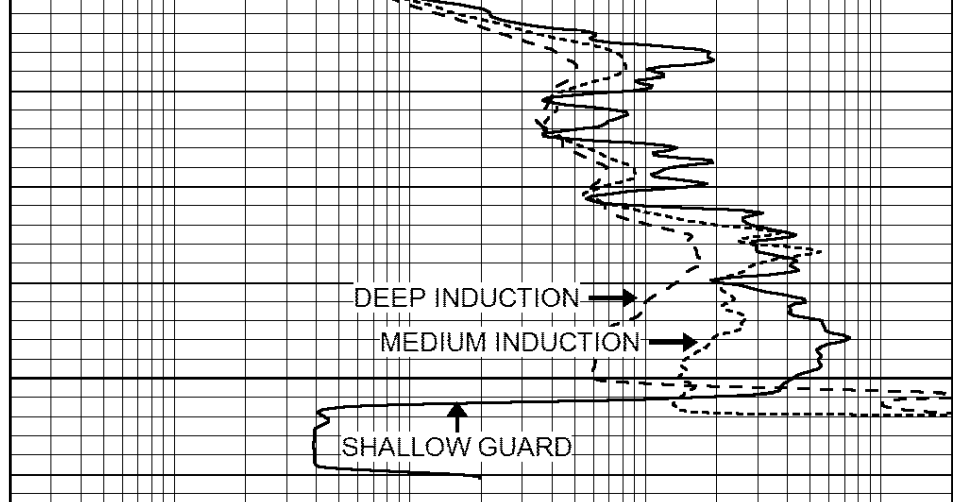

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

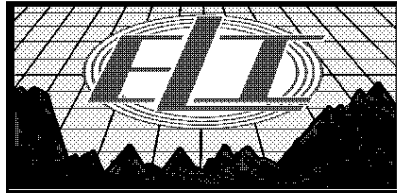


# REPEAT SECTION

Database File: 2120pe.db  
 Dataset Pathname: pass2.1  
 Presentation Format: \_dil  
 Dataset Creation: Sun Dec 17 23:25:22 2017 by Calc Open-Cased 090629  
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

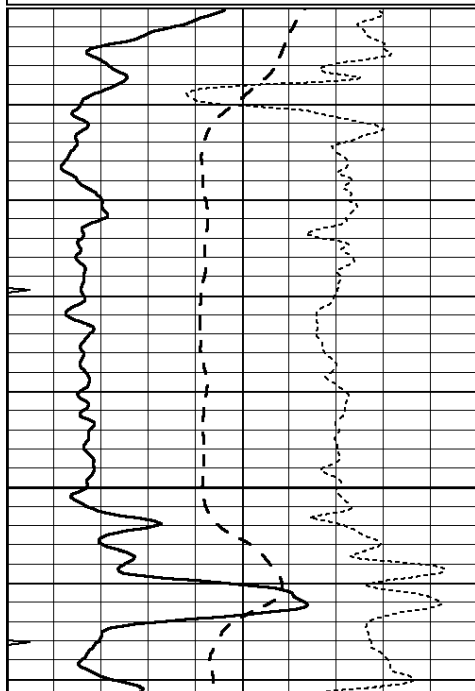

5000

5100

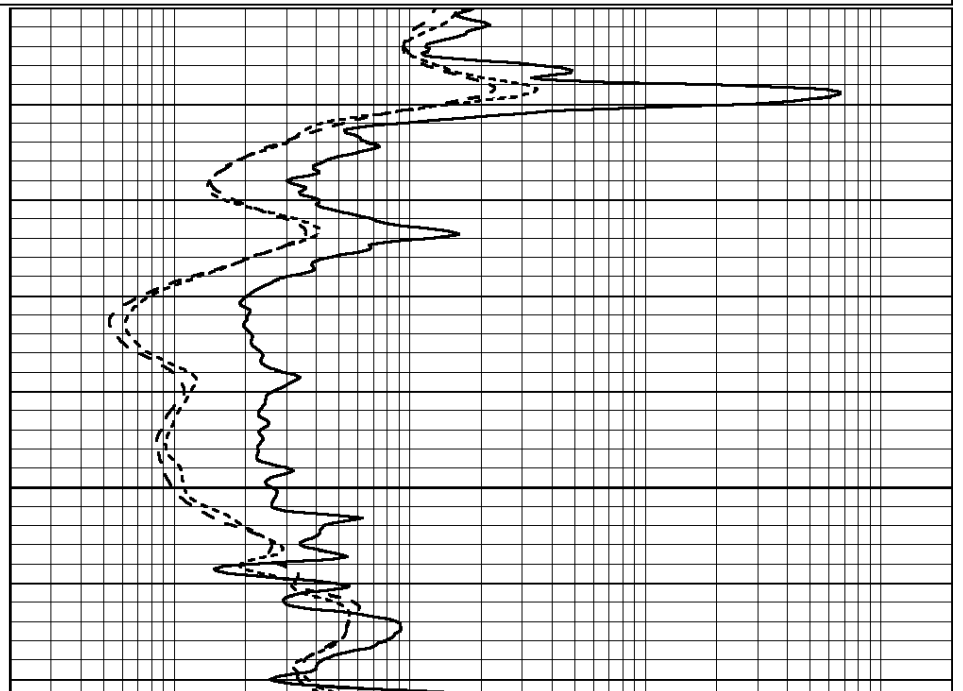

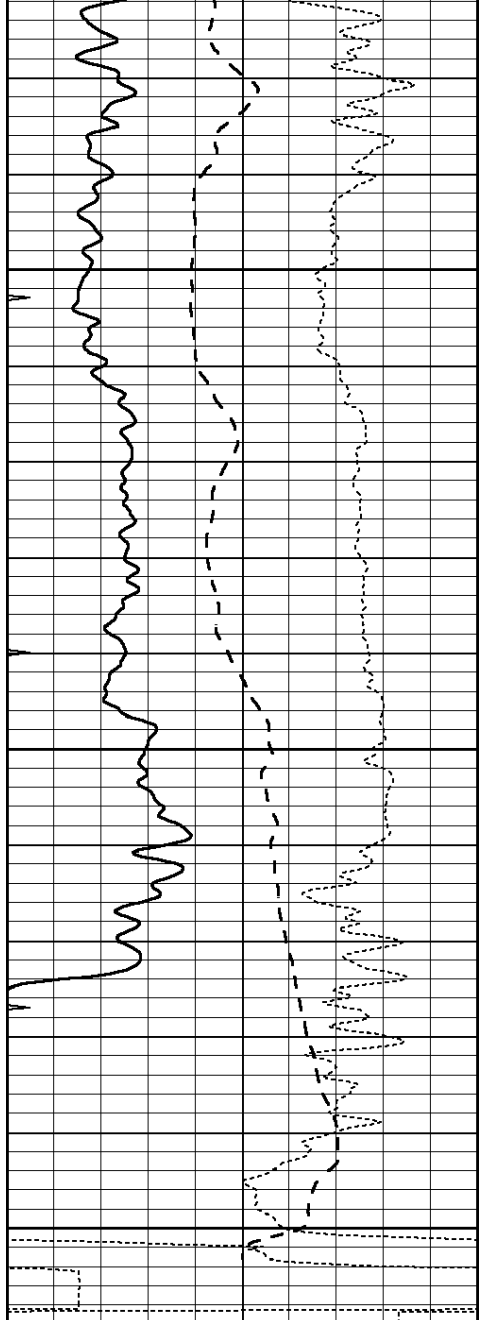


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

5150

5200

5250

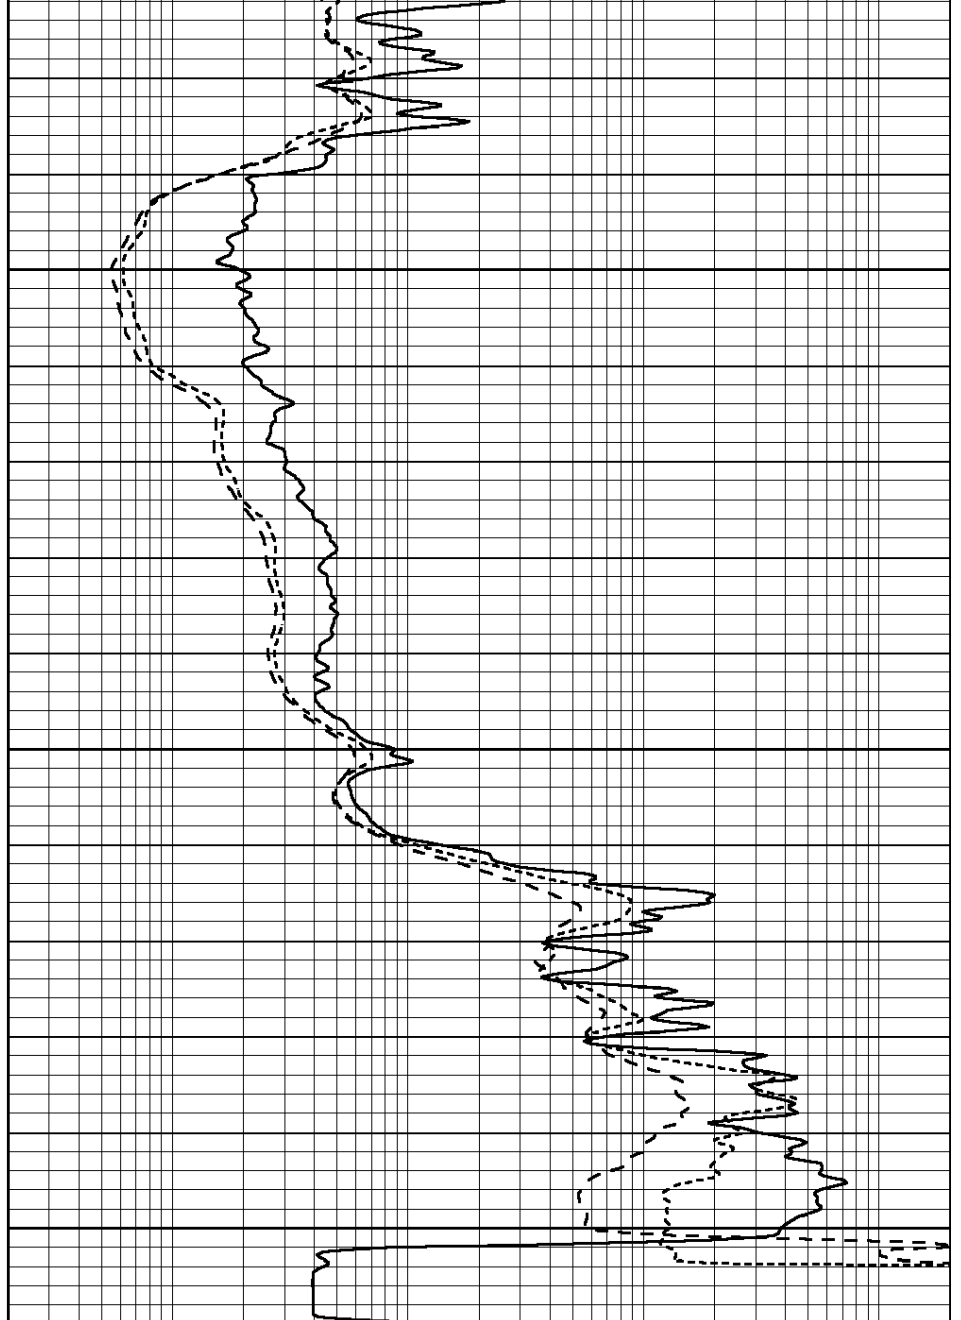

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Calibration Report

Database File: pe2.db  
 Dataset Pathname: pass2  
 Dataset Creation: Mon Aug 21 11:58:02 2017 by Log Open-Cased 090629

Dual Induction Calibration Report

Serial-Model: PROBE8-DILG  
 Surface Cal Performed: Mon Aug 21 11:58:18 2017  
 Downhole Cal Performed: Mon Aug 21 11:58:21 2017  
 After Survey Verification Performed: Mon Aug 21 11:58:23 2017

Surface Calibration

Readings

References

Results

Loop:	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.029	0.796	V	0.000	464.000	mmho/m	590.000	-12.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration								
	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification								
	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report  
Serial: 002      Model: PRB

Master Calibration					Performed Mon Aug 21 11:56:41 2017			
	Background	Magnesium	Aluminum	Sandstone				
Window 1	833.6	7394.2	2287.3	8111.8				cps
Window 2	768.9	6322.3	1995.6	6800.0				cps
Window 3	621.5	3261.9	1186.4	3380.9				cps
Window 4	184.2	185.7	184.9	184.8				cps
Long Space	0.0	5553.4	1226.6	6031.1				cps
Short Space	1.2	1307.5	903.9	1387.7				cps
Rho		1.7100	2.5900	1.3800				g/cc
Pe		0.0000	2.5700	1.5500				
Rib Angle	: 46.3	Rib Slope	: 1.045	Density/Spine Ratio				: 0.566
Spine Angle	: 76.3	Spine Slope	: 4.090	Spine Intercept				: -20.7

Before Survey Verification					Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0				cps
Window 2	0.0	0.0	0.0	0.0				cps
Window 3	0.0	0.0	0.0	0.0				cps
Window 4	0.0	0.0	0.0	0.0				cps
Long Space	0.0	0.0	0.0	0.0				cps
Short Space	0.0	0.0	0.0	0.0				cps
Measured Rho		0.0000	0.0000	0.0000				g/cc
Measured Correction		0.0000	0.0000	0.0000				g/cc
Measured Pe			0.0000	0.0000				

After Survey Verification      Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 6I  
Tool Model: G

CALIBRATION

Detector	Readings	Target	Normalization
Short Space	1.00 cps	1.00 cps	1.0000
Long Space	1.00 cps	1.00 cps	1.0000

PRE-SURVEY VERIFICATION

	Detector	Readings	Measured	Target
1)	Short Space	cps		
	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	
3)	Short Space	cps		
	Long Space	cps	pu	

POST-SURVEY VERIFICATION

	Detector	Readings	Measured	Target
1)	Short Space	cps		
	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	pu
3)	Short Space	cps		
	Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: GR6  
Tool Model: OPEN  
Performed: Mon Aug 21 11:59:01 2017

Calibrator Value: 150.0 GAPI

Background Reading: 0.0 cps  
Calibrator Reading: 276.0 cps

Sensitivity: 0.5500 GAPI/cps