

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-165-21464-00-00  
Spot: SWNENW Sec/Twnshp/Rge: 36-16S-20W  
4180 feet from S Section Line, 3480 feet from E Section Line  
Lease Name: HOUSE Well #: 3-36  
County: RUSH Total Vertical Depth: 3860 feet

Operator License No.: 33146

Op Name: HEMBREE ENERGY, LLC

Address: 1801 E 56TH AVE.  
HUTCHINSON, KS 67502

String	Size	Depth (ft)	Pulled (ft)	Comment
DVT		1371		WITH 400 SX CMT
PROD	5.5	3851	0	WITH 175 SX CMT
SURF	8.625	301		

Well Type: OIL

UIC Docket No:

Date/Time to Plug: 05/19/2006 3:30 PM

Plug Co. License No.: 33695

Plug Co. Name: MID-KAN WELL SERVICE, LLC

Proposal Revd. from: FRED HEMBREE

Company: HEMBREE ENERGY

Phone: (620) 728-1632

Proposed PUMP 15 SX GEL & 50 SX CMT AT 3275'. PULL TUBING. CIRCULATE CMT TO SURFACE. PULL OUT  
Plugging TUBING. TOP OFF 5 1/2". PRESSURE TEST CASING.

Method:

Plugging Proposal Received By: RICHARD LACEY

Date/Time Plugging Completed: 05/19/2006 6:50 PM

WitnessType: COMPLETE (100%)

KCC Agent: RICHARD LACEY

Actual Plugging Report:

DV TOOL @ 1371' WITH 400 SX CMT. CASING BAD AT 3277'. COULDN'T GET PAST THAT POINT. PUMPED 15 SX GEL & 50 SX CMT AT 3275' THROUGH TUBING. PULLED TUBING TO 1400'. CIRCULATED CMT TO SURFACE WITH 135 SX CMT. PULLED TUBING OUT OF HOLE. TOPPED OFF 5 1/2" CASING WITH 25 SX CMT. PRESSURE TESTED 8 5/8" X 5 1/2" TO 500 PSI WITH 10 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3851	3860	OH	


INVOICED

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND ACID.

Plugged through: TBG

DATE 5-25-06  
WV. PG. 2006061712

District: 01

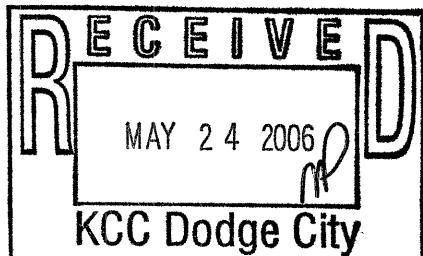

Signed Richard W. Lacey  
(TECHNICIAN)

Form CP-283

RECEIVED  
MAY 25 2006  
KCC WICHITA

PCT