

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-31534-00-01
Spot: NWSENE Sec/Twnshp/Rge: 30-23S-14W
3630 feet from S Section Line, 990 feet from E Section Line
Lease Name: CADMAN Well #: 4
County: STAFFORD Total Vertical Depth: 3840 feet

Operator License No.: 3911
Op Name: RAMA OPERATING CO., INC.
Address: 101 S. MAIN
STAFFORD, KS 67578

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	3839	1440	
SURF	8.625	268		

\$ 124.80

Well Type: EOR UIC Docket No: E15604.2 Date/Time to Plug: 05/18/2006 9:00 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: PUMP 50 SX CMT & DISPLACE TO 3000'. PLUG AT 900' WITH 15 SX GEL - 50 SX CMT. PLUG AT 300' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 05/19/2006 9:45 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:

ANHYDRITE = 887'. PACKER & TUBING FISH 3720'-1550'. PUMPED 50 SX COMMON CMT & DISPLACED TO 3000'. WELL REMAINED STATIC. PUMPED PLUGS THROUGH TUBING. 1ST PLUG AT 900' WITH 15 SX GEL - 50 SX CMT. GOOD CIRCULATION. 2ND PLUG AT 300' WITH 100 SX CMT. POOR CIRCULATION. 3RD PLUG AT 40' WITH 150 SX CMT. NO CIRCULATION. 05/19/06: CMT AT 100' & GOING DOWN HOLE. RAN TUBING TO 82' & TAGGED CMT. PULLED TUBING TO 64' & CIRCULATED CMT TO SURFACE WITH 100 SX CMT. MUST HAVE HAD A SHALLOW HOLE IN SURFACE PIPE.

Perfs:


Top	Bot	Thru	Comments
3785	3800		

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND ACID.

Plugged through: CSG

INVOICED
DATE: 5-25-06
BY: 2006061715

District: 01

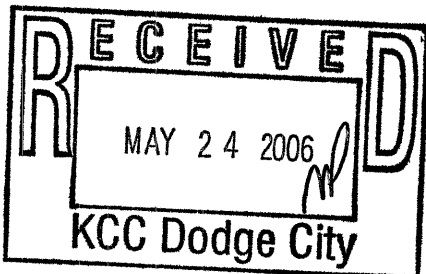

Signed Richard W. Lacey
(TECHNICIAN)

RECEIVED
MAY 25 2006
KCC WICHITA

Form 2006
PCT