

KANSAS CORPORATION COMMISSION  
OIL & GAS CONSERVATION DIVISION  
**WELL PLUGGING APPLICATION**  
Please TYPE Form and File ONE Copy

**RECEIVED**  
MAY 25 2006  
KCC WICHITA

Form CP-1  
September 2003  
This Form must be Typed  
Form must be Signed  
All blanks must be Filled

API # 15 - 113-20899-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued,

indicate original spud or completion date \_\_\_\_\_.

Well Operator: Hess Oil Company KCC License #: 5663  
(Owner / Company Name) (Operator's)

Address: P. O. Box 1009 City: McPherson

State: Kansas Zip Code: 67460 Contact Phone: ( 620 ) 241 - 4640

Lease: Maude Smith Well #: 4 Sec. 15 Twp. 19 S. R. 2  East  West

*Handwritten:* NW/4, SE, SW

Spot Location / QQQQ \_\_\_\_\_ County: McPherson

1007 Feet (in exact footage) From  North /  South (from nearest outside section corner) Line of Section (Not Lease Line)

3285 Feet (in exact footage) From  East /  West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One:  Oil Well  Gas Well  D&A  Cathodic  Water Supply Well  
 SWD Docket # \_\_\_\_\_  ENHR Docket # \_\_\_\_\_  Other: \_\_\_\_\_

Conductor Casing Size: \_\_\_\_\_ Set at: \_\_\_\_\_ Cemented with: \_\_\_\_\_ Sacks

Surface Casing Size: 8-5/8" Set at: 212' Cemented with: 130 Sacks

Production Casing Size: 4-1/2" Set at: 2960' Cemented with: 40 Sacks

List (ALL) Perforations and Bridgeplug Sets: Perf 2947'-2954' Open hole 2960'-2962'

Elevation: 1562' ( G.L. /  K.B.) T.D.: 2962' P.B.T.D.: \_\_\_\_\_ Anhydrite Depth: \_\_\_\_\_  
(Stone Corral Formation)

Condition of Well:  Good  Poor  Casing Leak  Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Per district office instructions

Is Well Log attached to this application as required?  Yes  No Is ACO-1 filed?  Yes  No

If not explain why? \_\_\_\_\_

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Bryan Hess

Phone: ( ) -

Address: \_\_\_\_\_ City / State: \_\_\_\_\_

Plugging Contractor: Hess Oil Company KCC License #: 5663  
(Company Name) (Contractor's)

Address: P.O. Box 1009, McPherson, KS 67460 Phone: ( ) -

Proposed Date and Hour of Plugging (if known?): June 30, 2006

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 5-23-06 Authorized Operator / Agent: Bryan Hess  
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202



# Blackstone Drilling, Inc.

Box 1184 • 528 West Kansas • Phone (316) 241-1250

McPHERSON, KANSAS 67460

November 19, 1981

RECEIVED  
MAY 25 2006  
KCC WICHITA

COMPANY: LARRY MOORE RANCH, INC.  
 CONTRACTOR: BLACKSTONE DRILLING, INC.  
 FARM: MAUDE SMITH #4  
 LOCATION: NW SE SW Section 15-19S-2W,  
 McPherson County, Kansas  
 COMMENCED: November 12, 1981  
 COMPLETED: November 19, 1981  
 ELEVATION:

---

|      |    |      |              |
|------|----|------|--------------|
| 0    | to | 40   | Clay         |
| 40   | to | 85   | Sand         |
| 85   | to | 215  | Shale        |
| 215  | to | 610  | Shale & Lime |
| 610  | to | 1360 | Lime & Shale |
| 1360 | to | 1710 | Shale & Lime |
| 1710 | to | 1990 | Lime         |
| 1990 | to | 2320 | Shale & Lime |
| 2320 | to | 2535 | Lime         |
| 2535 | to | 2735 | Lime & Shale |
| 2735 | to | 2962 | Lime         |
|      |    | 2962 | T. D.        |

---

Cut 12 $\frac{1}{4}$ " hole to 212' and run 214' of 8 5/8" surface pipe, cemented with 130 sacks of cement at 212'. Plug down at 1:15 P. M., November 12, 1981. Run 2966 of 4 $\frac{1}{2}$ " casing, cemented with 40 sacks of cement at 2960'. Plug down at 1:00 A. M., November 19, 1981.


TOPS: MISSISSIPPI - 2944'

Measurements taken from K. B.


---


### CERTIFICATE

I, P. E. Plouffe, President of Blackstone Drilling, Inc. do hereby certify that the above and foregoing is a true and correct copy of log on your Maude Smith #1, located on the NW SE SW Section 15-19S-2W, McPherson County, Kansas as reflected by the files of Blackstone Drilling, Inc.

  
 P. E. Plouffe, President

Subscribed and sworn to before me a Notary Public in and for McPherson County, Kansas this 20th day of November, 1981.

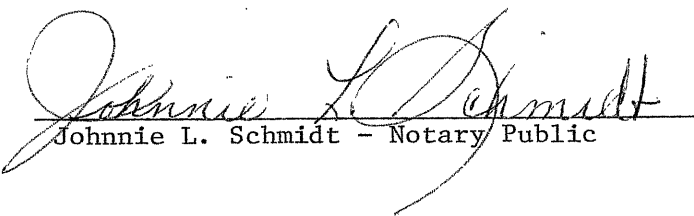  
 Johnnie L. Schmidt - Notary Public





# KANSAS

CORPORATION COMMISSION

Kathleen Sebelius, Governor    Brian J. Moline, Chair    Robert E. Krehbiel, Commissioner    Michael C. Moffet, Commissioner

## NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Hess Oil Company  
PO Box 1009  
McPherson, KS 67460

May 29, 2006

Re: MAUDE SMITH #4  
API 15-113-20899-00-00  
N2SESW 15-19S-2W, 1007 FSL 3285 FEL  
MCPHERSON COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

**Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

**This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.**

Sincerely

District: #2  
3450 N. Rock Road, Suite 601  
Wichita, KS 67226  
(316) 630-4000

David P. Williams  
Production Supervisor