



MICRO LOG

Company L. D. DRILLING, INC.		Company L. D. DRILLING, INC.	
Well #1-6 JETMORE		Well #1-6 JETMORE	
Field WILDCAT		Field WILDCAT	
County HODGEMAN		County HODGEMAN	
State KANSAS		State KANSAS	
Location: API #: 15-083-21978-0000		Other Services CDL/CNL MEL	
Permanent Datum GROUND LEVEL Elevation 2450		Elevation	
Log Measured From KELLY BUSHING 5' A.G.L.		K.B. 2455	
Drilling Measured From KELLY BUSHING		D.F. 2453	
		G.L. 2450	
Date 4/30/20	Run Number TWO		
Depth Driller	4850		
Depth Logger	4850		
Bottom Logged Interval	4848		
Top Log Interval	3800		
Casing Driller	8 5/8" @ 248'		
Casing Logger	248		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 6,800 PPM	
Density / Viscosity	9.7774		
pH / Fluid Loss	9.0/10.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.680 @ 82F		
Rmf @ Meas. Temp	.510 @ 82F		
Rmc @ Meas. Temp	.816 @ 82F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.450 @ 124F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	4:00 P.M.		
Maximum Recorded Temperature	124F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	KIM SHOEMAKER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING E.L.I. WIRELINE SERVICES HAYS, KANSAS (785)628-6395
DIRECTIONS
JETMORE, KS., 6S. ON HWY 283 TO "RD. G", 1E., S. INTO




MAIN SECTION

Database File	4541ddn.db
Dataset Pathname	pass9.2
Presentation Format	micro
Dataset Creation	Thu Apr 30 17:36:55 2020
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	0	MEL15 (Ohm-m)	40

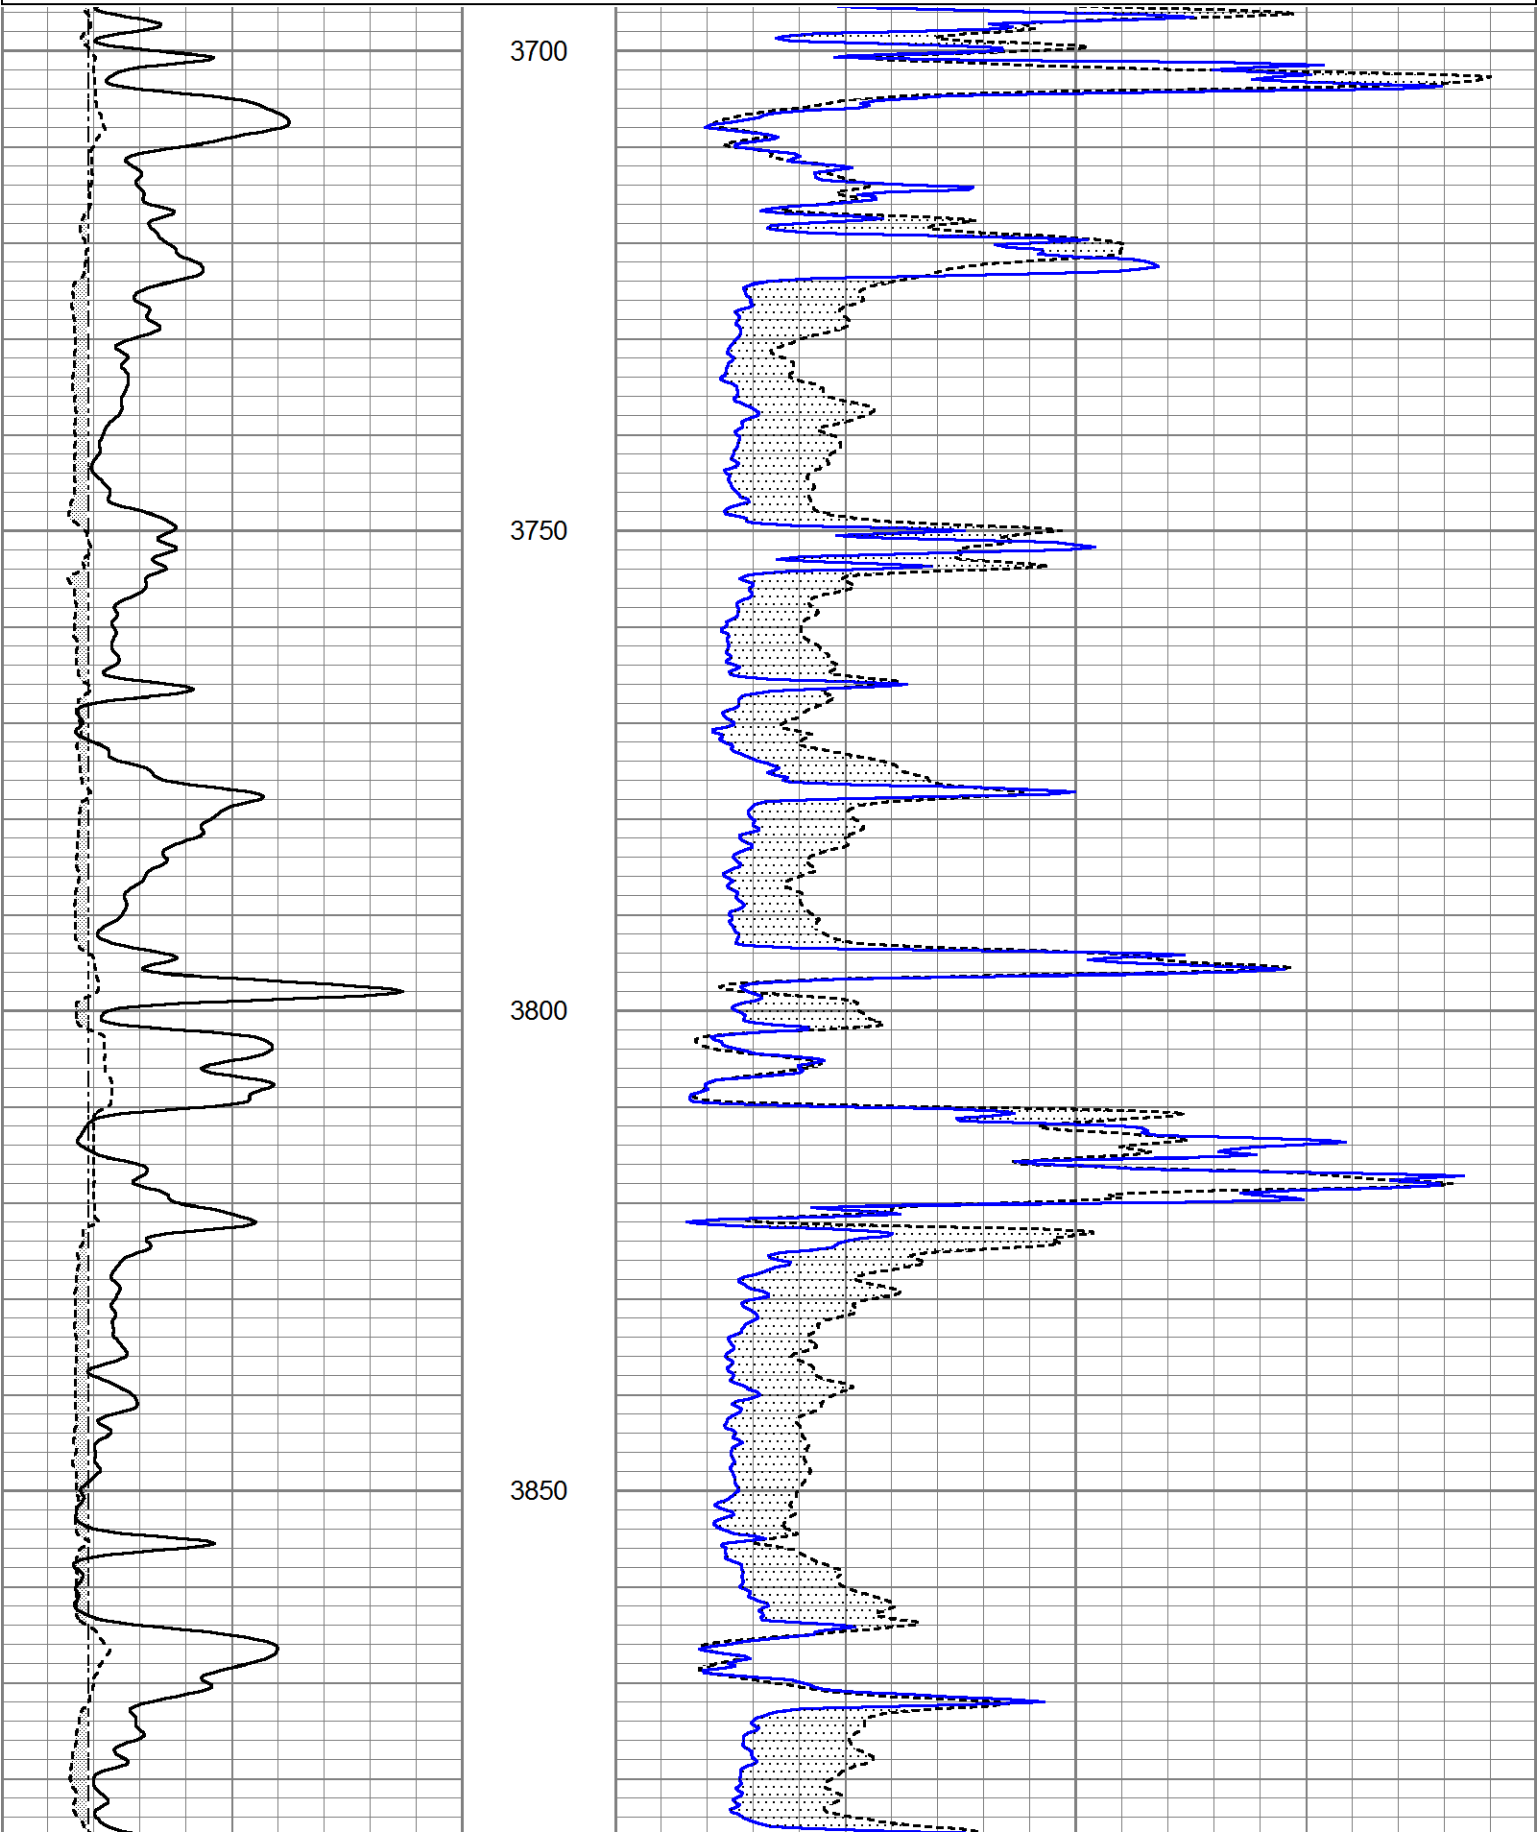

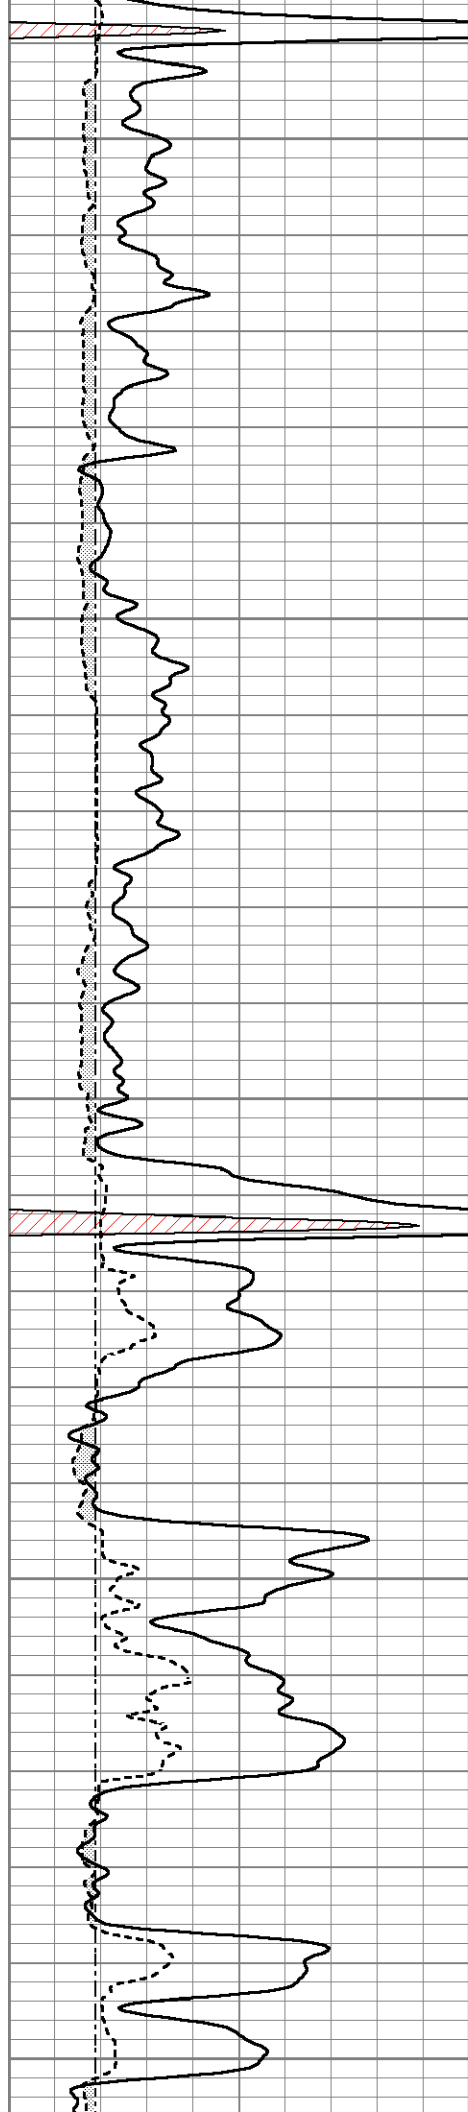


3900


3950

4000

4050

4100

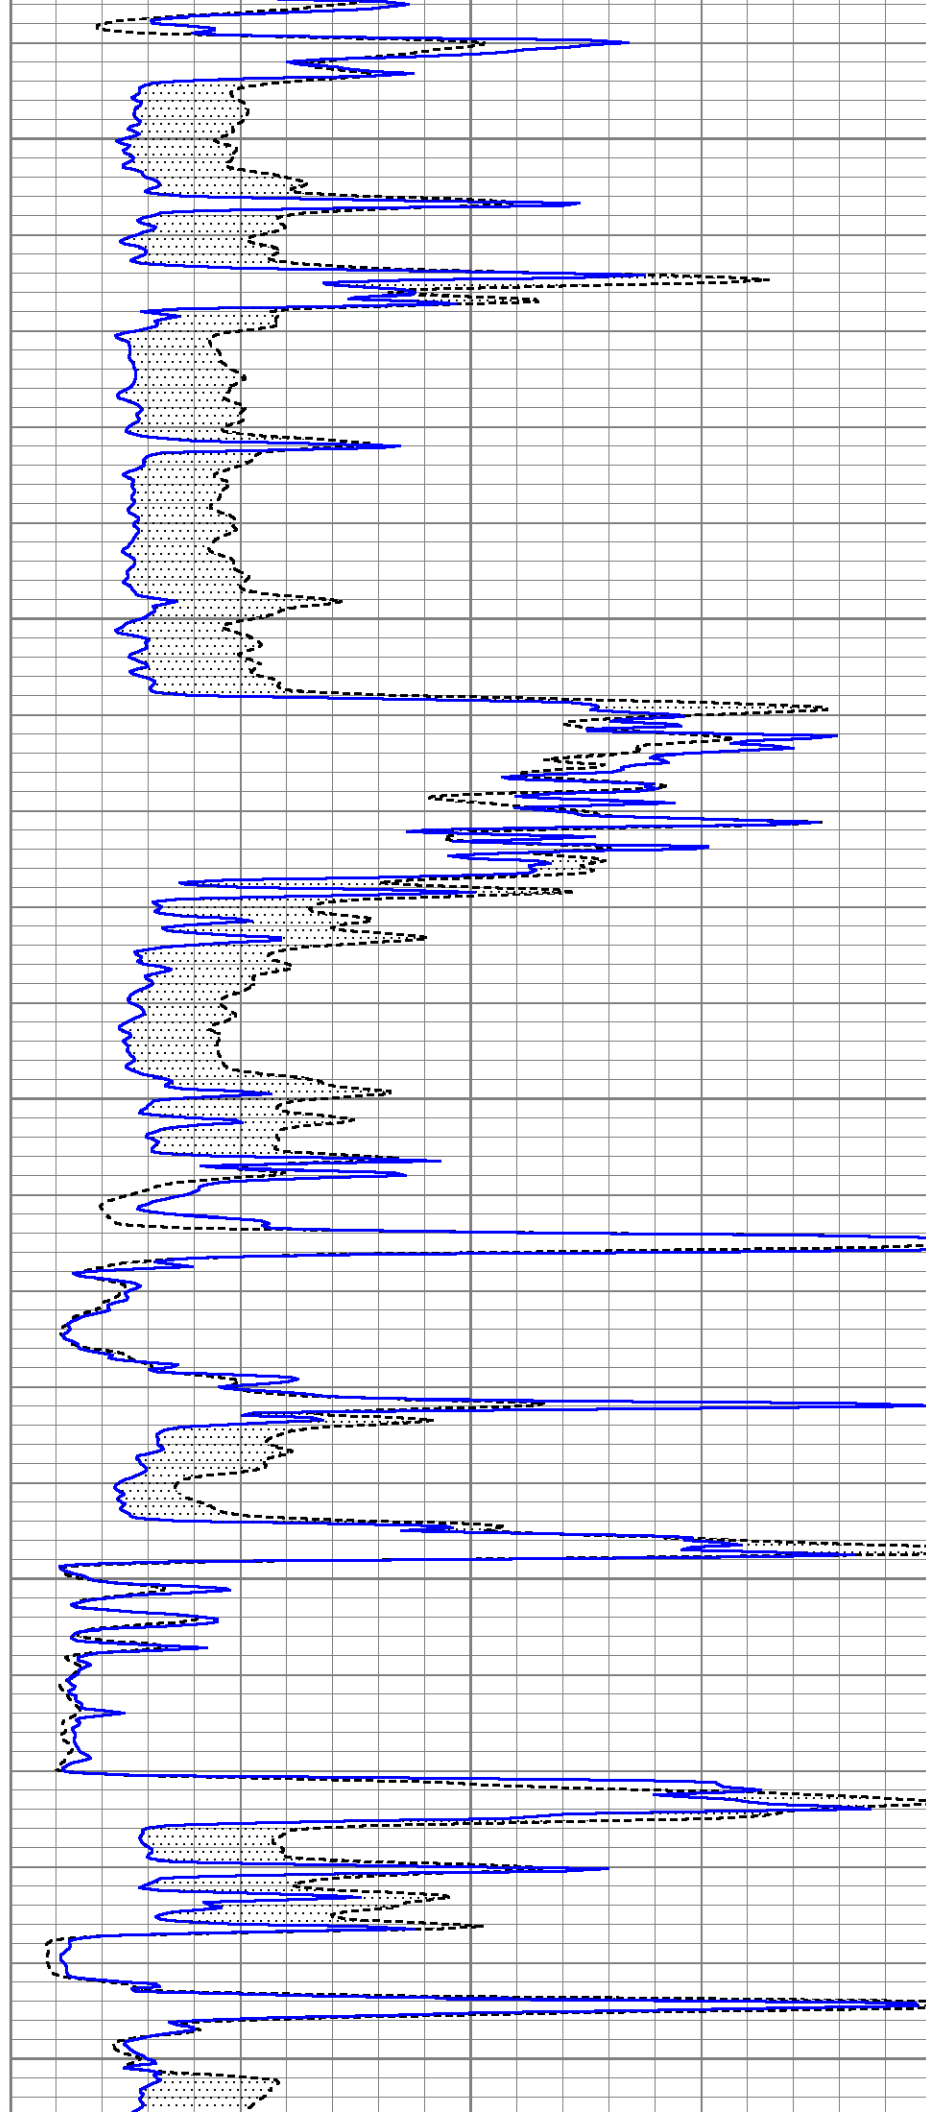

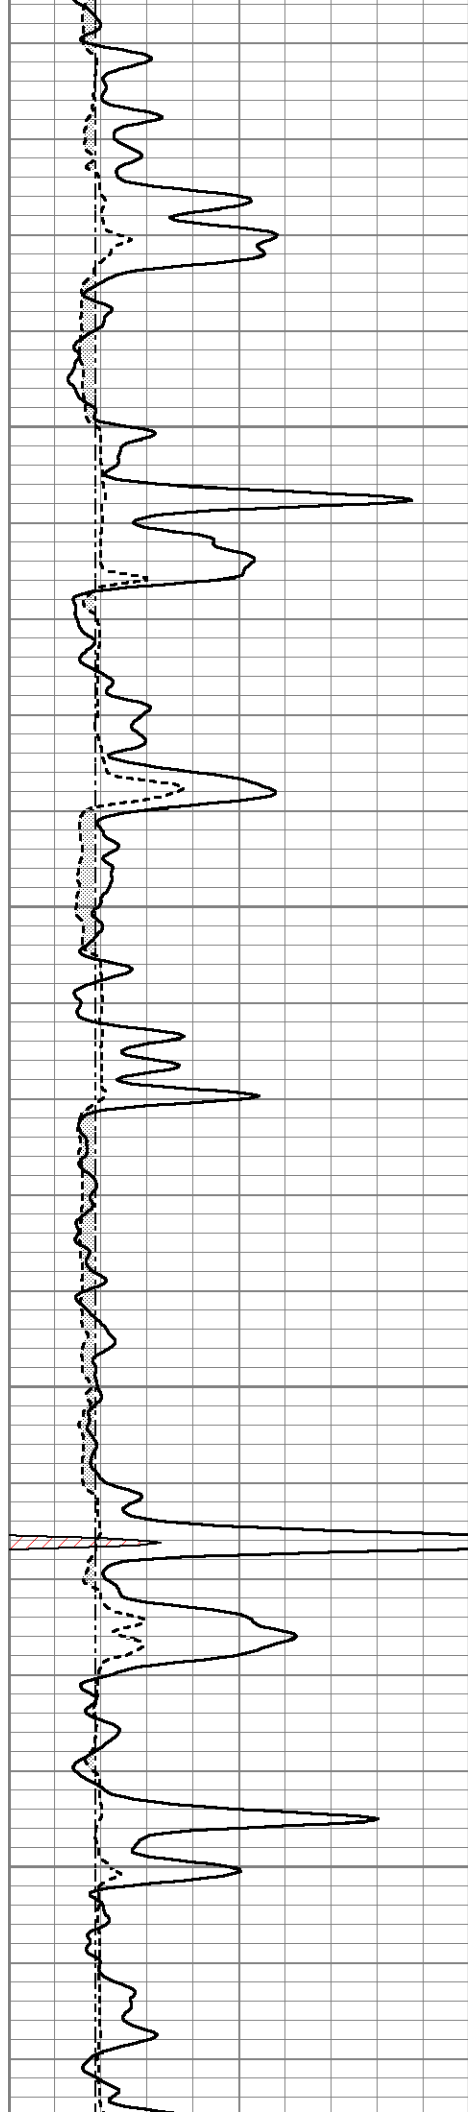


4150

4200

4250

4300

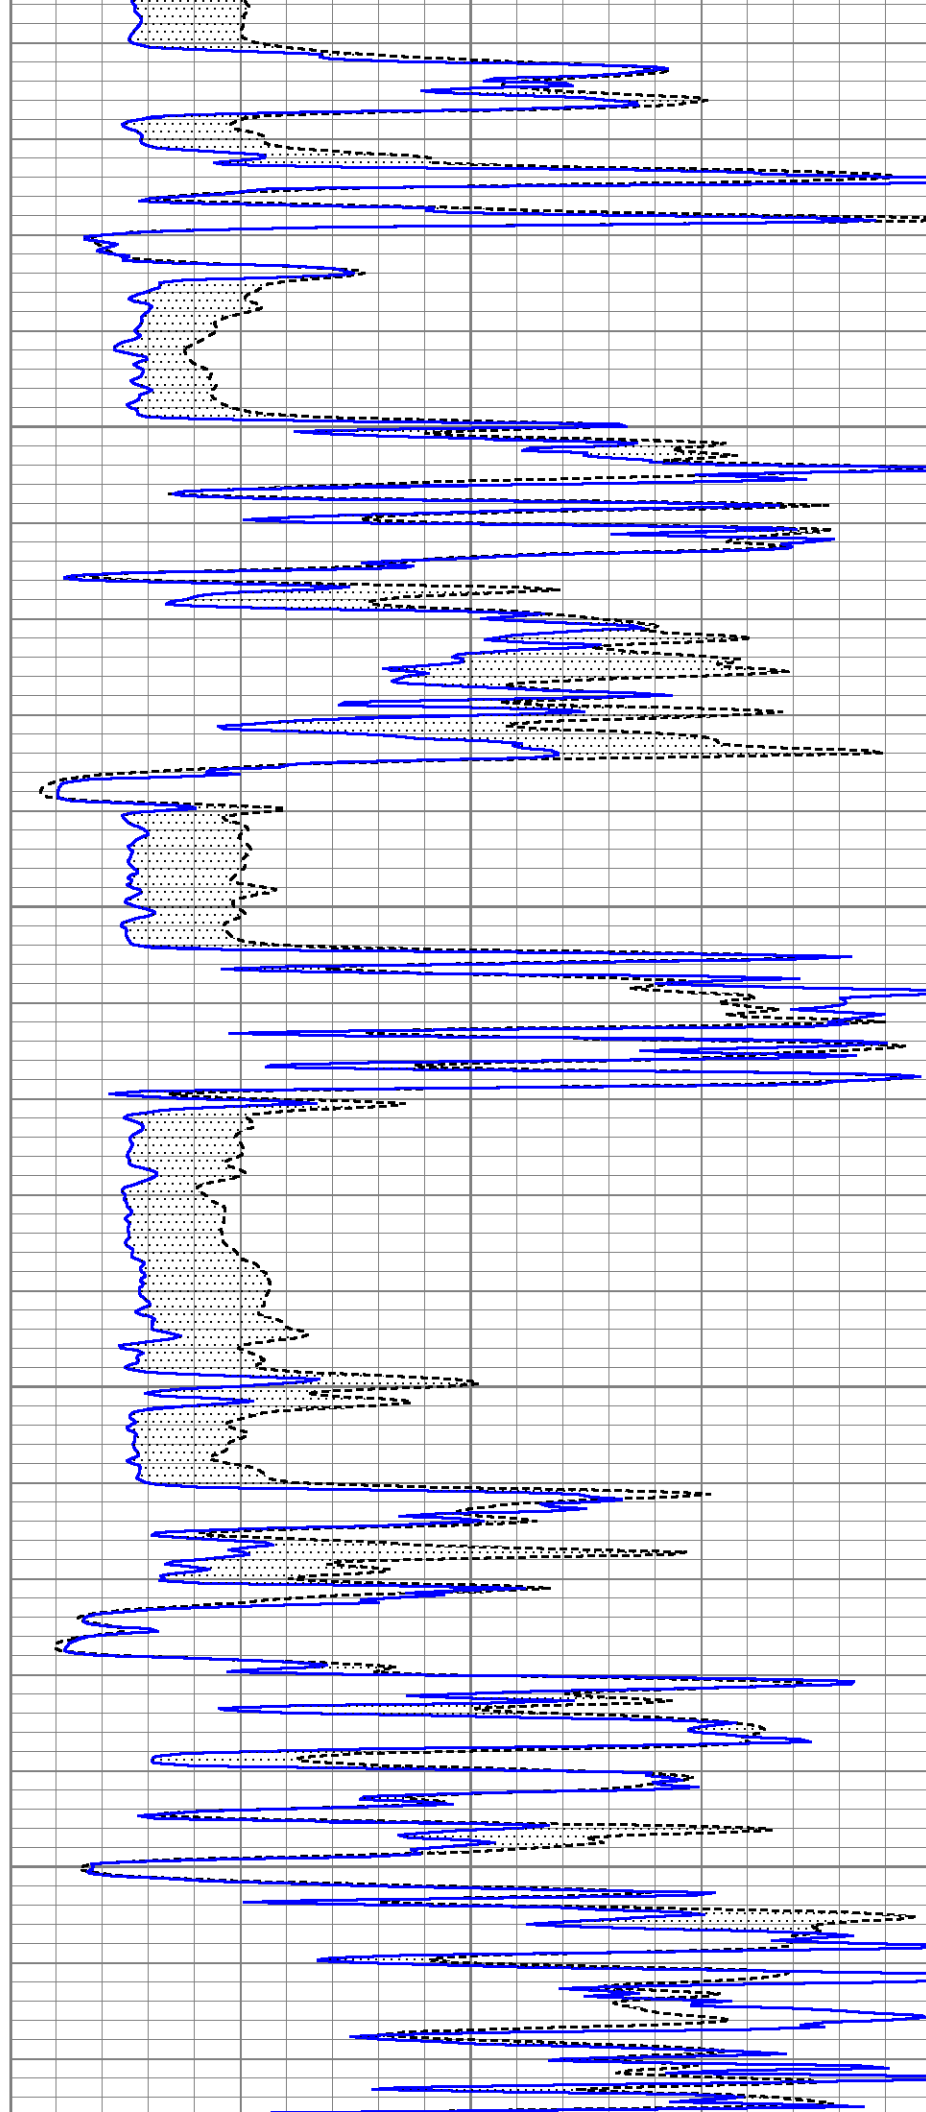





4350

4400

4450

4500

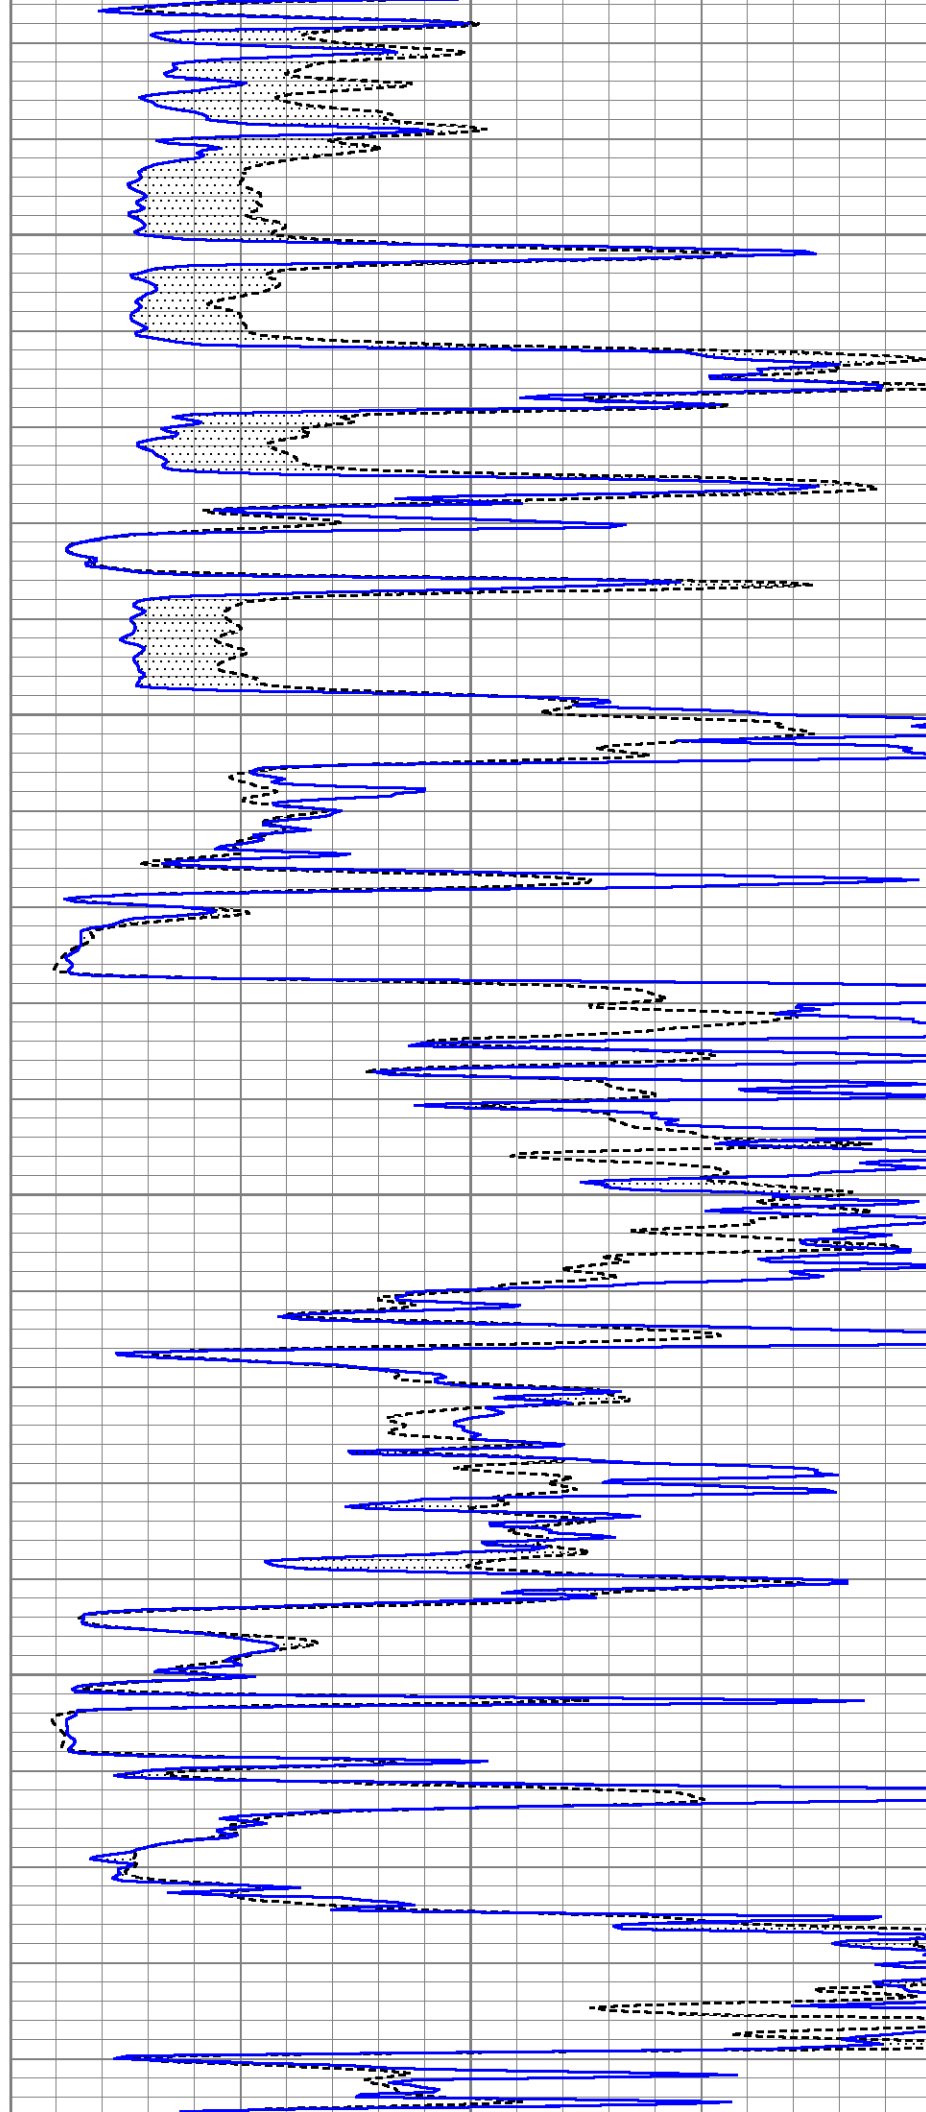

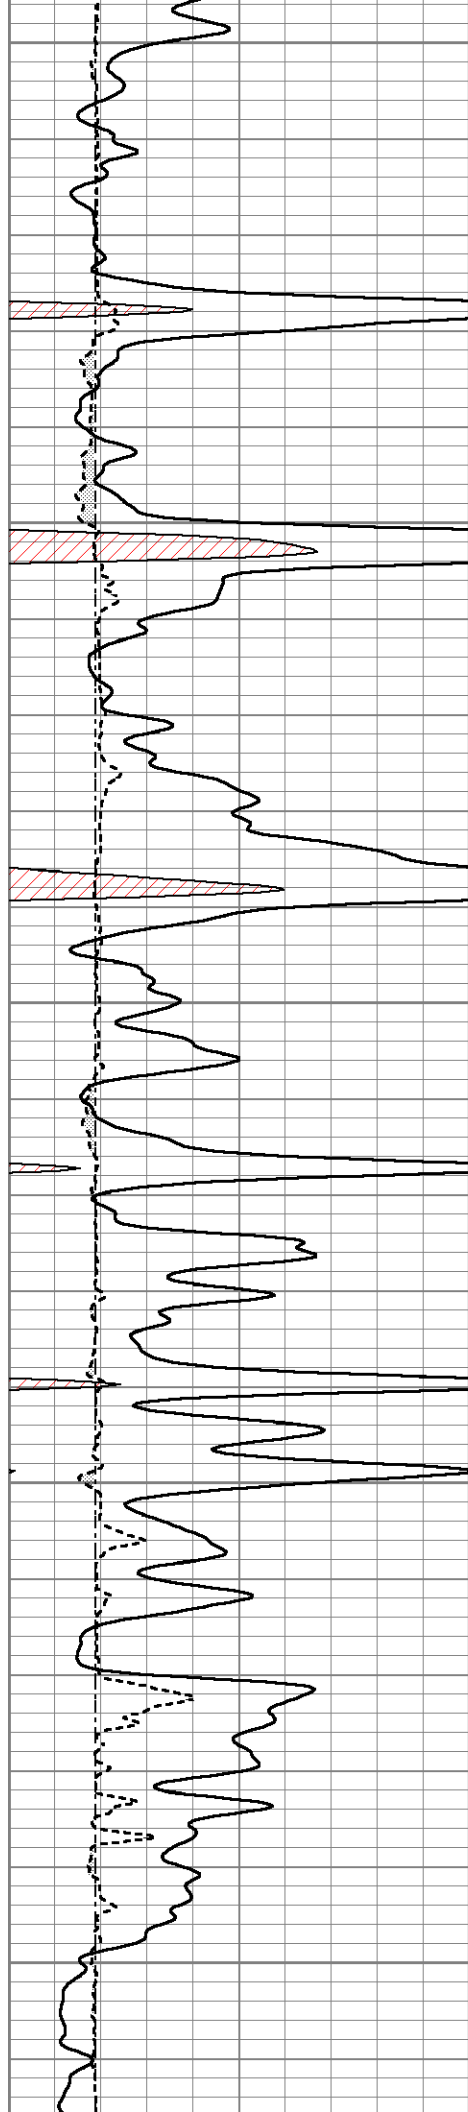


4550



4600

4650

4700

4750

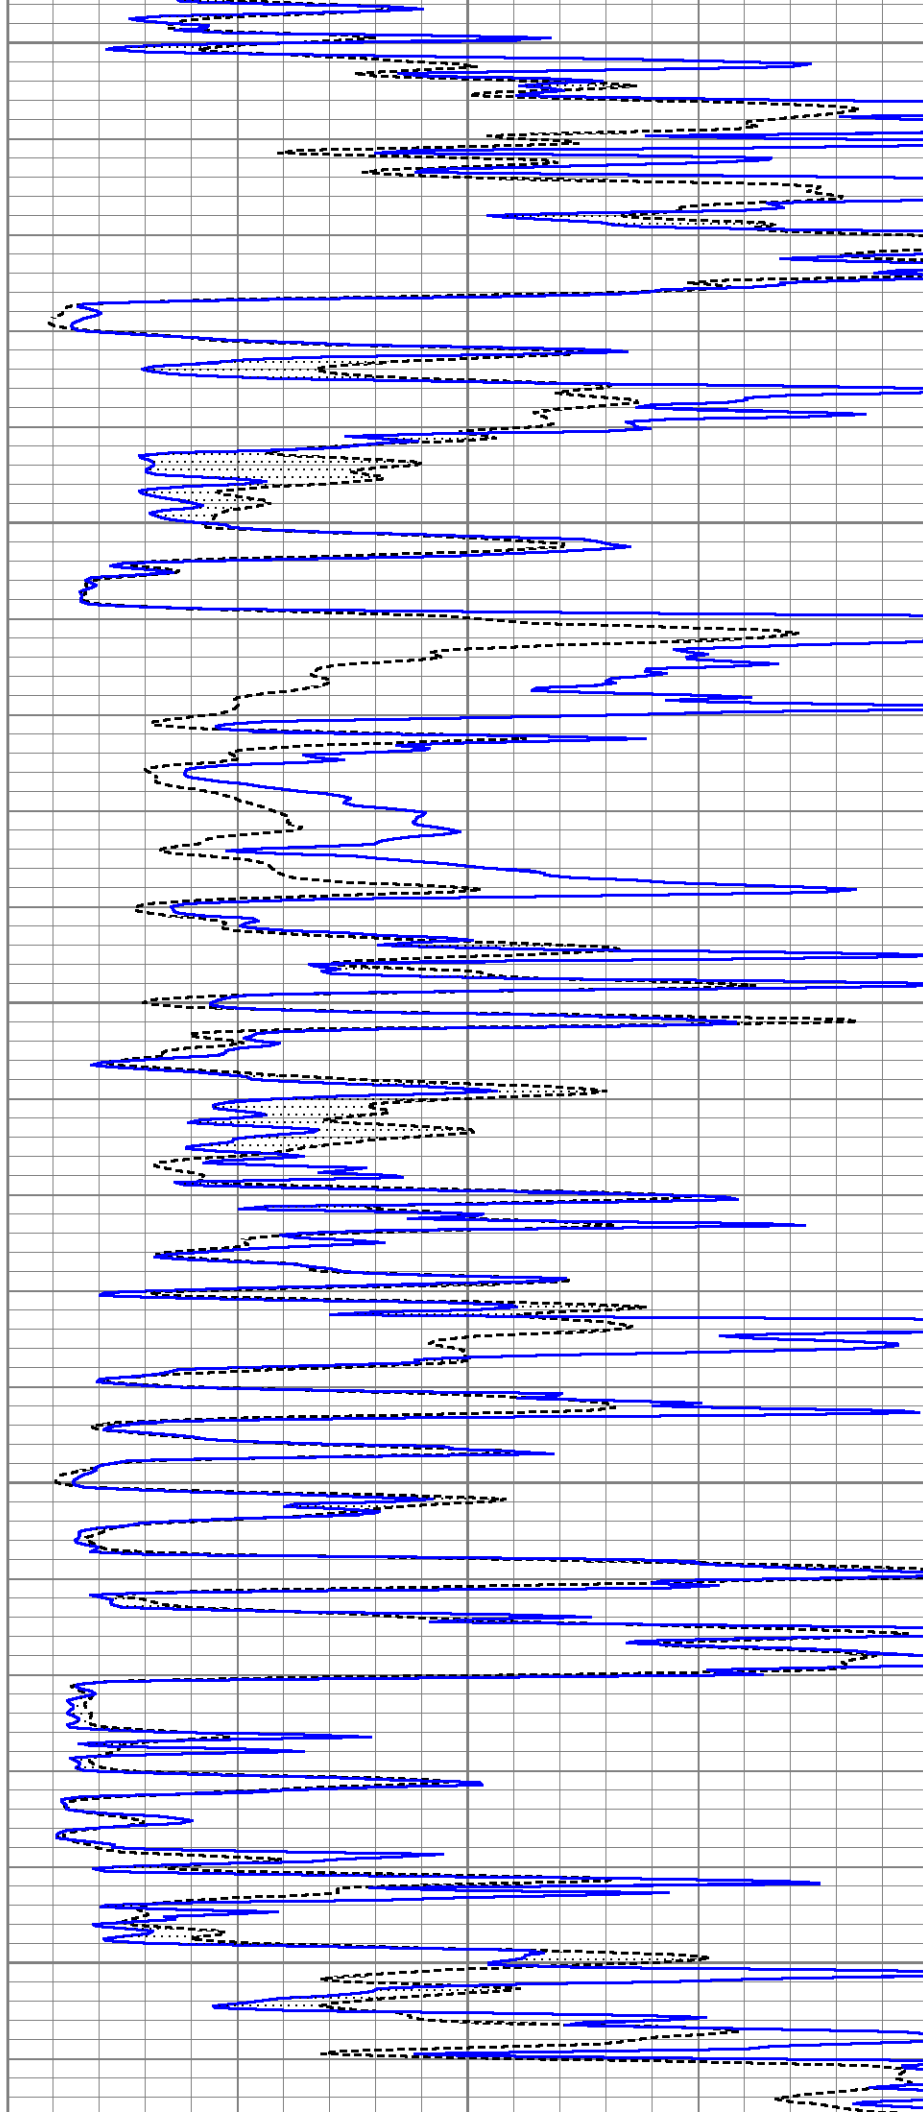


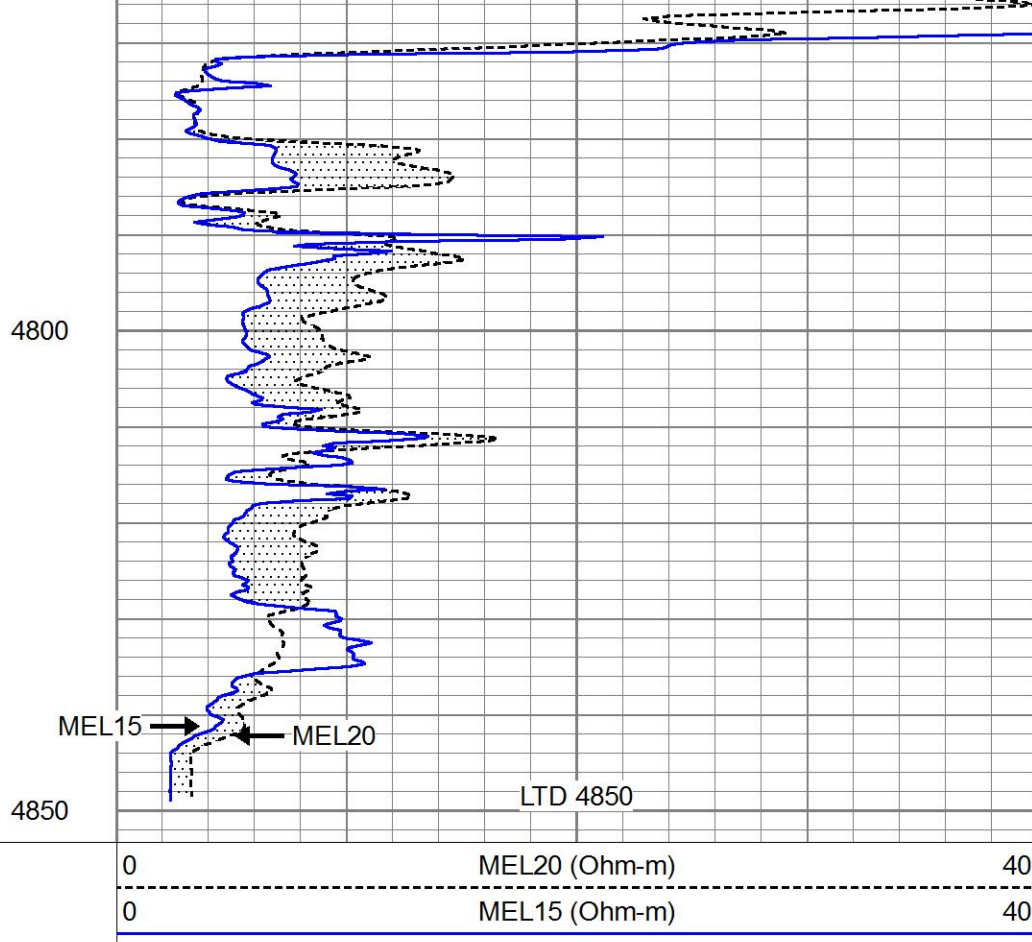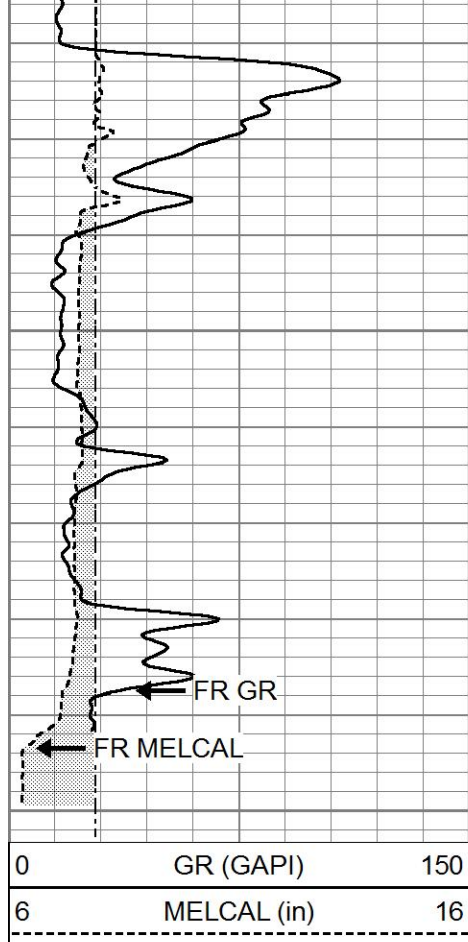

REPEAT SECTION

Database File 4541ddn.db
 Dataset Pathname pass8.1
 Presentation Format micro
 Dataset Creation Thu Apr 30 17:09:58 2020
 Charted by Depth in Feet scaled 1:240


0	GR (GAPI)	150
6	MELCAL (in)	16

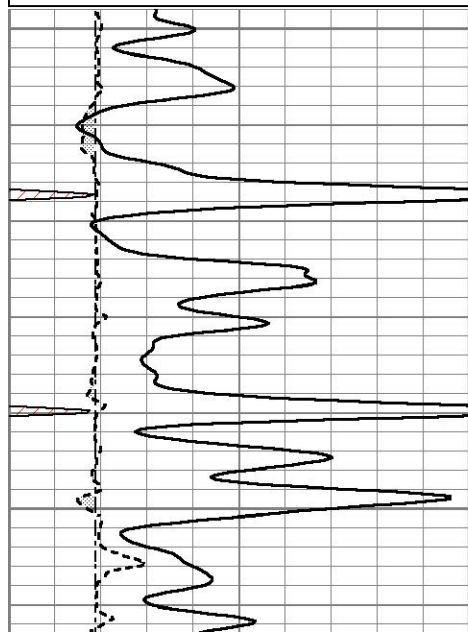


4650

4700

0	MEL20 (Ohm-m)	40
0	MEL15 (Ohm-m)	40

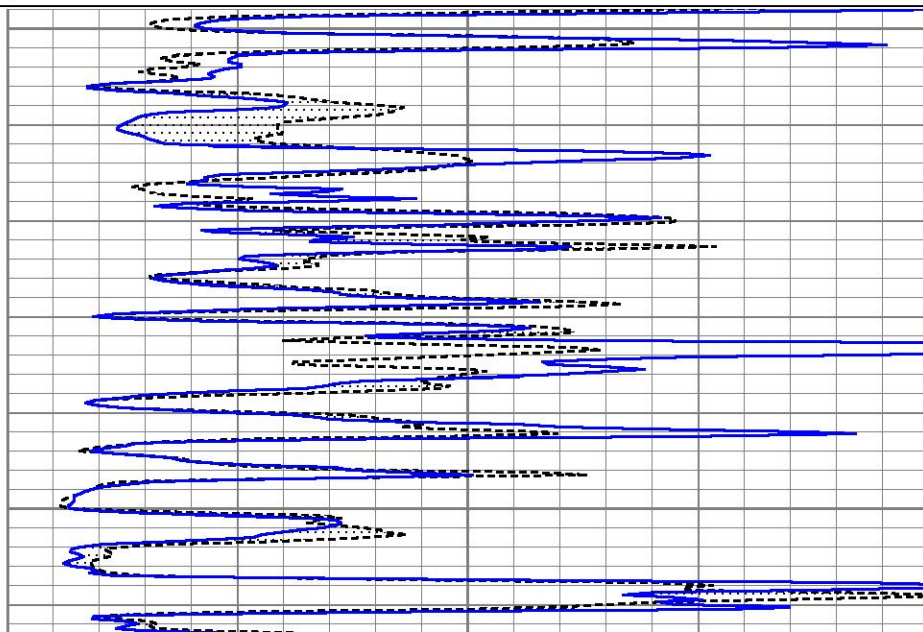


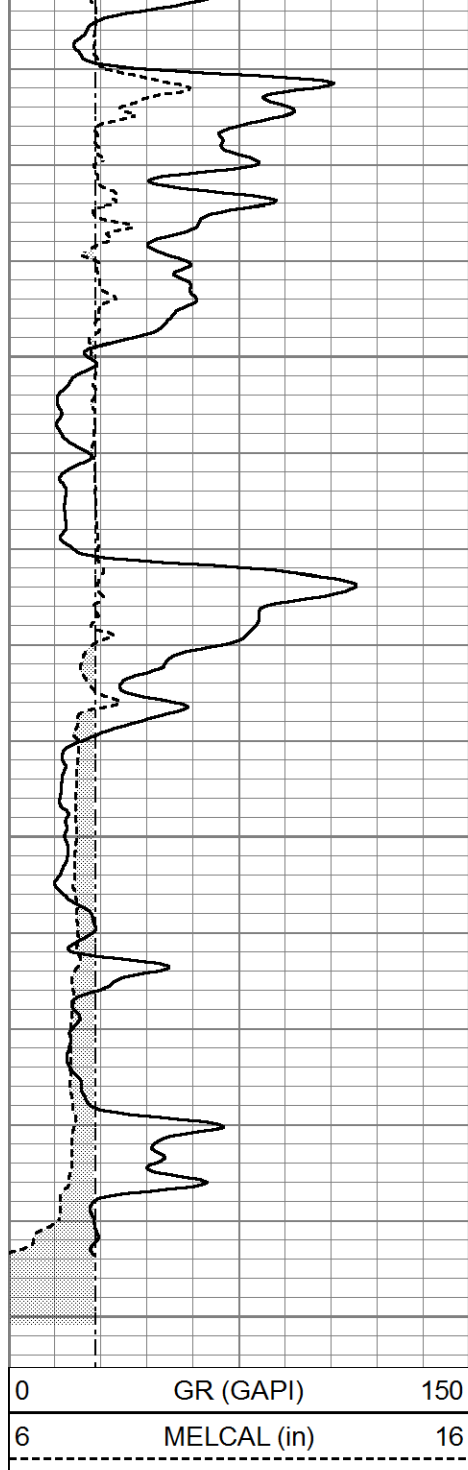

4750

4800

4850

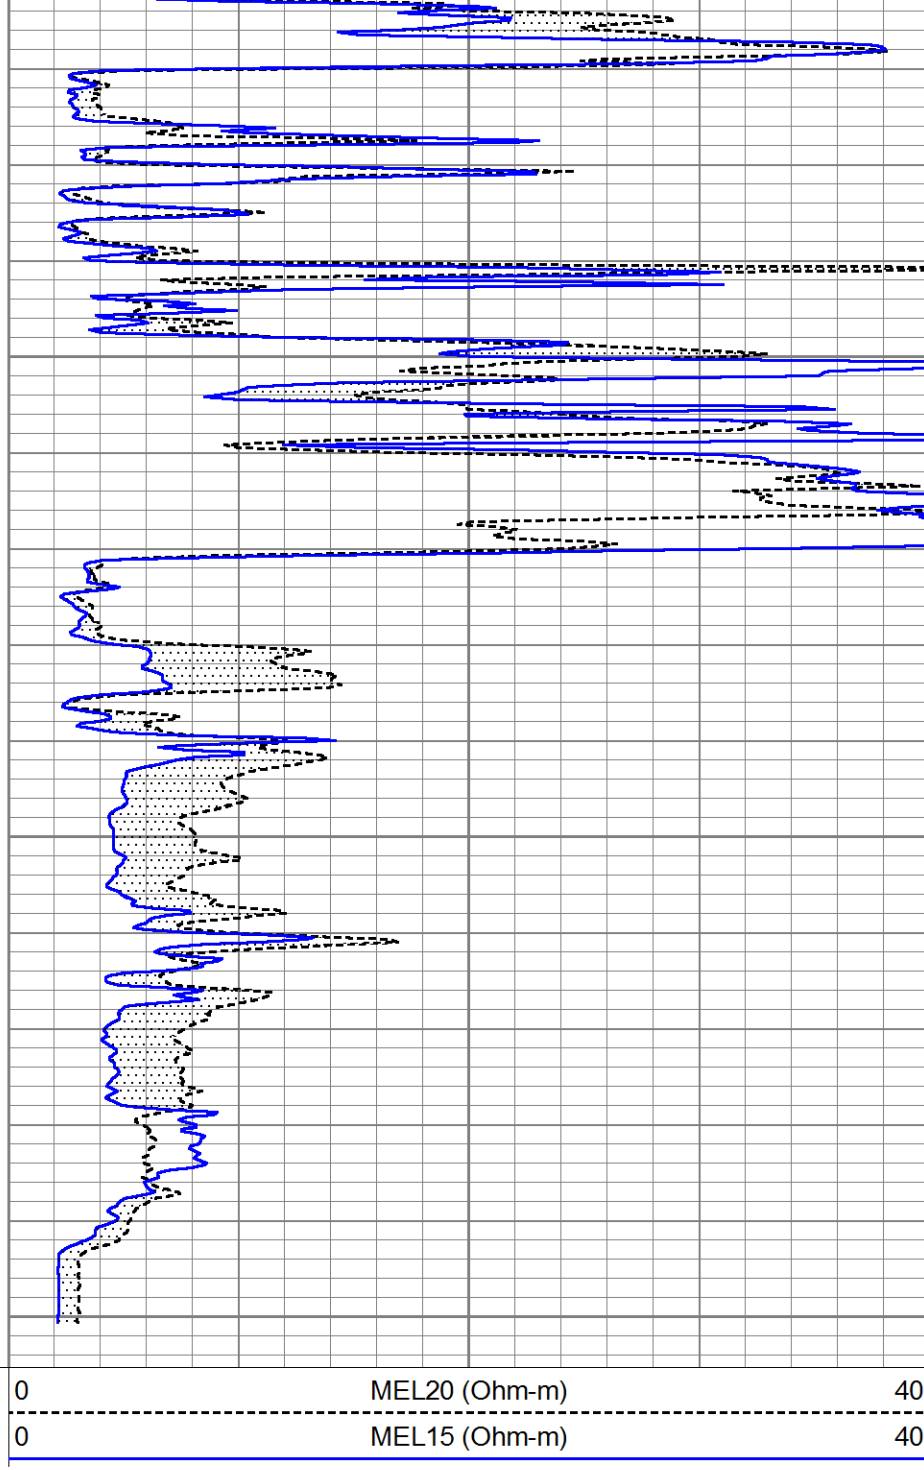

Calibration Report			
Database File	4541ddn.db		
Dataset Pathname	pass9.2		
Dataset Creation	Thu Apr 30 17:36:55 2020		
MICRO Calibration Report			
Serial Number:	070910		
Tool Model:	ProbeN		
Performed:	Thu Apr 30 17:16:08 2020		
Caliper Calibration:	Gain=6.135	Offset=-0.405	
References	Low Cal	High Cal	
Readings	8.000	18.000	
	1.370	3.000	
1.5" Calibration:	Gain=22.000	Offset=1.000	

References Readings	Low Cal 0.000 0.000	High Cal 20.000 1.216
2" Calibration:	Gain=54.000	Offset=-1.000
References Readings	Low Cal 0.000 0.002	High Cal 20.000 1.053
Gamma Ray Calibration Report		
Serial Number: Tool Model: Performed:	070559 OPEN_GR Thu Apr 30 17:12:02 2020	
Calibrator Value:	1.0	GAPI
Background Reading: Calibrator Reading:	0.0 1.0	cps cps
Sensitivity:	0.3000	GAPI/cps