

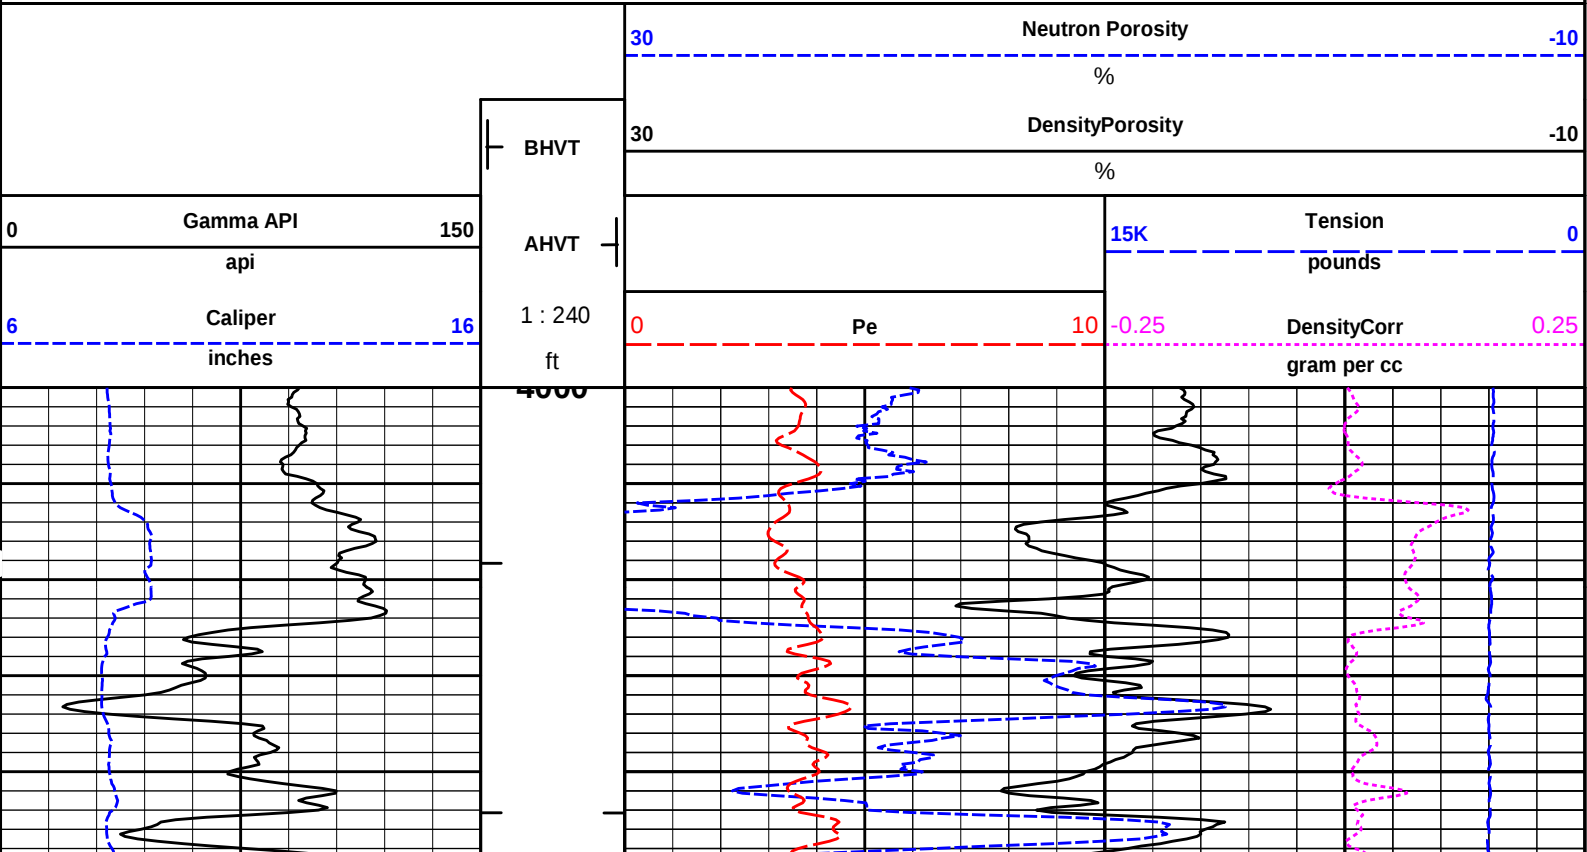



**SPECTRAL DENSITY
DUAL SPACED NEUTRON
LOG**



Fold here


Service Ticket No.: 904731126						API No.: 15-175-22259-00-00						PGM Version: WL INSITE R5.6.3 (Build 4)							
CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE										RESISTIVITY SCALE CHANGES									
Date	Sample No.					Type Log	Depth	Scale Up Hole		Scale Down Hole									
Depth-Driller																			
Type Fluid in Hole																			
Density	Viscosity																		
Ph	Fluid Loss																		
Source of Sample						RESISTIVITY EQUIPMENT DATA													
Rm @ Meas. Temp		@		@		Run No.	Tool Type & No.	Pad Type		Tool Pos.		Other							
Rmf @ Meas. Temp.		@		@															
Rmc @ Meas. Temp.		@		@															
Source Rmf	Rmc																		
Rm @ BHT		@		@															
Rmf @ BHT		@		@															
Rmc @ BHT		@		@															
EQUIPMENT DATA																			
GAMMA				ACOUSTIC				DENSITY				NEUTRON							
Run No.				Run No.				Run No.				Run No.							
Serial No.				Serial No.				Serial No.				Serial No.							
Model No.				Model No.				Model No.				Model No.							
Diameter				No. of Cent.				Diameter				Diameter							
Detector Model No.				Spacing				Log Type				Log Type							
Type								Source Type				Source Type							
Length				LSA [Y/N]				Serial No.				Serial No.							
Distance to Source				FWDA [Y/N]				Strength				Strength							
LOGGING DATA																			
GENERAL				GAMMA		ACOUSTIC			DENSITY			NEUTRON							
Run	Depth		Speed	Scale		Scale		Matrix	Scale		Matrix	Scale		Matrix					
No.	From	To	ft/min	L	R	L	R		L	R		L	R						

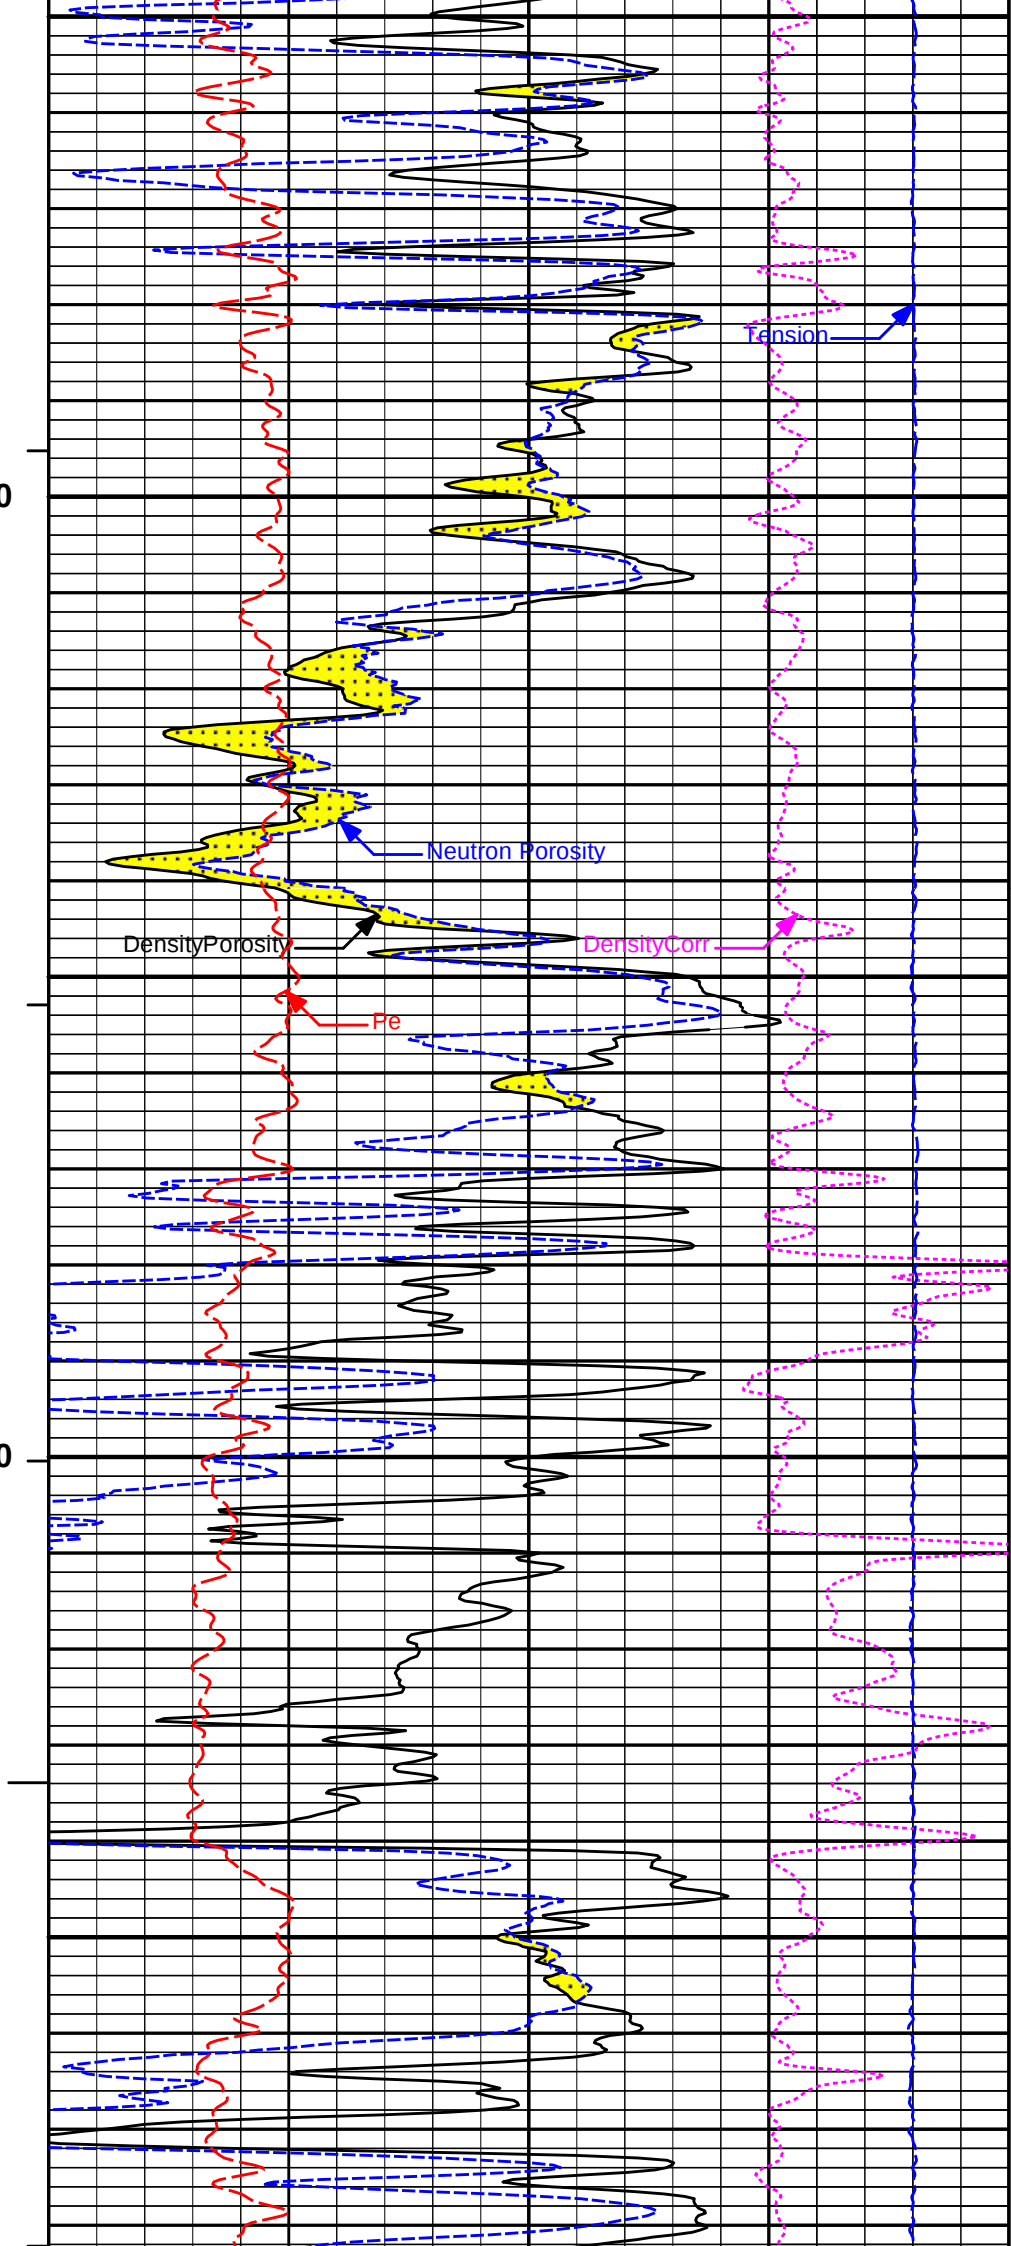


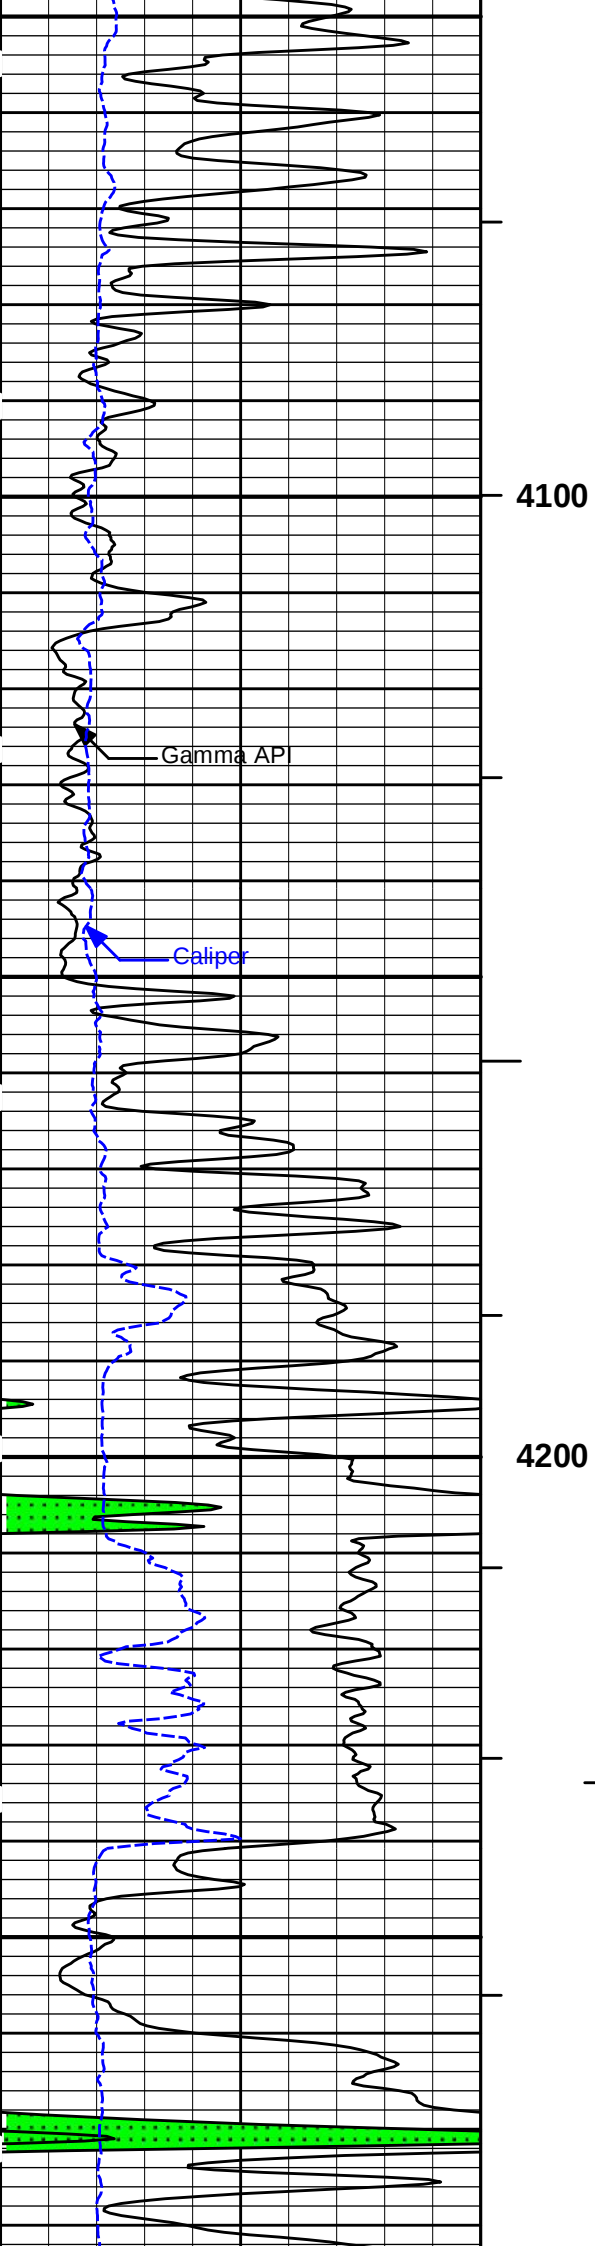


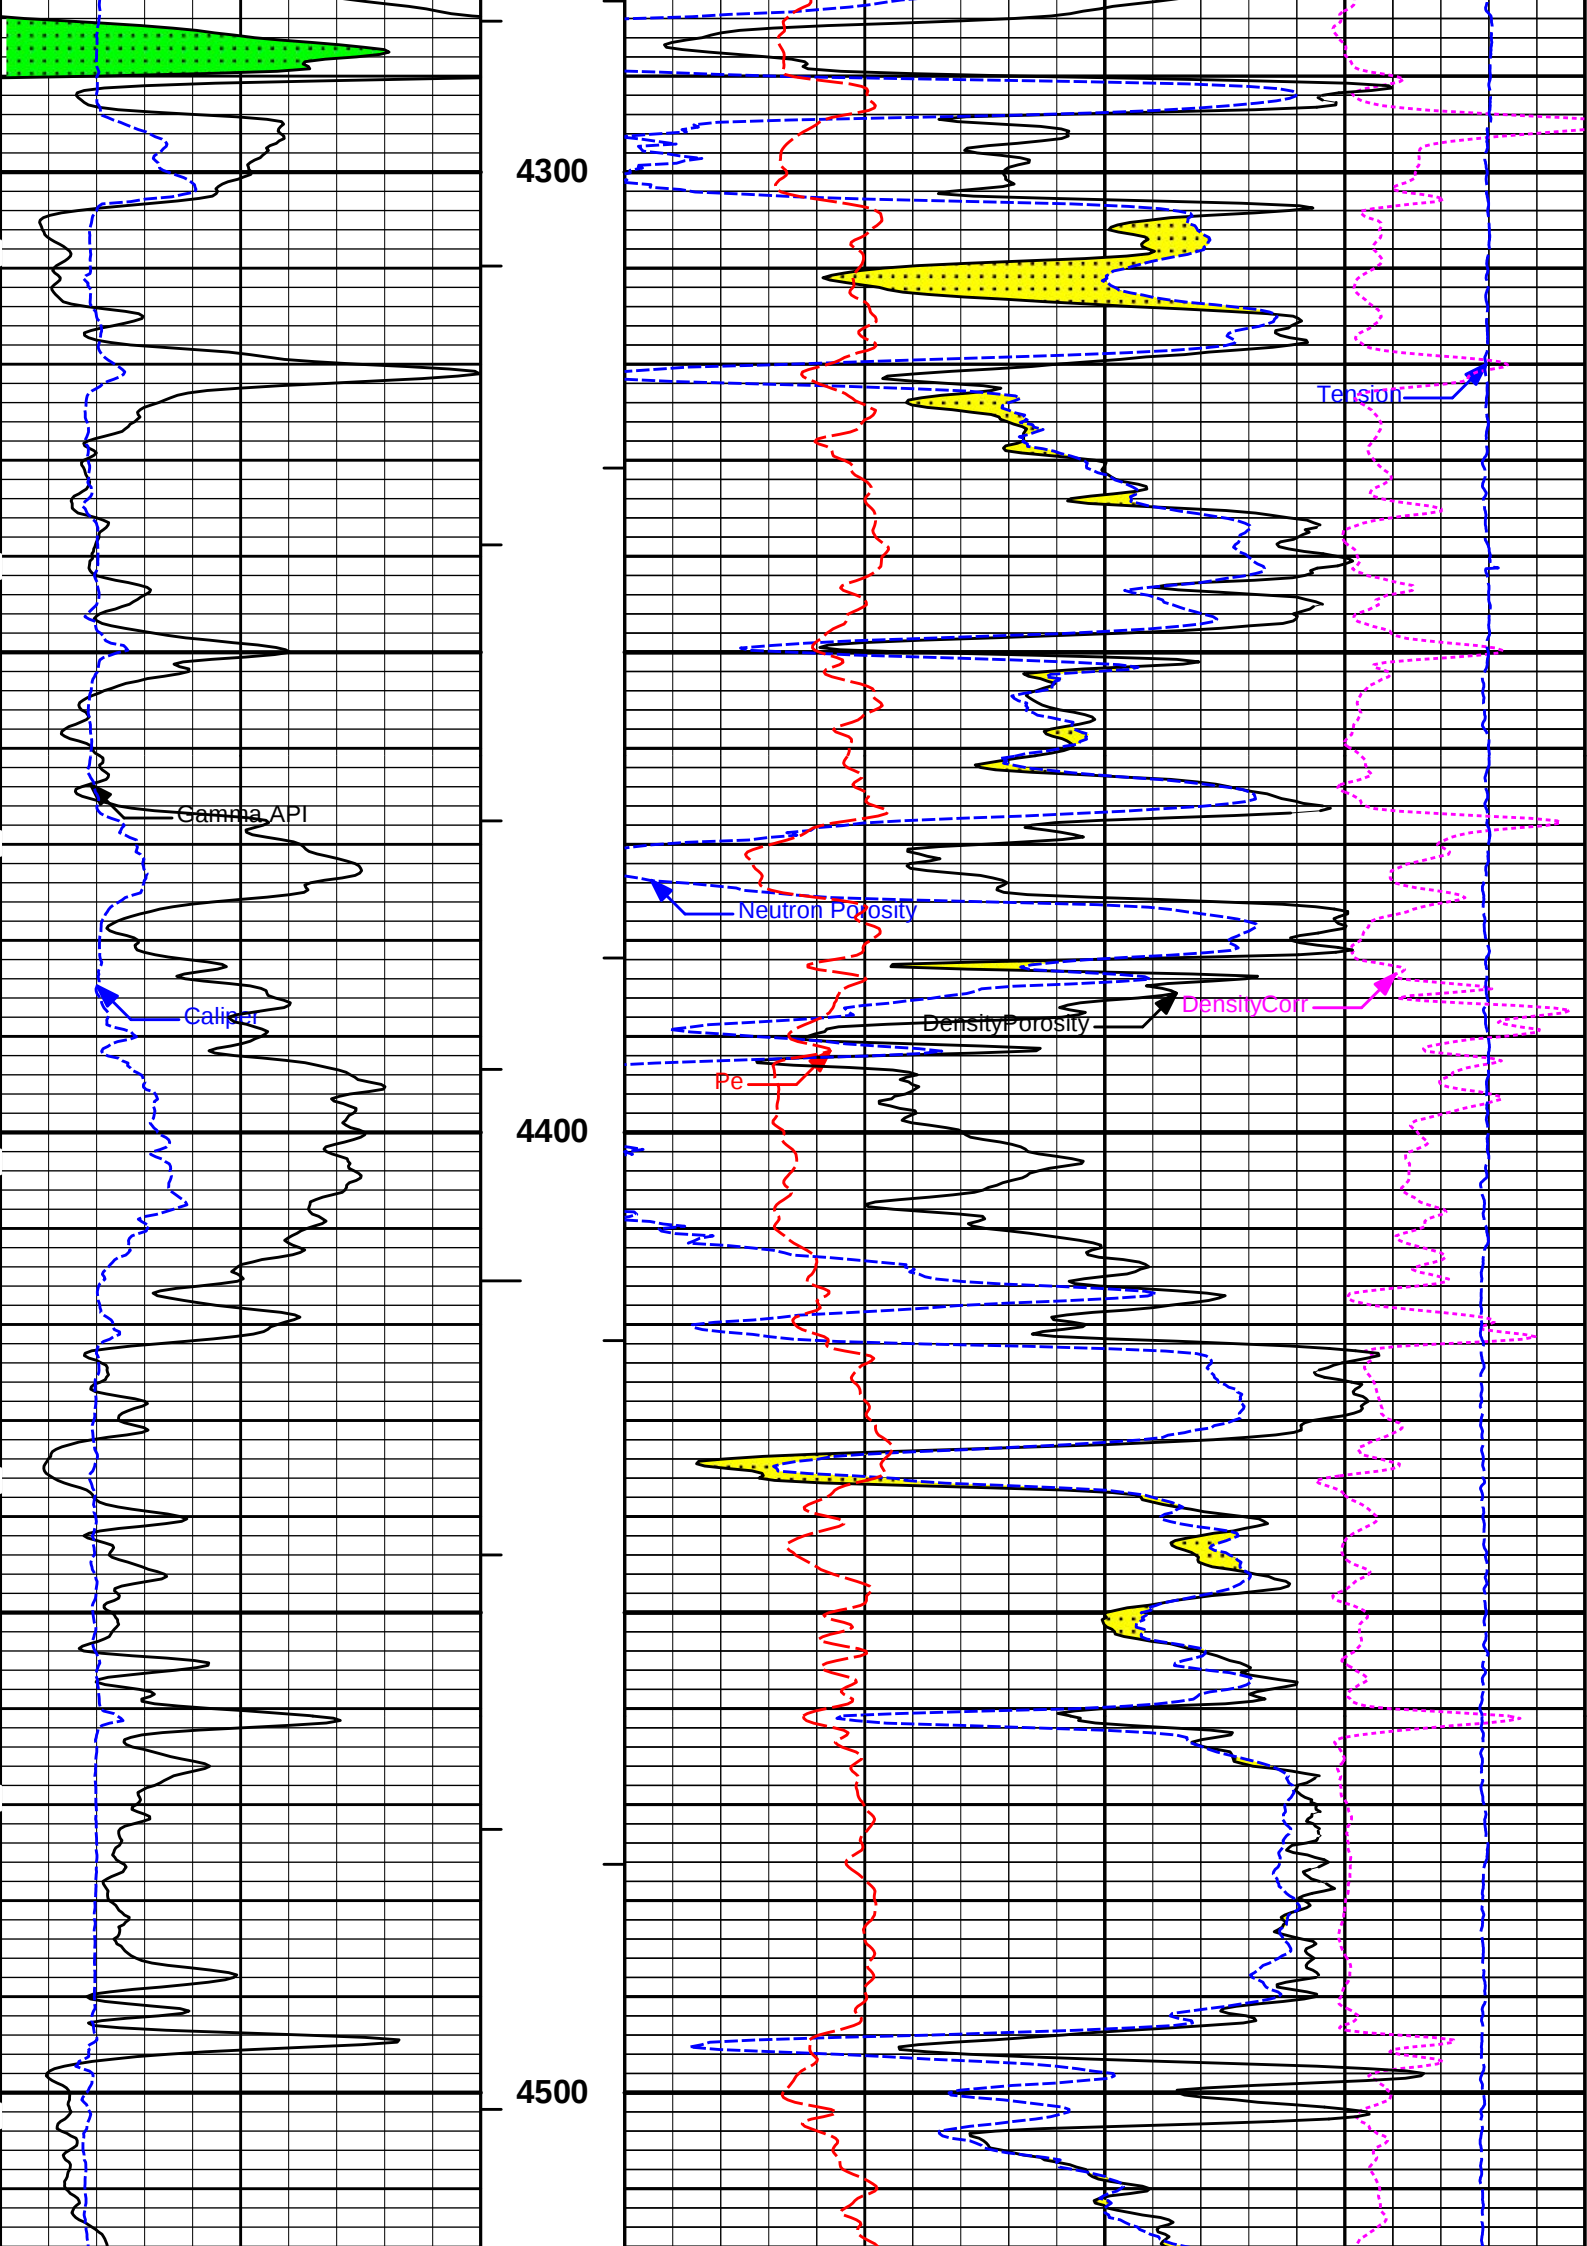


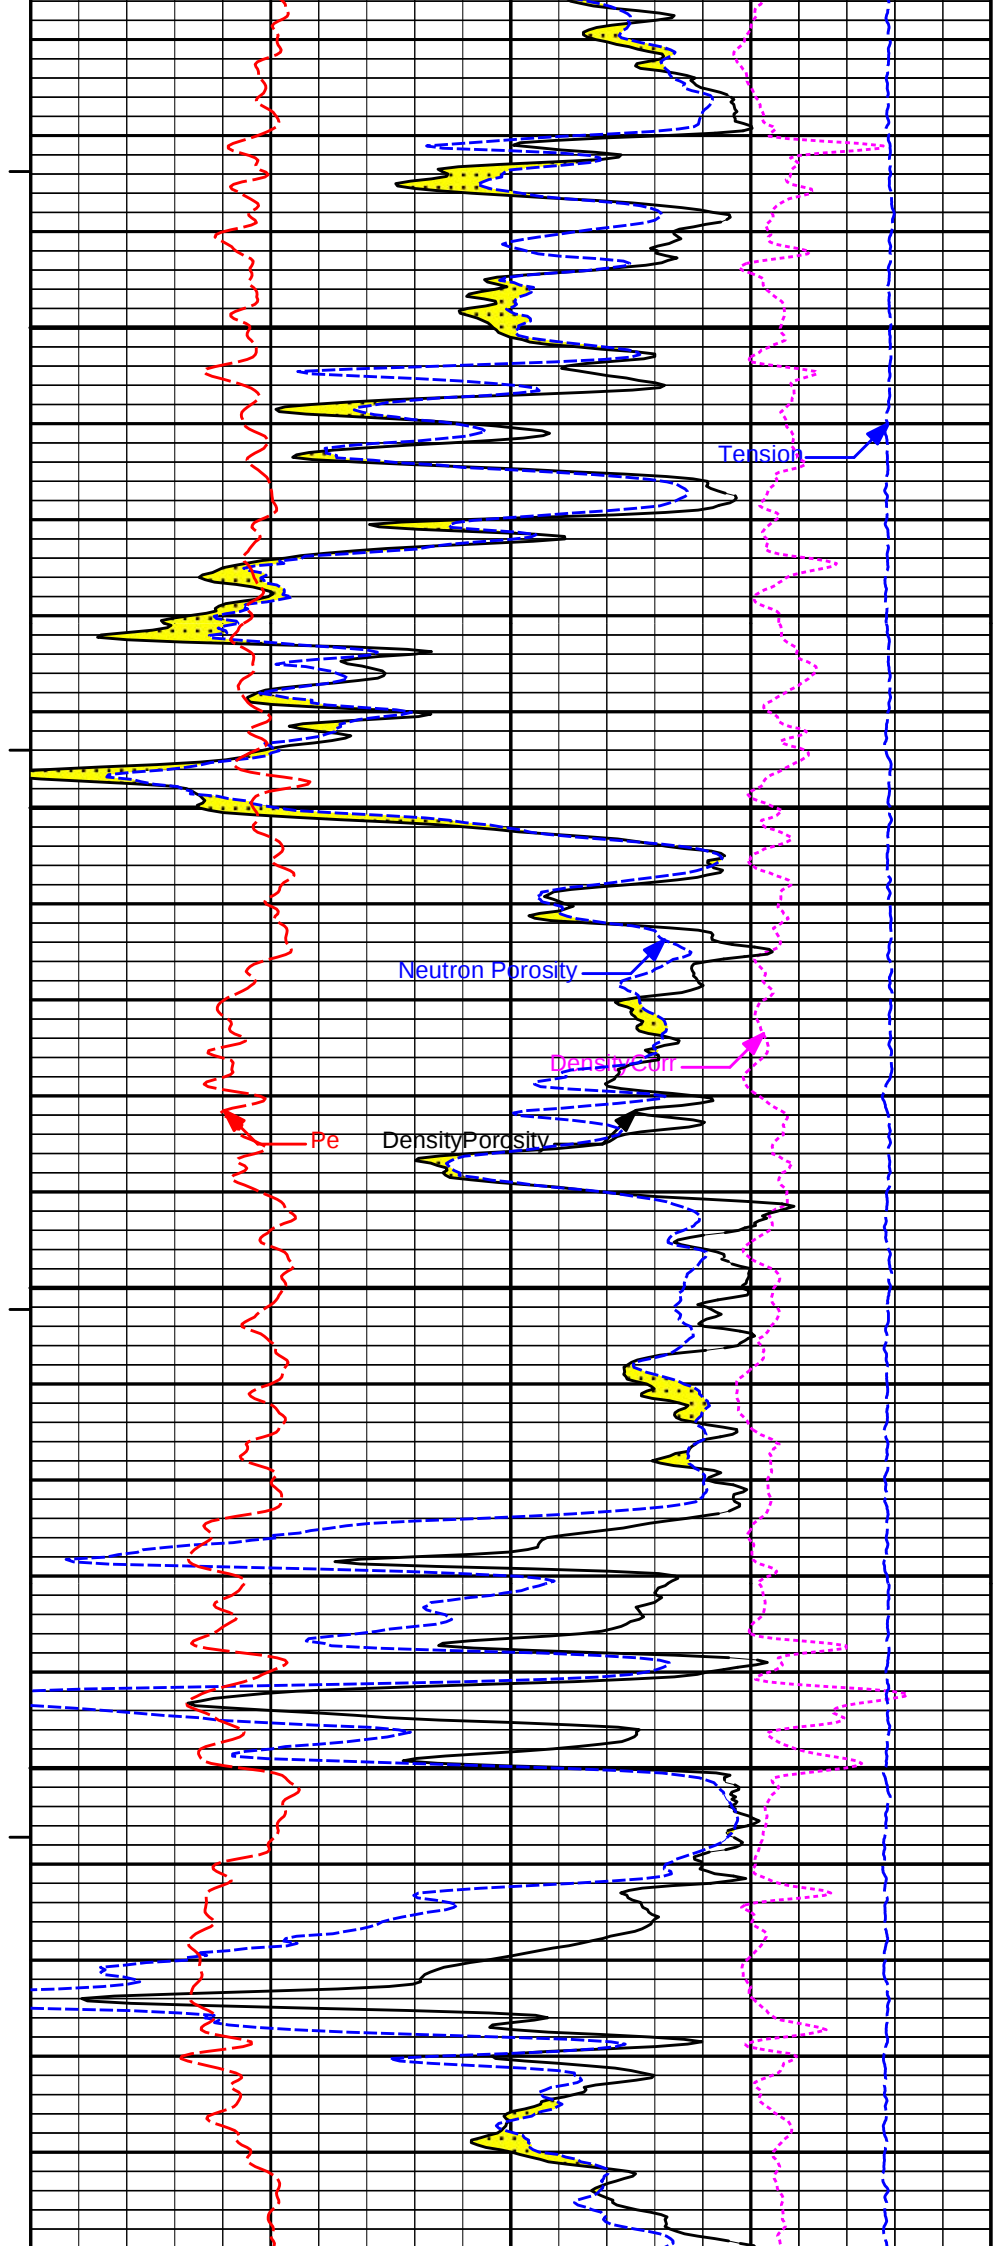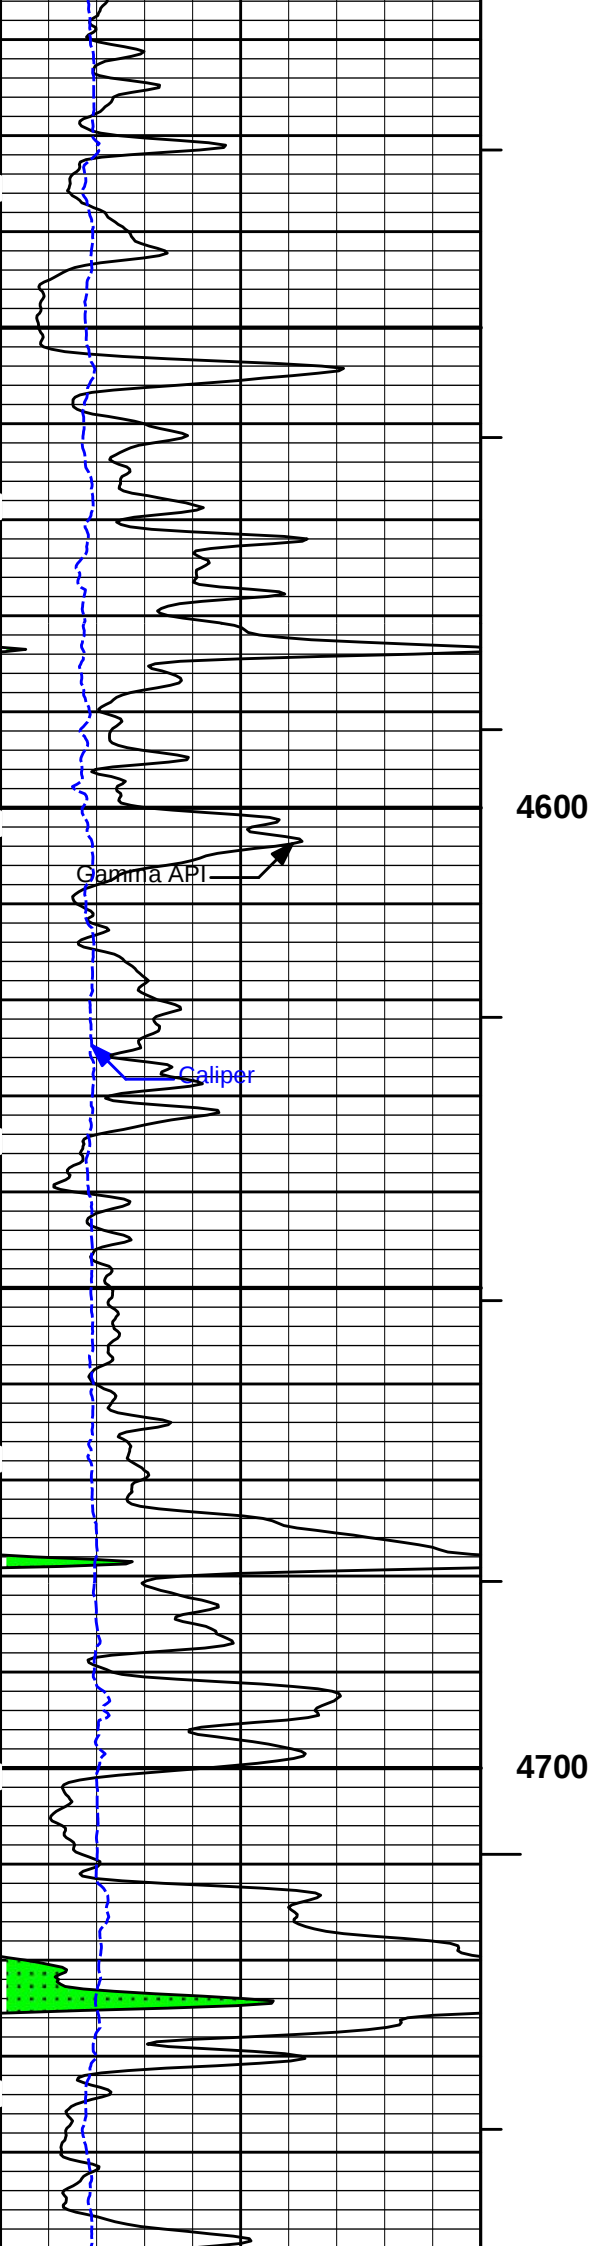

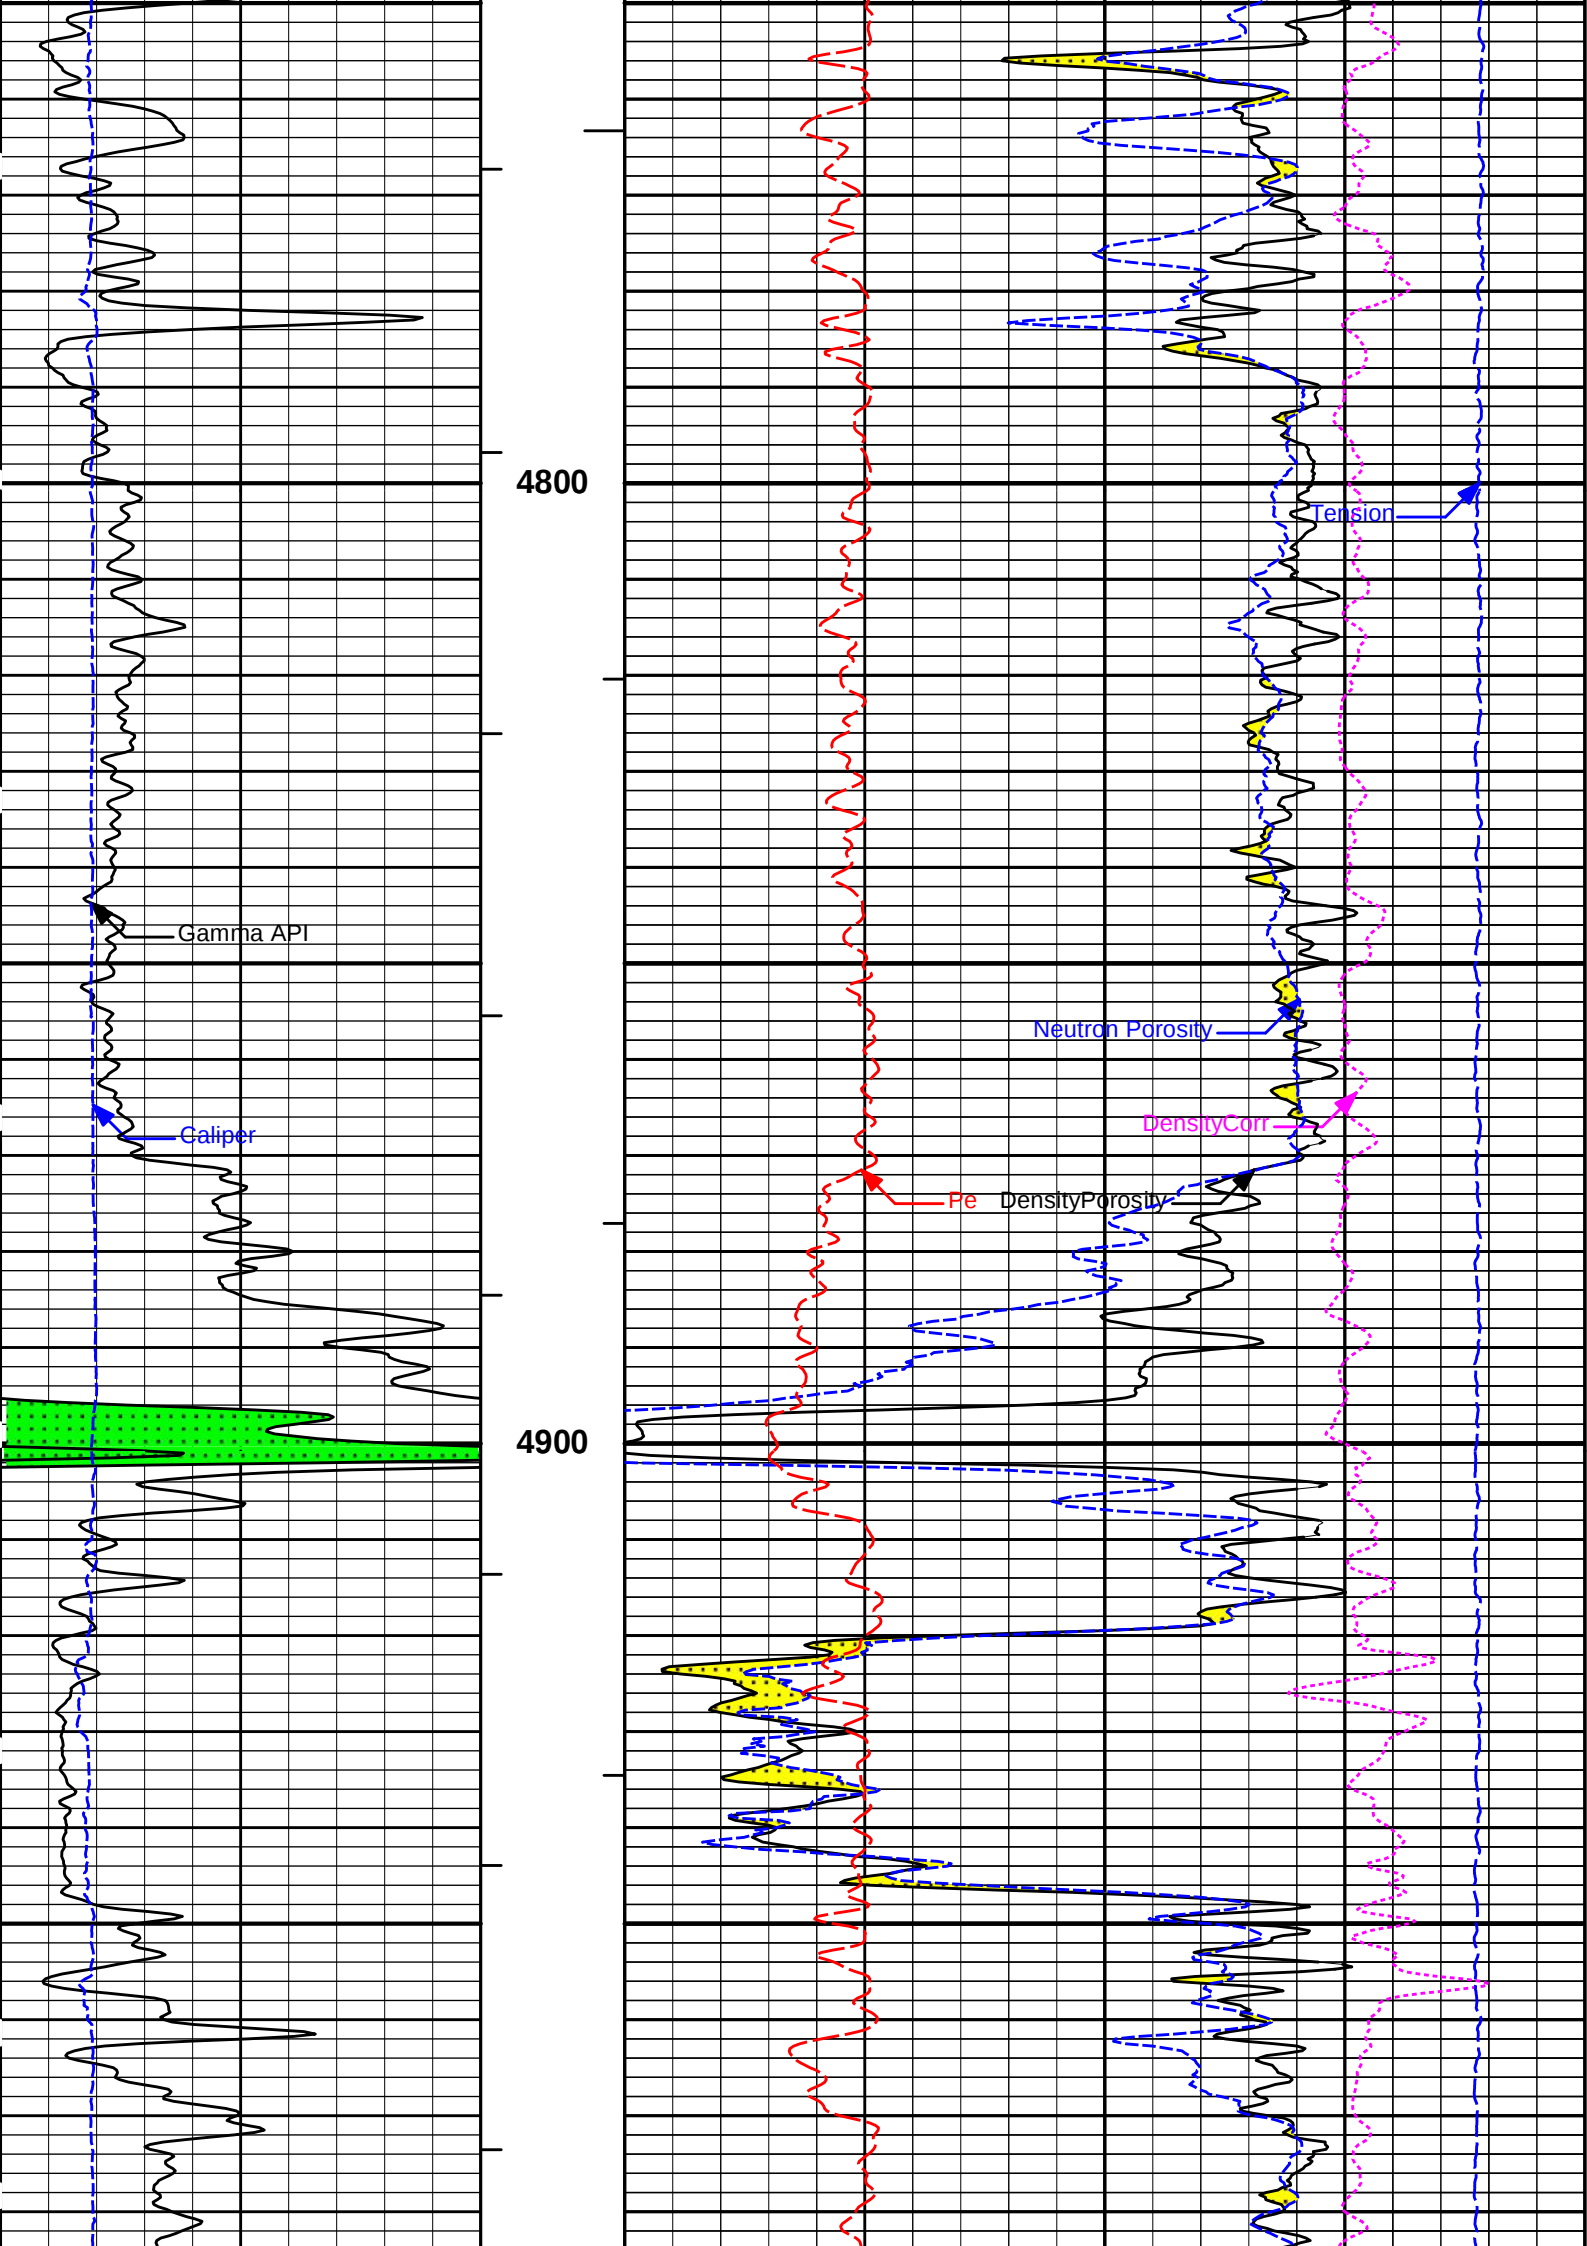

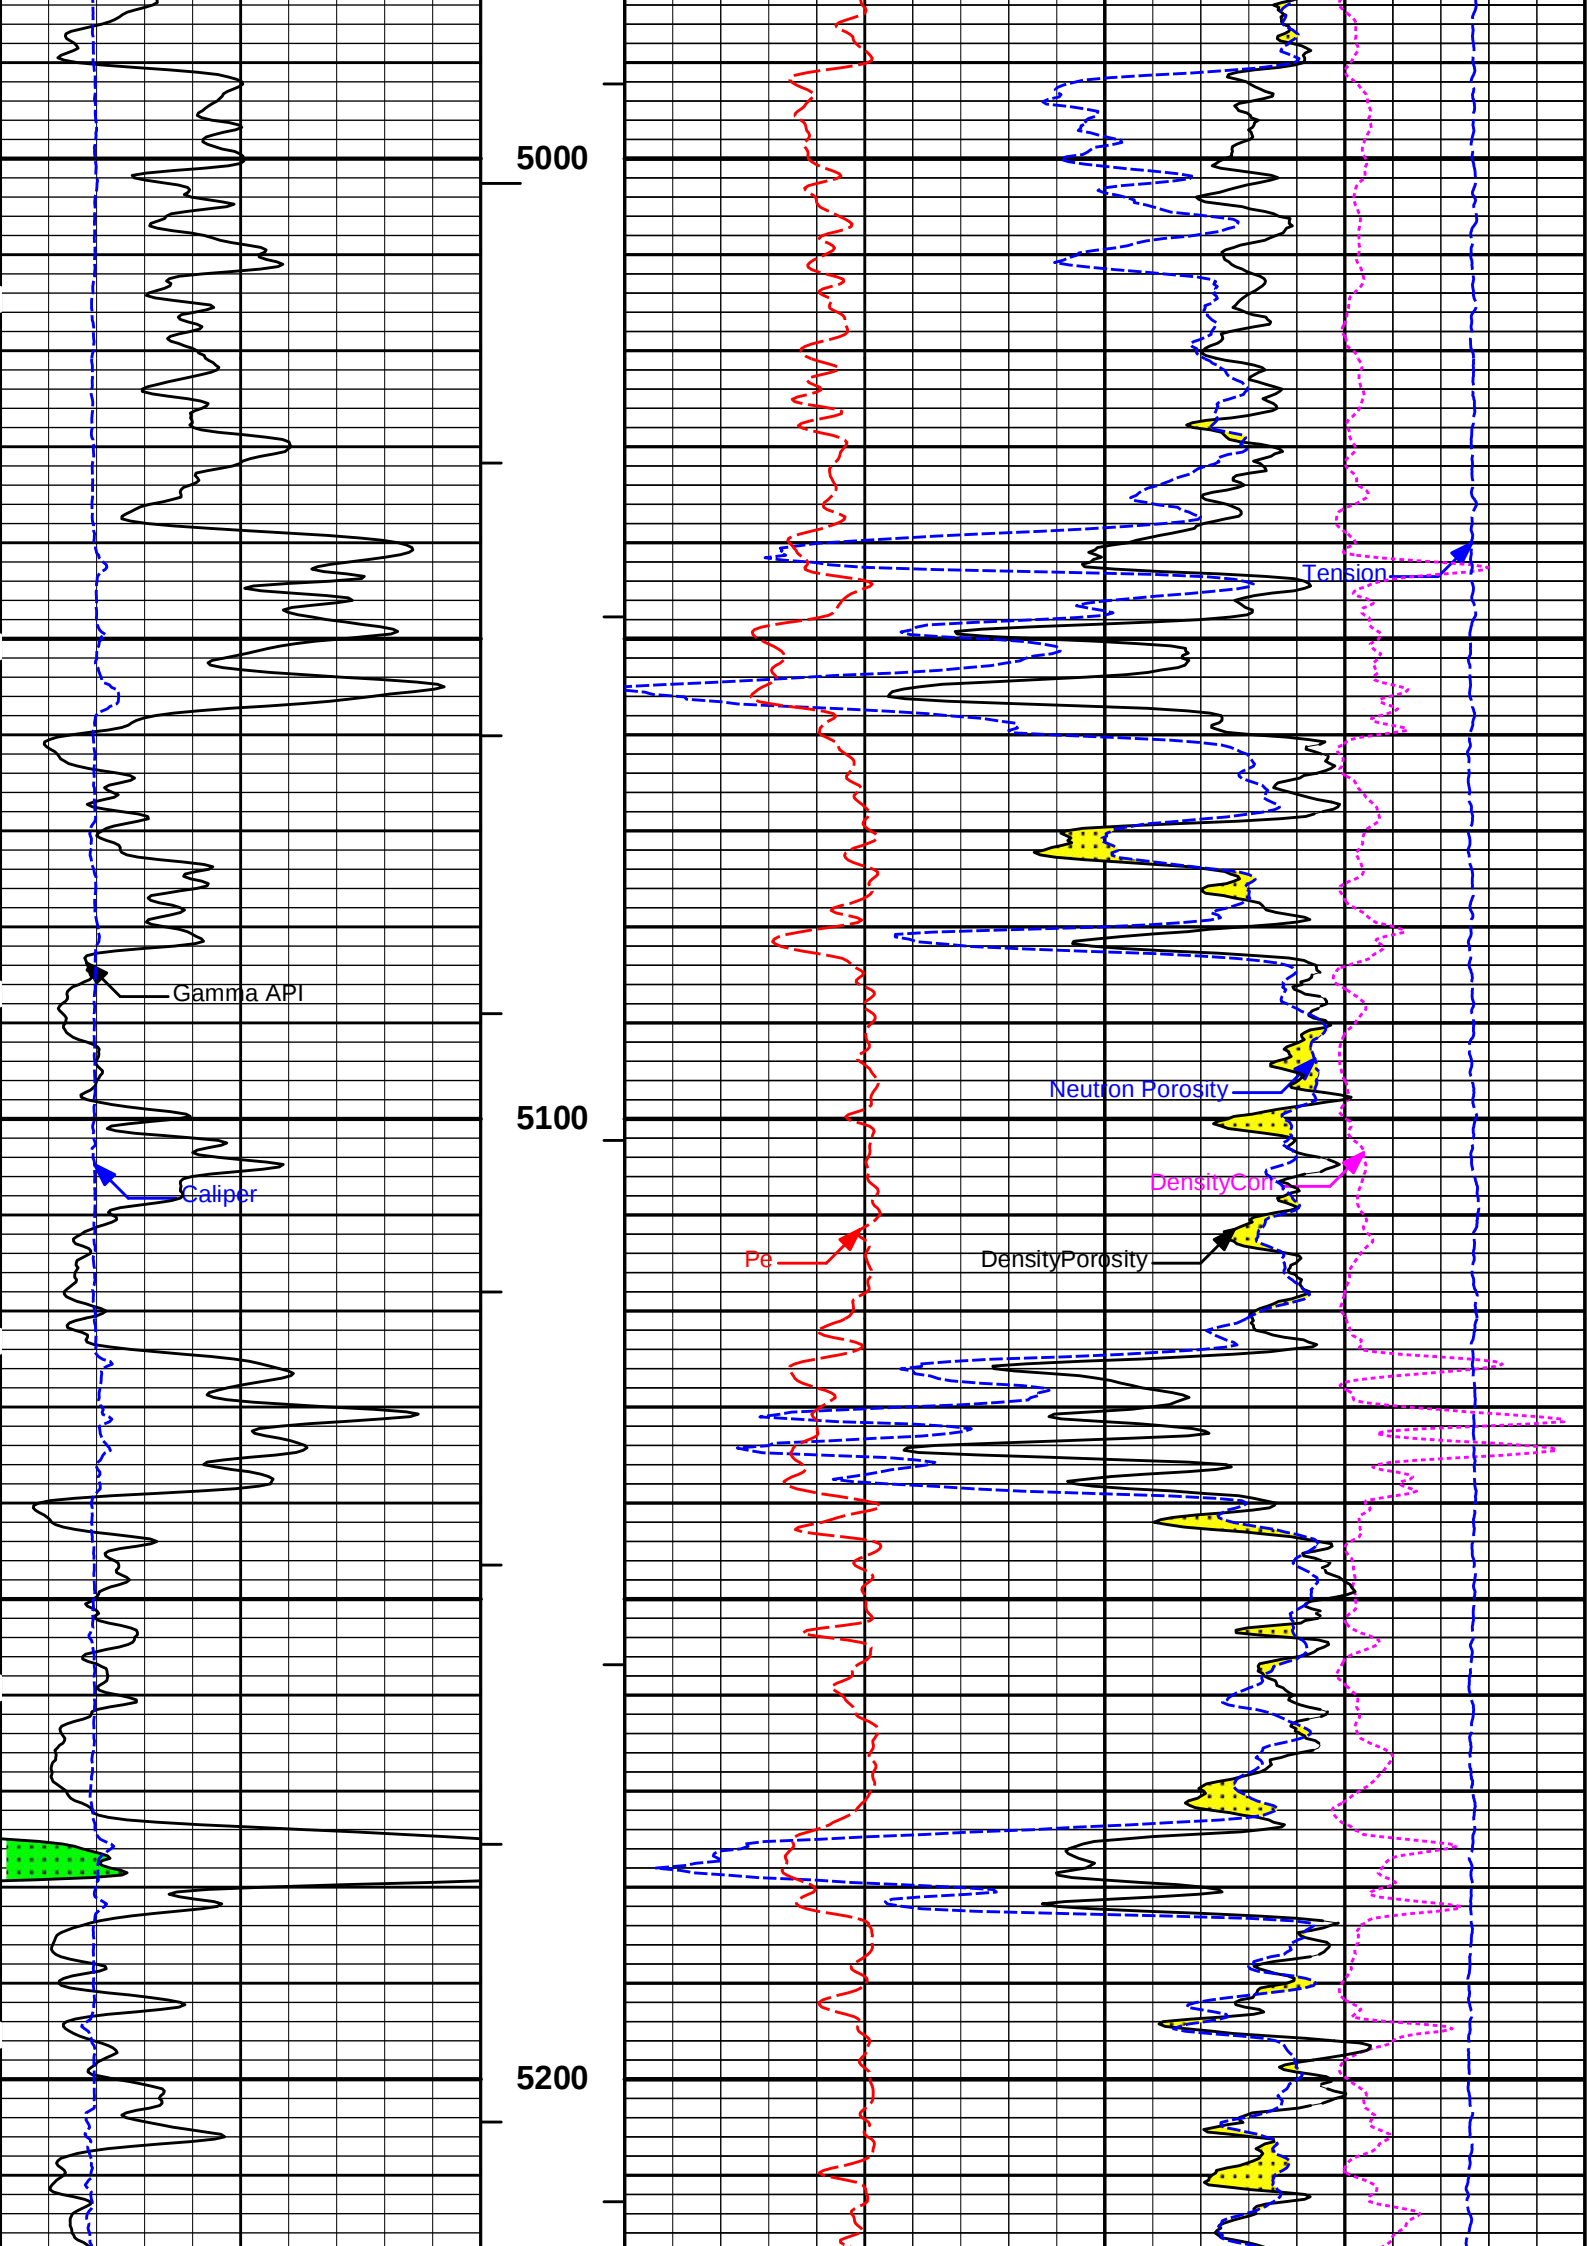

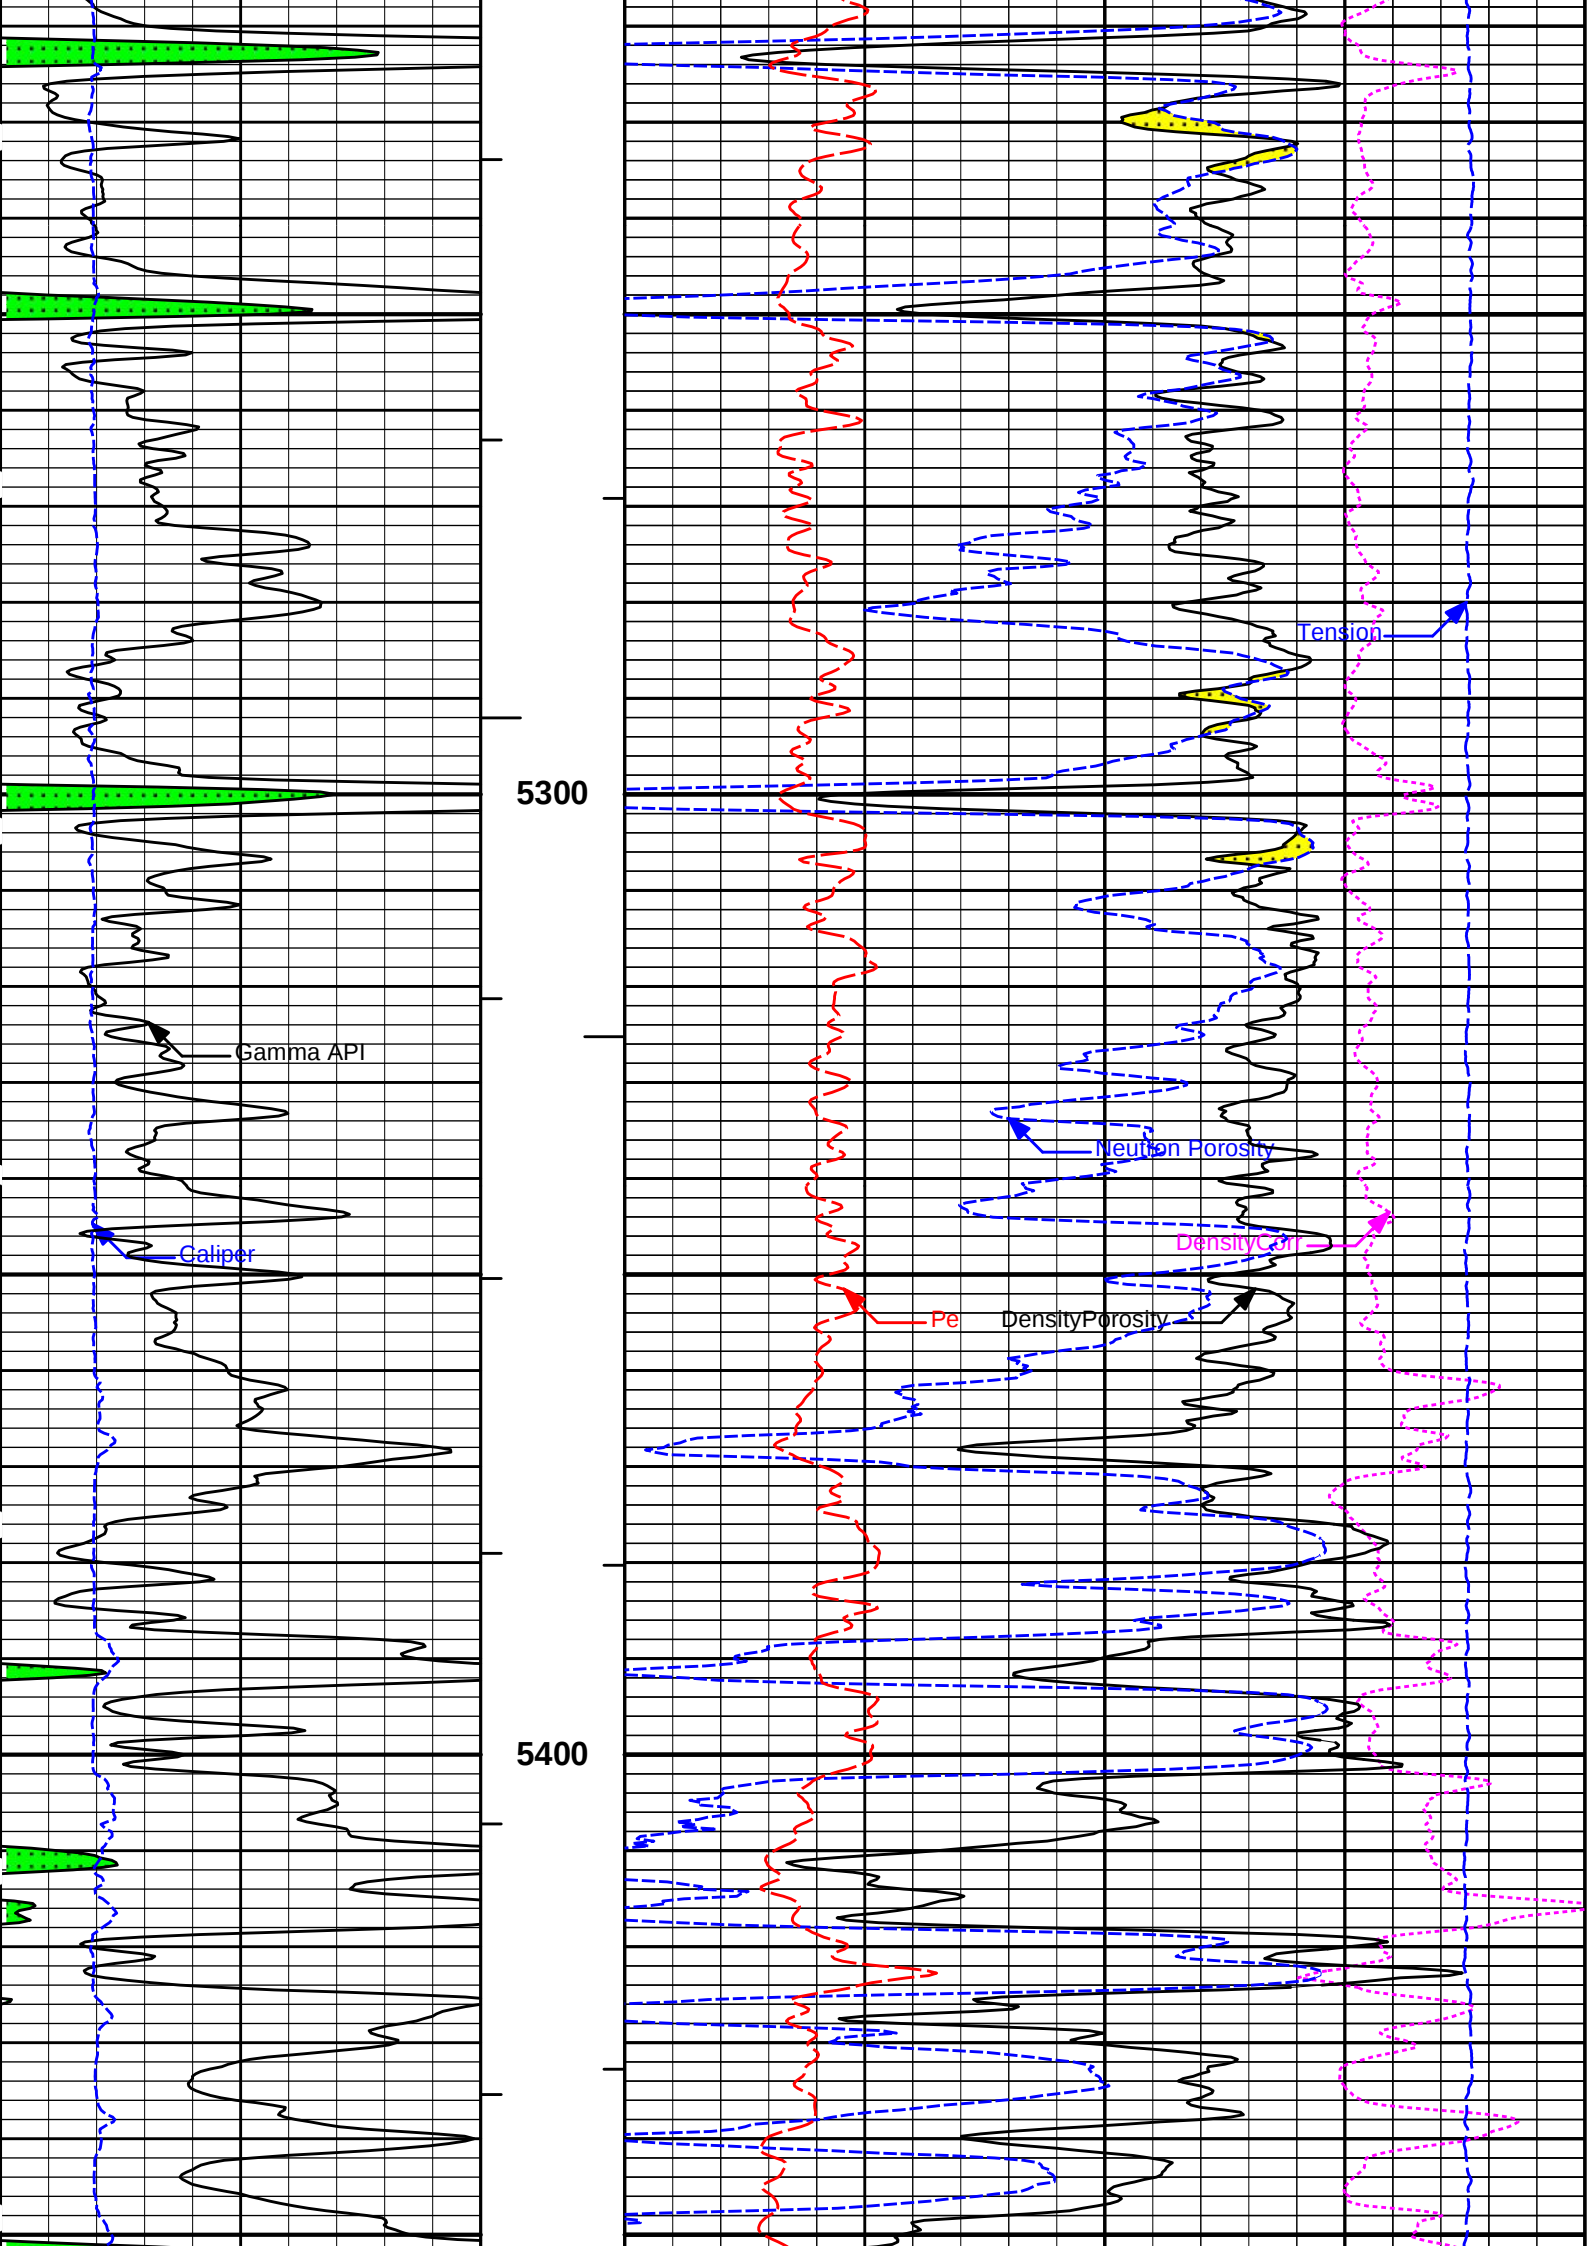

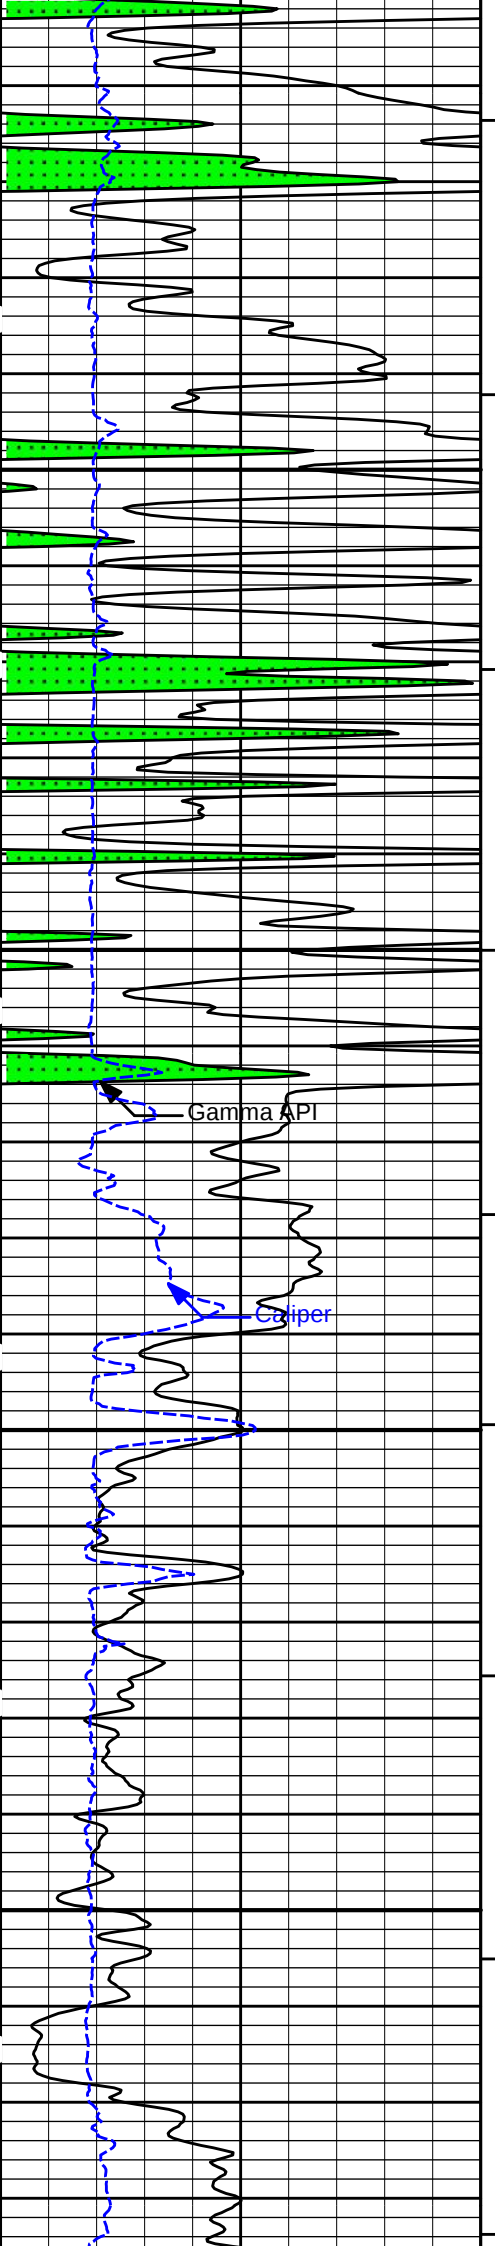


5500

5600

Gamma API

Caliper

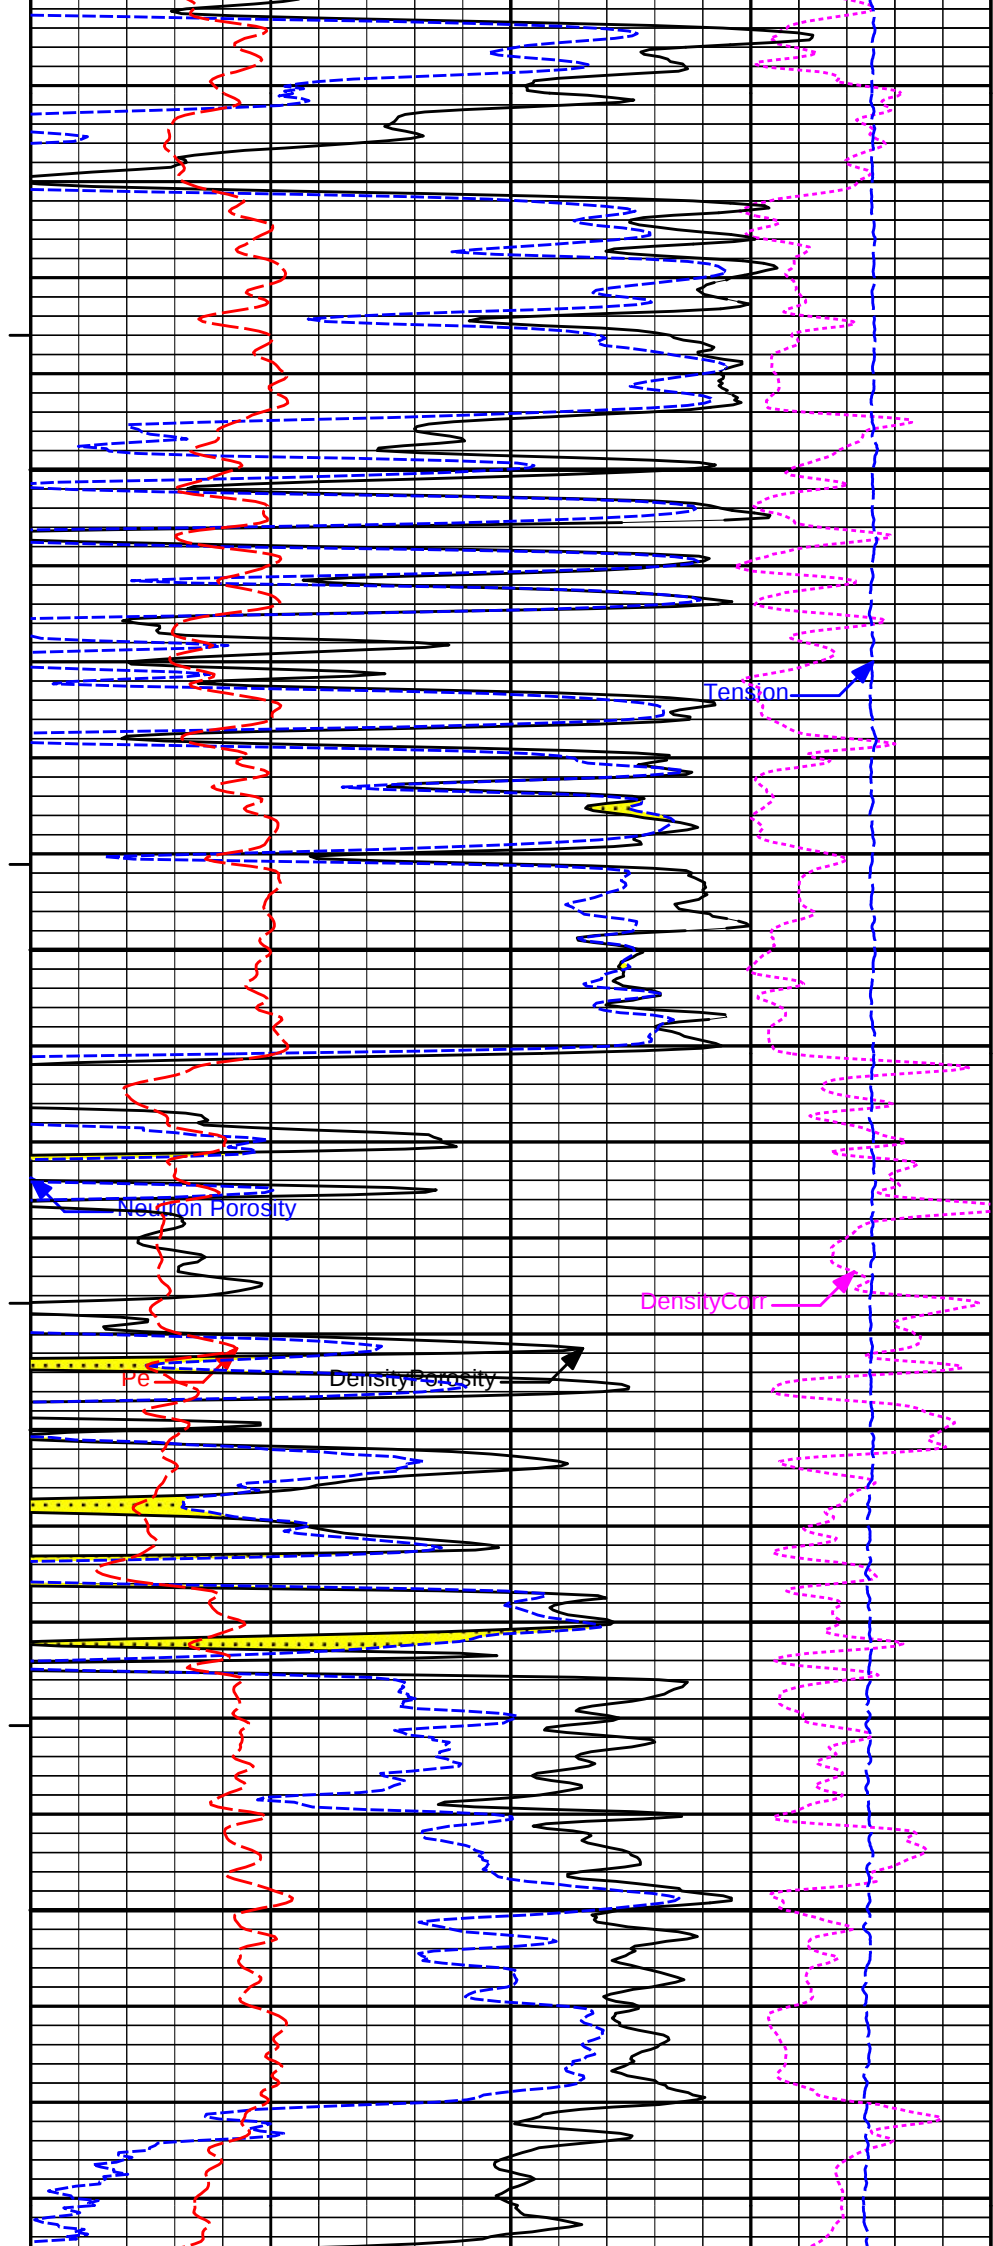


Tension

Neutron Porosity

Density Corr

Density Porosity

re

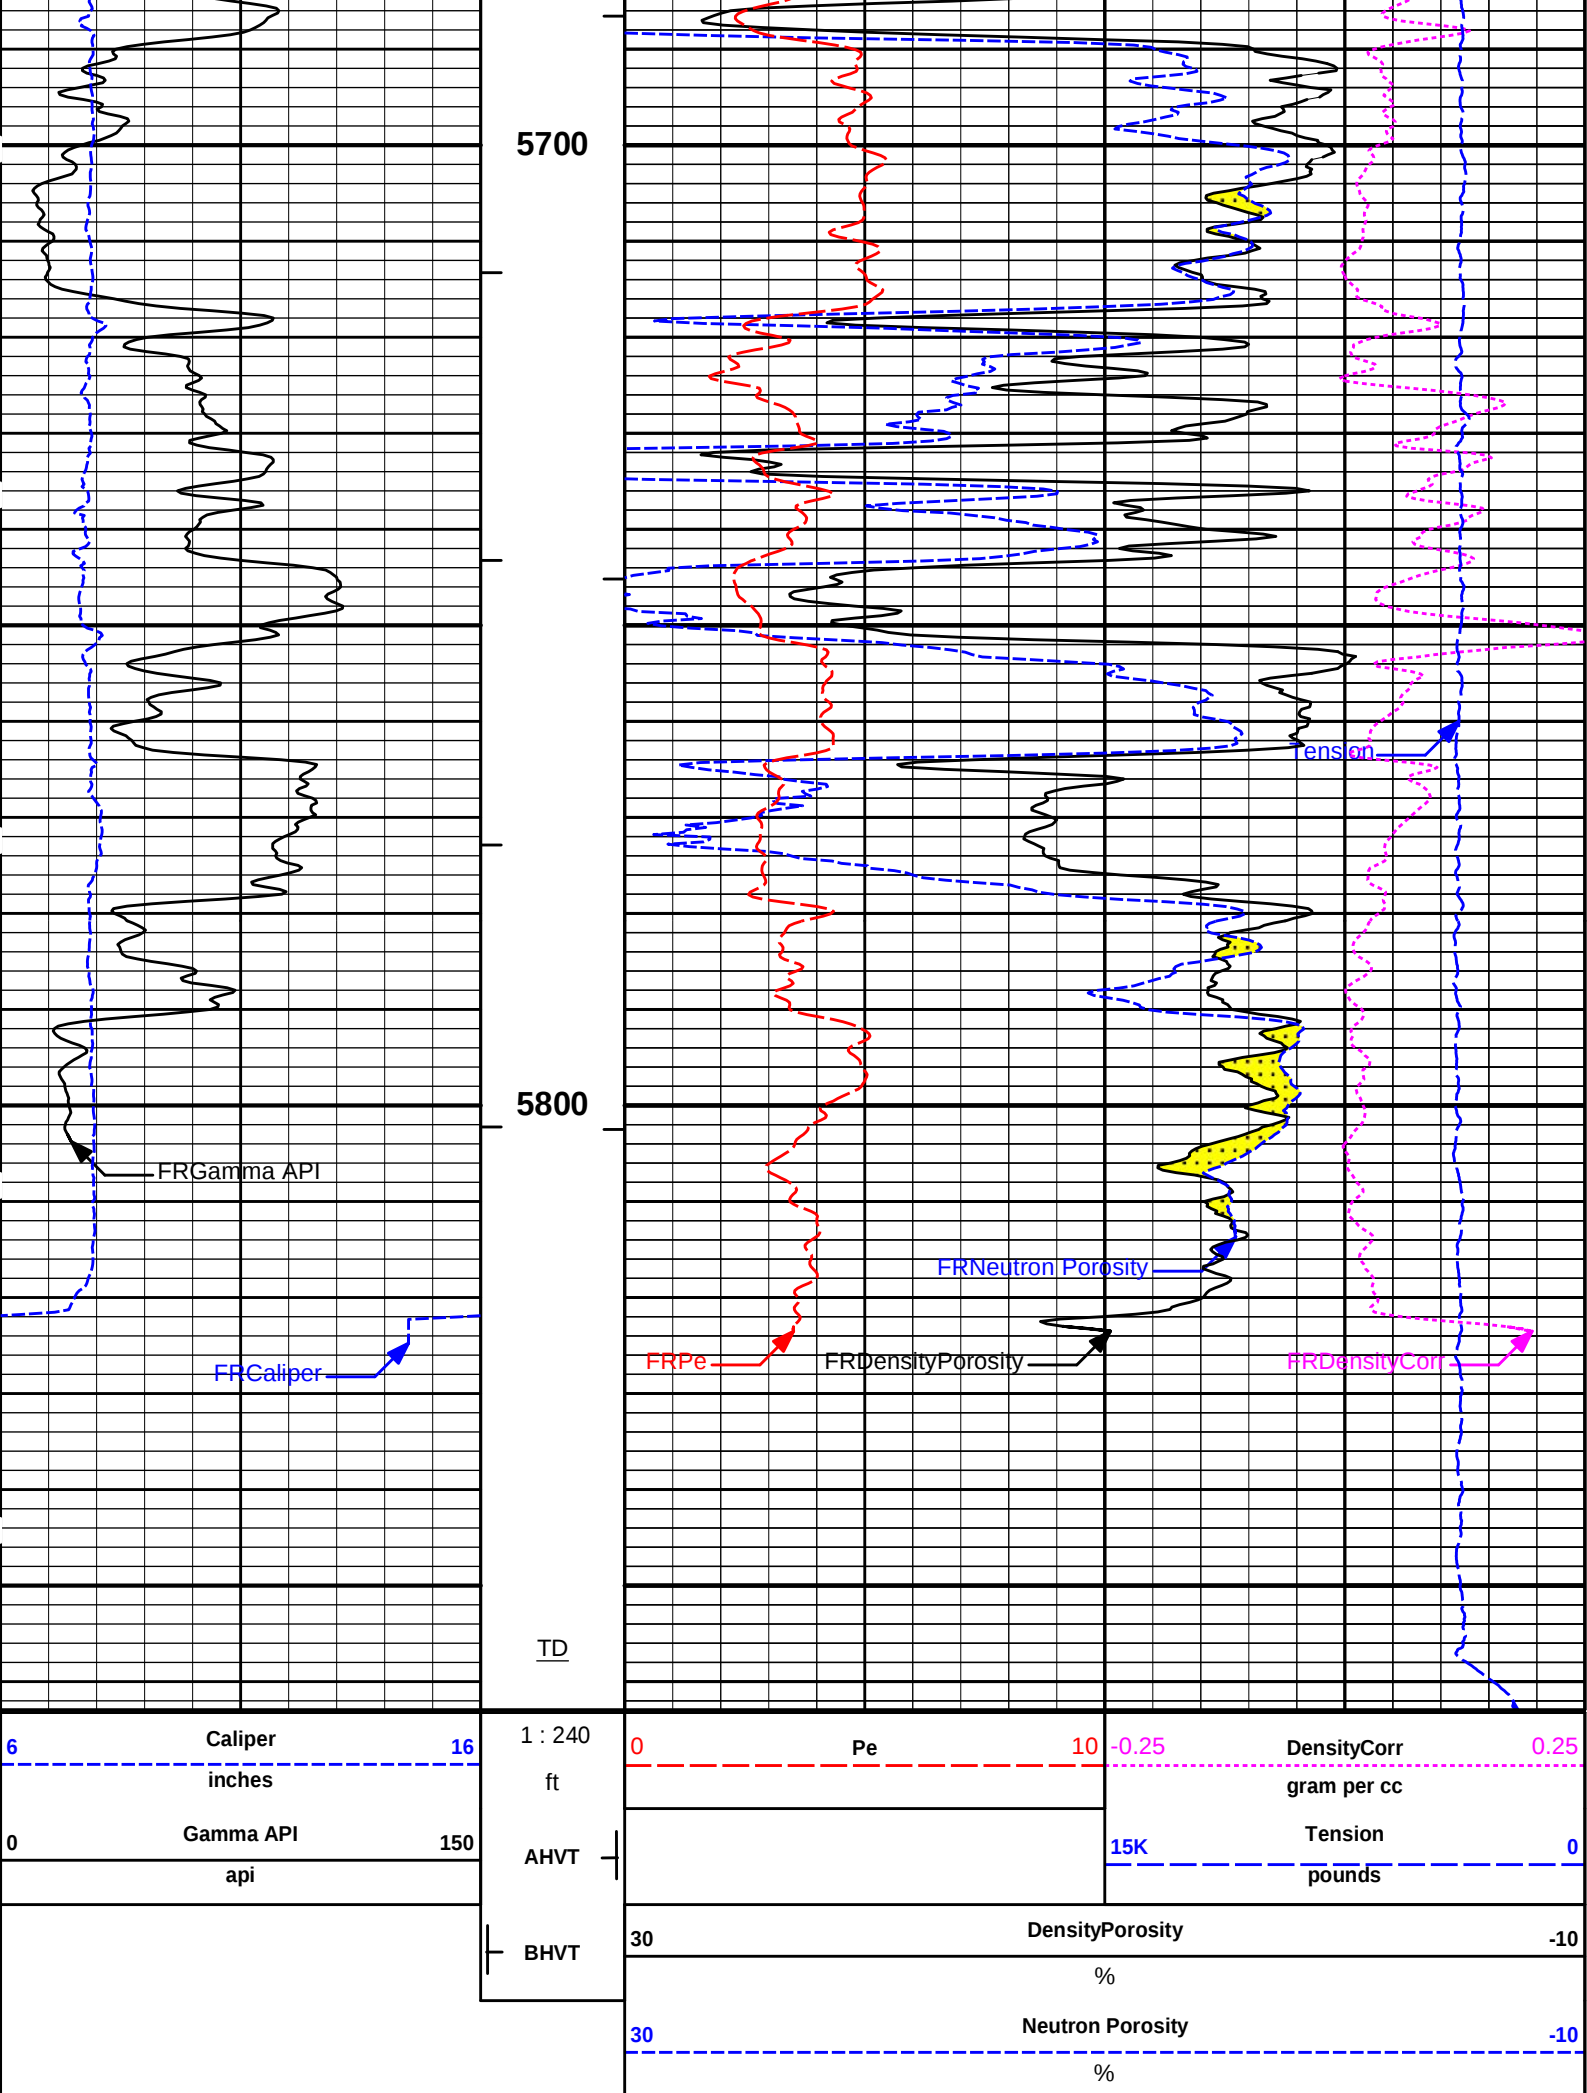

5 INCH MAIN LOG


MAIN SECTION 5" PER 100'


HALLIBURTON


Plot Time: 02-Apr-18 21:00:53
Plot Range: 5500 ft to 5864 ft
Data: RAYDON_ROCK\Well Based\DAQ-0001-003\
Plot File: \\SDL-DSN\Poro_IQ_5_MAIN


REPEAT SECTION



REPEAT SECTION

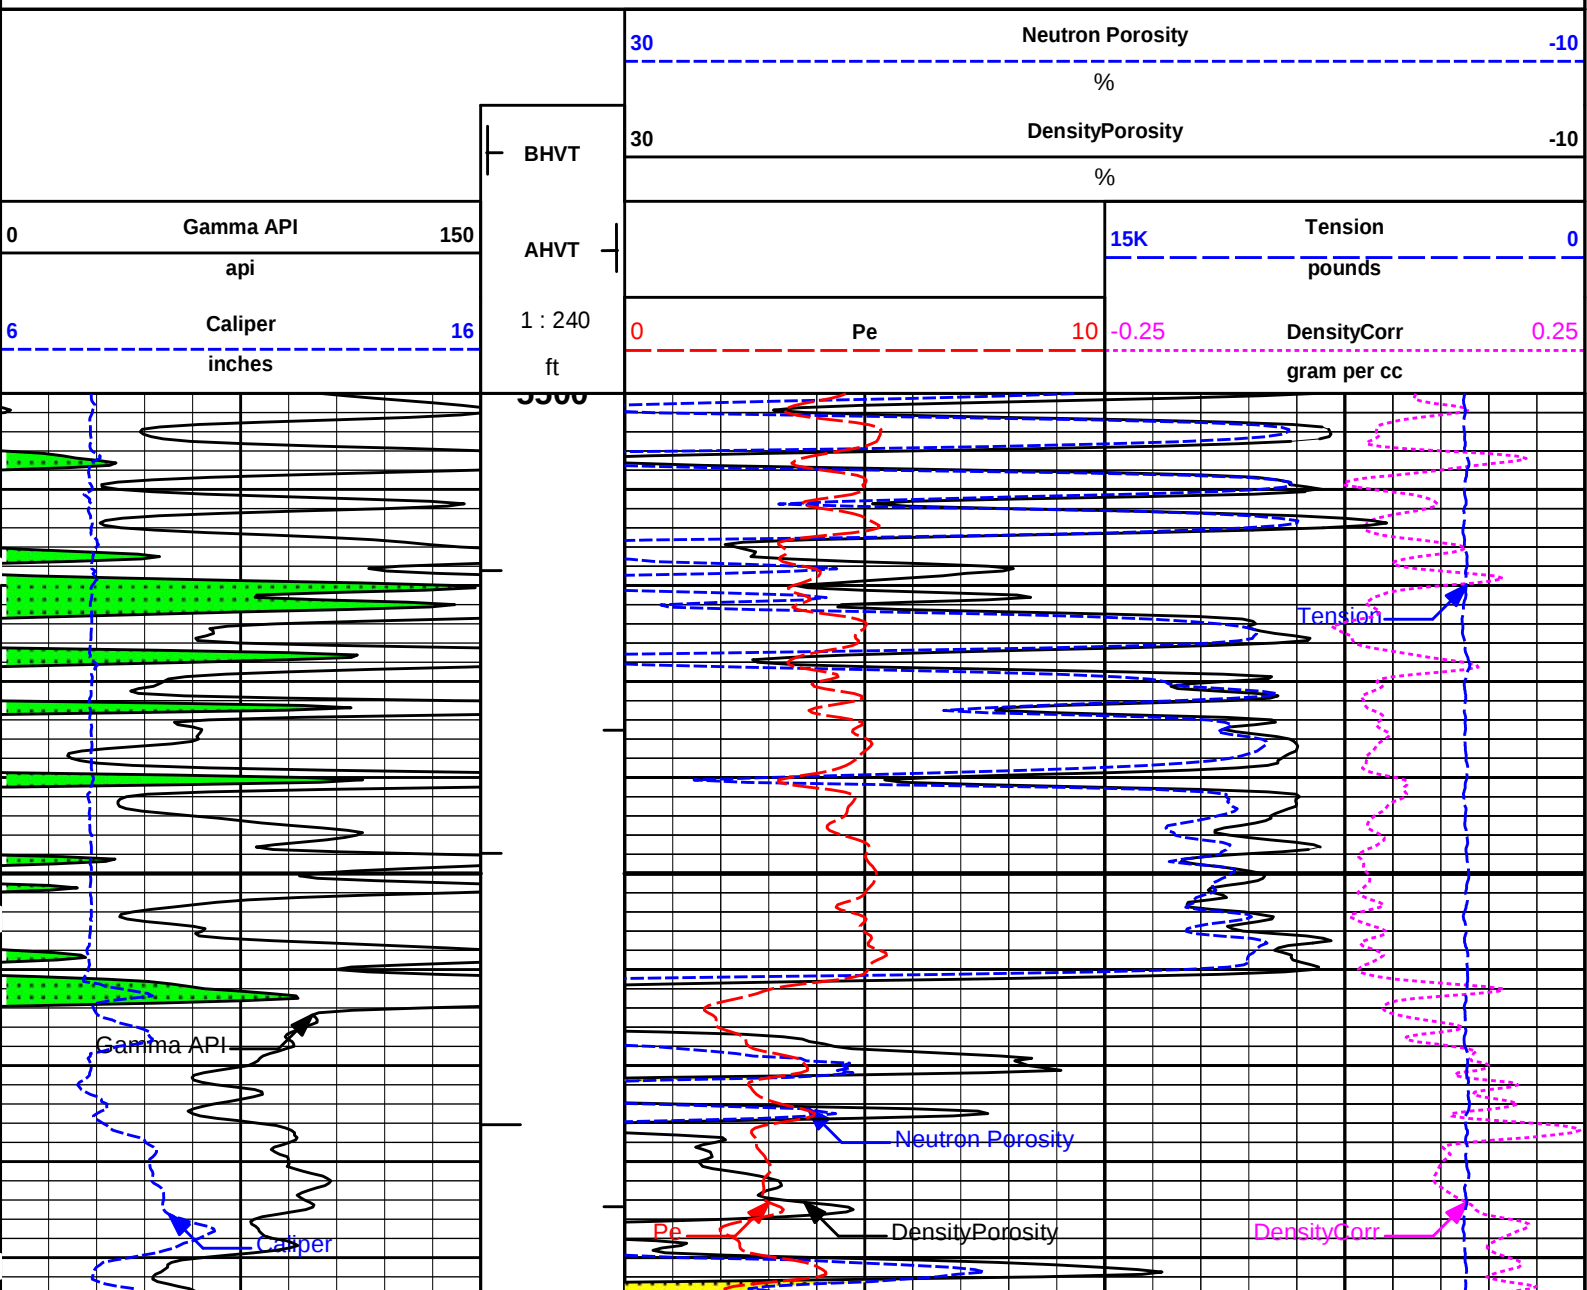


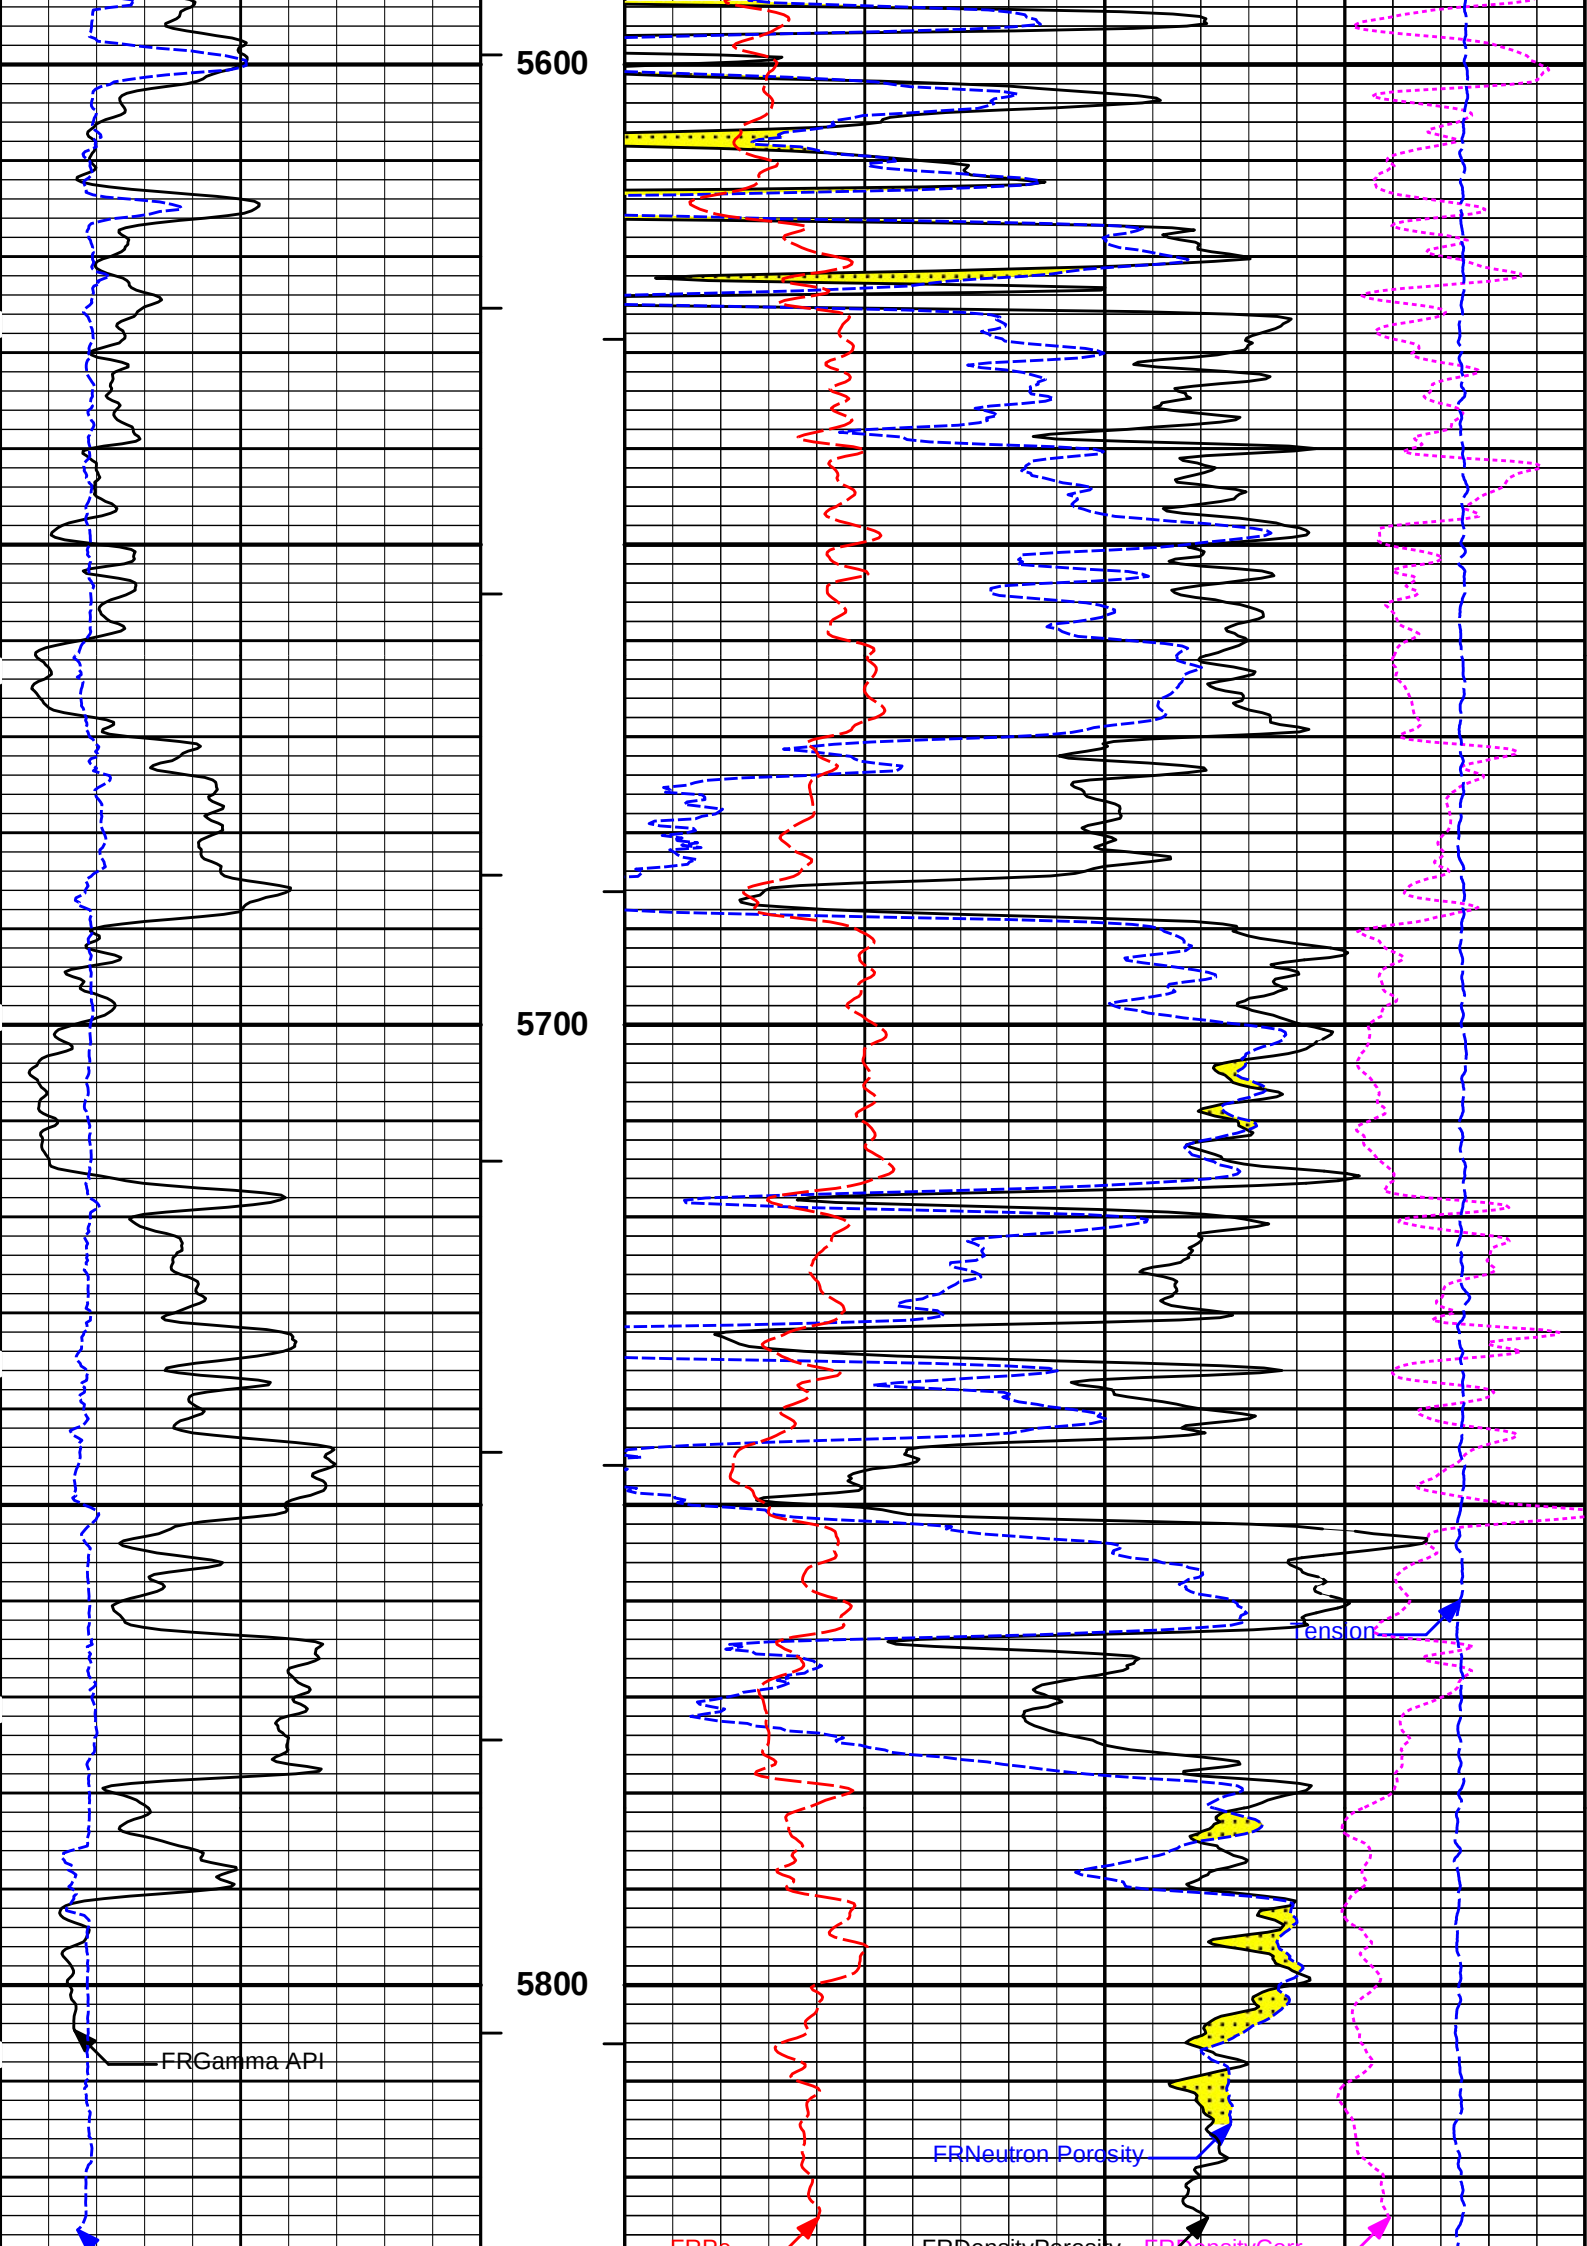


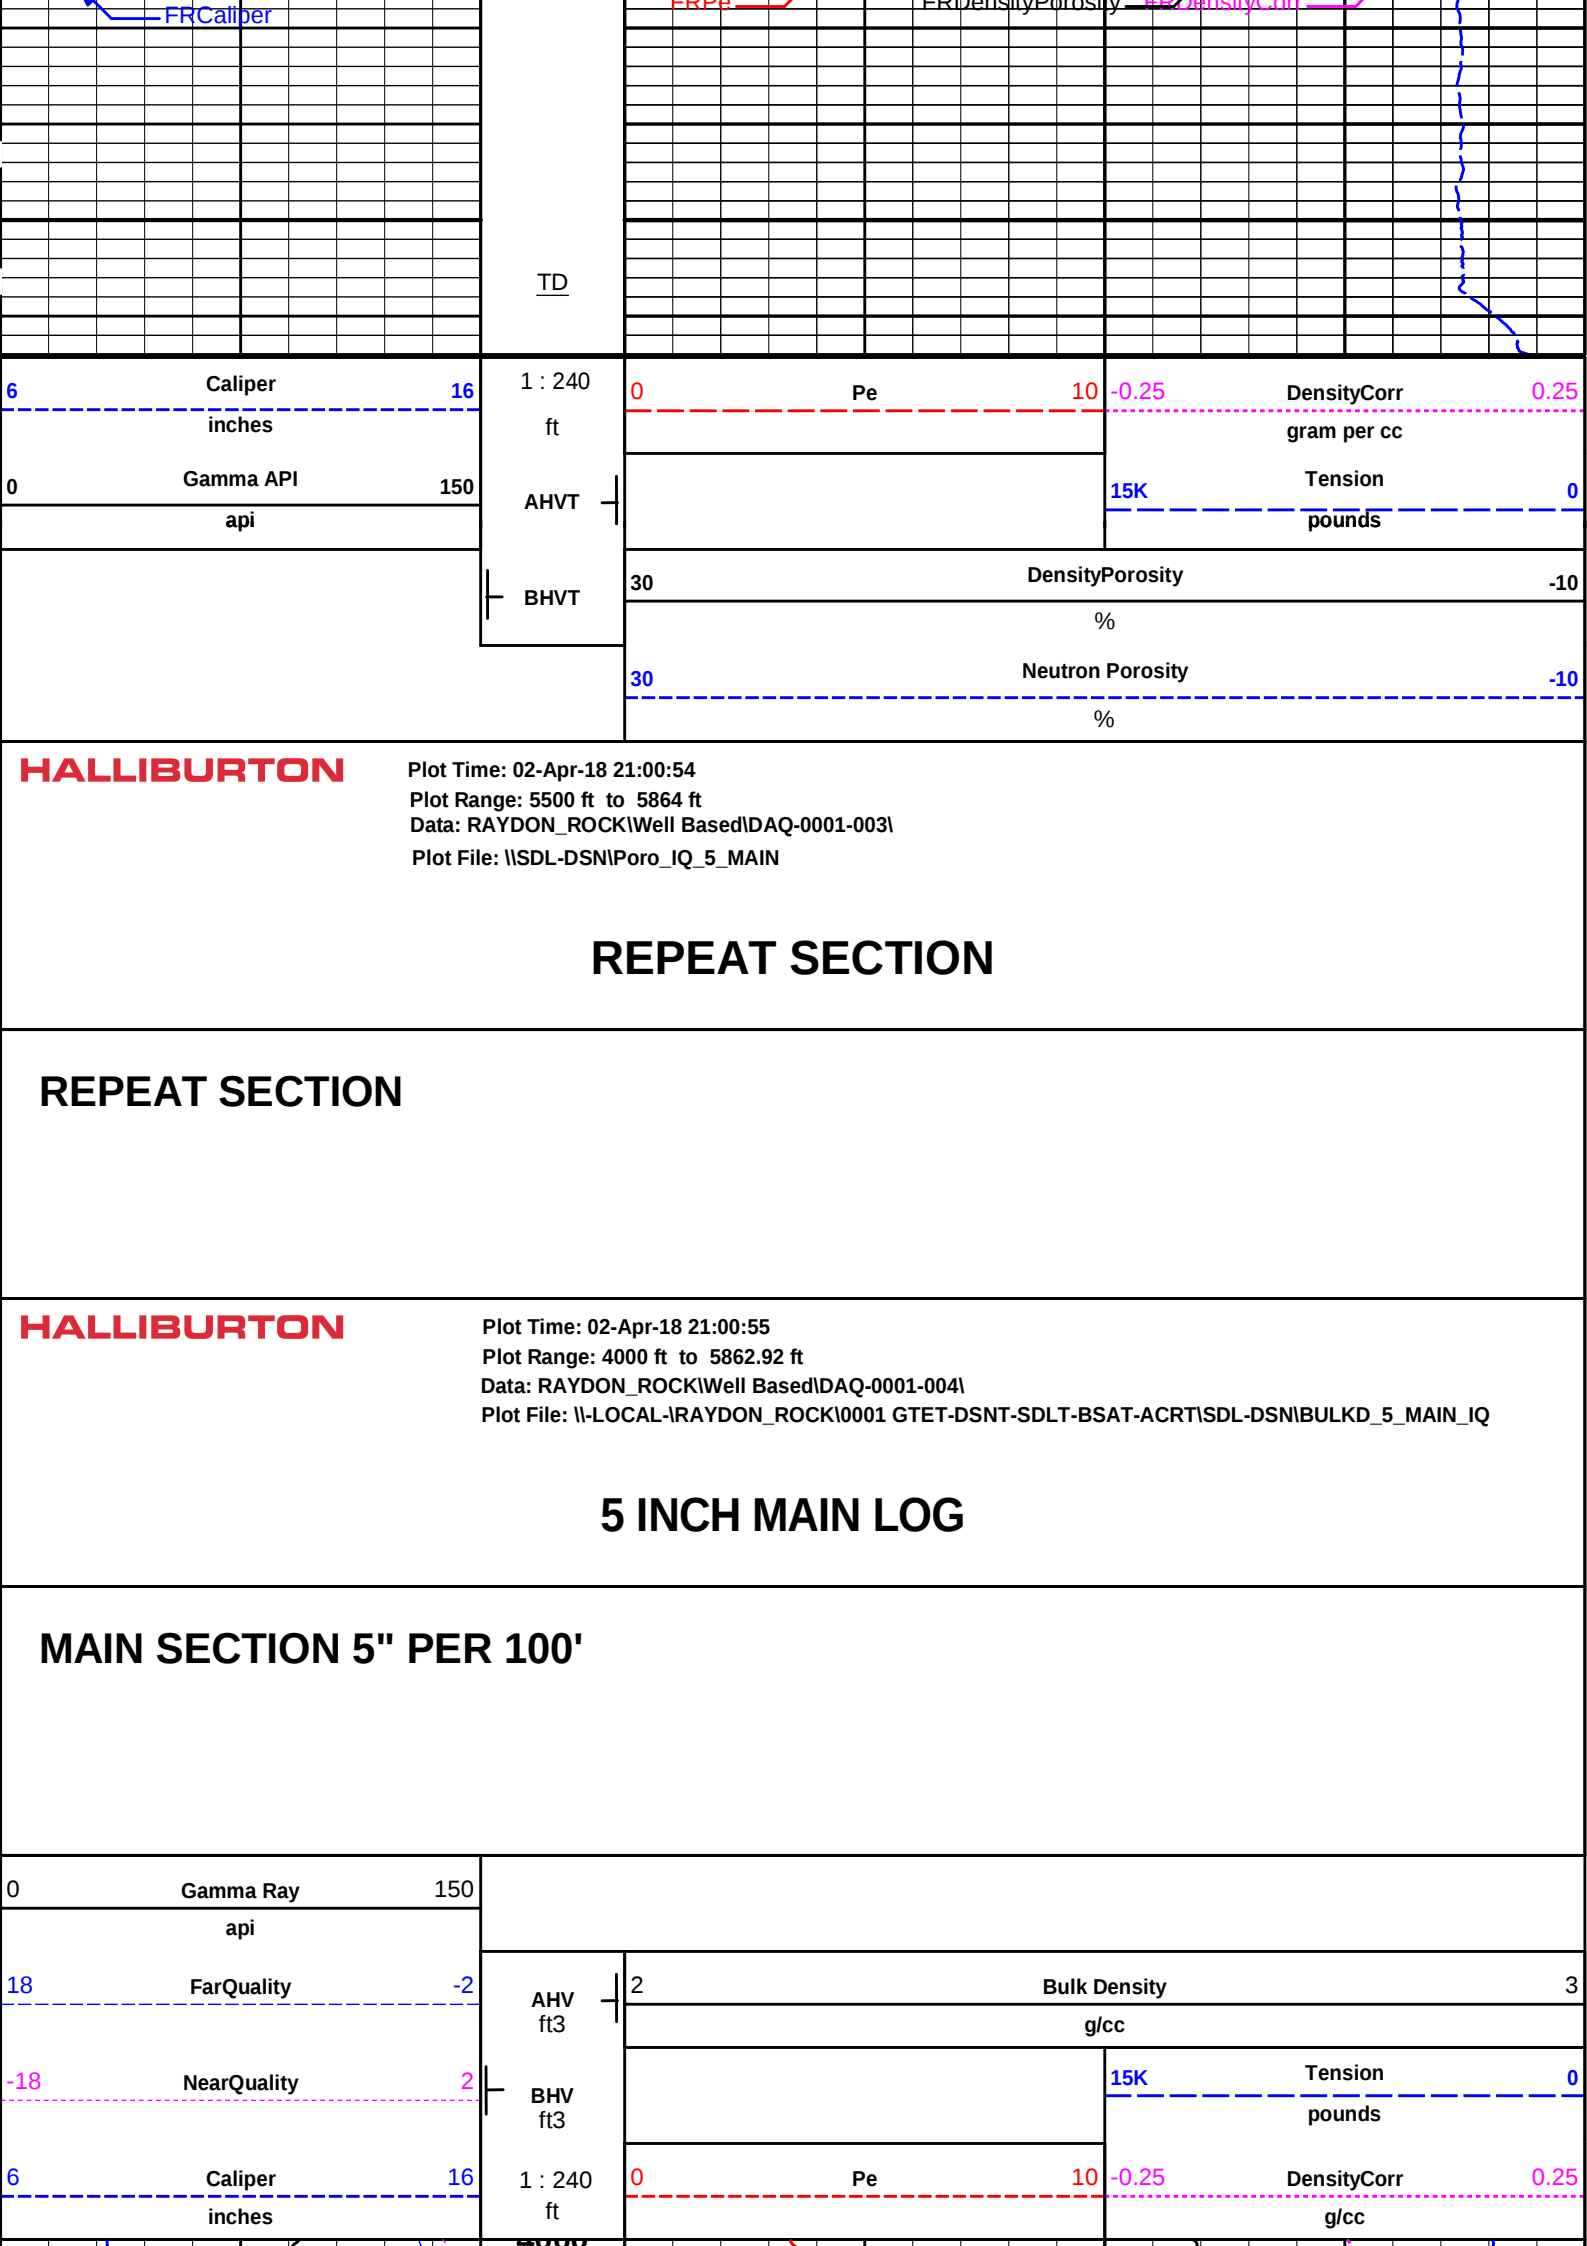


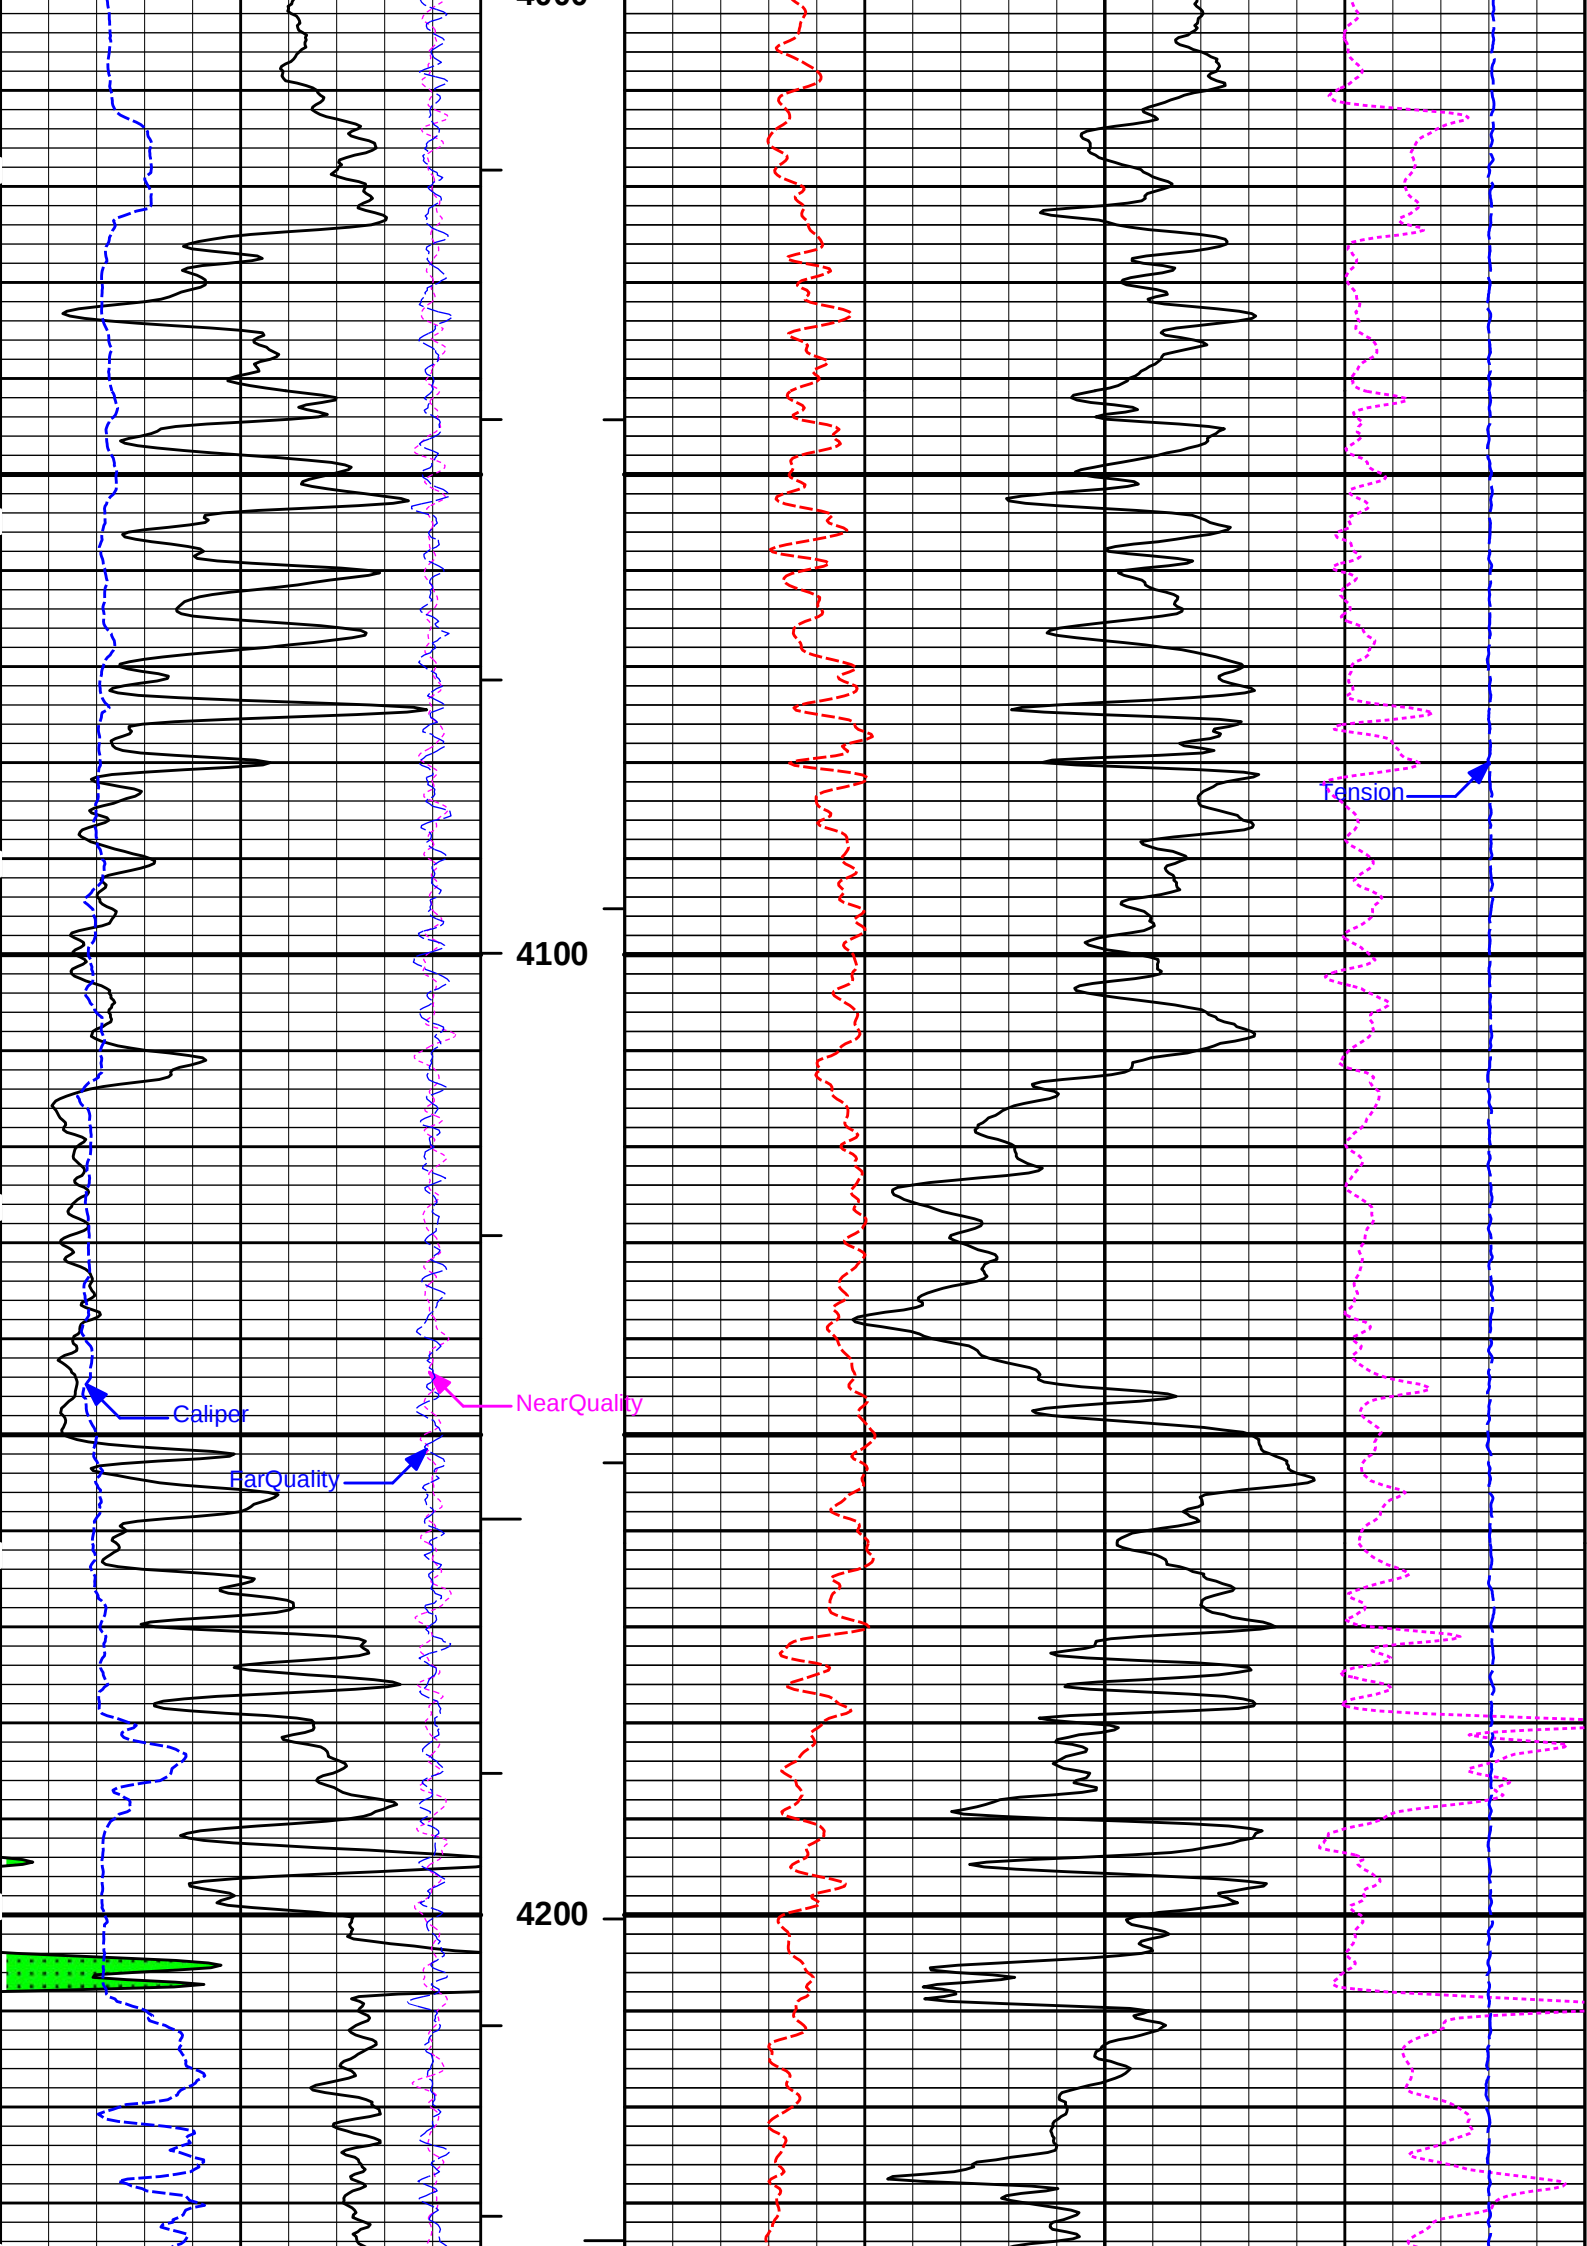


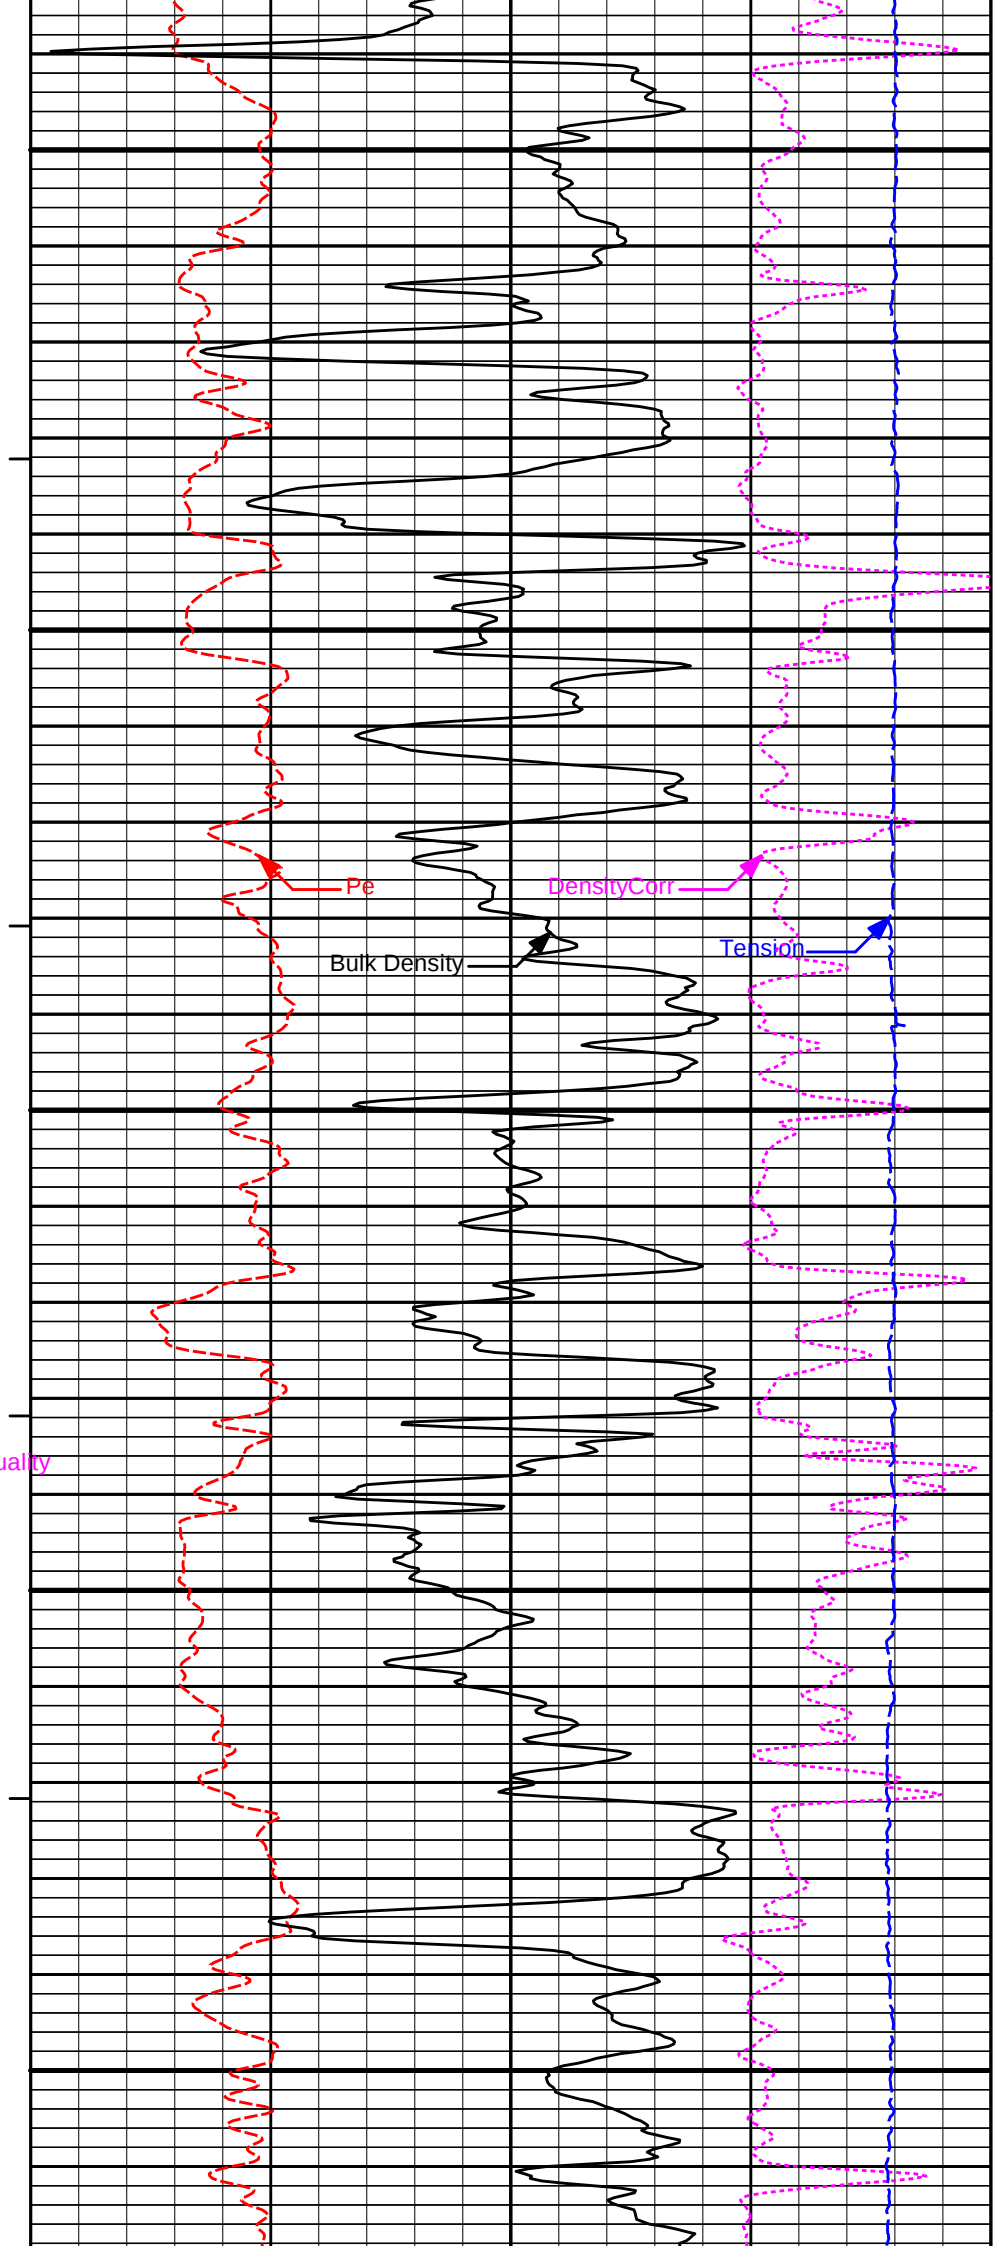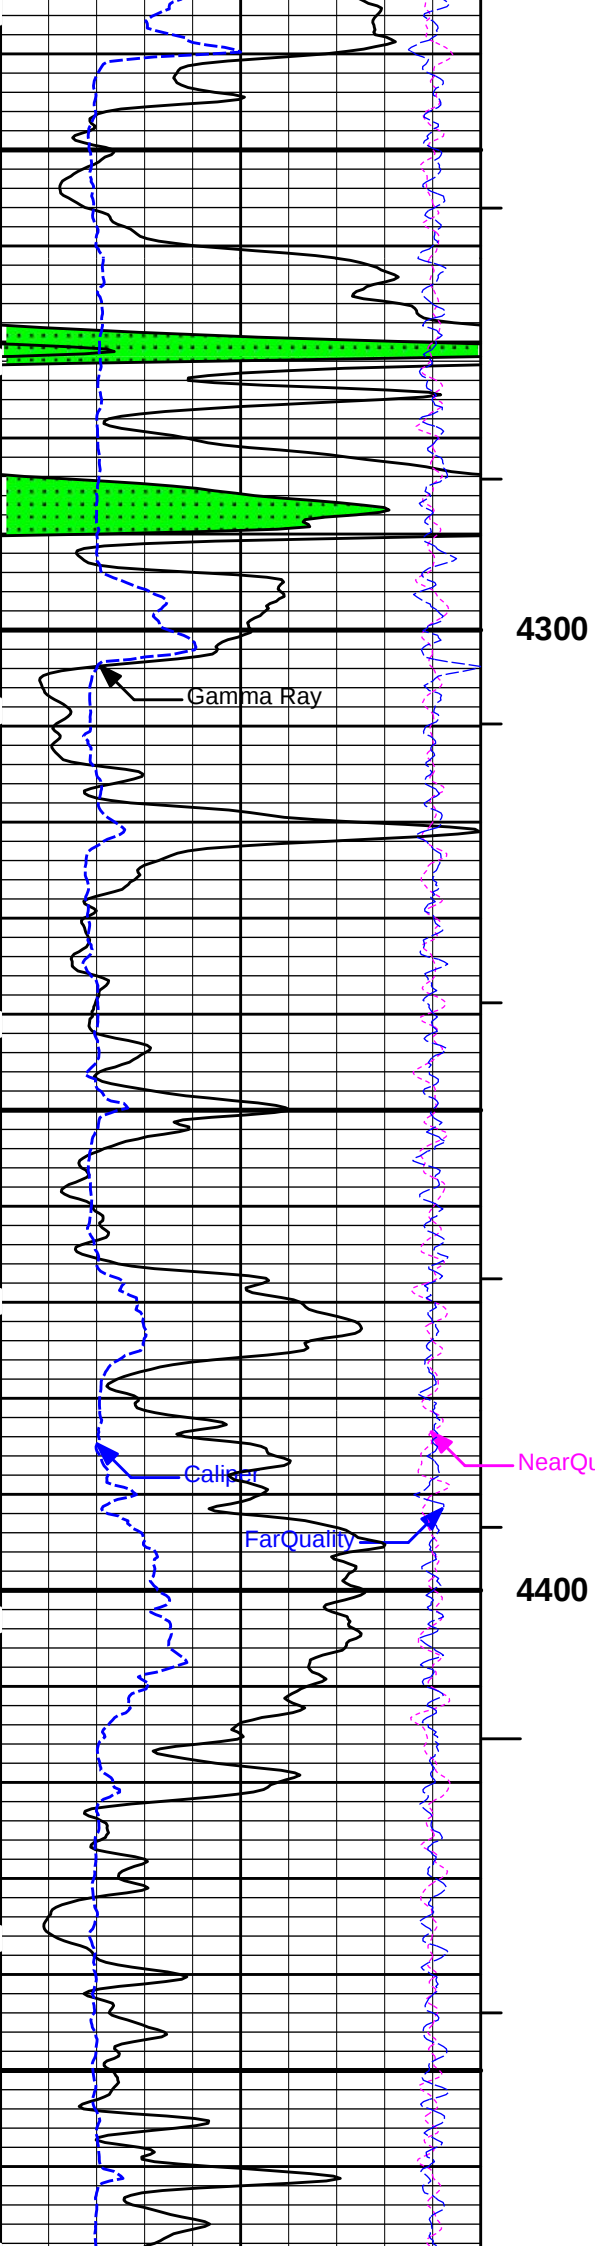


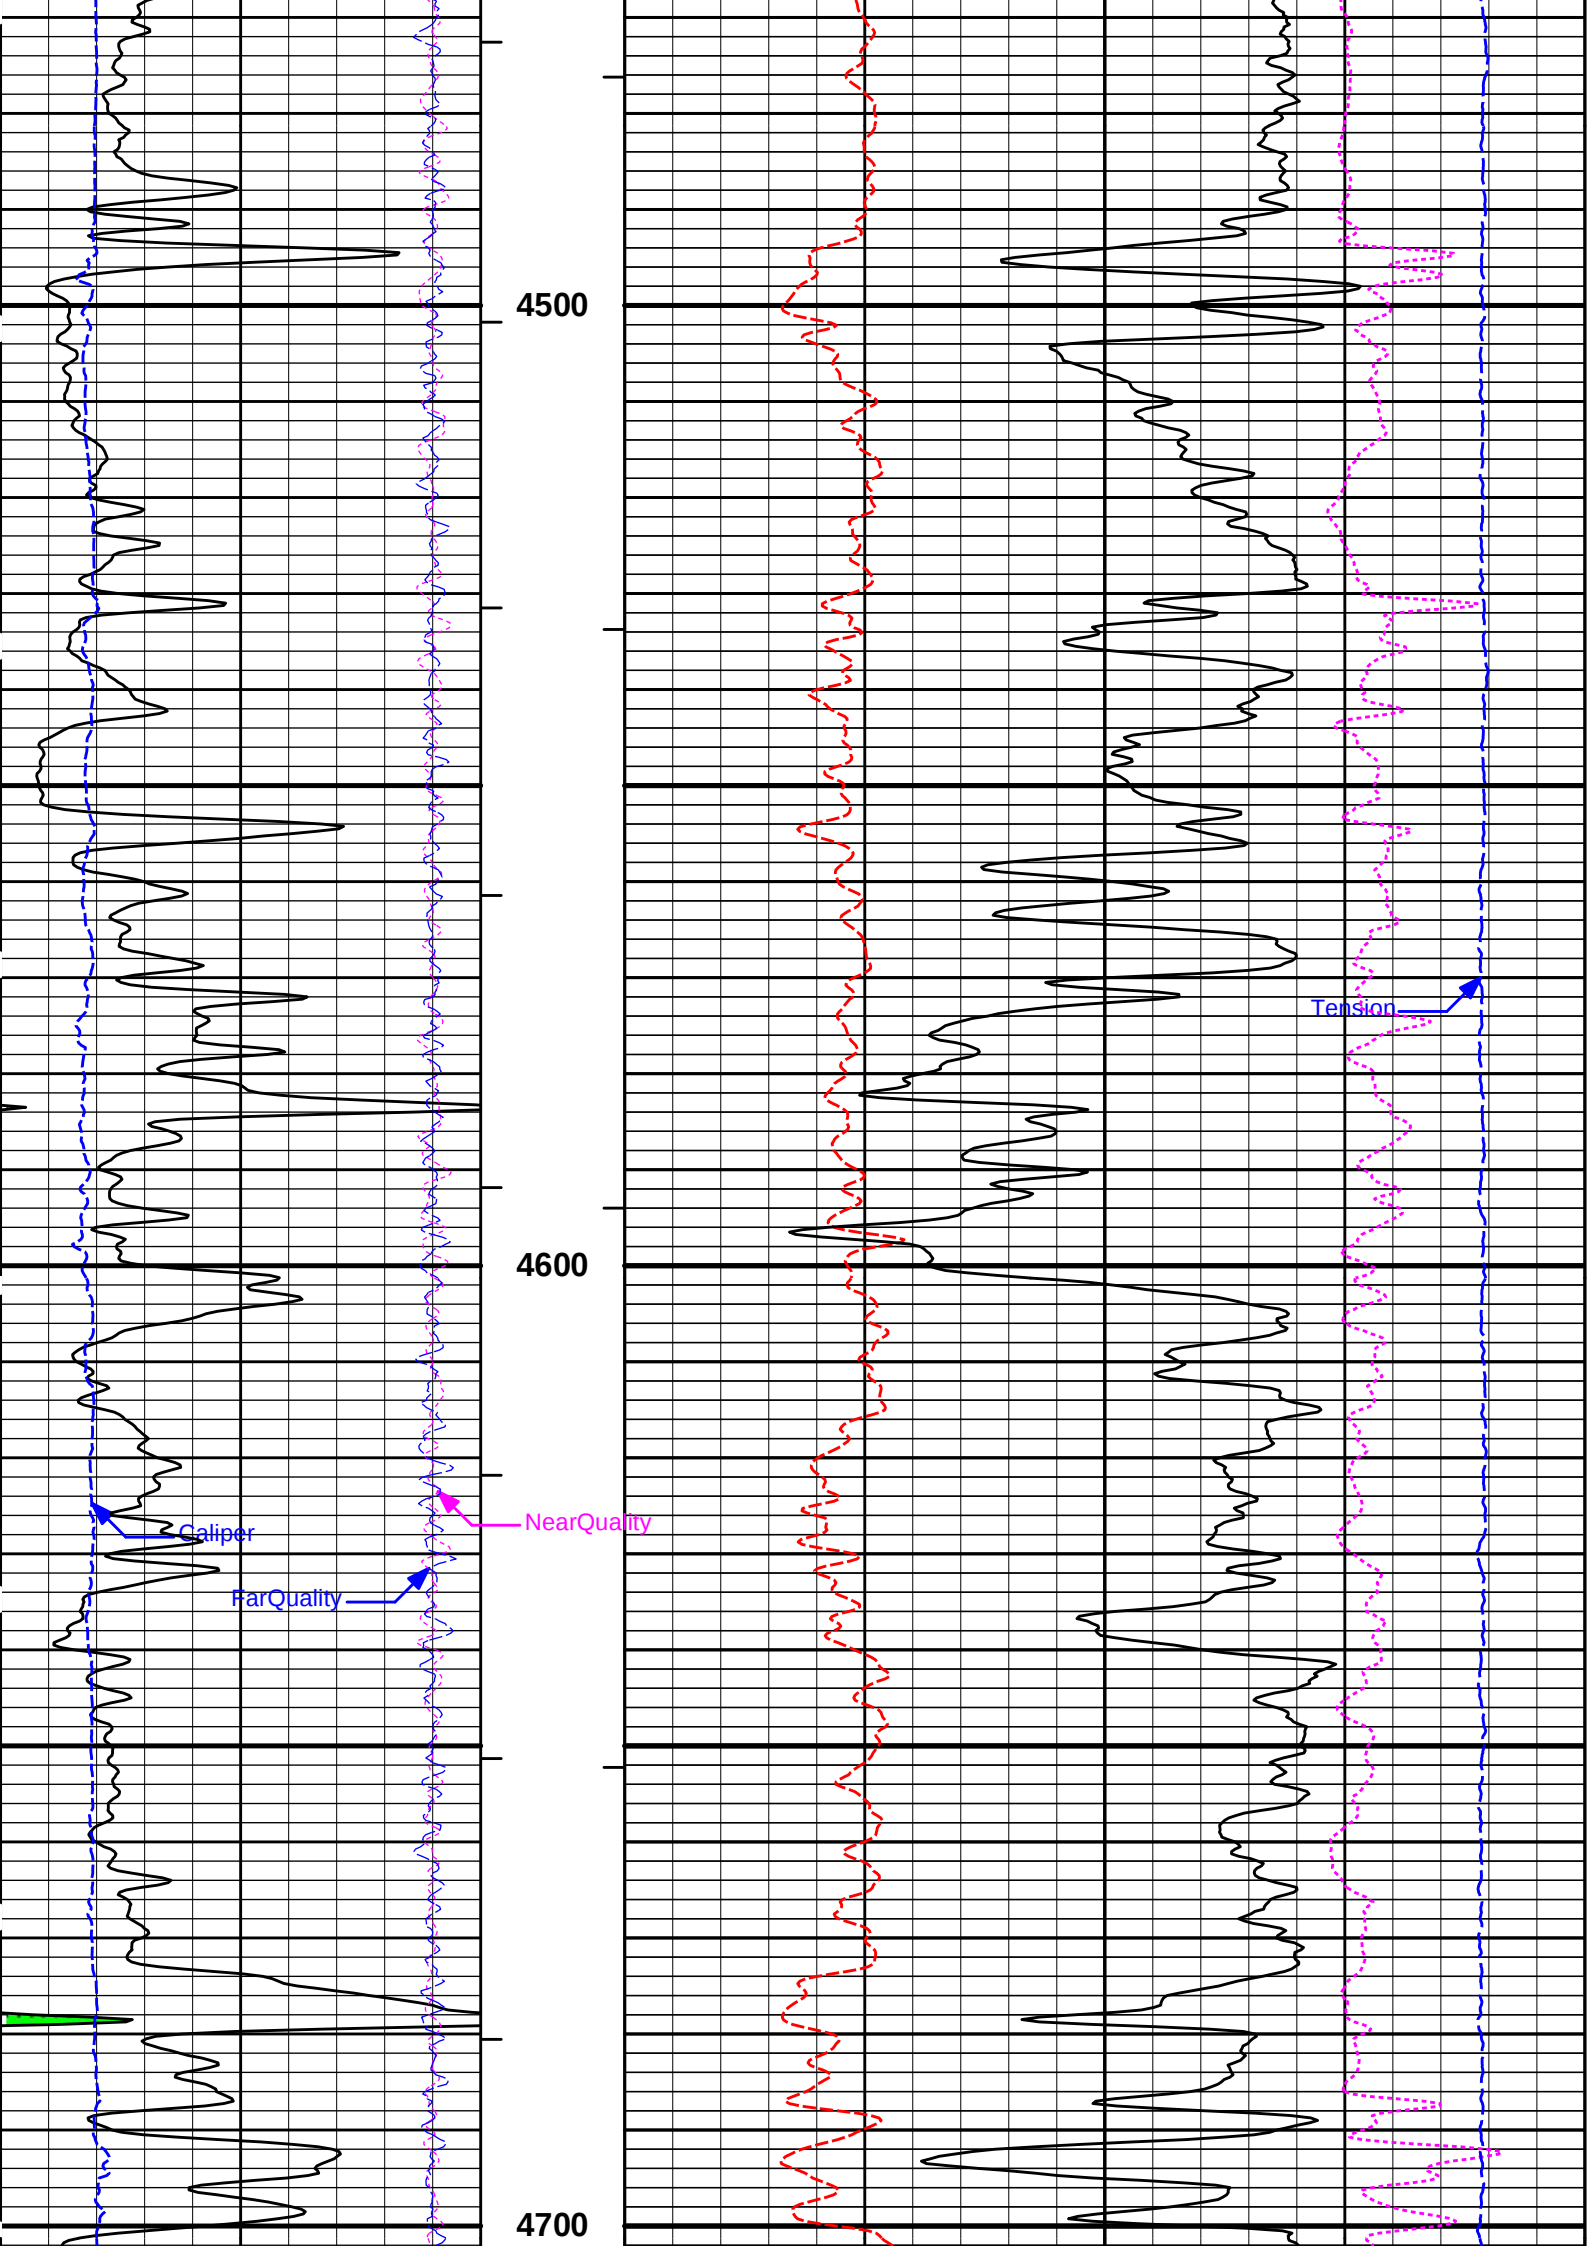


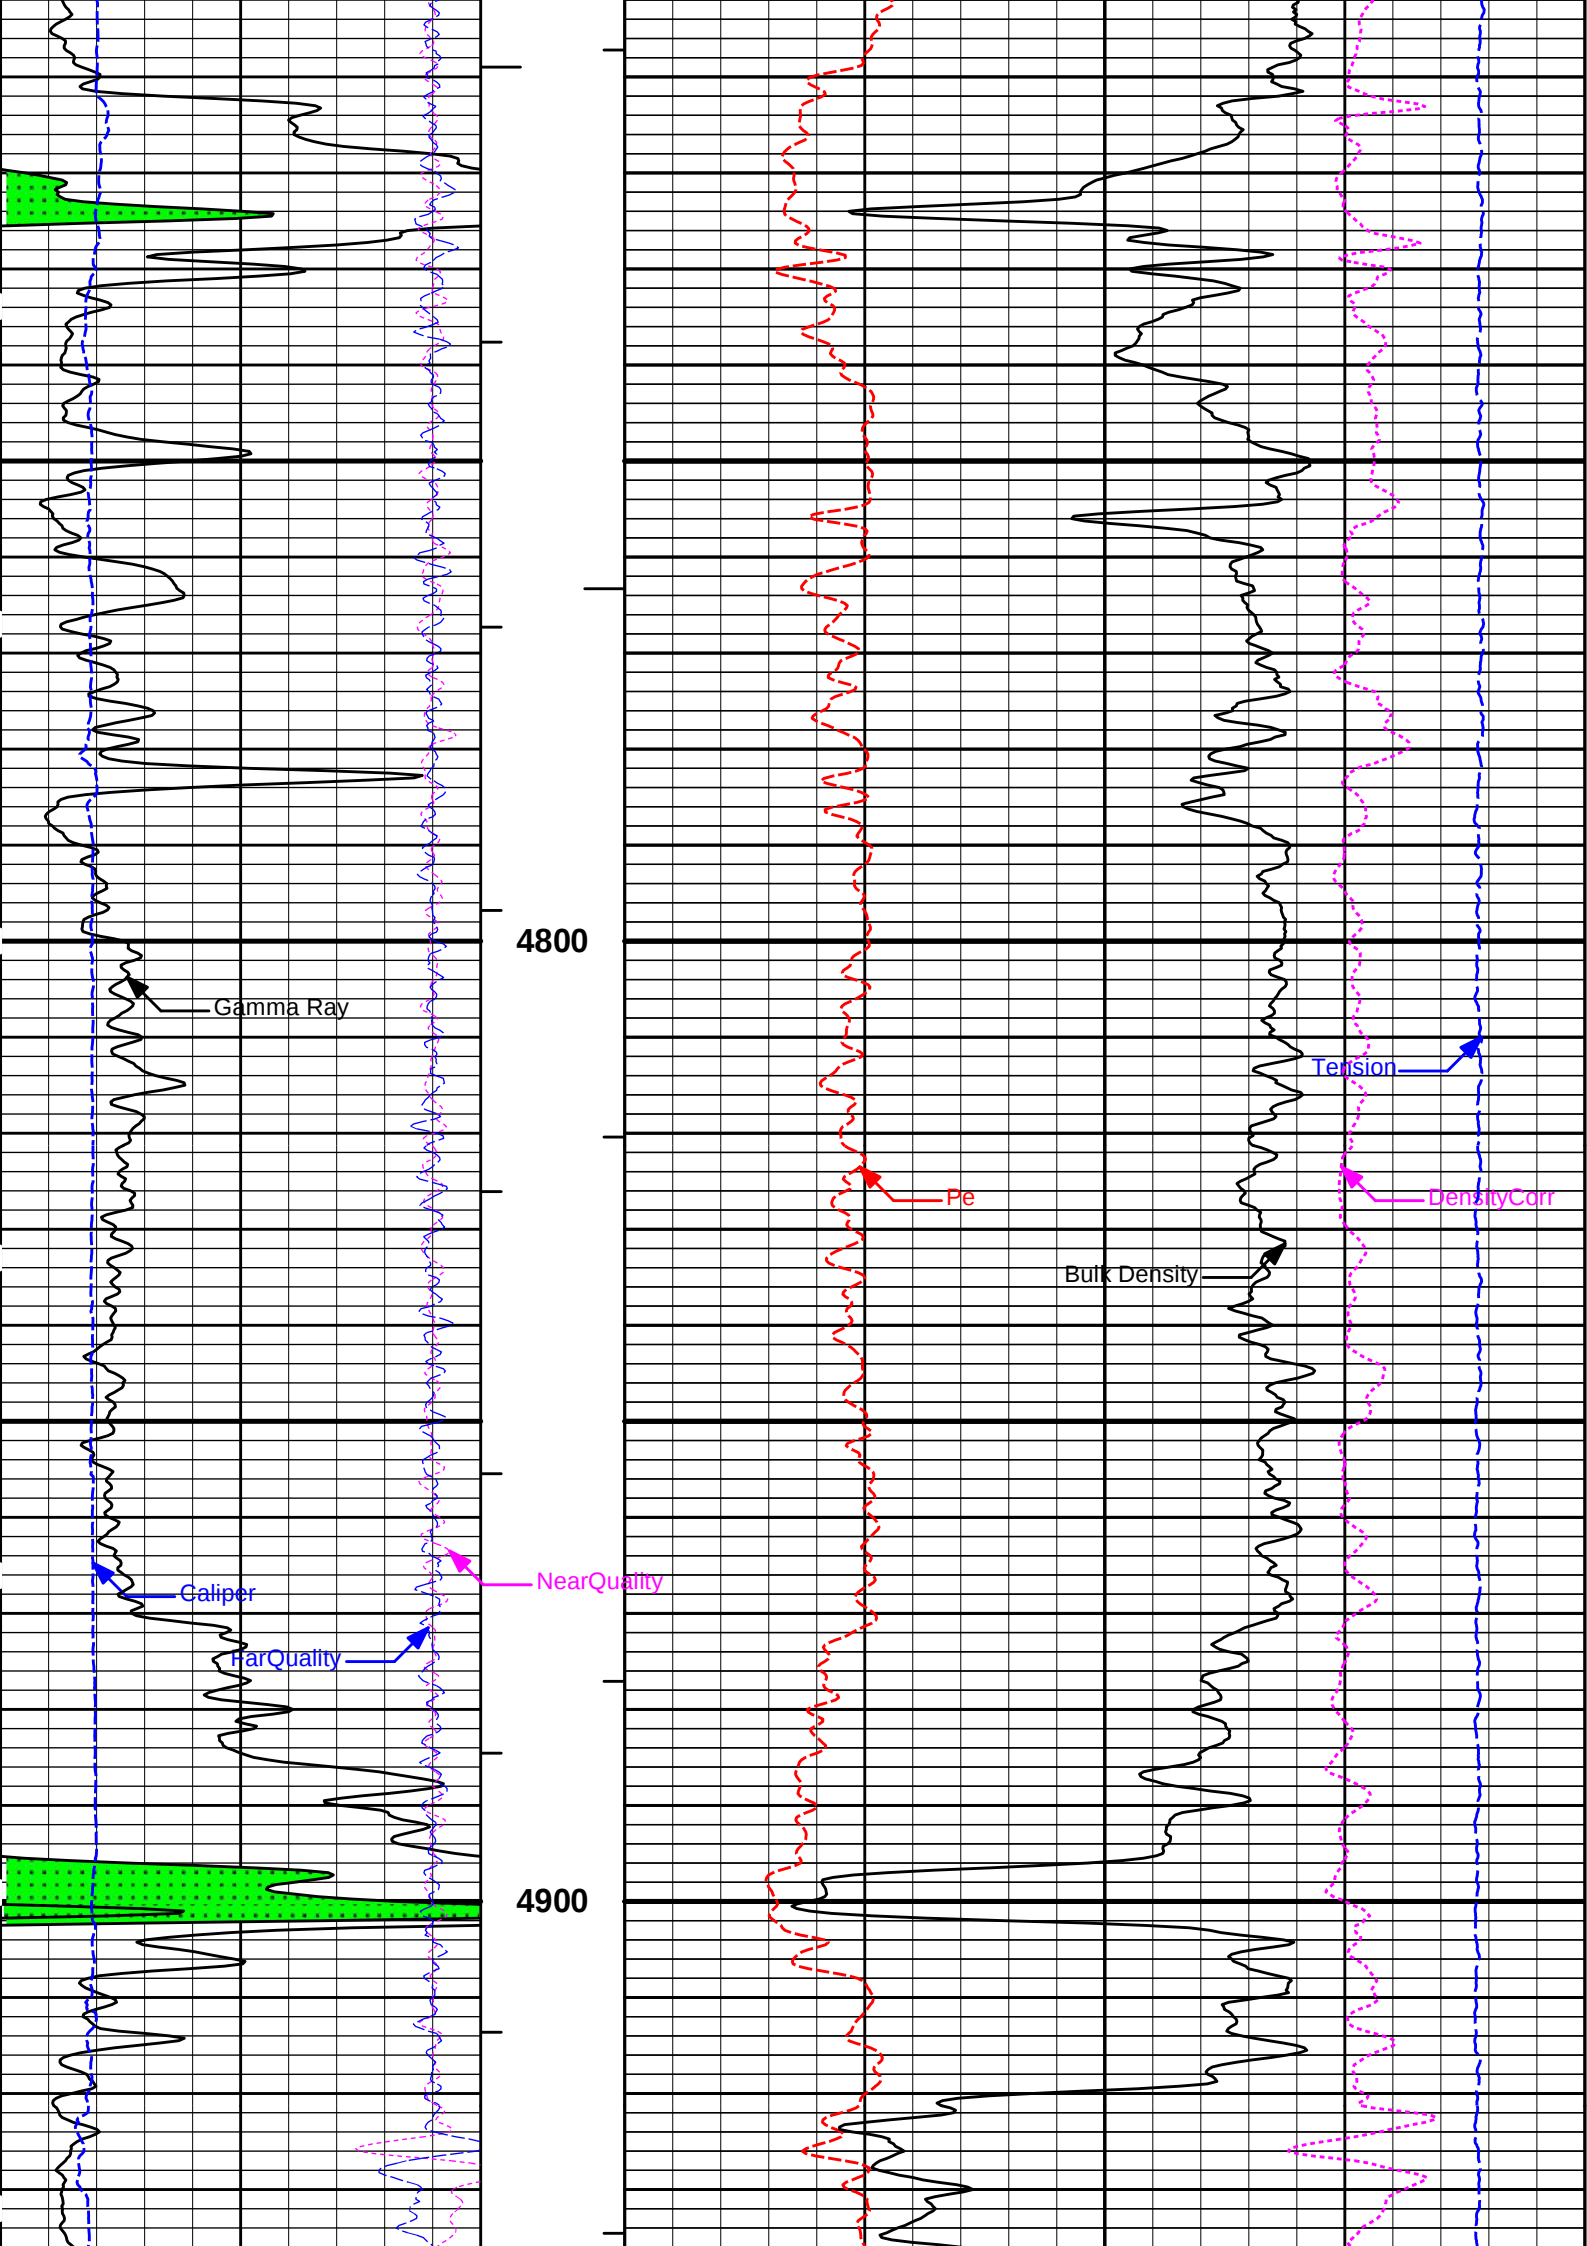

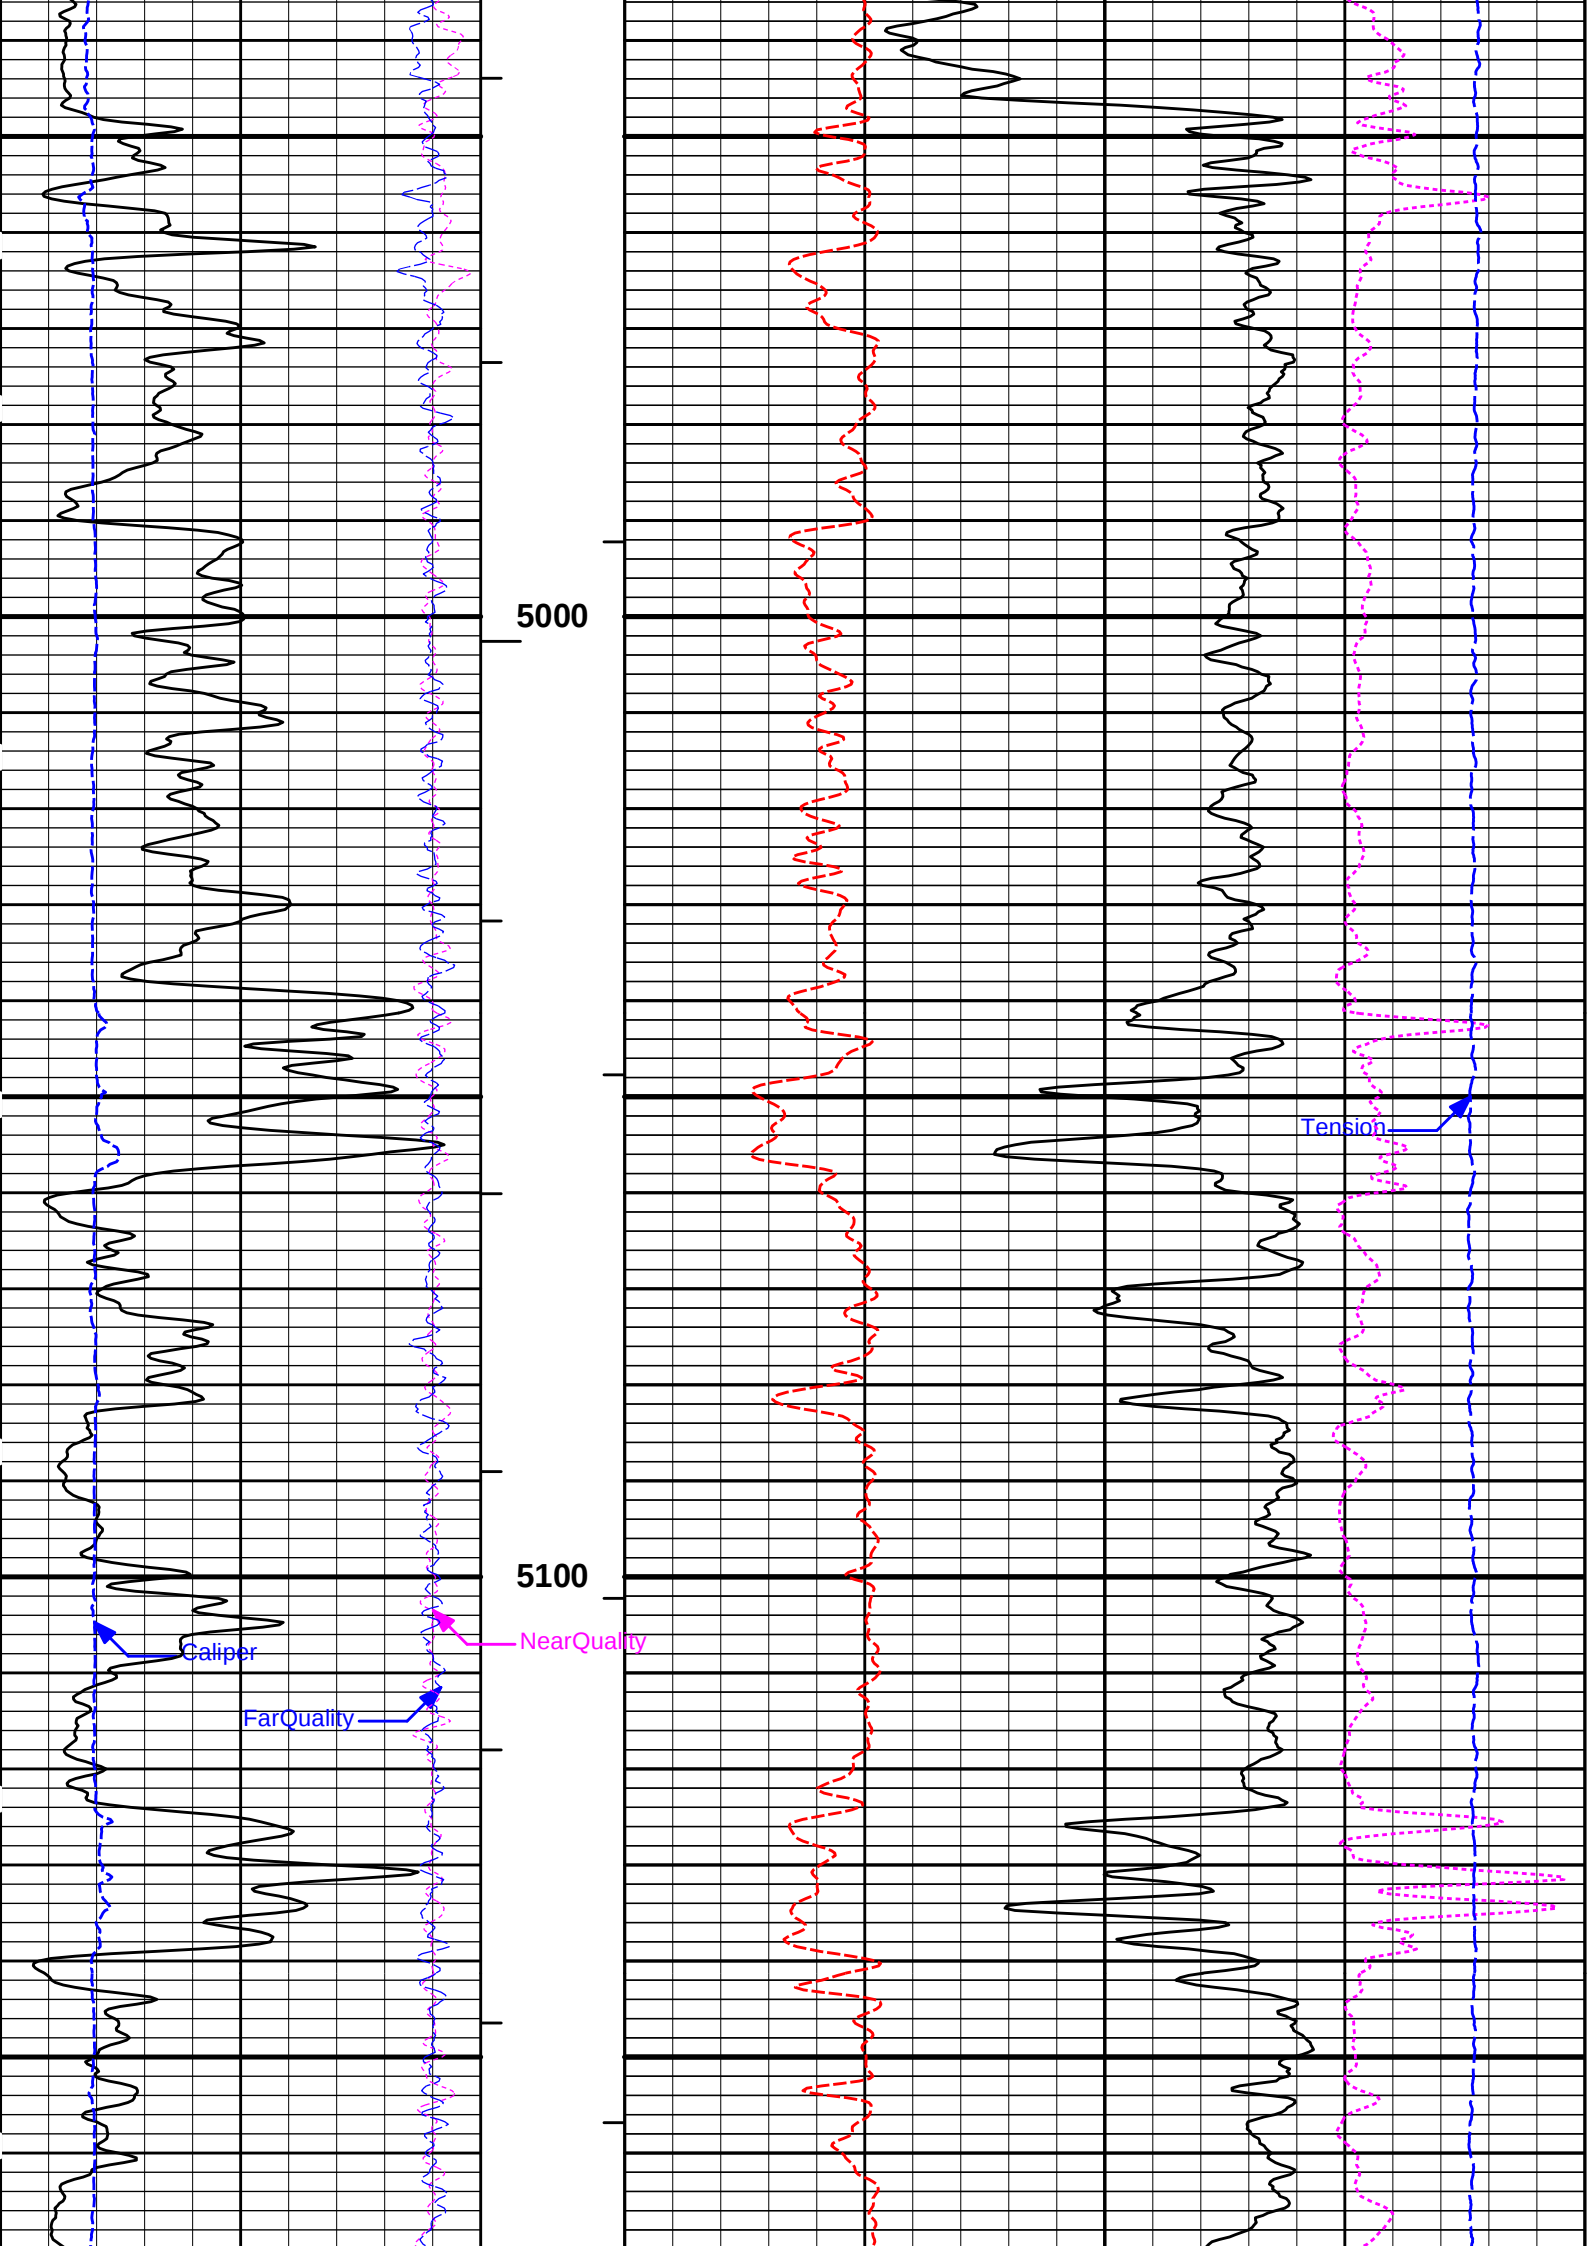

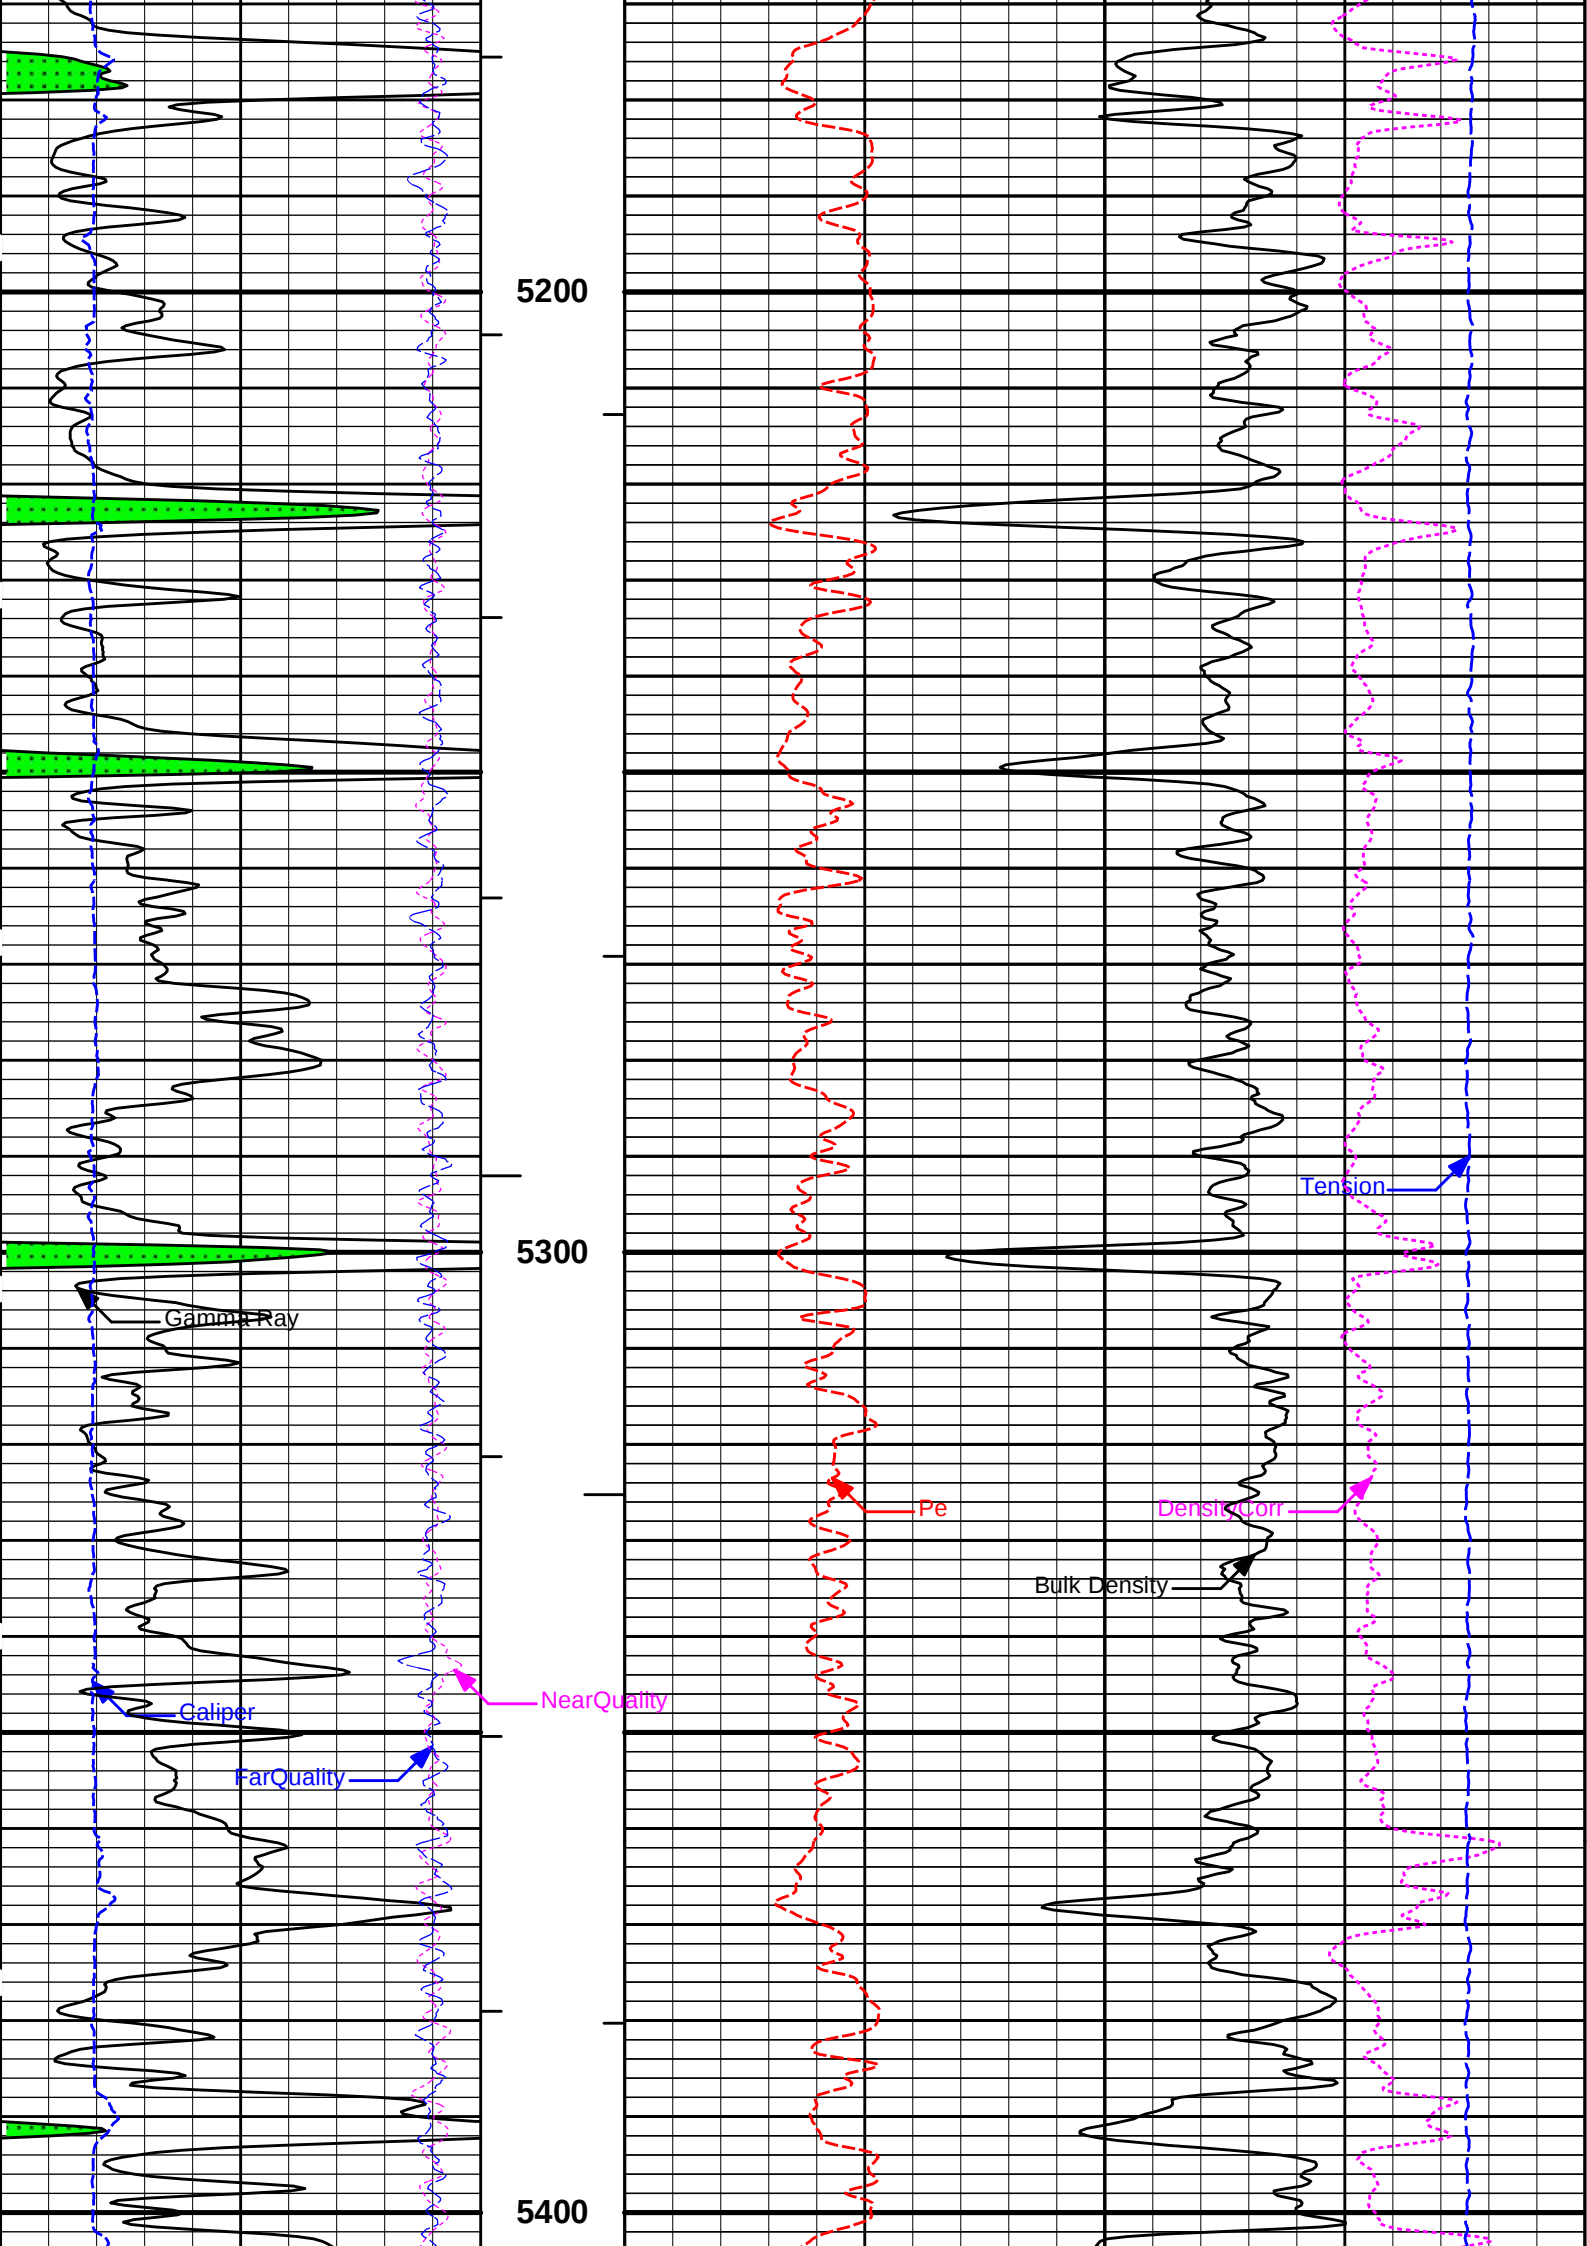

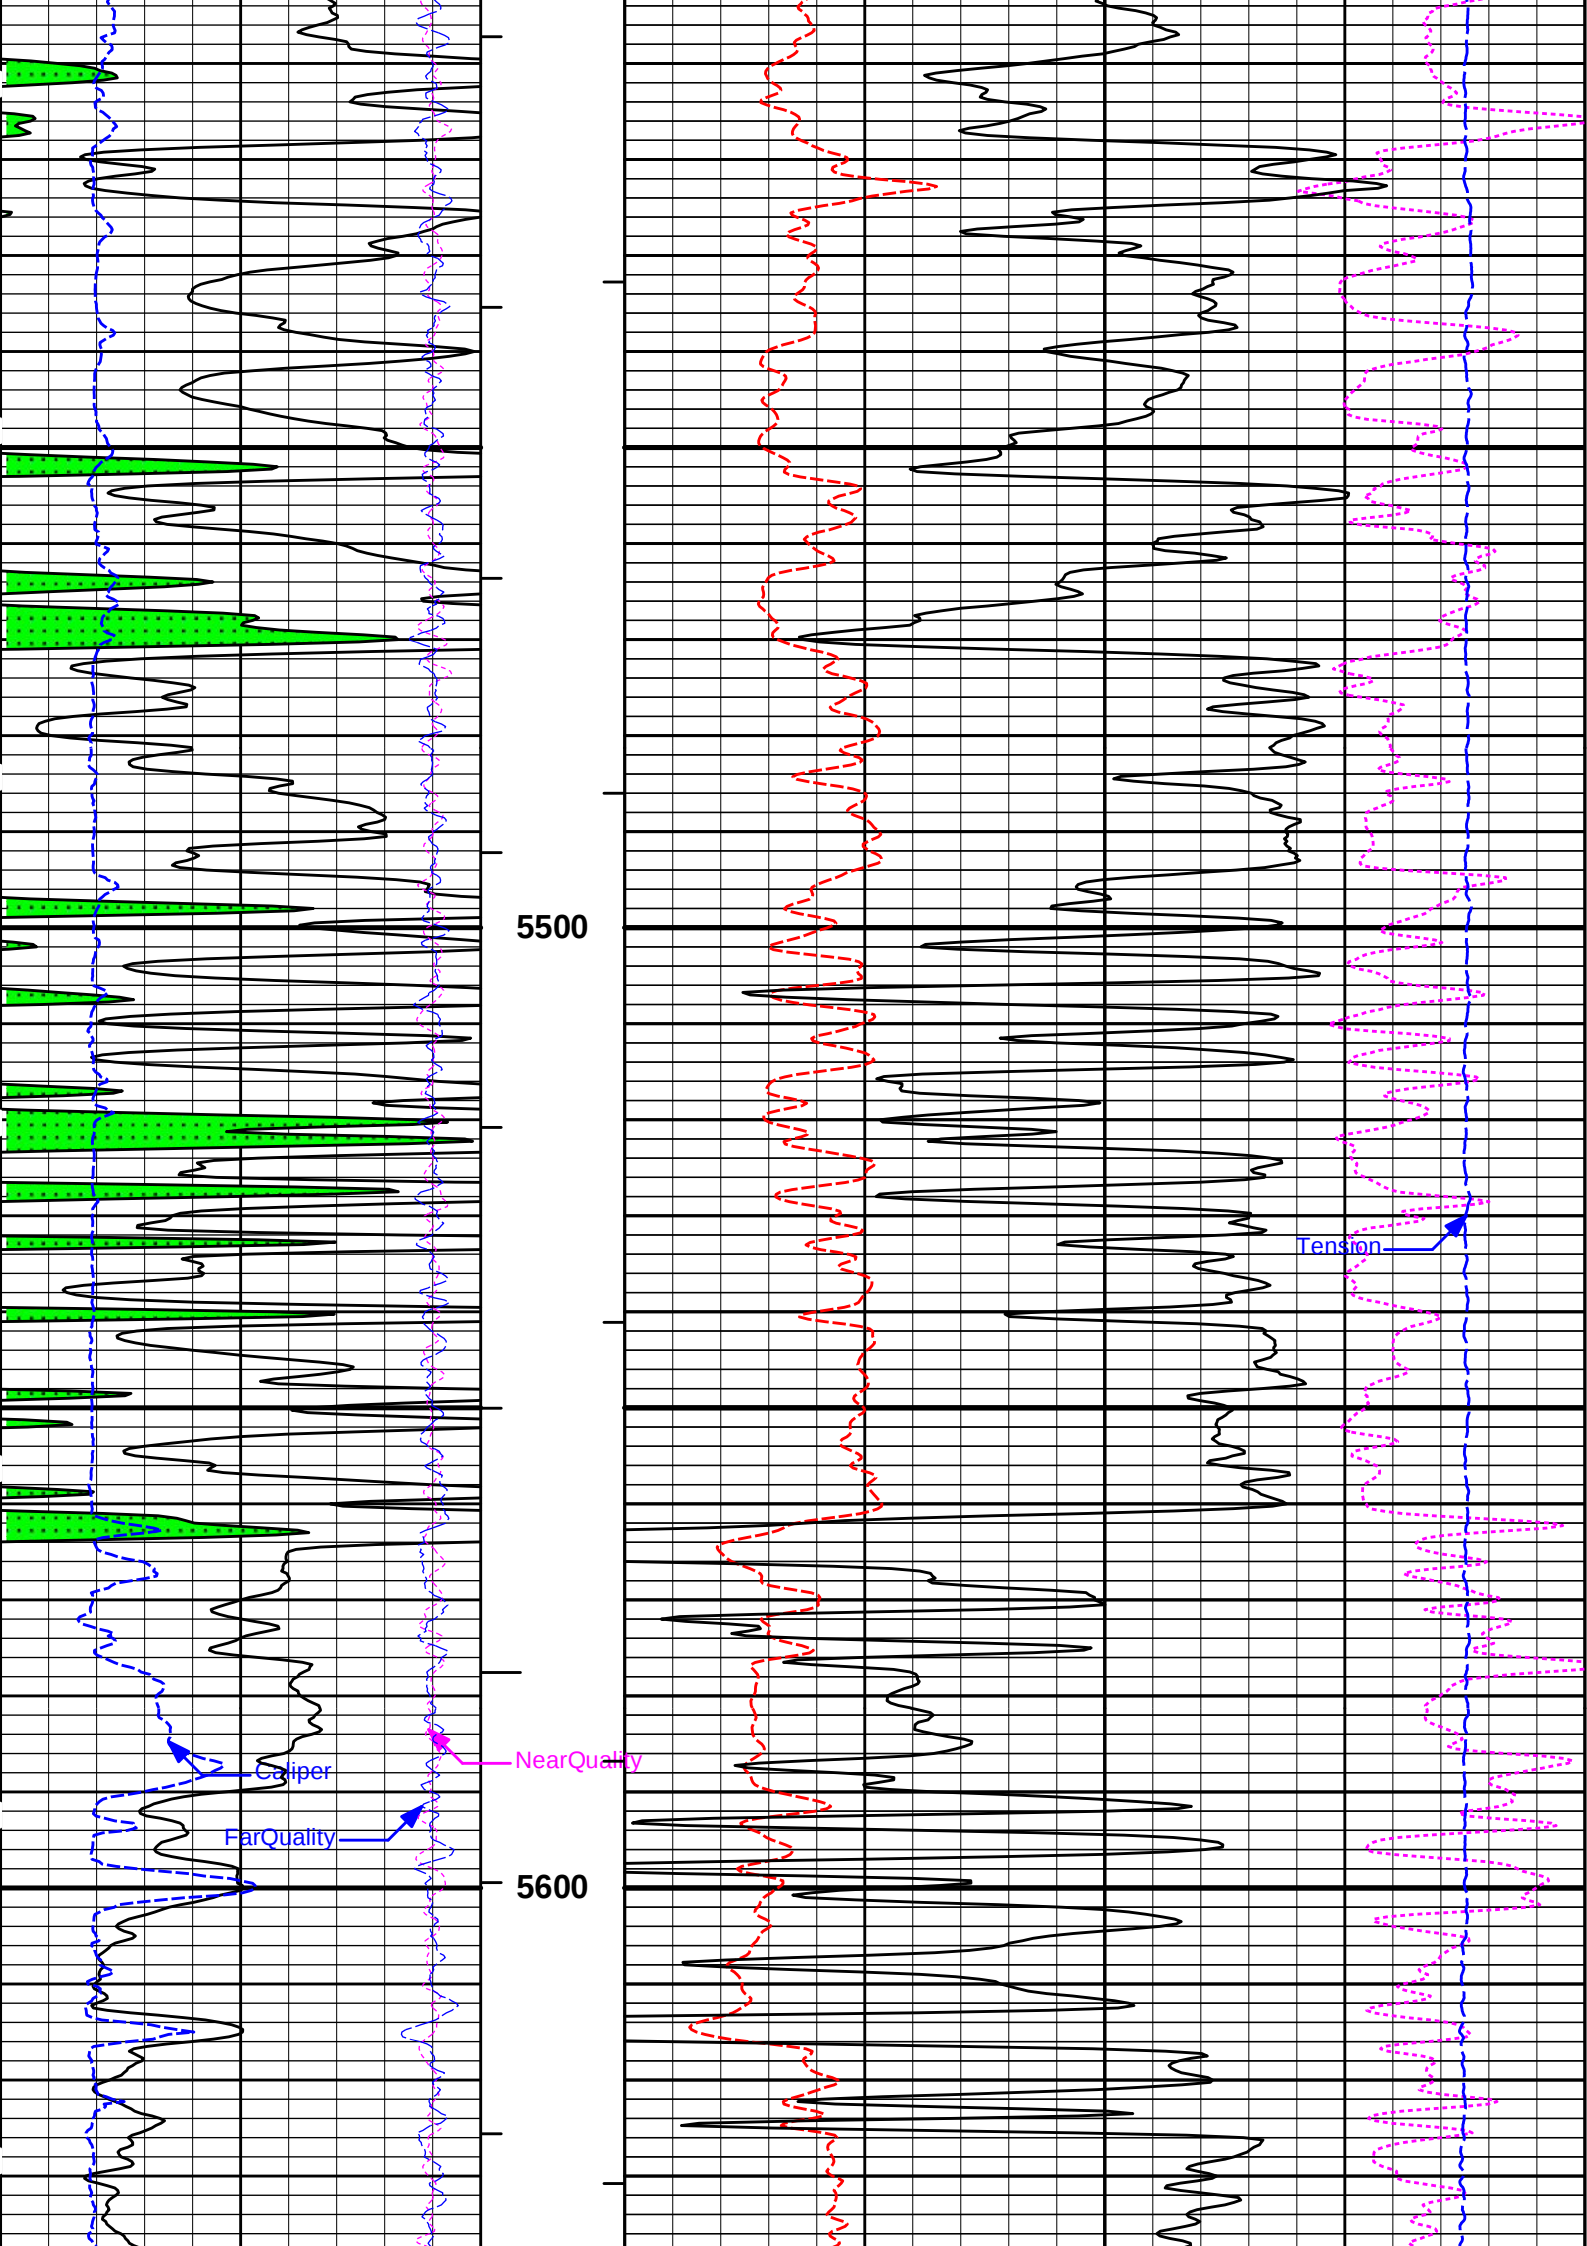

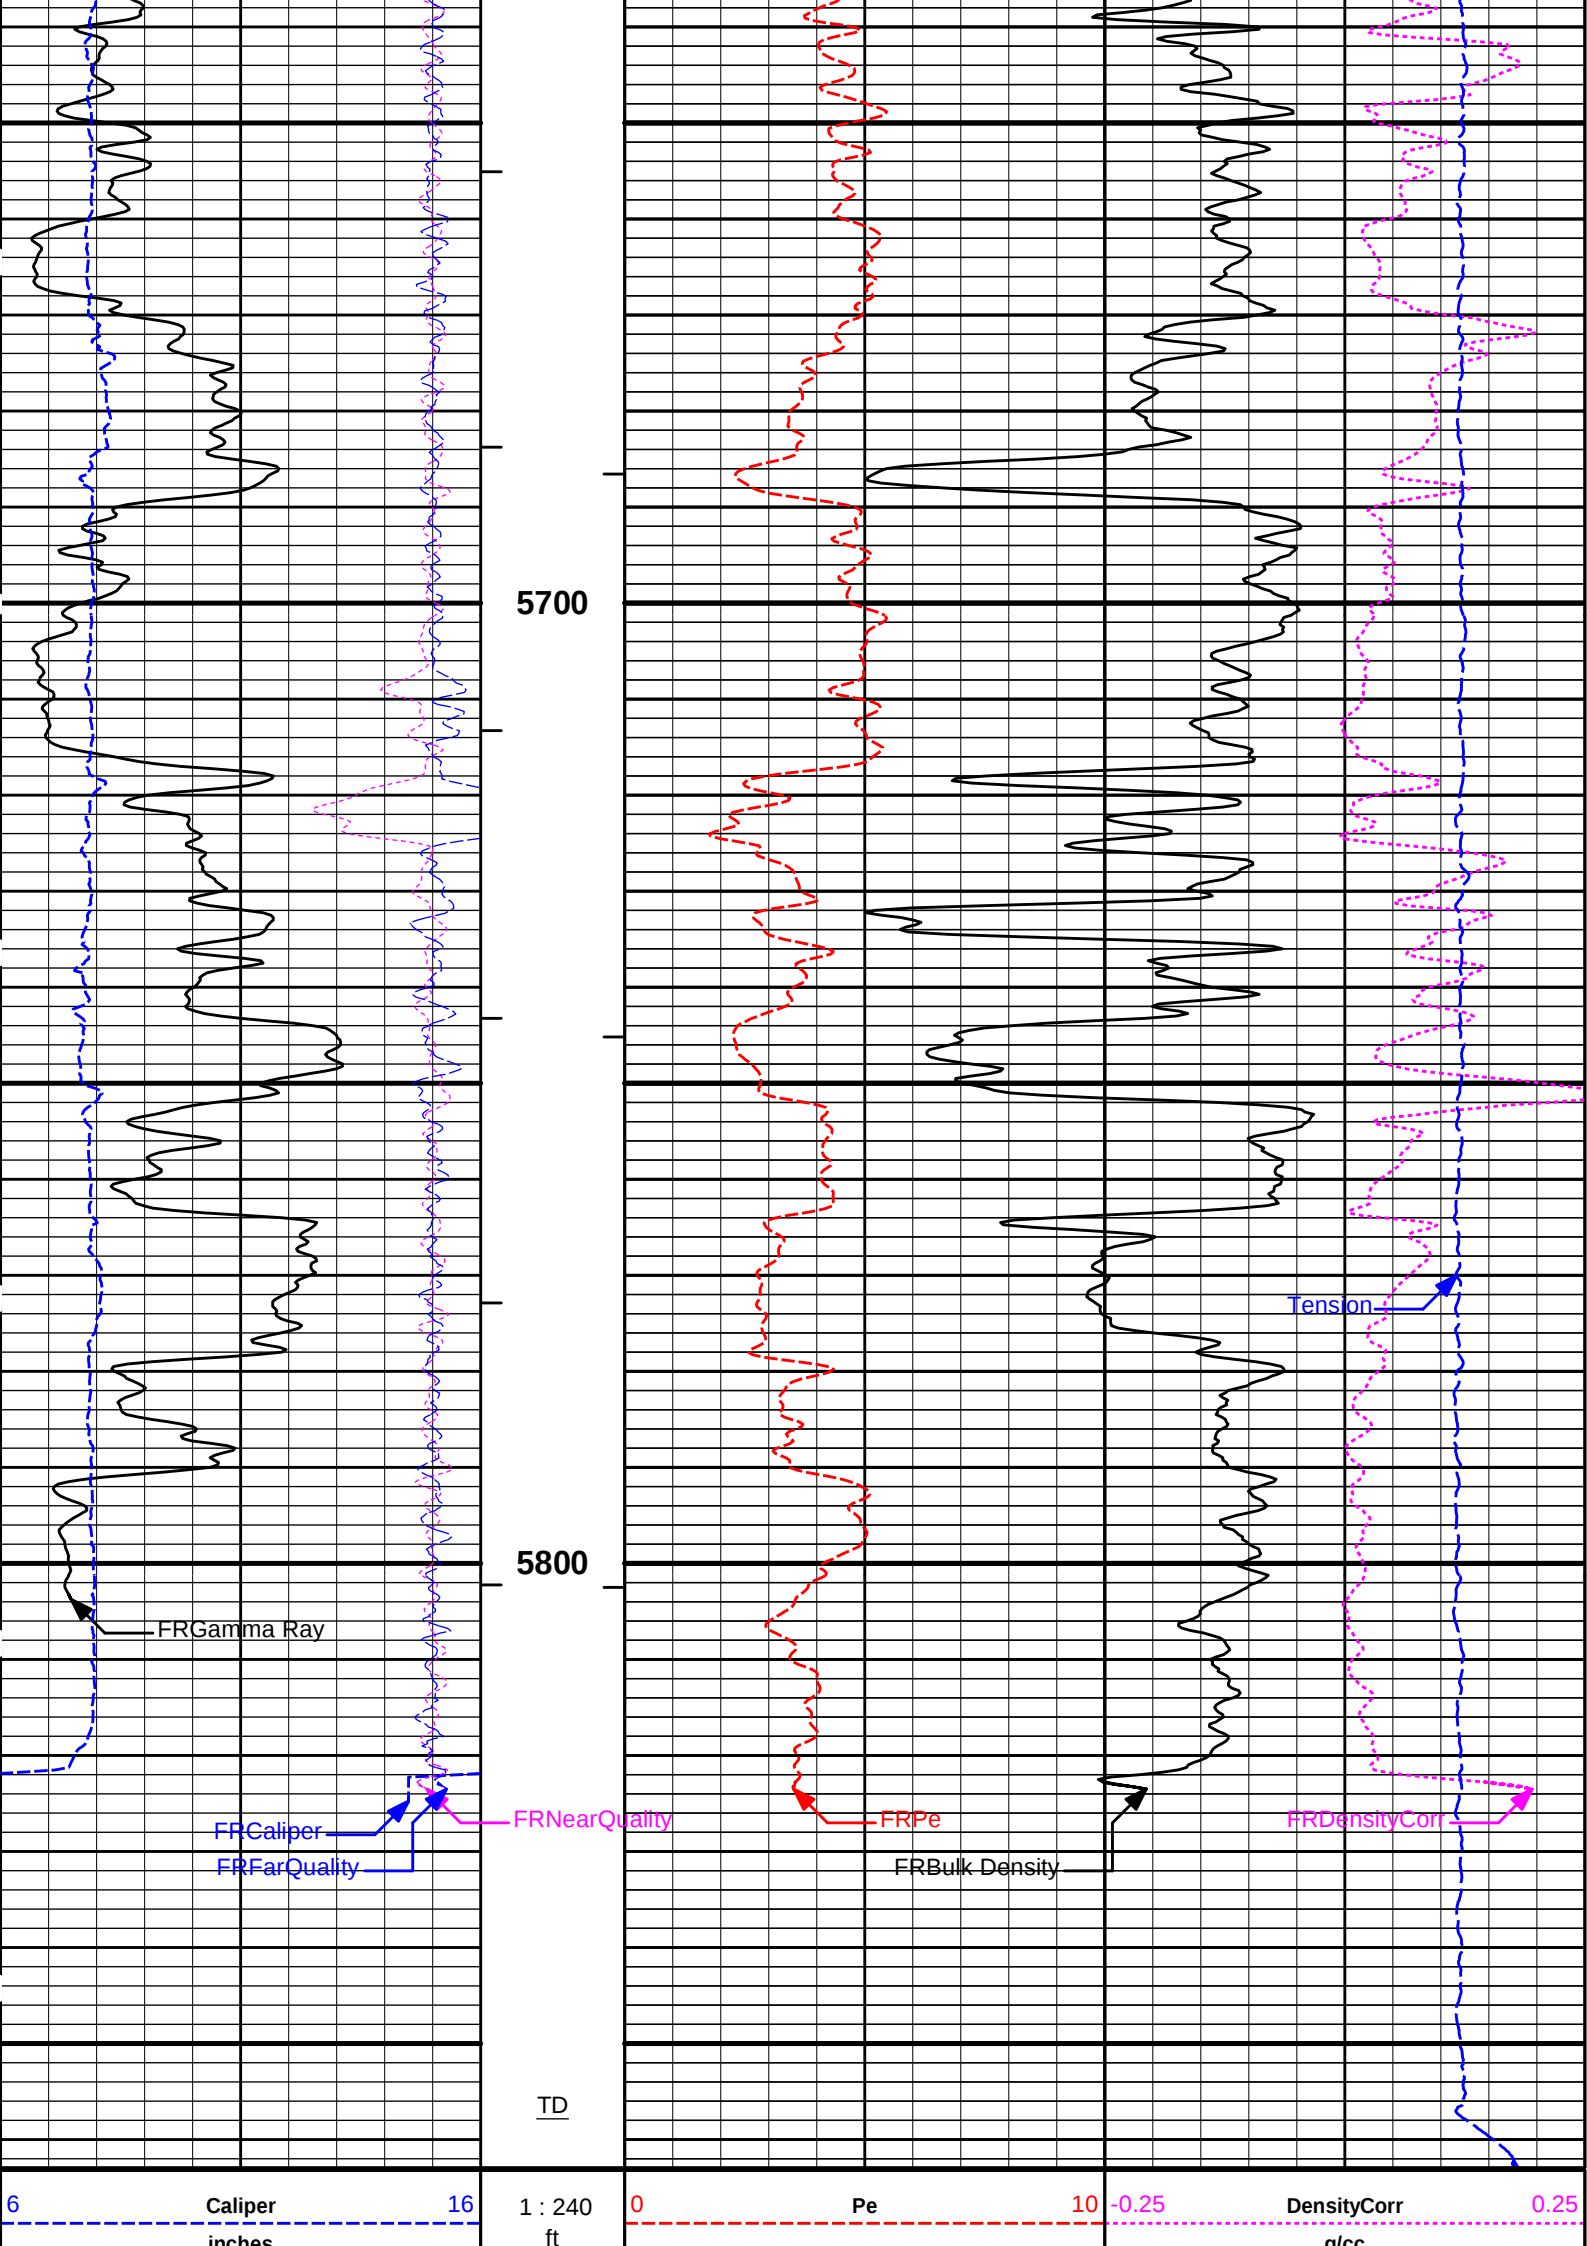

inches		ft		g/cc	
-18	NearQuality	2	BH ft3	15K	Tension
					pounds
18	FarQuality	-2	AHV ft3	Bulk Density	
				g/cc	
0	Gamma Ray	150			
api					

HALLIBURTON

Plot Time: 02-Apr-18 21:00:57
Plot Range: 4000 ft to 5862.92 ft
Data: RAYDON_ROCK\Well Based\DAQ-0001-004\
Plot File: \\-LOCAL-\\RAYDON_ROCK\0001 GTET-DSNT-SDLT-BSAT-ACRT\SDL-DSN\BULKD_5_MAIN_IQ

5 INCH MAIN LOG


MAIN SECTION 5" PER 100'


HALLIBURTON


Plot Time: 02-Apr-18 21:00:58
Plot Range: 5500 ft to 5864 ft
Data: RAYDON_ROCK\Well Based\DAQ-0001-003\
Plot File: \\-LOCAL-\\RAYDON_ROCK\0001 GTET-DSNT-SDLT-BSAT-ACRT\SDL-DSN\BULKD_5_MAIN_IQ

REPEAT SECTION

REPEAT SECTION

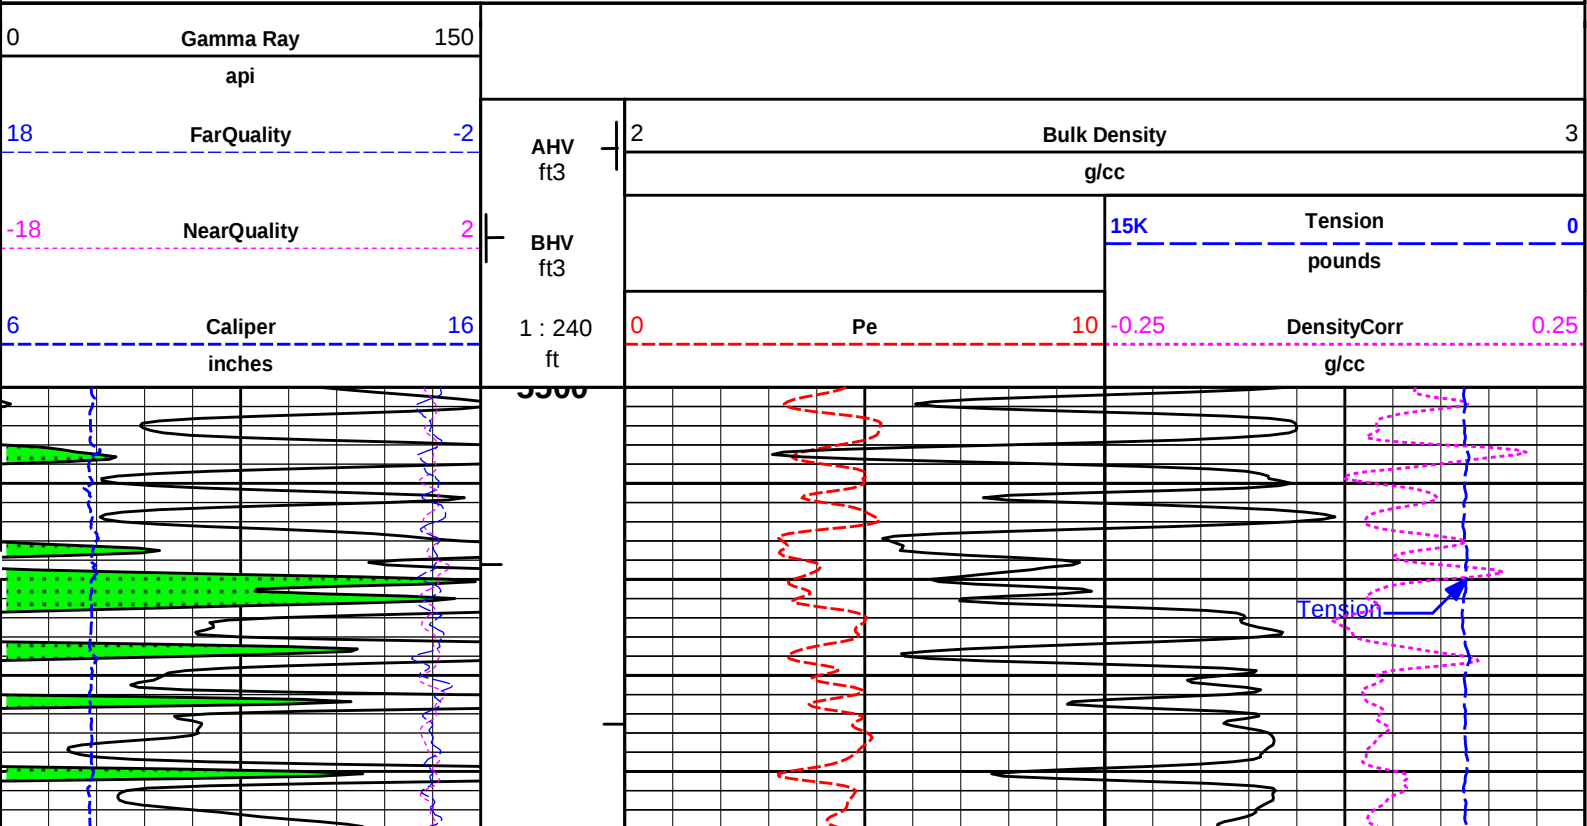

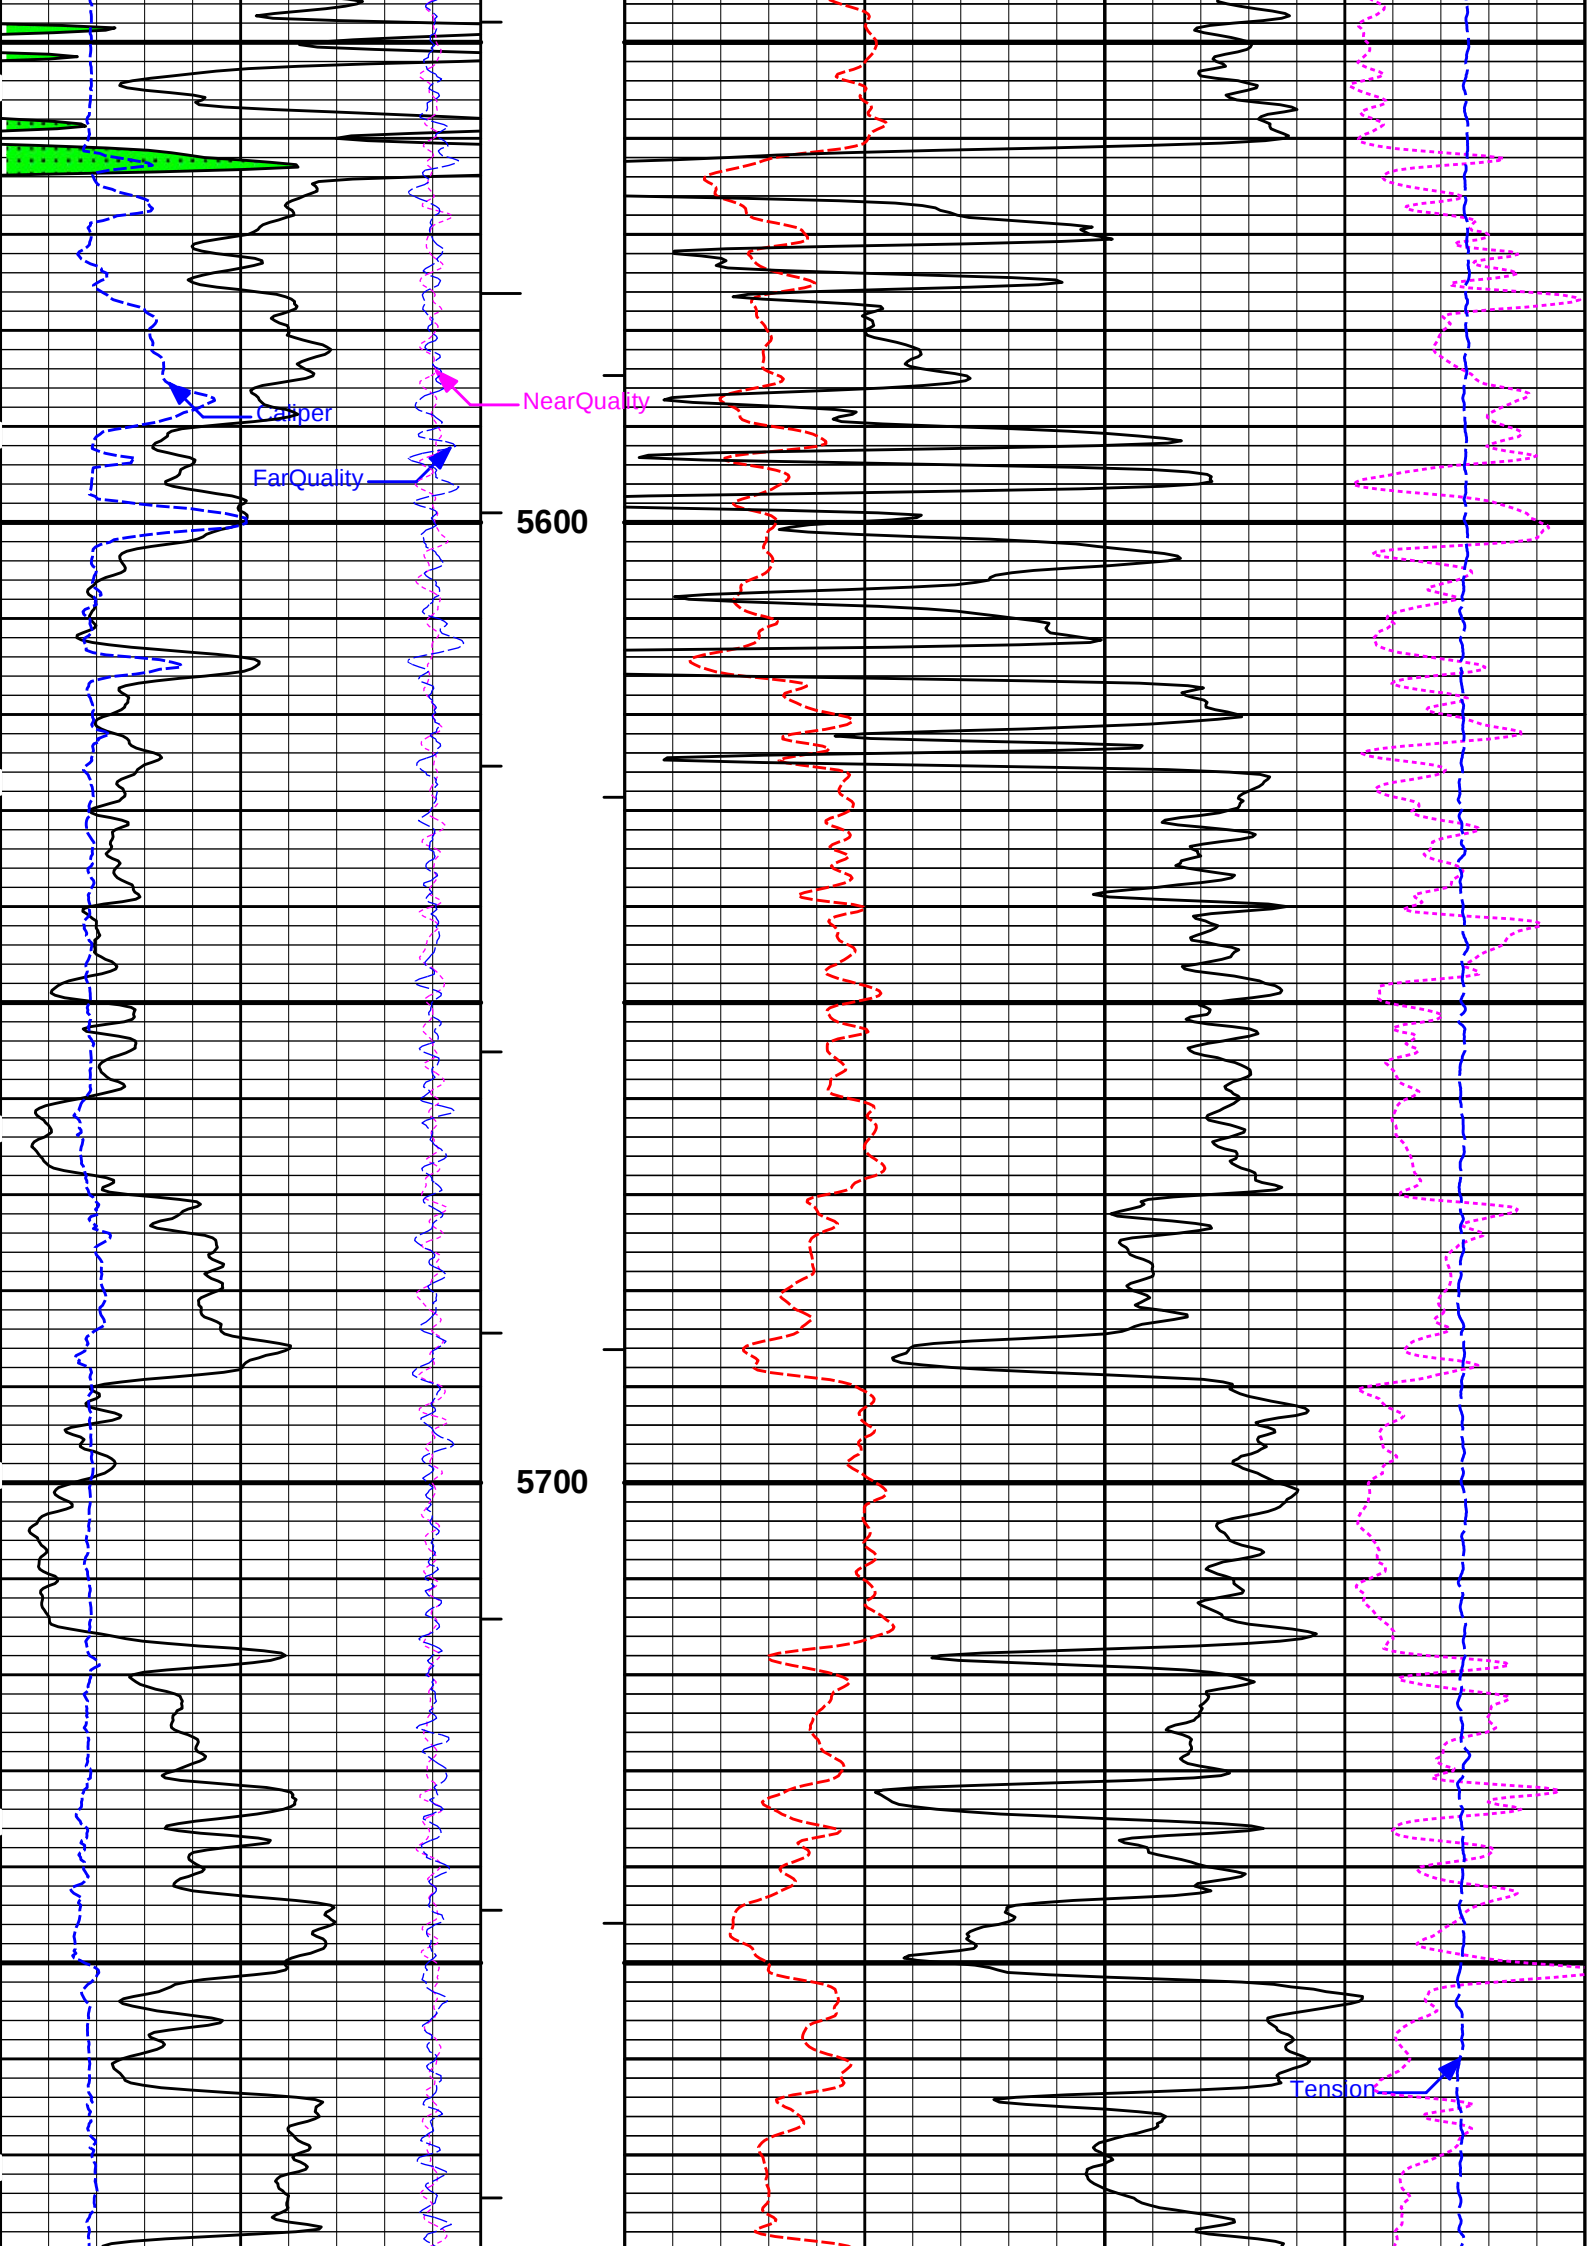

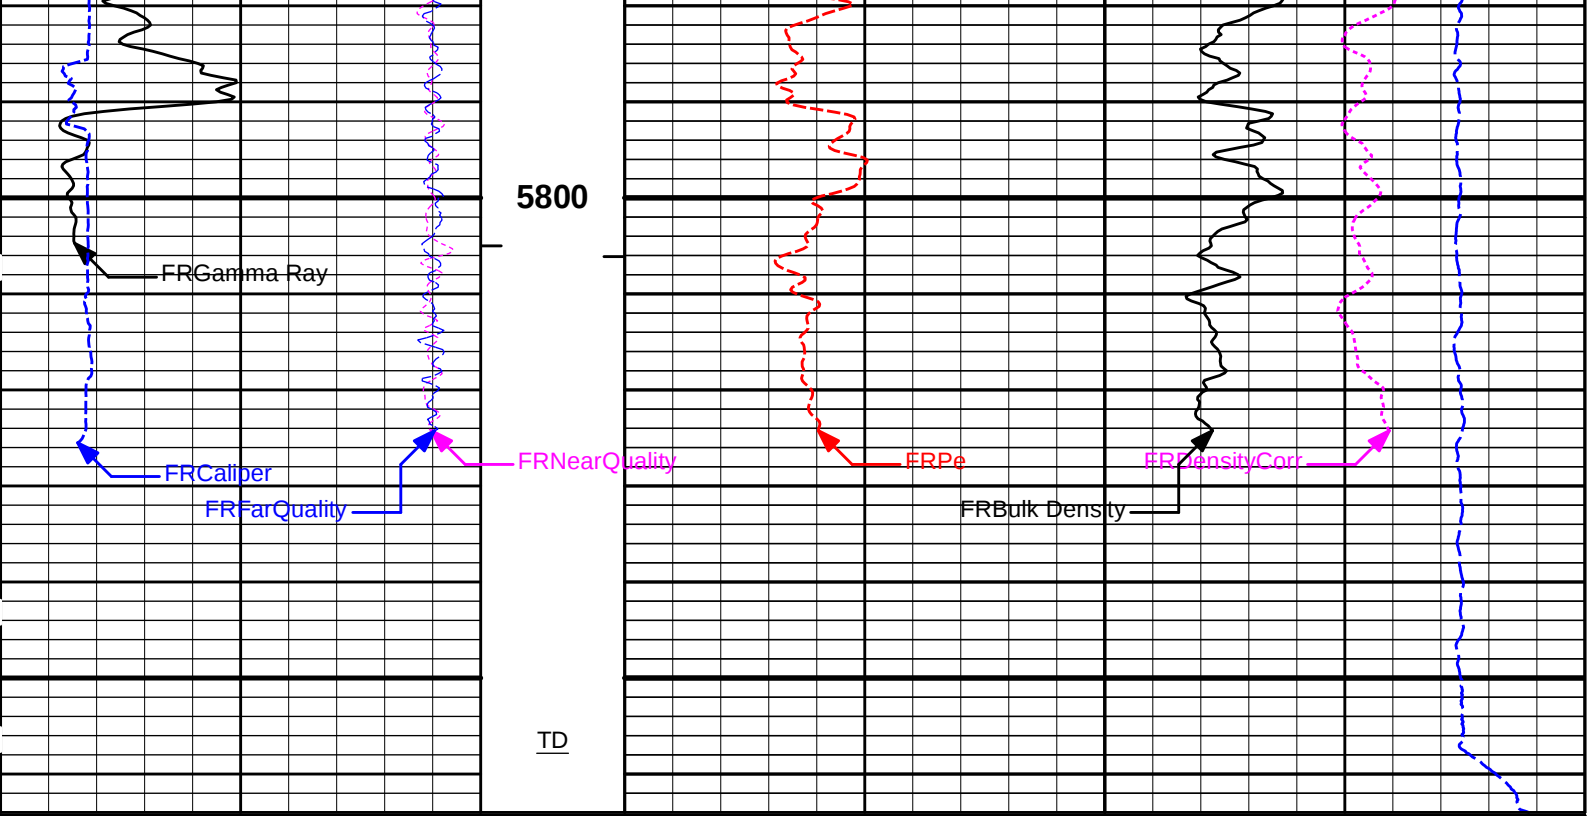

6	Caliper	16	1 : 240 ft	0	Pe	10	-0.25	DensityCorr	0.25	
	inches							g/cc		
-18	NearQuality	2		BHV ft3			15K	Tension	0	
								pounds		
18	FarQuality	-2	AHV ft3	2	Bulk Density					3
					g/cc					
0	Gamma Ray	150								
	api									

HALLIBURTON

Plot Time: 02-Apr-18 21:00:59
Plot Range: 5500 ft to 5864 ft
Data: RAYDON_ROCK\Well Based\DAQ-0001-003\
Plot File: \\LOCAL-1\RAYDON_ROCK\0001 GTET-DSNT-SDLT-BSAT-ACRT\SDL-DSN\BULKD_5_MAIN_IQ

REPEAT SECTION

REPEAT SECTION

HALLIBURTON

CALIBRATION REPORT

SURFACE TENSION SHOP CALIBRATION			
Tool Name:	Depth Panel - 12345678	Reference Calibration Date:	22-Mar-18 13:22:04
Engineer:	MICHAEL RICHTER	Calibration Date:	26-Mar-18 02:44:11
Software Version:	WL INSITE R5.6.3 (Build 4)	Calibration Version:	1

SURFACE TENSION LOAD CELL				
Measurement	Load Cell Value	Measurement	Calibrated	Units
Low	10487.49	152.55	0.00	lbs

	High	16966.98	7992.00	7830.00	lbs
DOWNHOLE TENSION SHOP CALIBRATION					
Tool Name:	CH_HOS - CH_HOS_I		Reference Calibration Date:	22-Mar-18 13:25:56	
Engineer:	MICHAEL RICHTER		Calibration Date:	26-Mar-18 02:47:18	
Software Version:	WL INSITE R5.6.3 (Build 4)		Calibration Version:	1	
	DOWNHOLE LOAD CELL				
	Measurement	Tool Value	Measurement	Calibrated	Units
	Low	-387.58	-26.64	0.00	lbs
	High	4481.23	556.85	1810.00	lbs
NATURAL GAMMA RAY TOOL SHOP CALIBRATION					
Tool Name:	GTET - 11013113		Reference Calibration Date:	02-Mar-18 10:43:25	
Engineer:	WHITLOCK		Calibration Date:	02-Apr-18 09:34:23	
Software Version:	WL INSITE R5.6.3 (Build 4)		Calibration Version:	1	
Calibrator Source S/N: TB-79					
Calibrator API Reference:222.00 api					
Equivalent Calibrator API Reference:225.9 api					
	Measurement	Measured	Calibrated	Units	
	Background	24.8	24.5	api	
	Background + Calibrator	253.9	250.4	api	
	Calibrator	229.0	225.9	api	
NATURAL GAMMA RAY TOOL FIELD CALIBRATION					
Tool Name:	GTET - 11013113		Reference Calibration Date:	02-Apr-18 09:34:23	
Engineer:	WHITLOCK		Calibration Date:	02-Apr-18 09:42:58	
Software Version:	WL INSITE R5.6.3 (Build 4)		Calibration Version:	1	
Calibrator Source S/N: TB-79					
Calibrator API Reference:222.00 api					
Equivalent Calibrator API Reference:225.9 api					
	Field Verification	Shop	Field	Units	
	Background	24.5	24.2	api	
	Background + Calibrator	250.4	247.0	api	
	Calibrator	225.9	222.8	api	
	Shop	Field	Difference	Tolerance	
	225.9	222.8	3.1	+/- 9.00	
DUAL SPACED NEUTRON SHOP CALIBRATION					
Tool Name:	DSNT - 11019641		Reference Calibration Date:	23-Jan-18 12:17:50	
Engineer:	WHITLOCK		Calibration Date:	23-Jan-18 12:36:13	
Software Version:	WL INSITE R5.6.3 (Build 4)		Calibration Version:	1	
Logging Source S/N: DSN-436					
Tank Serial Number: EL RENO HWT					
Reference value assigned to Tank: 56.100					
Snow Block S/N: 12156883					
Calibration Tank Water Temperature: 72 degF					
Min. Tool Housing Outside Diameter: 3.625 in					
	CALIBRATION CONSTANTS				
	Measurement	Prev. Value	New Value	Control Limit On New Value	
	Gain:	0.98237	0.98197	0.900 - 1.100	
	WATER TANK SUMMARY (Horizontal Water Tank)				
	Current Density	Calibrator	Control Limit	Control Method	

Measurement	Current Reading (Previous Coef.)	Calibrated (New Coef.)	Change	Control Limit On Change
Porosity (decp):	0.2359	0.2358	0.0001	+/- 0.0020
Calibrated Ratio:	10.5640	10.5596	0.004	+/- 0.050

VERIFIER		
Measurement	Value	Control Limit
Snow-Block Porosity (decp):	0.0770	0.02000 - 0.09000

PASS/FAIL SUMMARY		
Background Check:		Passed
Gain-Range Check:		Passed
Snow-Block Check:		Passed

DUAL SPACED NEUTRON FIELD CALIBRATION			
Tool Name:	DSNT - 11019641	Reference Calibration Date:	23-Jan-18 12:36:13
Engineer:	SEAN WOLTEMATH	Calibration Date:	02-Apr-18 09:46:51
Software Version:	WL INSITE R5.6.3 (Build 4)	Calibration Version:	1

Logging Source S/N: DSN-436
Snow Block S/N: 12156883

NEUTRON FIELD-CHECK SUMMARY				
	Shop	Field	Difference	Control Limit On Change
Snow-Block Porosity (decp):	0.0770	0.0634	-0.0136	+/- 0.0150

PASS/FAIL SUMMARY		
Block Change Check:		Passed
Snow Block Stat Check:		Passed
Temperature Check:		Passed

DENSITY CALIPER SHOP CALIBRATION			
Tool Name:	SDLT - 10950489	Reference Calibration Date:	01-Jan-70 00:00:00
Engineer:	WHITLOCK	Calibration Date:	14-Dec-17 13:55:25
Software Version:	WL INSITE R5.6.3 (Build 4)	Calibration Version:	1
Host Tool Name:	DSNT - 11019641		

CALIBRATION COEFFICIENTS			
Measurement	Previous Value	New Value	Control Limit On New Value
Pad Offset	-3919.89	-3919.89	-7000.00 - -1000.00
Pad Gain	0.0003729	0.0003729	0.0002000 - 0.0006000
Arm Offset	-3610.38	-3610.38	-5000.00 - 3000.00
Arm Gain	0.0004319	0.0004319	0.000300 - 0.000700
Arm Power	-0.000000447	-0.000000447	-0.000010000 - 0.000010000

The ring diameter is computed from: DIAMETER = PAD EXTENSION + ARM EXTENSION + TOOL DIAMETER
Tool Diameter: 4.50 in

CALIBRATION RINGS				
Measurement	Current Reading (Previous Coeff.)	Calibrated (New Coeff.)	Change	Control Limit On New Value
PAD EXTENSION:				
Small Ring (in)	2.00	2.00	0.00	+/- 0.20
Medium Ring (in)	3.75	3.75	0.00	+/- 0.20
RING DIAMETER:				
Small Ring (in)	6.50	6.50	0.00	+/- 0.20
Medium Ring (in)	8.25	8.25	0.00	+/- 0.20
Large Ring (in)	15.00	15.00	0.00	+/- 0.20

PASS/FAIL SUMMARY		
-------------------	--	--

PASS/FAIL SUMMARY	
Calibration-Coefficients Range Check:	Passed
Ring-Measurement Check:	Passed
PASS/FAIL SUMMARY	
Calibration-Coefficients Range Check:	Passed

ARRAY COMPENSATED TRUE RESISTIVITY SHOP CALIBRATION			
Tool Name:	ACRt Sonde - 11830728	Reference Calibration Date:	15-Dec-17 11:55:35
Engineer:	WHITLOCK	Calibration Date:	23-Feb-18 10:15:37
Software Version:	WL INSITE R5.6.3 (Build 4)	Calibration Version:	1
Host Tool Name:	ACRt Instrument - 11830684		

TYPICAL GAIN RANGE									
Subarray	R12KHz			R36KHz			R72KHz		
	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper
A1 (80")	0.95	1.0279	1.05	0.95	1.0076	1.05	0.95	0.9997	1.05
A2 (50")	0.95	1.0334	1.05	0.95	1.0139	1.05	0.95	1.0097	1.05
A3 (29")	0.95	1.0346	1.05	0.95	1.0146	1.05	0.95	1.0081	1.05
A4 (17")	0.95	1.0279	1.05	0.95	1.0063	1.05	0.95	1.0018	1.05
A5 (10")	N/A	N/A	N/A	0.95	1.0001	1.05	0.95	0.9950	1.05
A6 (6")	N/A	N/A	N/A	0.95	0.9869	1.05	0.95	0.9818	1.05

SONDE OFFSET									
Subarray	R12KHz			R36KHz			R72KHz		
	(mmho/m)			(mmho/m)			(mmho/m)		
A1 (80")	0.315			-4.964			-5.711		
A2 (50")	0.409			-3.450			-5.485		
A3 (29")	-11.648			-3.720			-3.783		
A4 (17")	-90.980			-28.724			-23.707		
A5 (10")	N/A			-76.200			-37.537		
A6 (6")	N/A			280.488			149.005		

TRANSMITTER CURRENT GAIN					R-MUD VERIFICATION			
Signal	Lower	R	Upper		Signal	Lower (ohm-m)	Measured (ohm-m)	Upper (ohm-m)
12K	0.6	0.82	1.3		Mud Cell	0.95	0.99	1.05
36K	1.0	1.80	2.0					
72K	1.0	1.05	2.0					

PASS/FAIL SUMMARY	
GAIN RANGE CHK	PASS
SONDE OFFSET CHK	PASS
TOOL OK TO LOG	

QUALITY CHECK SHOP CALIBRATION			
Tool Name:	ACRt Sonde - 11830728	Reference Calibration Date:	15-Dec-17 11:58:57
Engineer:	WHITLOCK	Calibration Date:	23-Feb-18 10:21:17
Software Version:	WL INSITE R5.6.3 (Build 4)	Calibration Version:	1
Host Tool Name:	ACRt Instrument - 11830684		

STANDARD DEVIATIONS									
	R12KHz			R36KHz			R72KHz		
	Measured (mmho/m)	Expected (mmho/m)	Pass/Fail	Measured (mmho/m)	Expected (mmho/m)	Pass/Fail	Measured (mmho/m)	Expected (mmho/m)	Pass/Fail
A1 (80")	0.000	< 0.750	Pass	0.000	< 0.750	Pass	0.000	< 0.750	Pass
A2 (50")	0.000	< 0.750	Pass	0.000	< 0.750	Pass	0.000	< 0.750	Pass

	CALIBRATION COEFFICIENT SUMMARY					
	Measurement	Micro Log Normal		Micro Log Lateral		
		Measured	Calibrated	Measured	Calibrated	Units
	Tool Zero	-0.07	-0.09	-0.01	-0.01	ohmm
	Calibration Point #1	0.02	0.00	0.00	0.00	ohmm
	Calibration Point #2	20.01	20.00	19.99	20.00	ohmm
	Internal Reference	19.92	19.91	19.98	19.99	ohmm
	Measurement	Micro Log Normal Tool Value		Micro Log Lateral Tool Value		Units
		Tool Zero	0.01		0.02	
	Calibration Point #1	22.62		2.05		V
	Calibration Point #2	5331.95		6945.96		V
	Internal Reference	5308.27		6942.10		V

MICRO LOG FIELD CHECK			
Tool Name:	Microlog Pad - 10950489	Reference Calibration Date:	29-Mar-18 10:10:09
Engineer:	WHITLOCK	Calibration Date:	02-Apr-18 09:31:49
Software Version:	WL INSITE R5.6.3 (Build 4)	Calibration Version:	1

	Measurement	Micro Log Normal		Micro Log Lateral		Units
		Shop	Field	Shop	Field	
	Tool Zero	-0.09	-0.09	-0.01	-0.01	ohmm
	Internal Reference	19.91	19.88	19.99	19.96	ohmm
	Summary					
Signal	Shop	Field	Difference		Tolerance	
Microlog Normal	19.91	19.88	0.03		+/- 0.80	
Microlog Lateral	19.99	19.96	0.03		+/- 0.80	

SPECTRAL DENSITY SHOP CALIBRATION			
Tool Name:	SDLT Pad - 11213308	Reference Calibration Date:	14-Dec-17 13:29:17
Engineer:	SEAN WOLTEMATH	Calibration Date:	29-Mar-18 13:45:53
Software Version:	WL INSITE R5.6.3 (Build 4)	Calibration Version:	1

Logging Source S/N: 5155GW		
Aluminum Block S/N: EL RENO	Density: 2.581g/cc	Pe: 3.170
Magnesium Block S/N: EL RENO	Density: 1.687g/cc	Pe: 2.594

DENSITY CALIBRATION SUMMARY			
Measurement	Previous Value	New Value	Control Limit
Near Bar Gain	1.0311	1.0351	0.90 - 1.10
Near Dens Gain	1.0140	1.0142	0.90 - 1.10
Near Peak Gain	1.0305	1.0443	0.90 - 1.10
Near Lith Gain	1.0375	1.0681	0.90 - 1.10
Far Bar Gain	1.0101	1.0125	0.90 - 1.10
Far Dens Gain	0.9969	0.9981	0.90 - 1.10
Far Peak Gain	0.9958	0.9949	0.90 - 1.10
Far Lith Gain	0.9757	0.9731	0.90 - 1.10
Near Bar Offset	0.0106	-0.0096	NONE
Near Dens Offset	0.1722	0.1818	NONE
Near Peak Offset	0.0177	-0.0795	NONE
Near Lith Offset	-0.0725	-0.3008	NONE
Far Bar Offset	0.1300	0.1155	NONE
Far Dens Offset	0.2552	0.2496	NONE
Far Peak Offset	0.2487	0.2613	NONE
Far Lith Offset	0.3676	0.3924	NONE

Near Bar Background	963.19	957.68	700 - 1450
Near Dens Background	320.82	317.42	230 - 480
Near Peak Background	140.46	138.59	100 - 210
Near Lith Background	171.88	169.33	125 - 260
Far Bar Background	490.97	486.09	450 - 900
Far Dens Background	195.43	194.85	175 - 345
Far Peak Background	78.63	78.00	70 - 140
Far Lith Background	81.18	81.14	75 - 145

CALIBRATION BLOCK SUMMARY				
Measurement	Current Reading (Previous Coef)	Calibrated (New Coef)	Change	Control Limit On Change
MAGNESIUM				
Density (g/cc)	1.674	1.687	0.013	+/- 0.015
Pe	2.623	2.551	-0.072	+/- 0.150
ALUMINUM				
Density (g/cc)	2.567	2.581	0.014	+/- 0.01500
Pe	3.146	3.123	-0.023	+/- 0.150

TOOL SUMMARY				
Measurement	Near Detector		Far Detector	
	Value	Control Limits	Value	Control Limits
QUALITY				
Background	-0.0015	+/- 0.0110	-0.0006	+/- 0.0140
Magnesium Block	-0.0009	+/- 0.0110	0.0001	+/- 0.0140
Aluminum Block	-0.0011	+/- 0.0110	-0.0005	+/- 0.0140
Resolution	9.25	6.00 - 11.50	9.36	6.00 - 11.50
Internal Verifier(B+D+P+L)	1583	1200 - 2700	840	800 - 1700

PASS/FAIL SUMMARY	
Background Quality Check:	Passed
Background Range Check:	Passed
Background Resolution Check:	Passed
Background Verification Check:	Passed
Magnesium Quality Check:	Passed
Aluminum Quality Check:	Passed
Gains Check:	Passed
Changes in Calibration Blocks:	Passed

SPECTRAL DENSITY FIELD CHECK

Tool Name:	SDLT Pad - 11213308	Reference Calibration Date:	29-Mar-18 13:45:53
Engineer:	WHITLOCK	Calibration Date:	02-Apr-18 09:35:32
Software Version:	WL INSITE R5.6.3 (Build 4)	Calibration Version:	1

Pad Temperature: 64.7 degF

DENSITY FIELD CALIBRATION SUMMARY				
Measurement	Shop	Field	Change	Control Limit +/-
Near (B+D+P+L) cps	1583.020	1579.950	-3.070	16.005
Far (B+D+P+L) cps	840.072	840.066	-0.006	15.931
Near Resolution	9.25	9.25	0.000	0.50
Far Resolution	9.36	9.25	-0.110	1.00

PASS/FAIL SUMMARY	
Bkg Quality Check:	Passed
Bkg Resolution Check:	Passed

Bkg Verification Check:				Passed		
CALIBRATION SUMMARY						
Sensor	Shop	Field	Post	Difference	Tolerance	Units
Depth Panel-12345678						
Tension Zero	0.00	-----	-----	0.00	-----	lbs
Tension Cal	7830.00	-----	-----	0.00	-----	lbs
CH_HOS-CH_HOS_I						
DH Tension Zero	0.00	-----	-----	0.00	-----	lbs
DH Tension Cal	1810.00	-----	-----	0.00	-----	lbs
GTET-11013113						
Gamma Ray Calibrator	225.9	222.8	-----	3.1	+/- 9.00	api
DSNT-11019641						
Snow-Block Porosity	0.0770	0.0634	-----	0.0136	+/- 0.0150	decp
SDLT-10950489						
Pad Extension	3.75	-----	-----	0.00	+/-0.20	in
Ring Diameter	8.25	-----	-----	0.00	+/-0.20	in
ACRt Sonde-11830728						
Mud Cell	0.99	-----	-----	0	-----	ohm-m
Microlog Pad-10950489						
MicroLog Normal	19.91	19.88	-----	0.03	+/-0.80	ohmm
MicroLog Lateral	19.99	19.96	-----	0.03	+/-0.80	ohmm
SDLT Pad-11213308						
Near(B+D+P+L)	1583.020	1579.950	-----	3.070	+/-16.005	cps
Far(B+D+P+L)	840.072	840.066	-----	0.006	+/-15.931	cps
Data: RAYDON_ROCK\0001 GTET-DSNT-SDLT-BSAT-ACRT\IDLE				Date: 02-Apr-18 17:05:59		


HALLIBURTON

PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP-----					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	8.900	ppg
	SHARED	WAGT	Weighting Agent	Natural	
	SHARED	BSAL	Borehole salinity	0.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	1.250	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	CSTR	Compressive Strength	1000.00	psia
	SHARED	ST	Surface Temperature	75.0	degF
	SHARED	TD	Total Well Depth	5860.00	ft
	SHARED	BHT	Bottom Hole Temperature	138.0	degF
	SHARED	SVTM	Navigation and Survey Master Tool	NONE	
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
	SHARED	TEMM	CBM Temperature Master Tool	GTET	
	SHARED	SOCI	Source of Casing Information	Parameters	
	SHARED	MSAL	Water-base mud filtrate salinity	0.00	ppm
	Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	

BOTTOM—

HALLIBURTON**TOOL STRING DIAGRAM REPORT**

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
CH_HOS_I 37.50 lbs	Weak Point 7000 lbs- CH_HOS_I 0.01 lbs	Ø 2.750 in → Ø 0.010 in* →		← Temperature @ 71.07 ft	3.03 ft	72.10 ft
XOHD-12345678 20.00 lbs		Ø 2.750 in → Ø 3.625 in →			0.95 ft	69.07 ft
SP Sub-11812437 60.00 lbs		Ø 3.625 in →		← SP @ 66.34 ft	3.74 ft	68.12 ft
				← Z-Accelerometer @ 63.93 ft		64.38 ft
GTET-11013113 165.00 lbs		Ø 3.625 in →			8.52 ft	
				← GammaRay @ 58.32 ft		55.86 ft
DSNT-11019641 174.00 lbs	DSN Decentralizer- 11660709 6.60 lbs	Ø 5.000 in* → Ø 3.625 in →		← DSN Far @ 48.92 ft ← DSN Near @ 48.17 ft	9.69 ft	46.17 ft
SDLT-10950489 360.00 lbs	SDLT Pad-11213308 65.00 lbs Microlog Pad-10950489 8.00 lbs RAM-Cs137-00005155 1.00 lbs	Ø 4.500 in → Ø 4.500 in* → Ø 4.750 in* → Ø 0.800 in* →		Microlog @ 38.36 ft SDL Caliper @ 38.17 ft SDL @ 38.16 ft	10.81 ft	35.36 ft
BSAT-12173982 300.00 lbs		Ø 3.625 in →		Receiver Array @ 26.84 ft Sonic Receivers @ 26.84 ft	15.77 ft	

