


KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION
Please TYPE Form and File ONE Copy

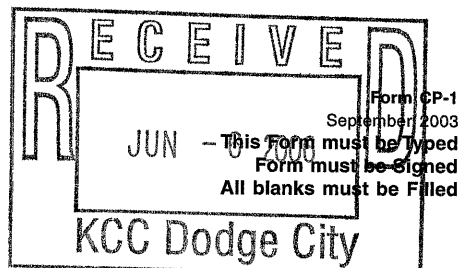

API # 15 - 047-21,143-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate original spud or completion date _____.

Well Operator: F.G. Holl Company, L.L.C. KCC License #: 5056
(Owner / Company Name) (Operator's)

Address: 9431 E. Central, Suite 100 City: Wichita

State: Kansas Zip Code: 67206 Contact Phone: (316) 684 - 8481

Lease: LOVETTE Well #: 2-17 Sec. 17 Twp. 24 S. R. 17 East West

NE - SE - NW Spot Location / QQQQ County: Edwards

1650 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

990 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well
 SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks

Surface Casing Size: 8-5/8" Set at: 265' Cemented with: 210 Sacks

Production Casing Size: 4-1/2" Set at: 4493' Cemented with: 225 Sacks

List (ALL) Perforations and Bridgeplug Sets: 4059', 4075' - 4078', 4084' - 4087', 4094' - 4107'

Elevation: 2125' (G.L. / K.B.) T.D.: 4500' PBTD: N/A Anhydrite Depth: 1164'
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed):

Heavy Mud, Hulls, Cement and Plug according to KCC specifications.

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? _____

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Mr. Rob Long

Phone: (620) 793 - 0915

Address: P.O. BOX 185 City / State: Belpre, KS. 67519

Plugging Contractor: Quality Well Service KCC License #: 31925
(Company Name) (Contractor's)


Address: 401 West Main, Lyson, KS. 67554 Phone: (620) 727 - 3410

Proposed Date and Hour of Plugging (if known?): Unknown

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 06/05/2006 Authorized Operator / Agent: Loveness Mpanje
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202



STERLING DRILLING CO.

BOX 129

STERLING, KANSAS 67579

WELL LOG - - - - - LOVETTE #2-17

Located: NE SE NW, Section 17-24S-17W, Edwards County,
Kansas

OWNER: F. G. Holl

ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: December 28, 1983

COMPLETED: January 3, 1984

TOTAL DEPTH: 4500'

LOG

0 - 95 Surface Soil and Sand
95 - 268 Shale - Clay
268 - 1164 Shale
1164 - 1178 Anhydrite
1178 - 1400 Shale
1400 - 2170 Shale, Lime Stringers
2170 - 4500 Lime

CASING RECORD

Ran 6 joints new 8 5/8", 24# casing.
252.69' pipe set at 265' K.B. ϕ
Cemented with 210 sacks 60/40 Pozmix
with 3% cc. Plug down at 1:45 PM,
12-28-83, by Howco.

Ran 117 joints 4 1/2", 10.5# casing.
32 joints used. 4483.66' pipe set
at 4493' K.B. Cemented with 100
sacks Lite and 125 sacks 50/50
Pozmix, plus our regular additives.
Plug down at 2:00 PM, 1-3-84, by
Howco. Plugged rat hole and water
well.

Deviation Surveys: 1 1/4° at 2237'
1 1/4° at 4383'

RECEIVED
JUN 07 2006
KCC WICHITA

KANSAS

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair Robert E. Krehbiel, Commissioner Michael C. Moffet, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Holl, F.G., Company L.L.C.
9431 E Central, Suite 100
Wichita, KS 67206

June 16, 2006

Re: LOVETTE #2-17
API 15-047-21143-00-00
NWSENE 17-24S-17W, 1650 FNL 990 FEL
EDWARDS COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888

Sincerely



David P. Williams
Production Supervisor