


KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION
Please TYPE Form and File ONE Copy

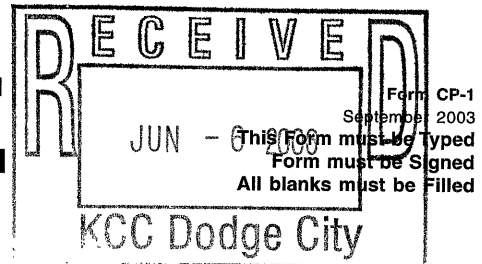

API # 15 - 047-21,353-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate original spud or completion date _____.

Well Operator: F.G. Holl Company, L.L.C. KCC License #: 5056
(Owner/Company Name) (Operator's)

Address: 9431 E. Central, Suite 100 City: Wichita

State: Kansas Zip Code: 67207 Contact Phone: (316) 684 - 8481

Lease: NIXON Well #: 4-8 Sec. 8 Twp. 24 S. R. 17 East West

& 170' S. - NE - NW - NE Spot Location / QQQQ County: Edwards
170' W.

4780 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

1820 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well
 SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks

Surface Casing Size: 8-5/8" Set at: 313' Cemented with: 225 Sacks

Production Casing Size: 4-1/2" Set at: 4517' Cemented with: 225 Sacks

List (ALL) Perforations and Bridgeplug Sets: 4348' - 358' Mississippi

Elevation: 2118' (G.L. / K.B.) T.D.: 4521' PBTD: N/A Anhydrite Depth: 1176'
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed):

Heavy Mud, Hulls, Cement and Plug according to KCC specifications.

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? _____

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Mr. Rob Long

Phone: (620) 793 - 0915

Address: P.O. BOX 185 City / State: Belpre, KS. 67519


Plugging Contractor: Quality Well Service KCC License #: 31925
(Company Name) (Contractor's)

Address: 401 West Main, Lyson, KS. 67554 Phone: (620) 727 - 3410

Proposed Date and Hour of Plugging (if known?): Unknown

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent.
Date: 06/05/2006 Authorized Operator / Agent: Loveness Mpanje
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202



STERLING DRILLING COMPANY

BOX 129

STERLING, KANSAS 67579

WELL LOG ----- Nixon #4-8

170' S & 170' W of NE NW NE, Sec. 8-T24S-R17W, Edwards
County, Kansas

OPERATOR: F. G. Holl Company

ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

DATE COMMENCED: April 9, 1990

DATE COMPLETED: April 16, 1990

TOTAL DEPTH: 4520' Dlr.
4521' Log

LOG

0' - 70' Surface soil & sand
70' - 318' Red bed & shale
318' - 730' Shale & red bed
730' - 1176' Shale
1176' - 1192' Anhydrite
1192' - 1456' Shale
1456' - 4520' Shale & lime

CASING RECORD

Spud at 12:15 AM 4-9-90. Drilled 318'
12 1/4" hole. Ran 7 joints 8 5/8" casing
24#. 302.24' pipe set at 313.74' KB.
Cemented with 225 sx 60/40 Pozmix W/ 2%
Gel & 3% cc. Plug down at 5:45 pm. 4-9-90
Good returns to surface. By Howco.

Ran 111 joints 4 1/2" 10.5# new & used casing.
(409.50' used). 4508.70' pipe set at
4517.70' KB. Cemented with 20 bbls. salt
flush followed W/ 12 bbl. Howco superflush
ahead of 100 sx Howco light cement followed
with 125 sx. 50/50 Pozmix cement W/ F. G.
Holl regular additives. Plug down at
3:45 AM 4-16-90. By Howco. Centralizers
on top joints 1, 3, 7 & 12. No scratchers.
Used 4 1/2" casing shoe and 4 1/2" insert float
W/ fill up attachment. Shoe jt. 17.85 &
float at 4500' KB.

DEVIATION SURVEY

1/2° @ 4365'
1% @ 4520'

RECEIVED
JUN 07 2006
KCC WICHITA

KANSAS

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair Robert E. Krehbiel, Commissioner Michael C. Moffet, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Holl, F.G., Company L.L.C.
9431 E Central, Suite 100
Wichita, KS 67206

June 16, 2006

Re: NIXON (~~EXT 7-8-01~~) #4-8
API 15-047-21353-00-00
NENWNE 8-24S-17W, 4780 FSL 1820 FEL
EDWARDS COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888

Sincerely



David P. Williams
Production Supervisor