

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-165-21188-00-01
Spot: NENWSE Sec/Twnshp/Rge: 3-16S-16W
2310 feet from S Section Line, 1650 feet from E Section Line
Lease Name: MCCONNELL Well #: 2
County: RUSH Total Vertical Depth: 3730 feet

Operator License No.: 33612
Op Name: GEIST, RON DBA WILDCAT WELL SER
Address: PO BOX 961
HAYS, KS 67601

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		3000		
PROD	5.5	3571	2000	WITH 100 SX CMT
SURF	8.625	1001		

\$121.23

Well Type: SWD UIC Docket No: D26713.0 Date/Time to Plug: 06/07/2006 8:00 AM
Plug Co. License No.: 33612 Plug Co. Name: GEIST, RON DBA WILDCAT WELL SERVICE
Proposal Rcvd. from: RON GEIST Company: GEIST, RON DBA WILDCAT WELL Phone: (785) 728-2040

Proposed Plugging Method: SAND TO 3500'. PLUG AT 1030' WITH 10 SX GEL - 50 SX CMT. PLUG AT 500' WITH 40 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 06/07/2006 9:55 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 3500'. WELL STILL TAKING FLUID. SET CIBP @ 3000'. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 1030' WITH 10 SX GEL - 50 SX CMT. 2ND PLUG AT 500' WITH 40 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3571	3730	OH	


INVOICED

DATE 6-15-06
WT. NO. 2006061791

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

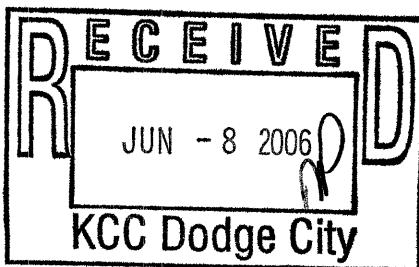

Signed Richard W. Lacey
(TECHNICIAN)

RECEIVED
JUN 14 2006
KCC WICHITA

Form CP-27
[Handwritten signature]
[Handwritten initials]