

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-24503-00-00
Spot: SWSESW Sec/Twnshp/Rge: 7-20S-26W
150 feet from S Section Line, 1555 feet from W Section Line
Lease Name: STIAWALT Well #: 2-A
County: NESS Total Vertical Depth: 4609 feet

Operator License No.: 3716
Op Name: B & G PRODUCTION, INC.
Address: PO BOX 427
BOOKER, TX 79005

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	378		WITH 225 SX CMT

\$ 149.⁷⁹

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 06/15/2006 4:00 AM
Plug Co. License No.: 33724 Plug Co. Name: WARREN DRILLING, LLC
Proposal Revd. from: GREG DAVIDSON Company: WARREN DRILLING, LLC Phone: (620) 933-2040

Proposed Plugging Method: PLUG AT 1920' WITH 50 SX CMT. PLUG AT 1080' WITH 50 SX CMT. PLUG AT 600' WITH 50 SX CMT. PLUG AT 390' WITH 50 SX CMT. PLUG AT 60' WITH 20 SX CMT. PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: NONE
Date/Time Plugging Completed: 06/15/2006 6:45 AM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

Perfs:


1ST PLUG 10' LONG PIECE OF 4 1/2" CASING DROPPED ON LOGGING TOOL & 25 SX CMT RED DYED CMT ON CASING. TOC @ 4520' (TAGGED). TOOL @ 4606'. 2ND PLUG AT 1920' WITH 50 SX CMT. 3RD PLUG AT 1080' WITH 50 SX CMT. 4TH PLUG AT 600' WITH 50 SX CMT. 5TH PLUG AT 390' WITH 50 SX CMT. 6TH PLUG AT 60' WITH 20 SX CMT. 7TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 8TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

INVOICED
6-21-06
2006061824

District: 01

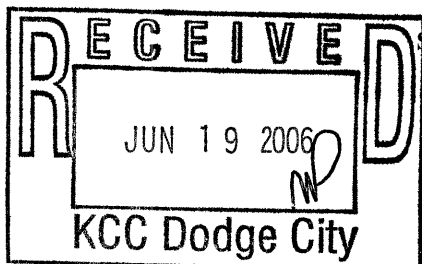

Signed Eric MacLaren
(TECHNICIAN)

RECEIVED
JUN 21 2006
KCC WICHITA

[Handwritten signature]