

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-033-20044-00-00
Spot: SESW Sec/Twnshp/Rge: 14-31S-18W
660 feet from S Section Line, 1980 feet from W Section Line
Lease Name: BOISSEAU A Well #: 1
County: COMANCHE Total Vertical Depth: 5161 feet

Operator License No.: 32158
Op Name: H & B PETROLEUM CORP.
Address: 130 E. ROSS, SUITE 103
CLEARWATER, KS 67026

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		4780		WITH 2 SX CMT
PROD	4.5	5157	0	WITH 150 SX CMT
SURF	8.625	328		WITH 430 SX CMT

\$ 167.73

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 06/15/2006 3:30 PM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Revd. from: AL HAMMERSMITH Company: H & B PETROLEUM Phone: (620) 584-6380

Proposed
Plugging
Method:

SET CIBP @ 4780' & 2 SX CMT. PERFORATE AT 360' & CIRCULATE CMT TO SURFACE.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 06/15/2006 4:15 PM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

2" STRETCH, WELL SQUEEZED UNKNOWN DEPTH. SET CIBP @ 4780' WITH 2 SX CMT. PERFORATE AT 360' & CIRCULATD CMT TO SURFACE WITH 150 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4971	5013		
4831	4835		

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

INVOICED
DATE 6-21-06
INV. NO 2006061827

District: 01

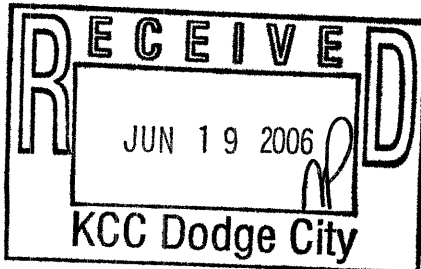

Signed Eric MacLaren
(TECHNICIAN)

RECEIVED
JUN 21 2006
KCC WICHITA

Form CP-2/3
[Handwritten signature]