

TO:
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION - PLUGGING
 130 SOUTH MARKET, SUITE 2078
 WICHITA, KANSAS 67202

API Well Number: 15-097-20049-00-00
 Spot: NESE Sec/Twnshp/Rge: 15-30S-19W
1968 feet from S Section Line, 659 feet from E Section Line
 Lease Name: SEALEY A Well #: 2
 County: KIOWA Total Vertical Depth: 5210 feet

Operator License No.: 32158
 Op Name: H & B PETROLEUM CORP.
 Address: 130 E. ROSS, SUITE 103
CLEARWATER, KS 67026

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		5010		
PROD	4.5	5206	2200	WITH 175 SX CMT
SURF	8.625	386		WITH 400 SX CMT

\$ 169.33

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 06/13/2006 12:30 PM
 Plug Co. License No.: 33369 Plug Co. Name: XTREME WELL SERVICE, INC.
 Proposal Rcvd. from: AL HAMMERSMITH Company: H & B PETROLEUM Phone: (620) 584-6380

Proposed Plugging Method: CIBP @ 5120'. 20 SX AT BOTTOM. PUMP GEL & HULLS ABOVE CASING LEAK. PLUG AT 2200' WITH 50 SX CMT. PLUG AT 1200' WITH 50 SX CMT. PLUG AT 410' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT

Plugging Proposal Received By: ERIC MACLAREN WitnessType: COMPLETE (100%)
 Date/Time Plugging Completed: 06/13/2006 5:30 PM KCC Agent: JERRY W. STAPLETON

Actual Plugging Report:

SET CIBP AT 5010' WITH 2 SX CMT. 1ST PLUG AT 5000' WITH 20 SX CMT. 2ND PLUG AT 4580' PUMP 500# HULLS & 20 SX CMT. 3RD PLUG AT 2248' WITH 50 SX CMT. 4TH PLUG AT 1192' WITH 50 SX CMT. 5TH PLUG AT 424' WITH 50 SX CMT. 6TH PLUG AT 30' WITH 15 SX CMT. GOOD CIRCULATION ON ALL PLUGS.

Perfs:

Top	Bot	Thru	Comments
5086	5088		
5082	5084		
5076	5079		


INDEXED

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: TBG

DATE: 6-21-06
 FILE NO: 2006061827

District: 01

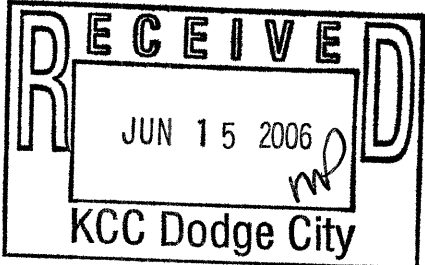

Signed Jerry W. Stapleton
 (TECHNICIAN)
 PIKT JT

RECEIVED
 JUN 21 2006
 KCC WICHITA

Form CI-23

POST