

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-093-20312-00-00
Spot: SESESENW Sec/Twnshp/Rge: 23-25S-36W
2540 feet from N Section Line, 2490 feet from W Section Line
Lease Name: CAMPBELL Well #: 11-2
County: KEARNY Total Vertical Depth: 3030 feet

Operator License No.: 32864
Op Name: XTO ENERGY INC.
Address: 210 PARK AVENUE - SUITE 2350
OKLAHOMA CITY, OK 73102

| String | Size | Depth (ft) | Pulled (ft) | Comment |
|--------|-------|------------|-------------|-----------------|
| PROD | 4.5 | 3010 | 1000 | WITH 700 SX CMT |
| SURF | 8.625 | 554 | | WITH 300 SX CMT |

\$ 98.48
~~100~~

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 06/09/2006 1:00 PM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: JOHN Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: PUMP 300# HULLS & 15 SX CMT. MUD BACK TO 1850'. 15 SX CMT AT 1850'. PULL TO 650' & SPOT 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: KEN JEHLIK WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 06/12/2006 10:30 AM KCC Agent: JIM HOLLAND

Actual Plugging Report:

CASING LEAK @ 1845-2097' SQUEEZED WITH 50 SX CMT. PUMP 300# HULLS WITH 15 SX CMT ON BOTTOM. 1ST PLUG AT 1850' WITH 15 SX CMT. 2ND PLUG AT 650' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:


| Top | Bot | Thru | Comments |
|------|------|------|----------|
| 2798 | 2802 | | |
| 2780 | 2784 | | |
| 2760 | 2764 | | |
| 2748 | 2752 | | |
| 2734 | 2736 | | |
| 2714 | 2728 | | |

Remarks: USED COMMON CEMENT BY SARGENTS.

Plugged through: CSG

INVOICED
6-19-06
DATE 20060618
JIM HOLLAND

District: 01

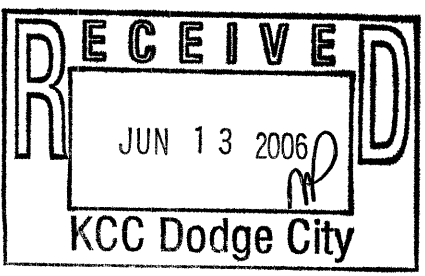

Signed Jim Holland PERT II
(TECHNICIAN)

RECEIVED
JUN 16 2006
KCC WICHITA

Form CR-23
[Signature]
PET