



DUAL RECEIVER CEMENT BOND LOG

Company	DIXON OPERATING COMPANY		
Well	#6 KIRKBRIDE "OWWO"		
Field	MEDICINE LODGE NORTH		
County	BARBER		
State	KANSAS		
	Country U.S.A.		
Company	DIXON OPERATING COMPANY		
Well	#6 KIRKBRIDE "OWWO"		
Field	MEDICINE LODGE NORTH		
County	BARBER		
State	KANSAS		
	Country U.S.A.		
Location:	API # : 15-007-2057-00-01		Other Services
500' FSL & 660' FEL			
Permanent Datum	SEC 20 TWP 32S RGE 12W	GROUND LEVEL	Elevation 1603
Log Measured From		KELLY BUSHING 11' A.G.L.	K.B. 1614
Drilling Measured From		KELLY BUSHING	D.F. 1612
			G.L. 1603
Date	6/11/2018		
Run Number	ONE		
Depth Driller	4818		
Depth Logger	4757		
Bottom Logged Interval	4755		
Top Log Interval	3000		
Open Hole Size	WATER		
Type Fluid			
Density / Viscosity			
Max. Recorded Temp.	3200		
Estimated Cement Top			
Time Well Ready			
Time Logger on Bottom			
Equipment Number	3362		
Location	HAYS, KANSAS		
Recorded By	DAN GOTTSCHALK		
Witnessed By			
Borehole Record			
Run Number	Bit	From	To
1	12 1/4"	0	247
2	7 7/8"	247	4818
Tubing Record			
	Size	Weight	From
			To
Casing Record	Size	Wgt/Ft	Top
Surface String	8 5/8"		0
Prot. String	5.5"		0
Production String			
Liner			


<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING E.L.I. WIRELINE SERVICES HAYS, KANSAS (785)628-6395
DIRECTIONS: MEDICINE LODGE - 3 WEST TO GYP HILL RD. - 2 SOUTH TO RED ROCK RD.
1/2 EAST - SOUTH INTO BEFORE CATLLEGUARD - SOUTH AND WEST INTO

Charted by: _____ Depth in Feet scaled 1:2.15								
0	Gamma Ray (GAPI)	150	0	3' Amplitude (mV)	100	200	5FT VDL	1000
200	5' Travel Time (usec)	1000	9	CCL	-1			
-----			0	Amplified Amplitude (mV)	20			

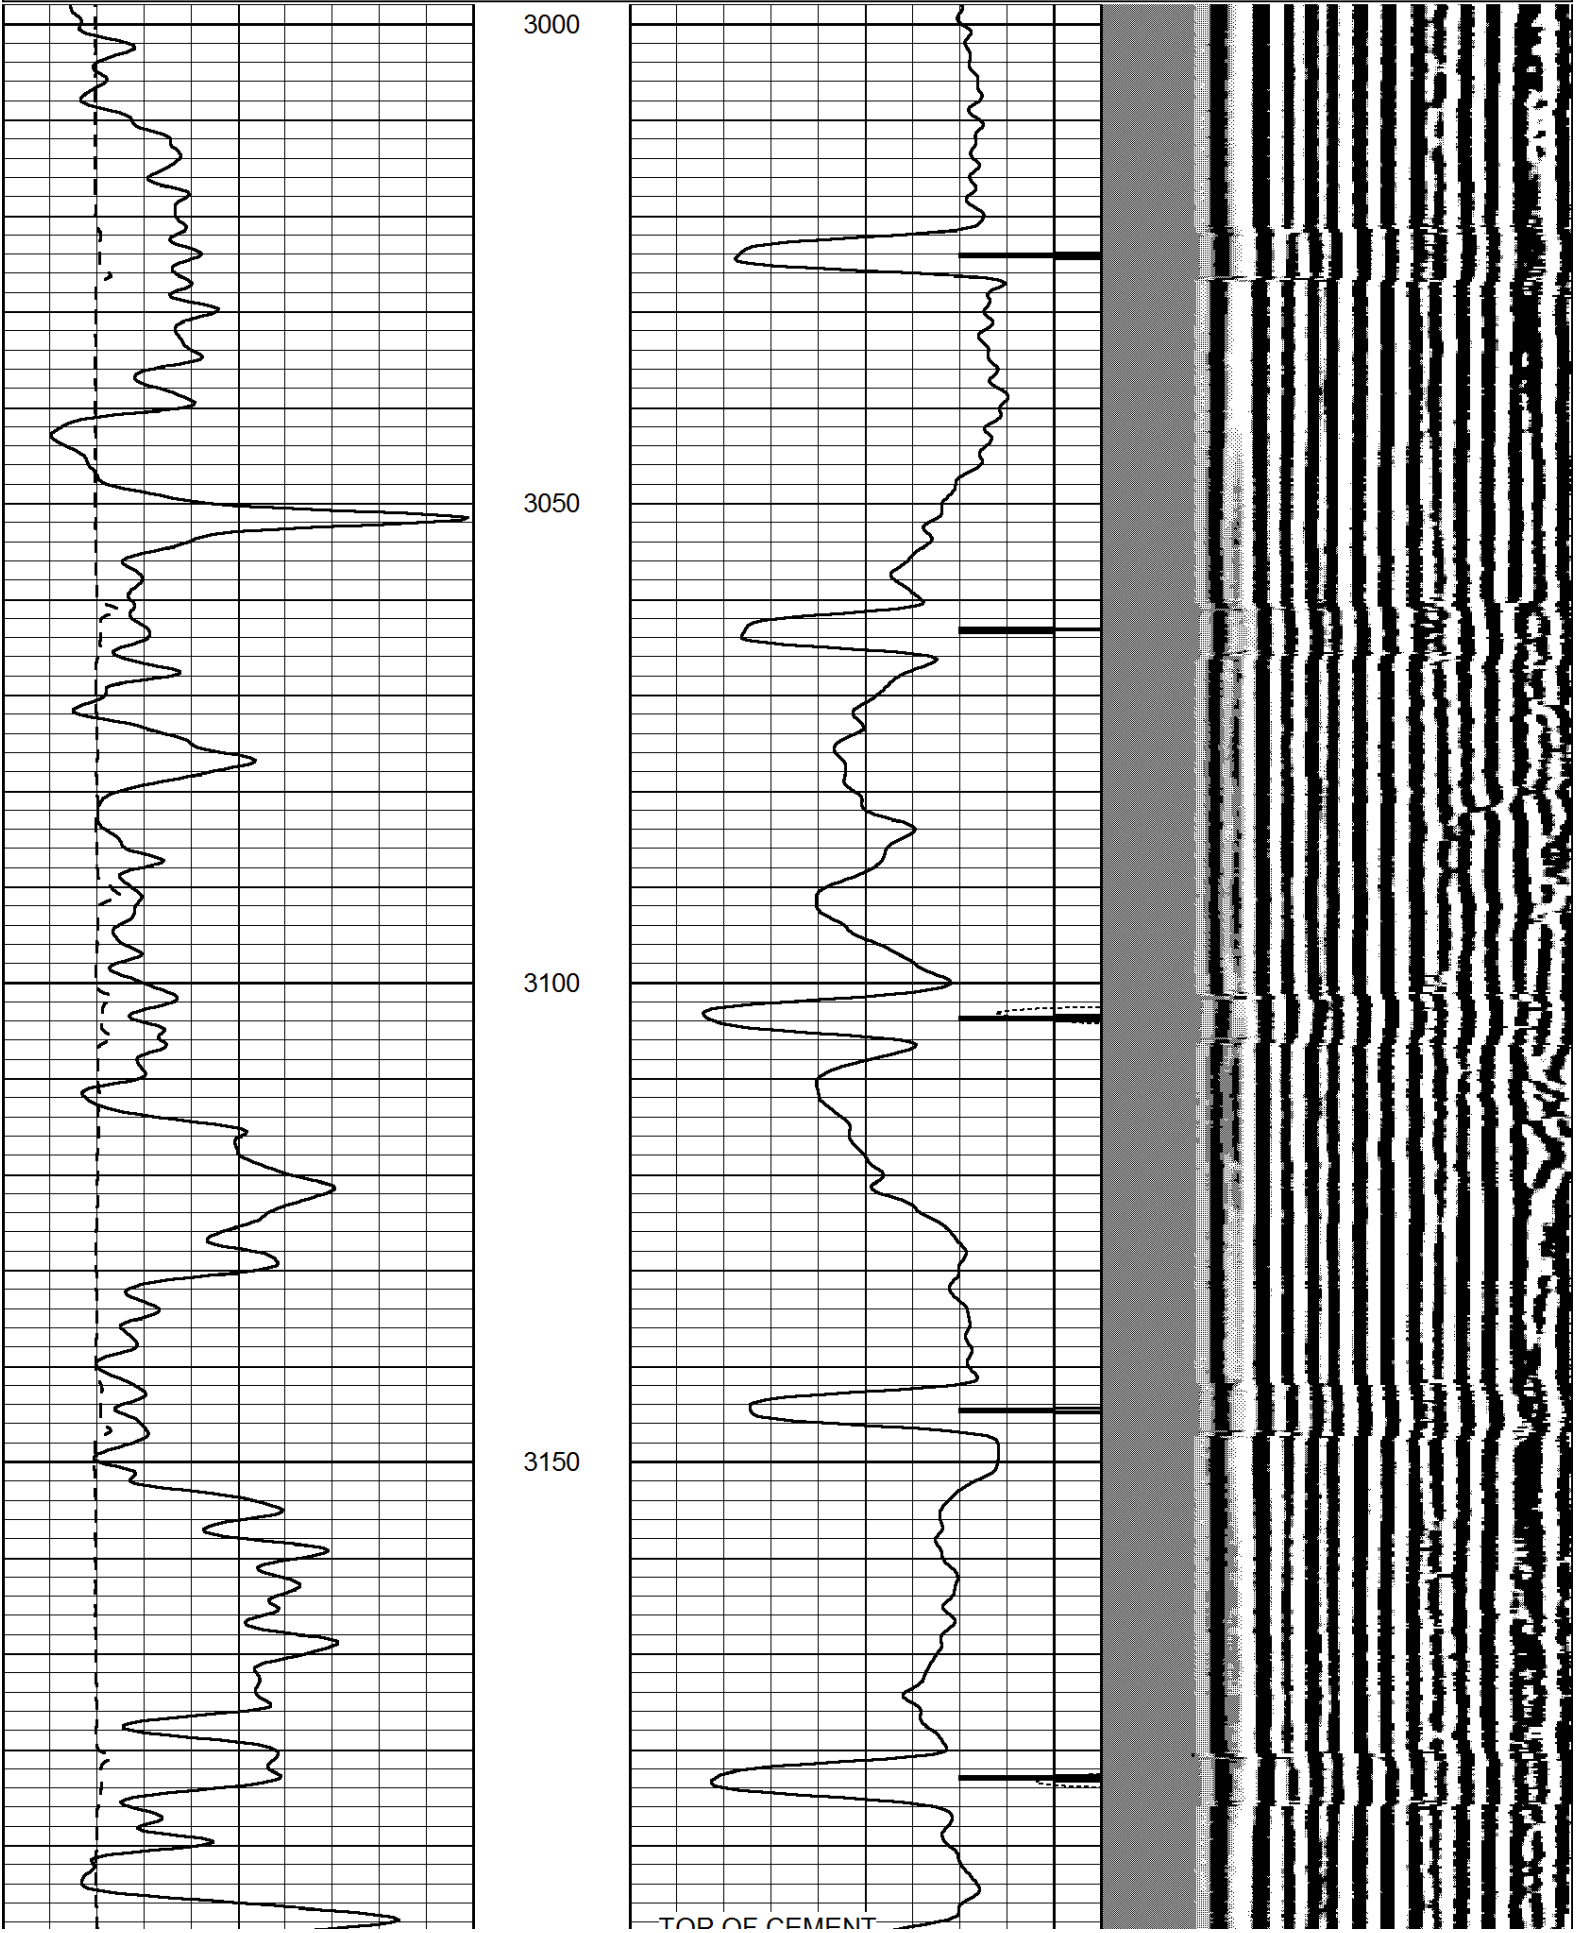

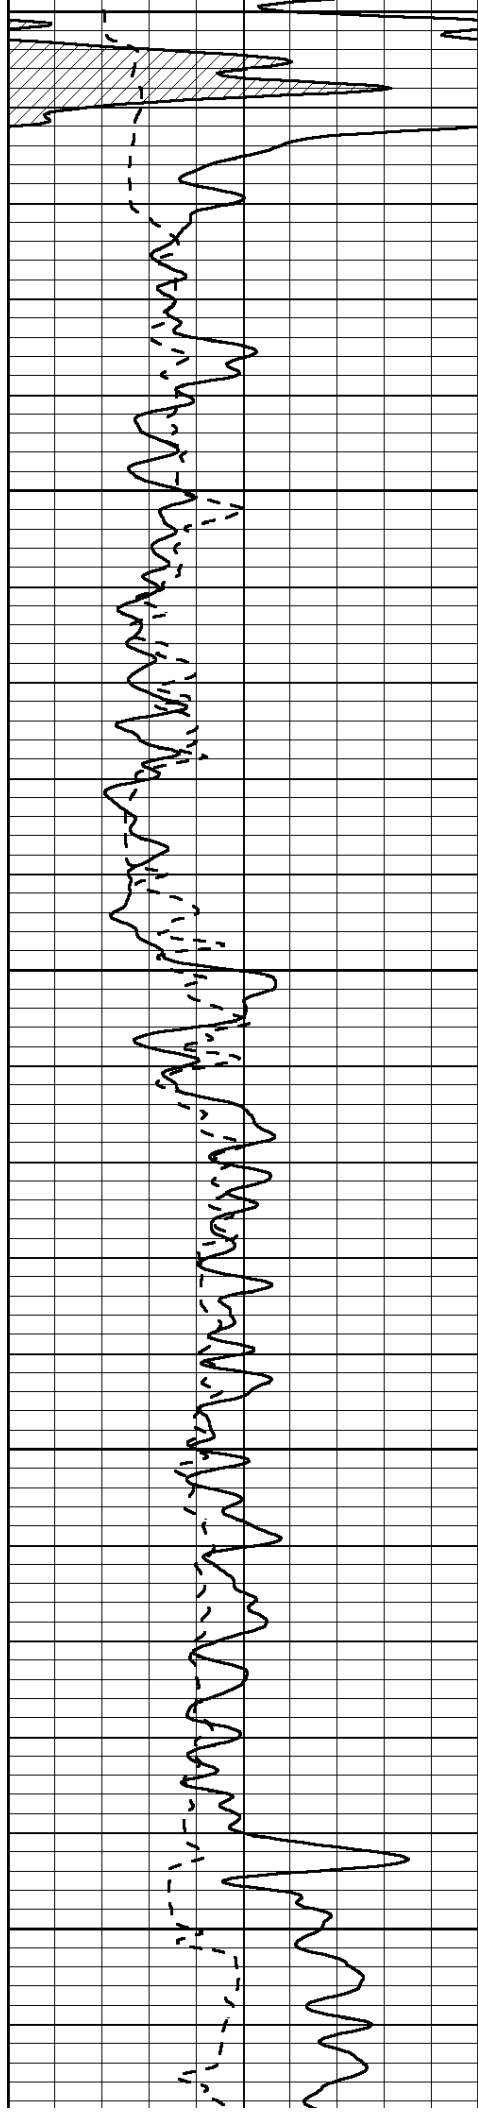


3200

3250


3300


3350

3400

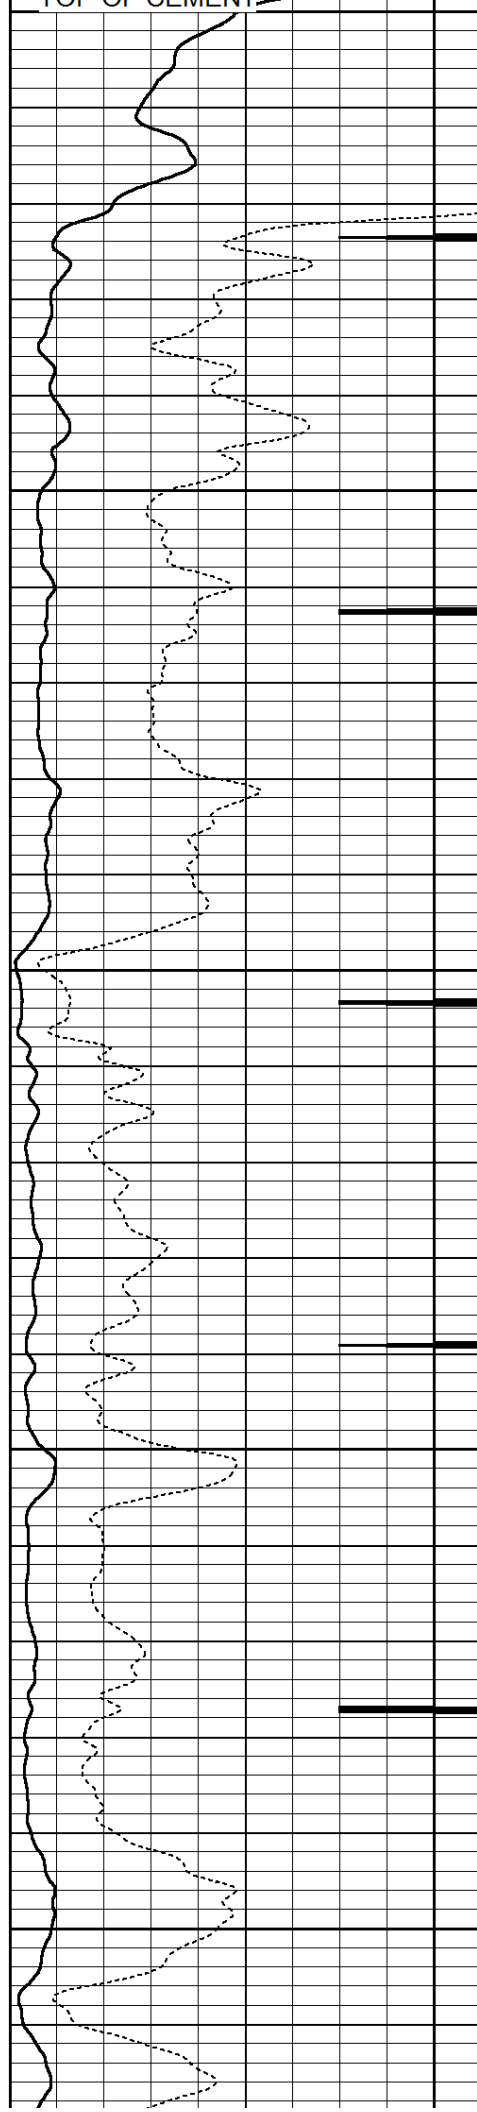

TOP OF CEMENT

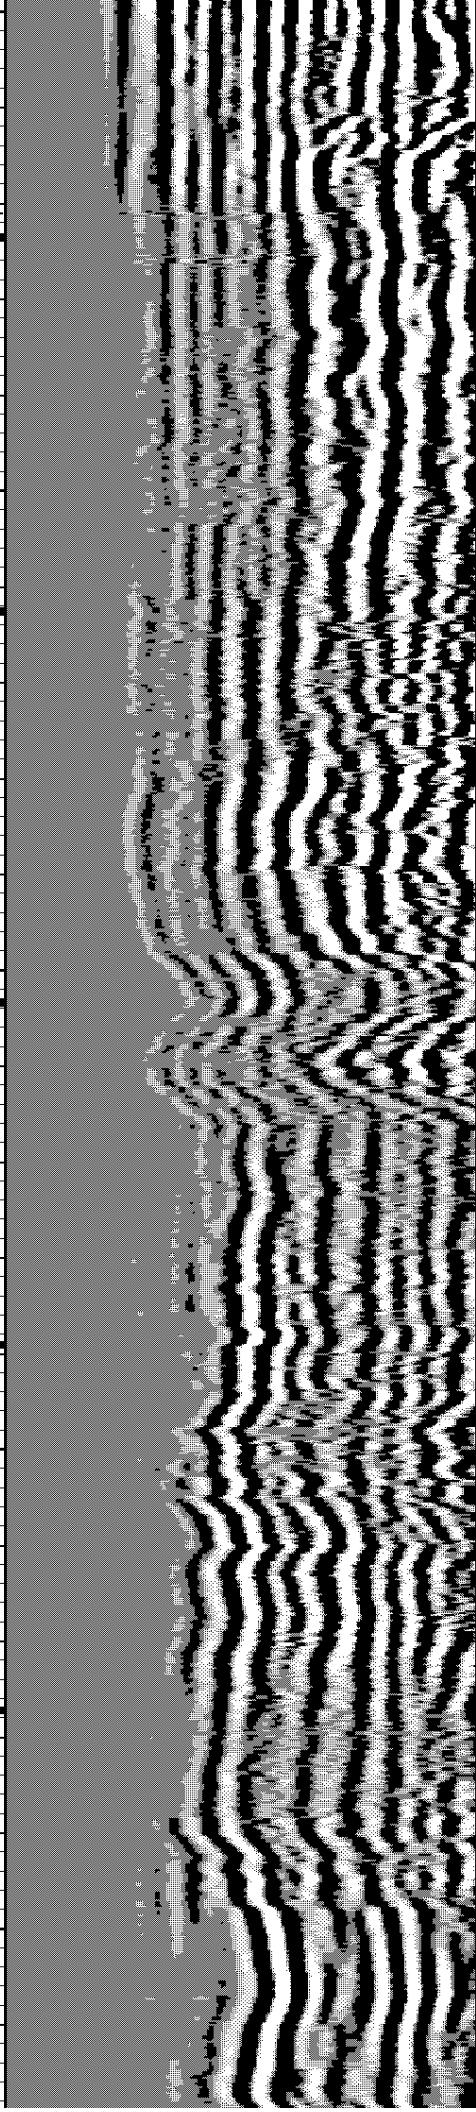


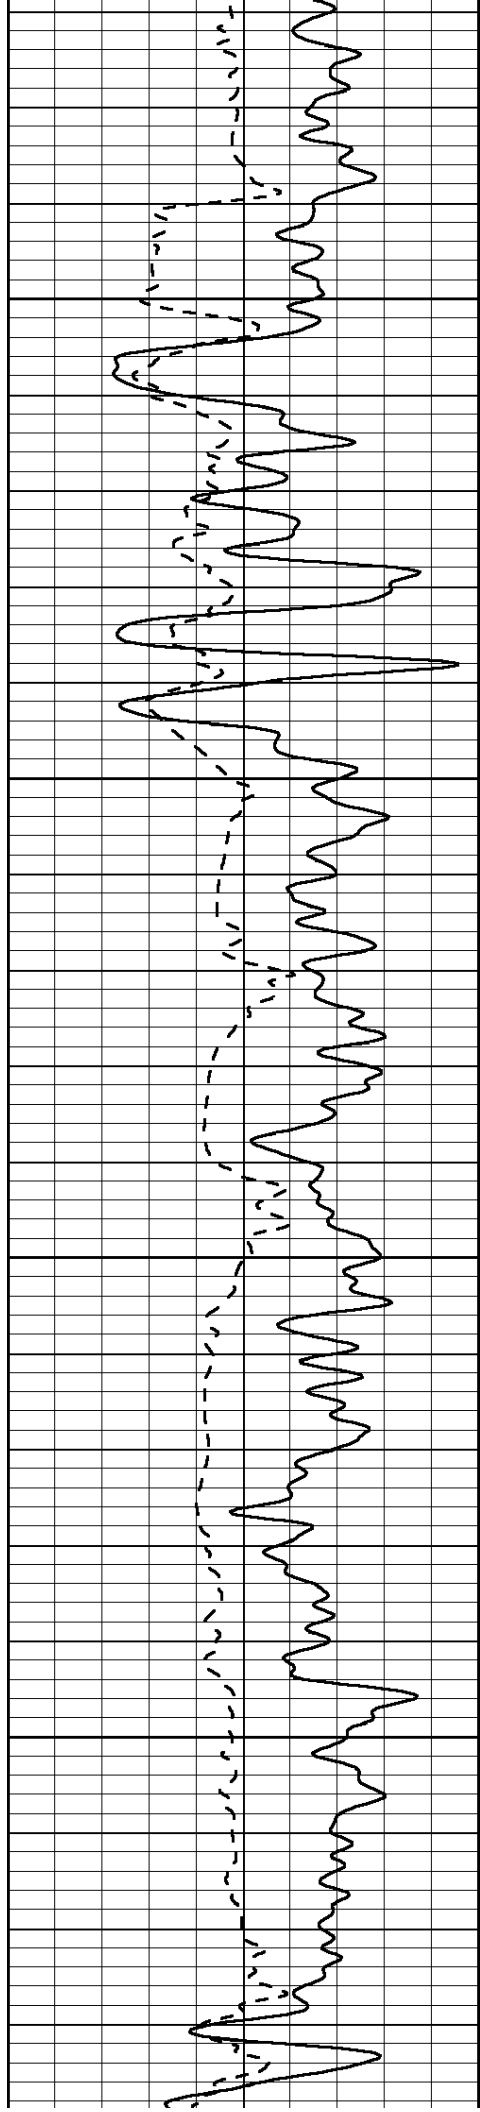



3450

3500

3550

3600

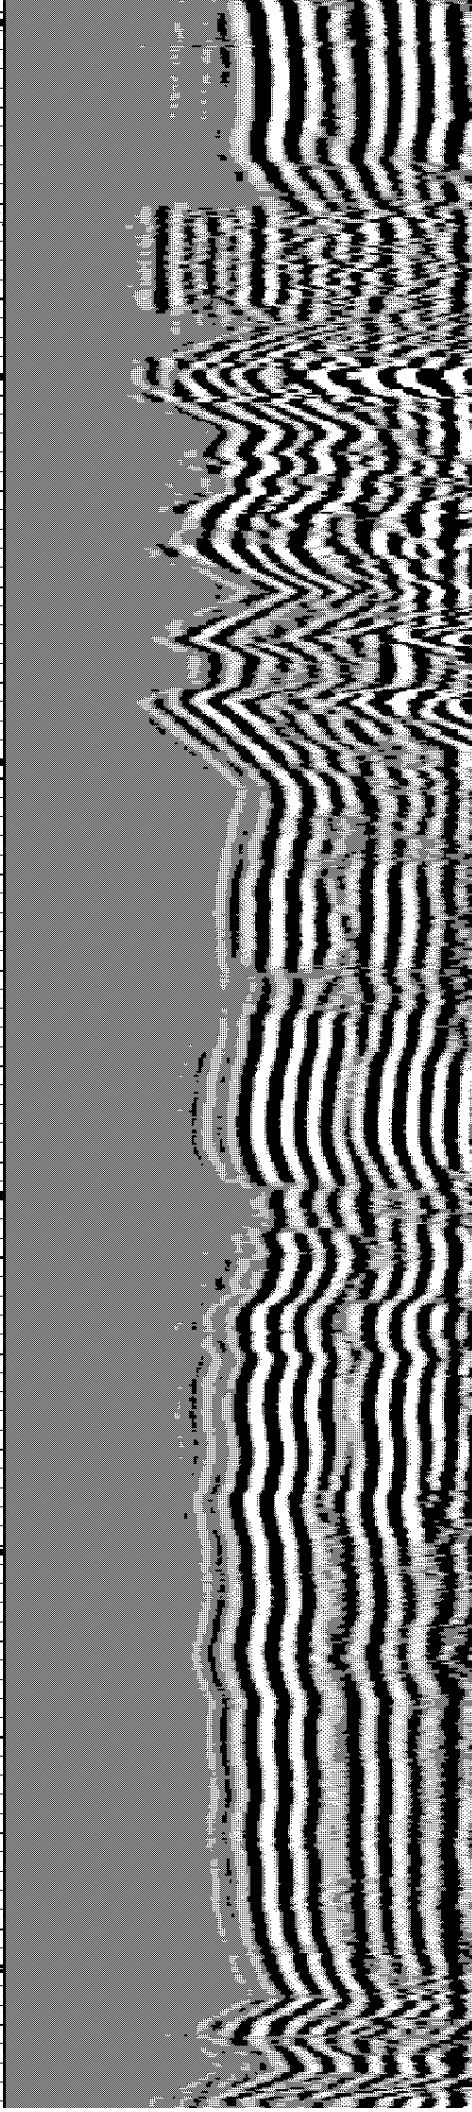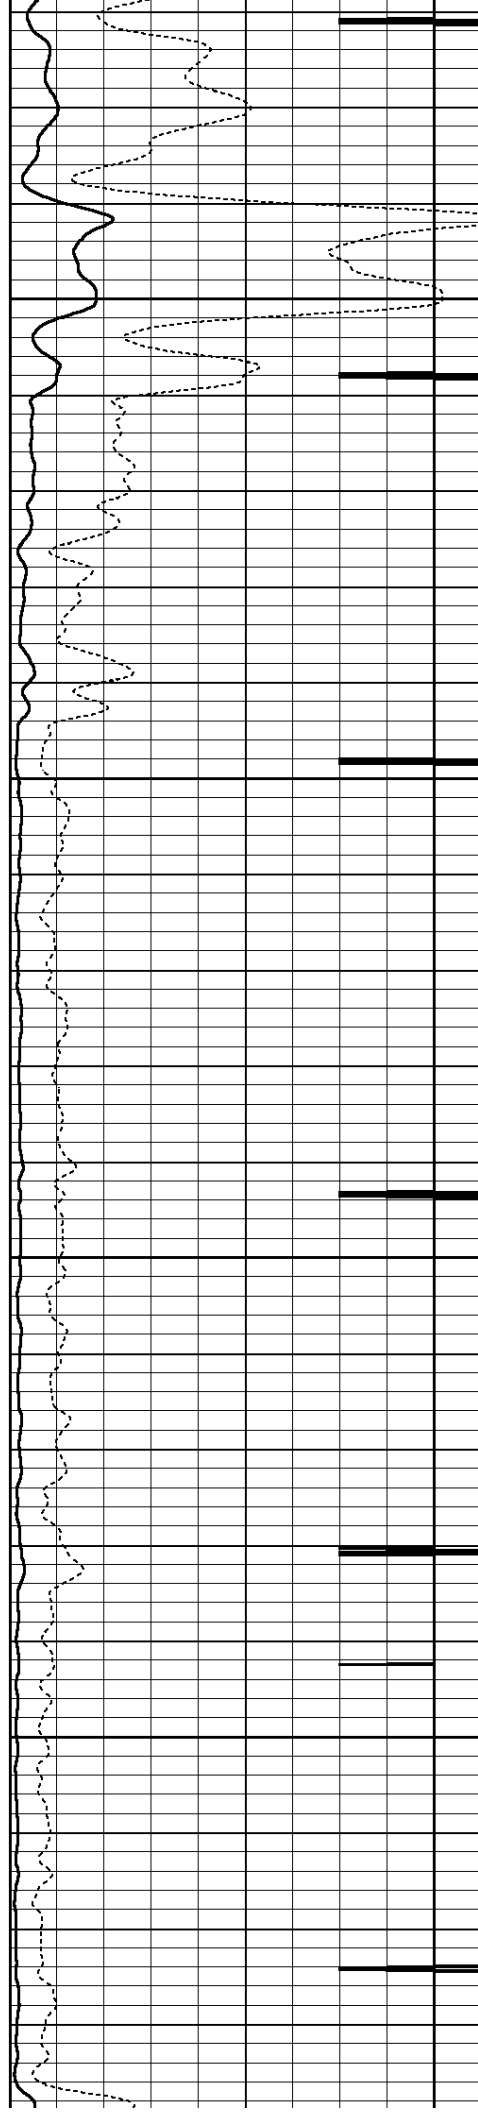

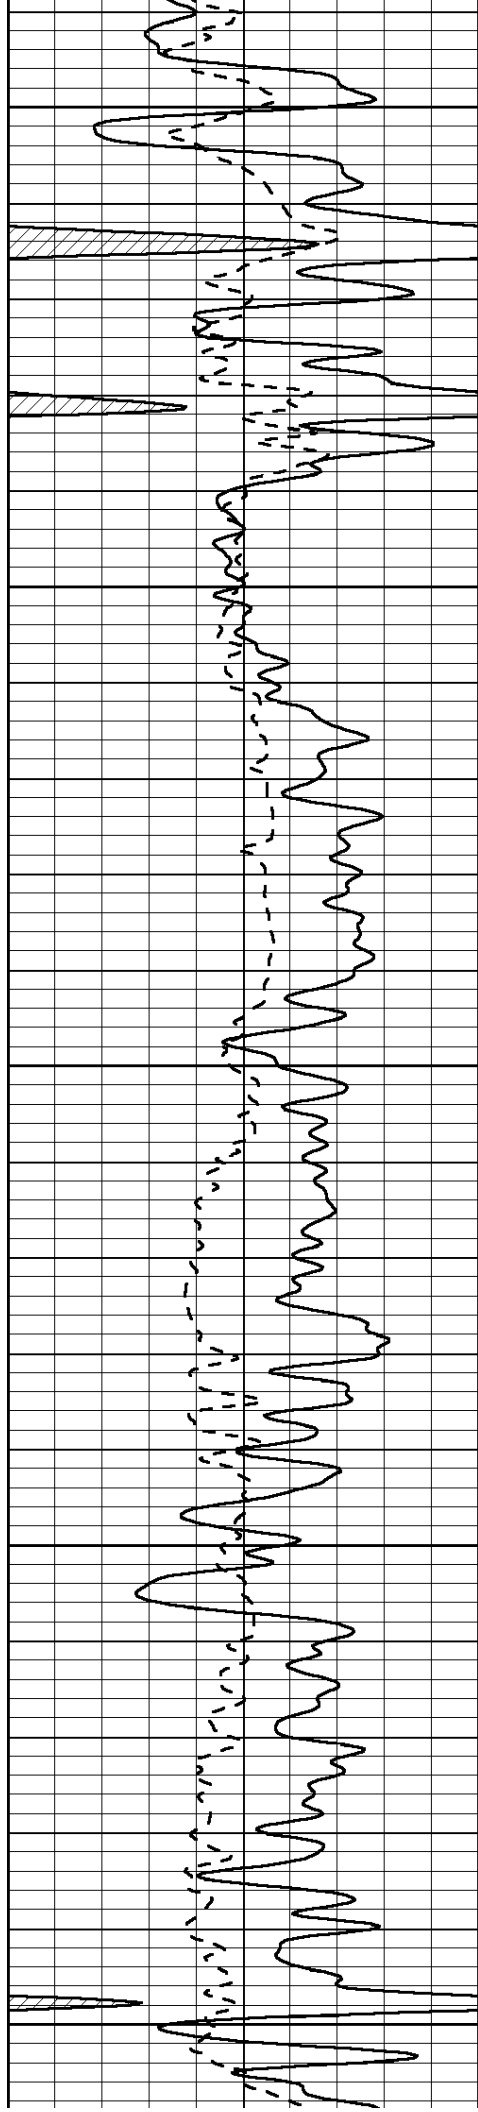



3650


3700

3750

3800

3850

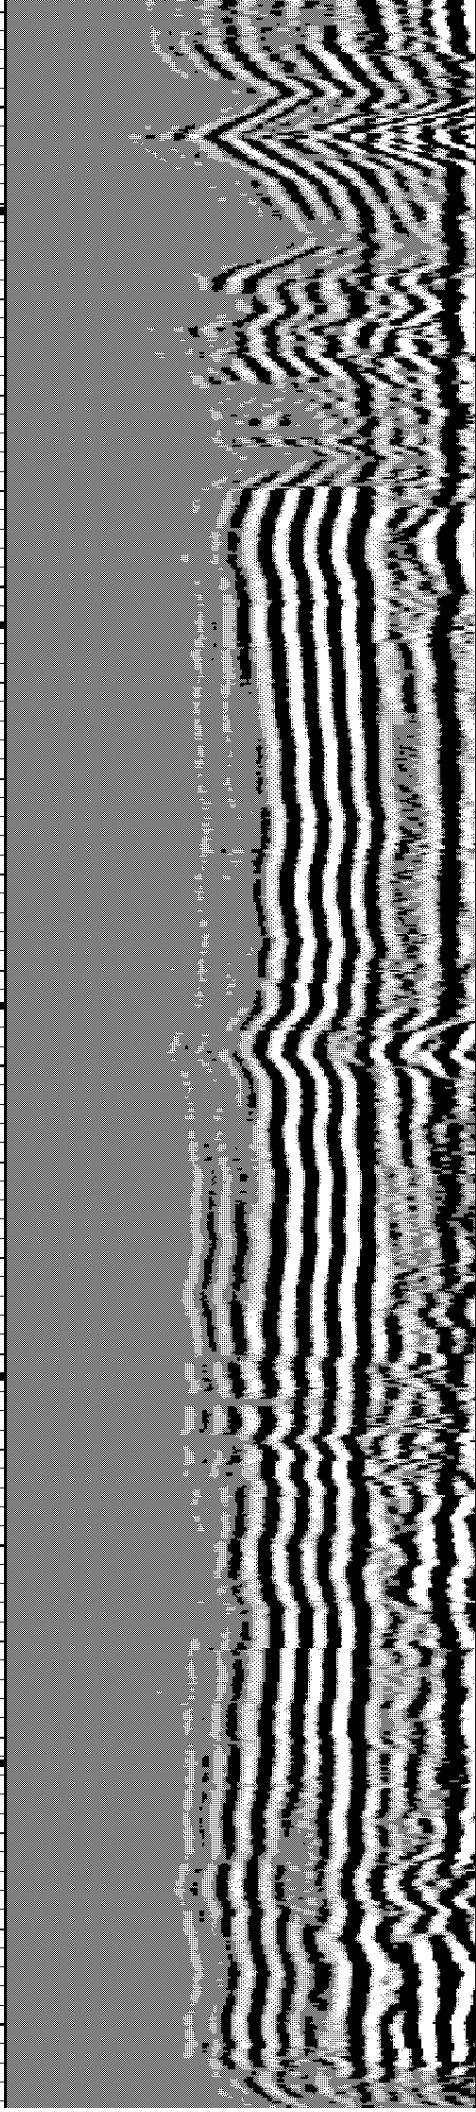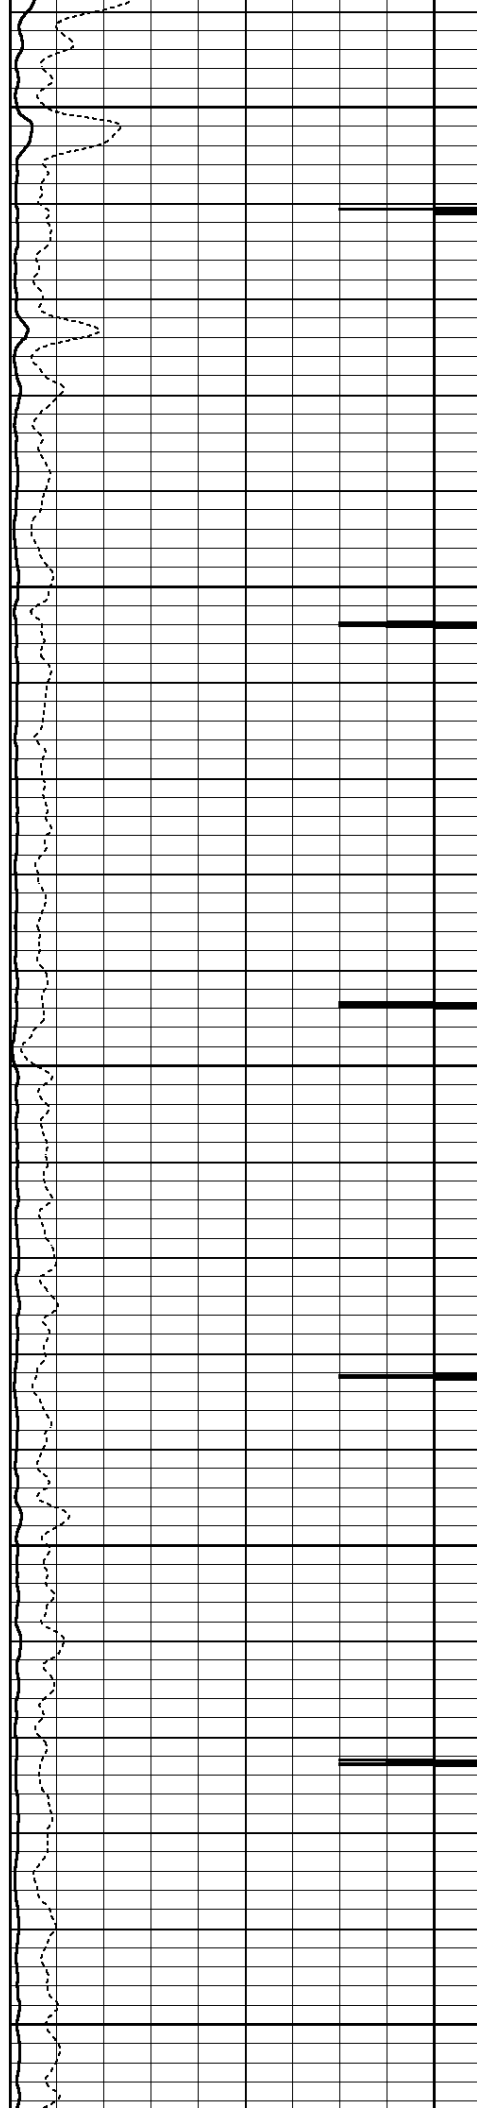


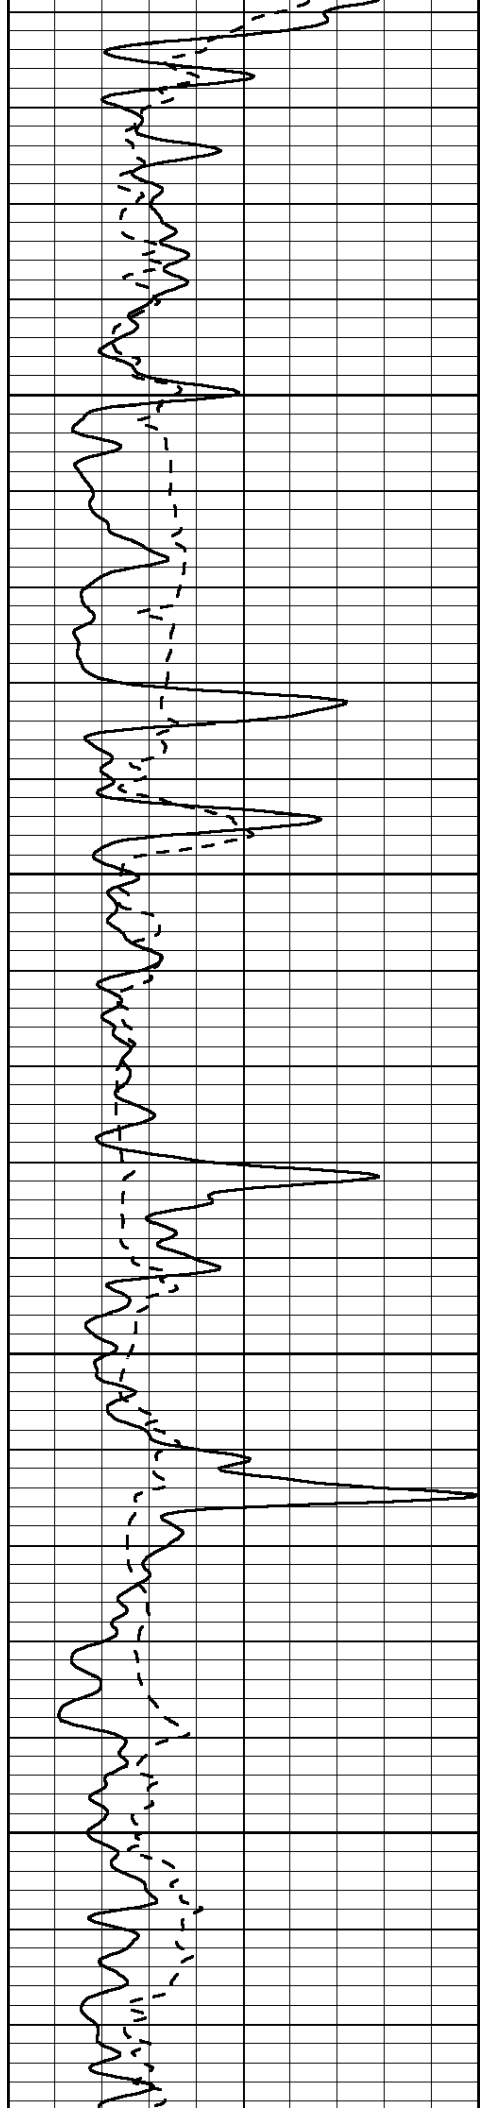



3900

3950

4000

4050

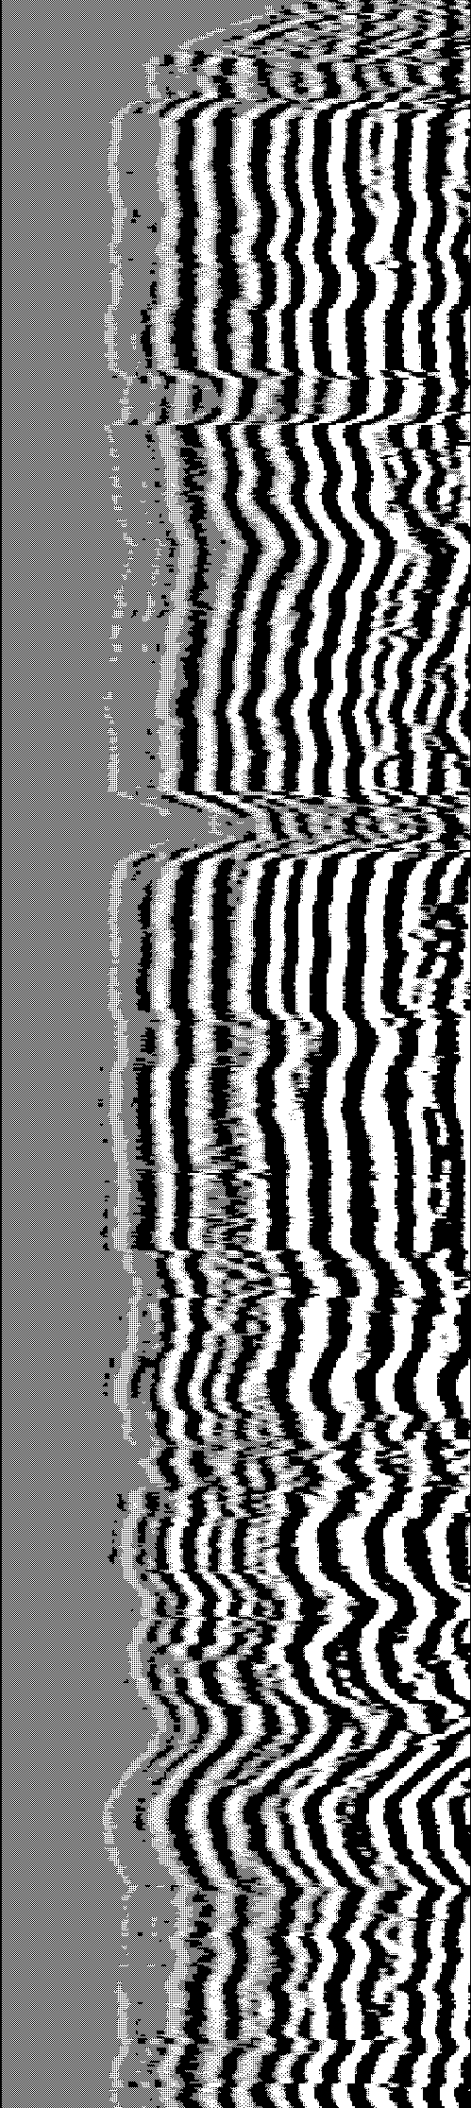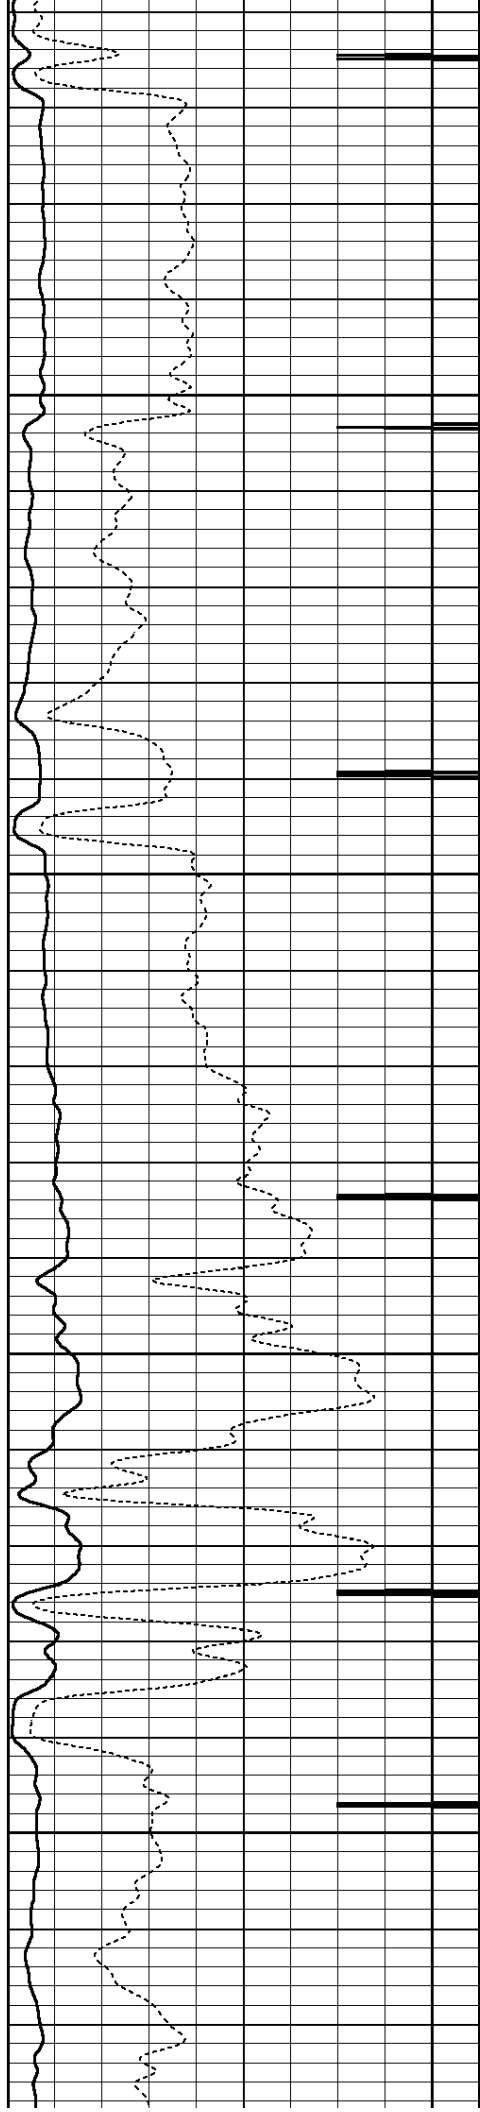


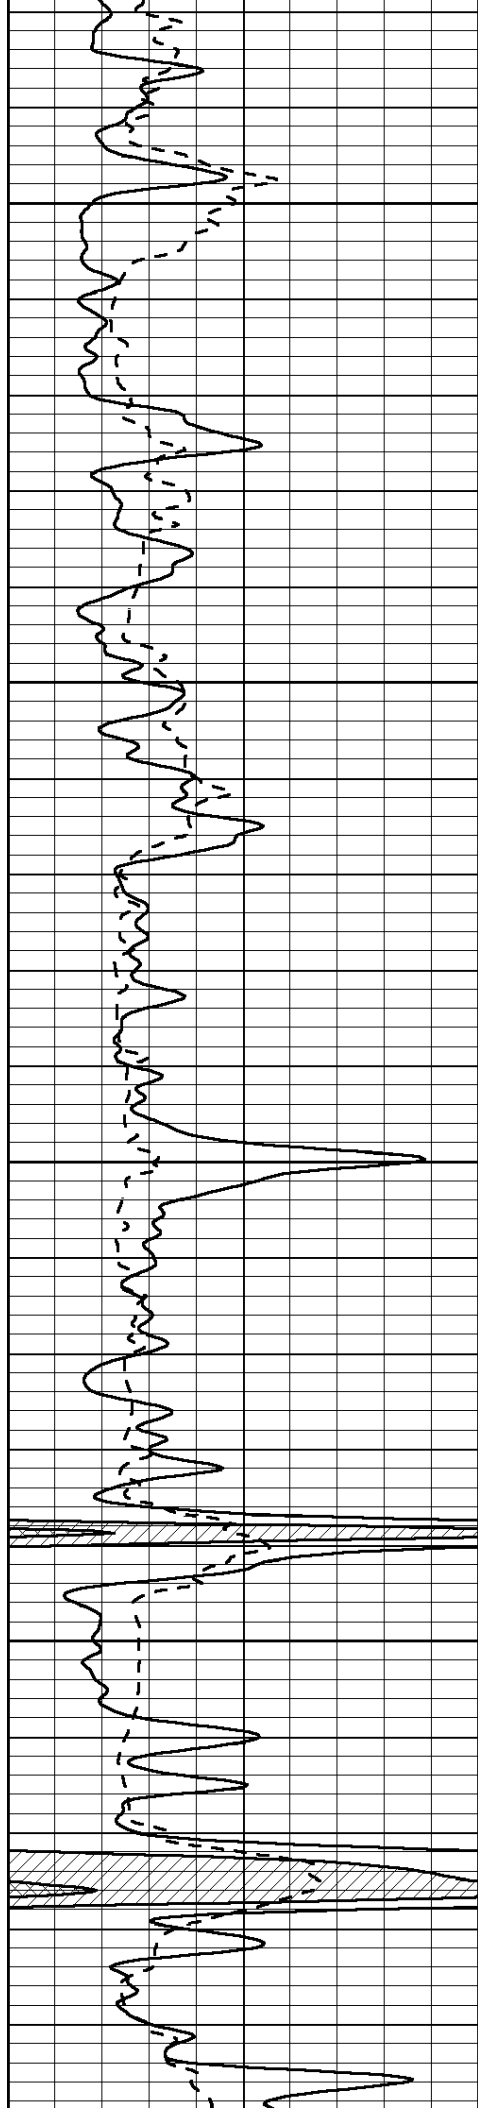



4100

4150

4200

4250

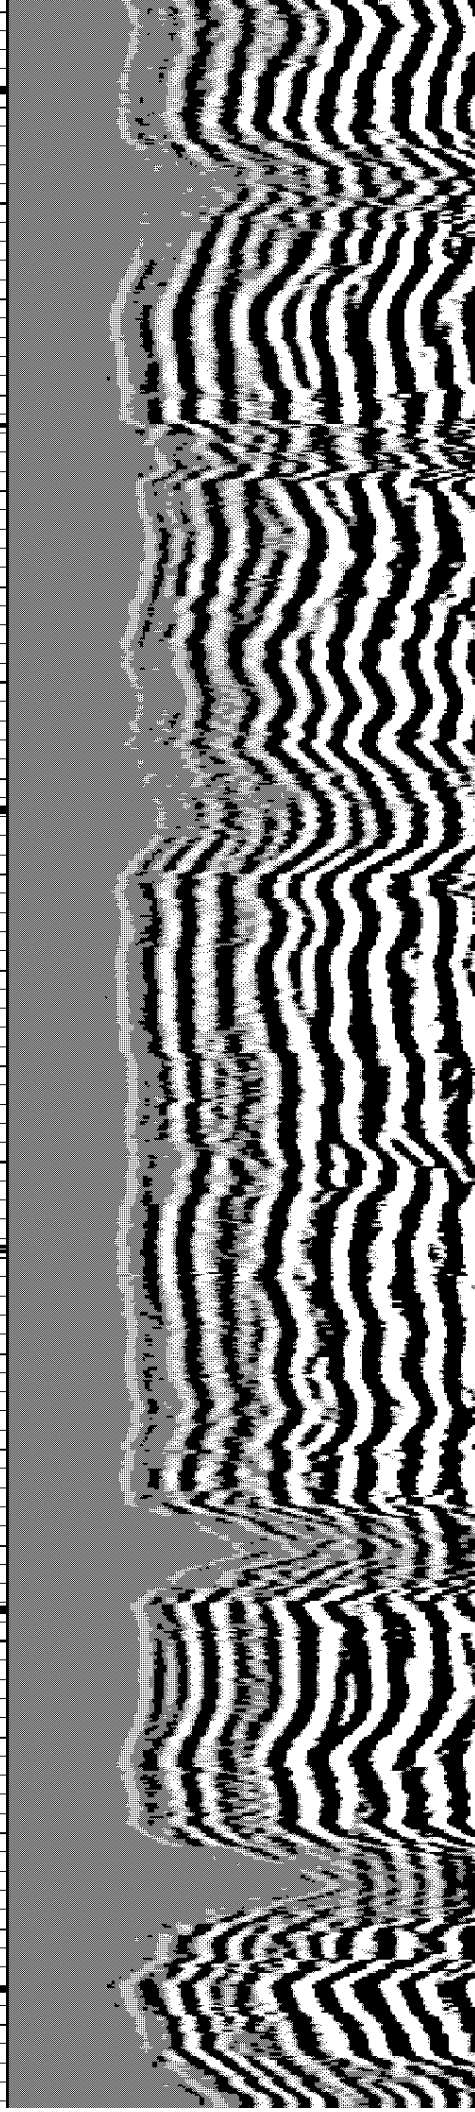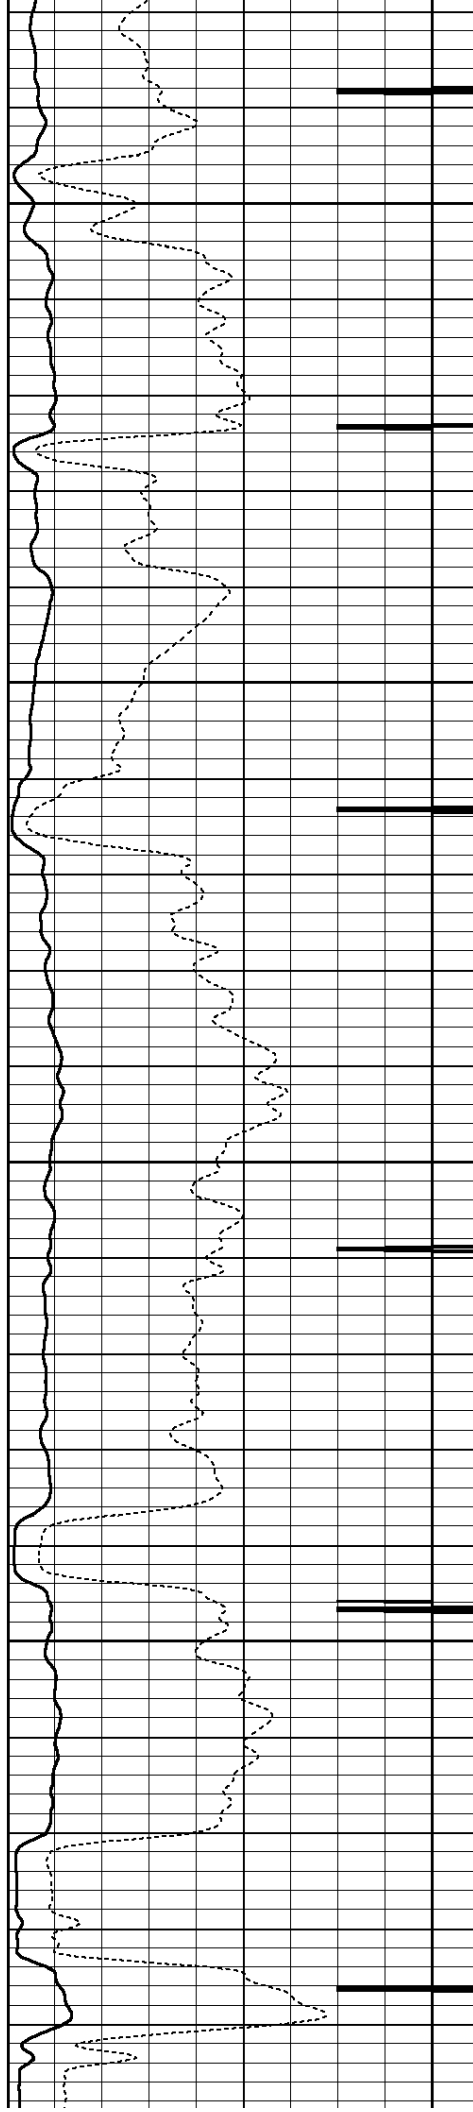

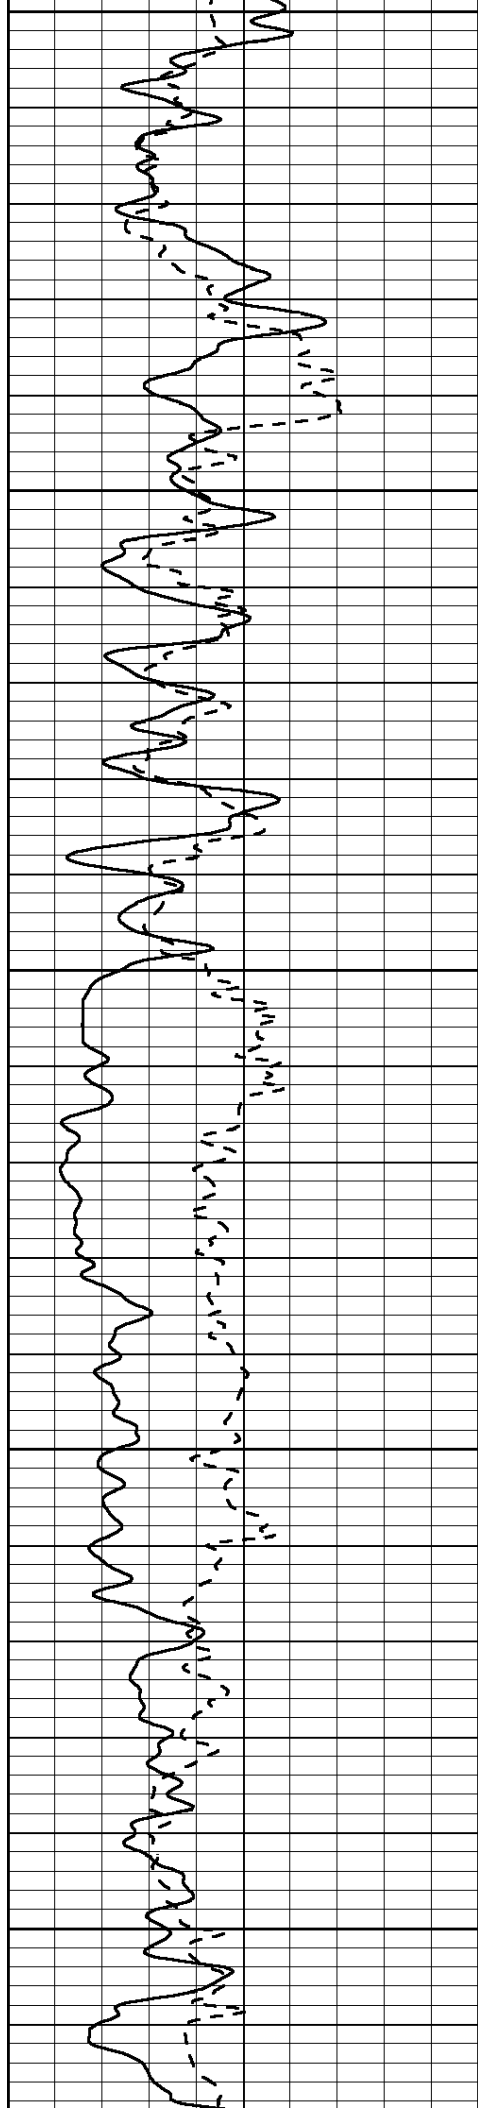



4300


4350

4400

4450

4500

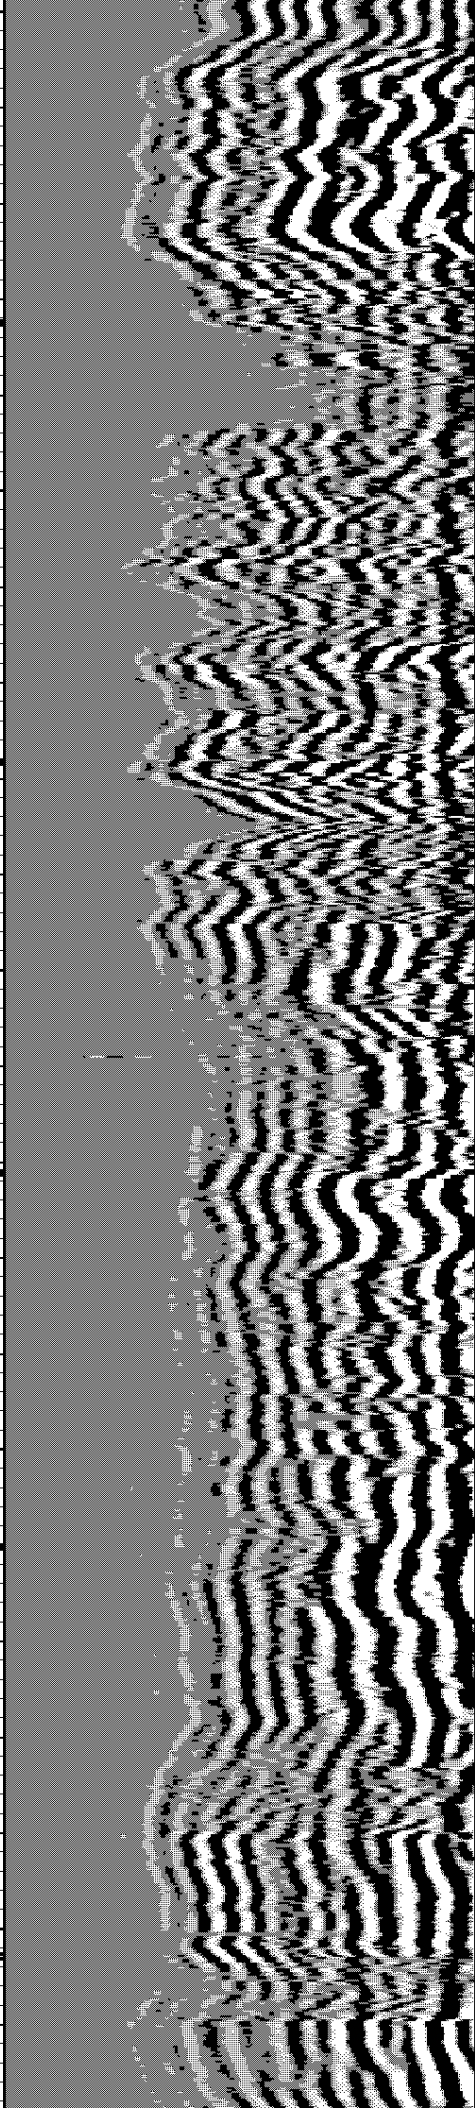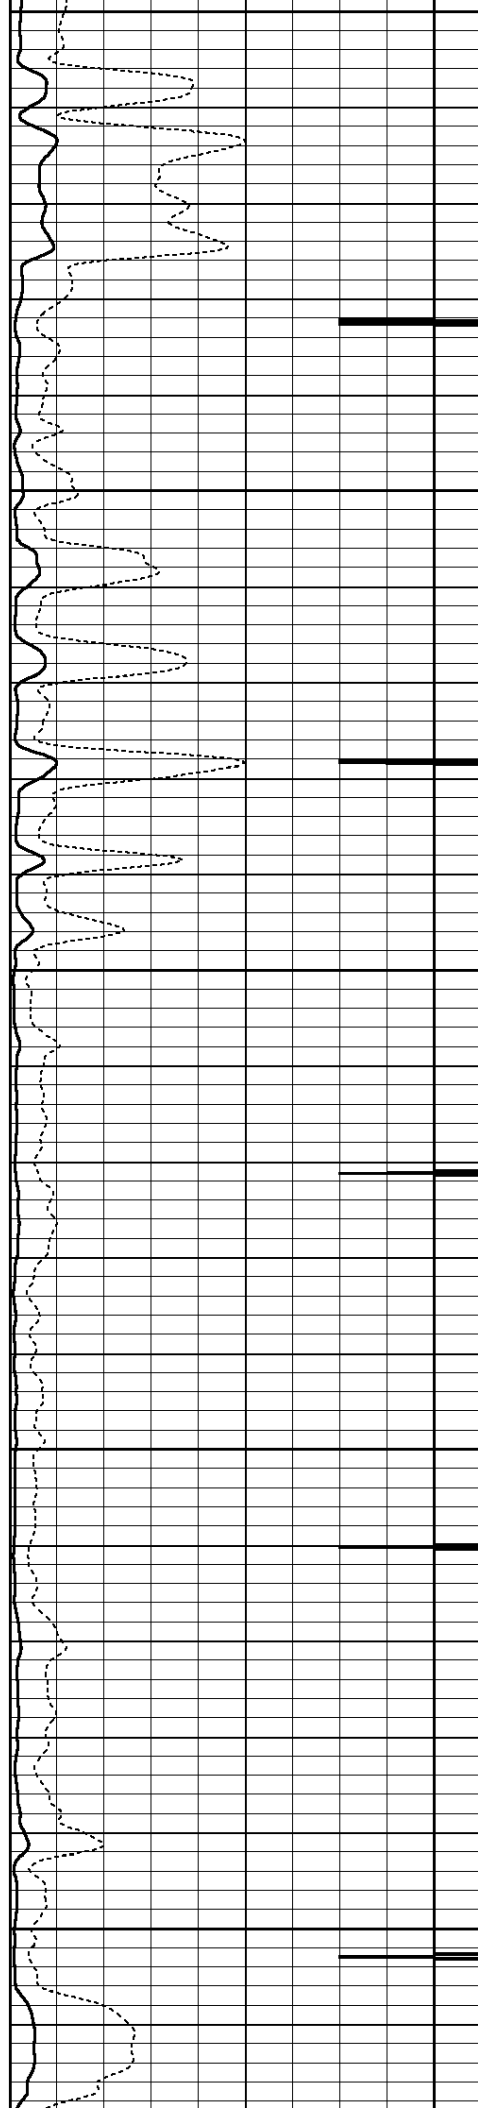

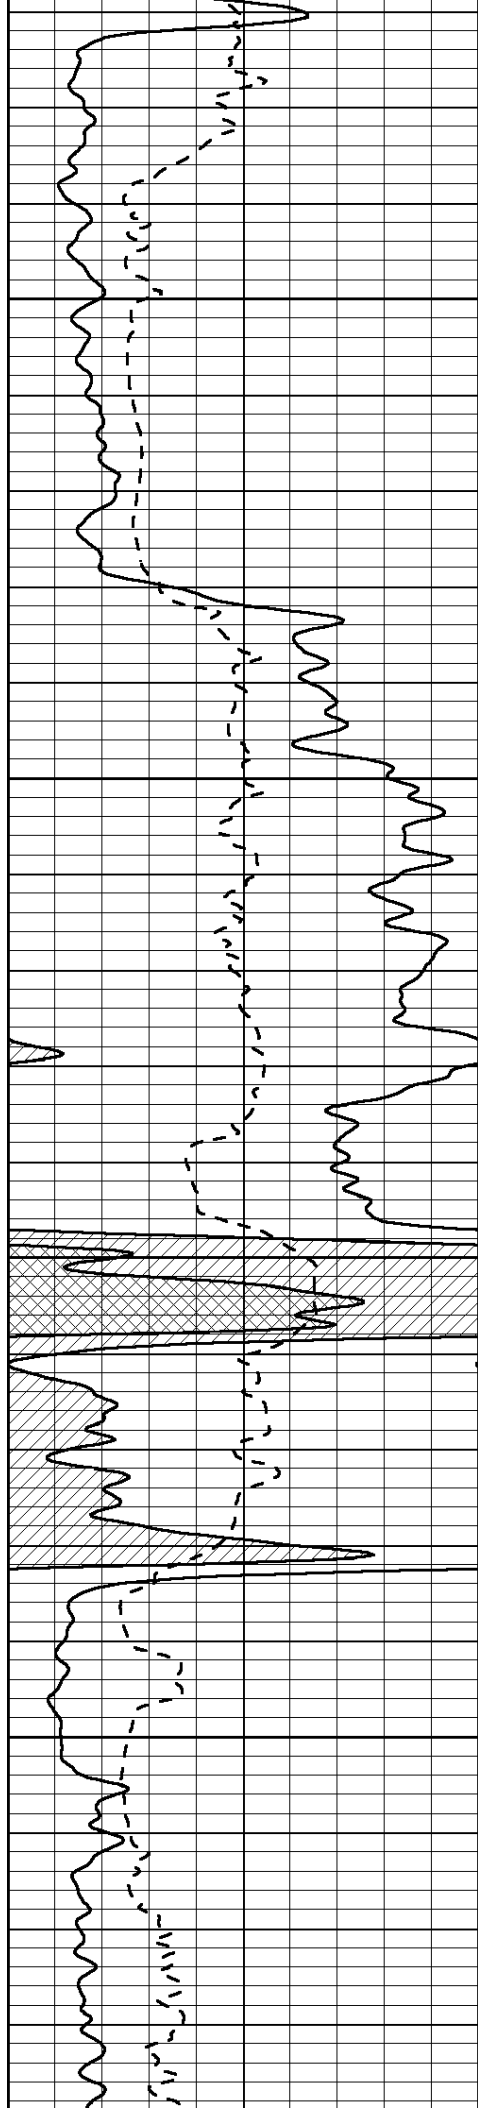


4550

4600

4650

4700

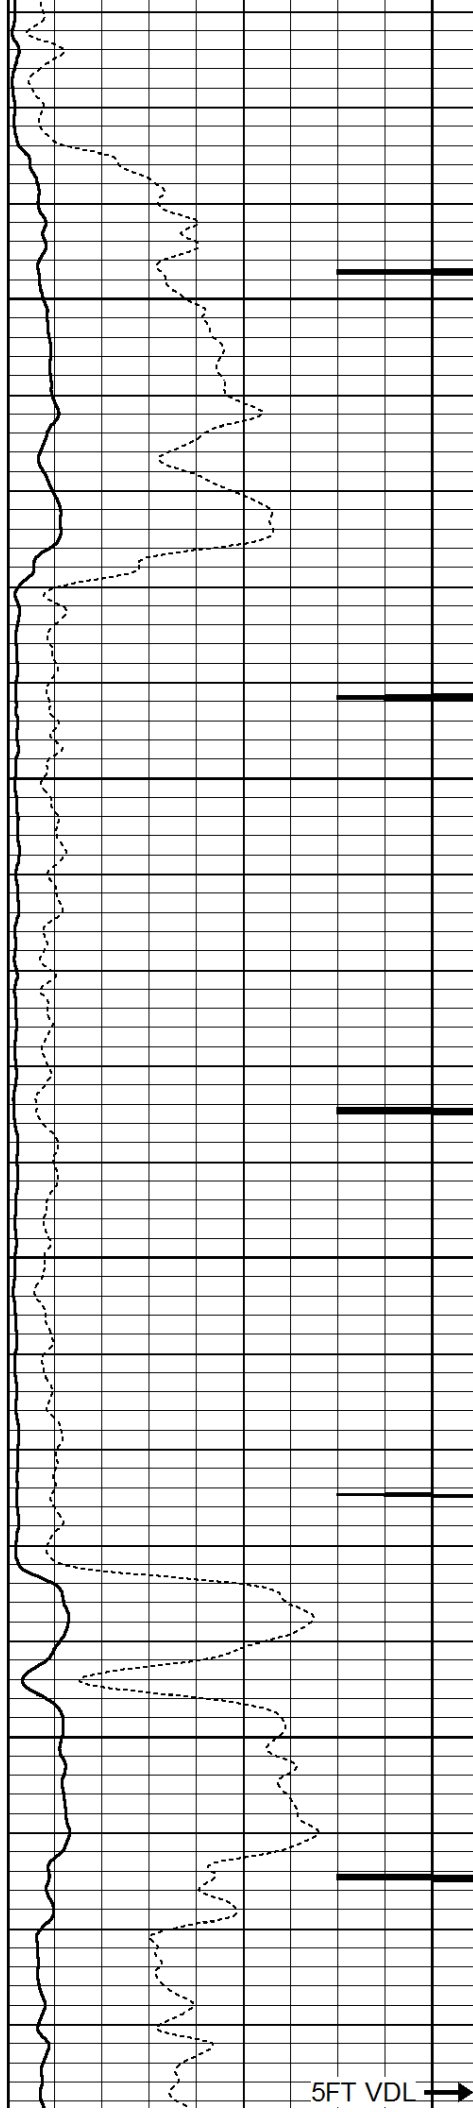

5FT VDL →

