


15-065-00415-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

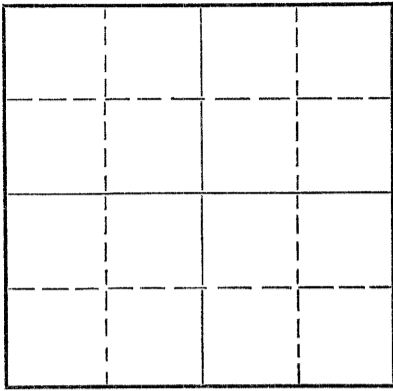

Locate well correctly on above
Section Plat

Graham County. Sec. 6 Twp. 8S Rge. 2E (E) W (W)
Location as "NE/CNW/SW" or footage from lines SW SW SE
Lease Owner Fred B. Anschutz
Lease Name Gosselin Well No. 1
Office Address 709 Union National Bank Bldg.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 26, 1954
Application for plugging filed October 26, 1954
Application for plugging approved October 26, 1954
Plugging commenced October 26, 1954
Plugging completed October 26, 1954
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty - Hays, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3693 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	169'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Bottom plug set at 1650' with 1/2 sack hulls and 15 sacks of cement
Top plug set at 40' with 1/2 sack hulls and 10 sacks of cement

OCT 29, 1954

Name of Plugging Contractor Anschutz Drilling Co., Inc. (If additional description is necessary, use BACK of this sheet)
Address 709 Union National Bank Building


STATE OF Kansas COUNTY OF Sedgwick, ss.
E. G. Koelling (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. G. Koelling
709 Union National Bank Building
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of October, 1954

Charlene Bachour
Notary Public.

My commission expires July 28, 1958



D R I L L E R ' S L O G

Fred B. Anschutz
Gosselin #1
SW SW SE 6-8S-21
Graham County, Kansas

<u>TO</u>	<u>FROM</u>	
0	1145	Shale & Shells
1145	1230	Shale
1230	1400	Sand
1400	1530	Red Bed
1530	1700	Red Bed, Shale & Shells
1700	1730	Anhydrite
1730	2265	Shale & Shells
2265	2595	Shale & Lime
2595	2815	Lime & Shale
2815	2940	Shale
2940	3045	Shale & Lime
3045	3598	Lime
3598	3645	Lime & Shale
3645	3657	Lime
3657	3693	Arbuckle
	3693	ROTARY TOTAL DEPTH

COMMENCED: 10-16-54
COMPLETED: 10-26-54

CASING RECORD:

Set 169' of 8 5/8" surface casing with 150 sacks cement.

D & A

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

I hereby affirm that the above and foregoing is a true and correct copy of the log of the Gosselin #1 located SW SW SE of Section 6-8S-21, Graham County, Kansas.

ANSCHUTZ DRILLING CO., INC.

OCT 29, 1954

BY: *E. G. Koelling*
E. G. Koelling

Subscribed and sworn to before me this 28th day of October, 1954.

Charlene Barbick
Notary Public

My Commission Expires: July 28, 1958

PLUGGING
FILE NO. 6-8-21W
BOOK PAGE 23 LINE 33