


15-163-30008-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

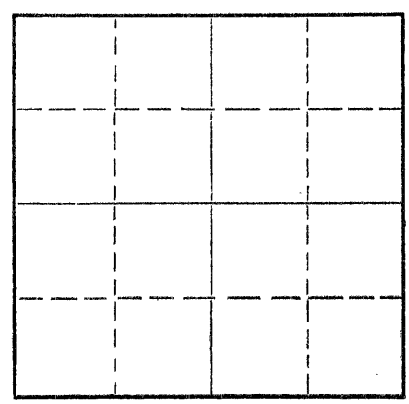

Locate well correctly on above
Section Plat

Rooks County. Sec. 21 Twp. 8S Rge. 16W (E) (W)
Location as "NE/CNW/SW" or footage from lines SE SE NW
Lease Owner Leben Drilling, Inc.
Lease Name X Chesney Well No. 1
Office Address Box 486, Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 1-18-65 19
Application for plugging filed 1-18-65 19
Application for plugging approved 1-18-65 19
Plugging commenced 1-18-65 19
Plugging completed 1-18-65 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols, Moreland, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3505 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 7/8"	174'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with mud to 550' set plug with 20 sacks cement
Filled hole with mud to 165' set plug with 1/2 sack hulls 20 sacks cement
Filled hole with mud to 35' set plug with 1/2 sack hulls 10 sacks cement

RECEIVED
STATE CORPORATION COMMISSION

JAN 21 1965

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Leben Drilling, Inc. 1-21-65
Address Box 486, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.
Leslie Kite (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leslie Kite
P. O. Box 486, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of January, 19 65

My commission expires April 1, 1967
Wanda Nichols Notary Public.

15-163-30008-00-00

DRILLER'S LOG

COMPANY: Leben Drilling, Inc.
 CONTRACTOR: LEBEN DRILLING, INC.
 FARM: CHESNEY #1
 LOCATION: SE SE NW Sec. 21-8-16
 ROOKS COUNTY, KANSAS
 COMMENCED: 1-12-65
 COMPLETED: 1-18-65

0	50	Clay & Rock
50	125	Sand & Shale
125	815	Shale
815	930	Sand
930	1232	Shale & Shells
1232	1266	Anhydrite
1266	1720	Shale & Shells
1720	2000	Shale & Lime
2000	2160	Lime & Shale
2160	2395	Shale & Lime
2395	2545	Lime & Shale
2545	2780	Shale & Lime
2780	3020	Lime & Shale
3020	3414	Lime
3414	3470	Lime & Shale
3470	3505	Lime
	<u>3505</u>	<u>Rotary Total Depth - D. & A.</u>

RECEIVED
 STATE CORPORATION COMMISSION
 JAN 21 1965
 CONSERVATION DIVISION
 Wichita, Kansas
 1-21-65

Set 8 5/8" used surface casing @ 174' with 150 sacks 60-40 Posmix Sunset

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Chesney #1 well, located SE SE NW of Section 21, Township 8, Range 16, Rooks County, Kansas, as reflected by the files of Leben Drilling, Inc.

Leslie Kite

Leslie Kite

STATE OF KANSAS)
) SS
 COUNTY OF BARTON)

Subscribed and sworn to before me, a Notary Public, in and for Barton County, Kansas, this 20th day of January, 1965.

Ulanda Nichols

Ulanda Nichols

My Commission Expires
 April 1, 1967