

15-163-20144-00-00


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Rooks County. Sec. 20 Twp. 8S Rge. (E) 16 (W)

Location as "NE/CNW/SW" or footage from lines NW SE NW  
Lease Owner Tilco, et al  
Lease Name Kollman Well No. 1  
Office Address 815 Wichita Plaza, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 11-8 1968  
Application for plugging filed 11-8 1968  
Application for plugging approved 11-8 1968  
Plugging commenced 11-8 1968  
Plugging completed 11-8 1968  
Reason for abandonment of well or producing formation Dry Hole

NORTH

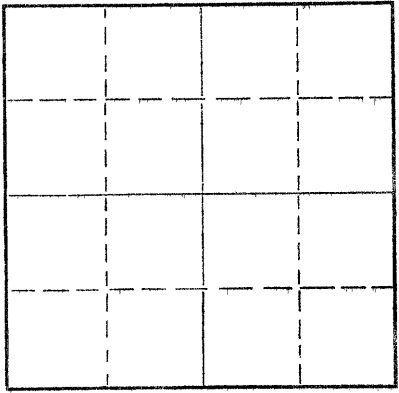

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3285 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	209'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged with 70 sacks 50/50 Posmix 6% gel @ 600'  
Plugged with 20 sacks 50/50 Posmix 6% gel @ 180'  
Plugged with 10 sacks 50/50 Posmix 6% gel @ 40'

RECEIVED  
STATE CORPORATION COMMISSION  
NOV 13 1968  
CONSERVATION DIVISION  
Wichita, Kansas

11-13-68

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Leben Drilling, Inc.  
Address Box 486 Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.  
Leslie Kite (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leslie Kite

(Address) \_\_\_\_\_

SUBSCRIBED AND SWORN TO before me this 11th day of November 19 68

My commission expires April 1, 1971  
Ulanda Nichols Notary Public.

15-163-20144-00-00

DRILLER'S LOG

COMPANY	Tilco, et al
CONTRACTOR	LEBEN DRILLING, INC.
FARM	KOLIMAN #1
LOCATION	NW SE NW SECTION 20-8S-16W ROOKS COUNTY, KANSAS
COMMENCED	11-2-68
COMPLETED	11-8-68

-----

0	50	Surface soil, Post Rock
50	65	Post Rock
65	209	Sand, Shale
209	520	Shale
520	850	Sand, Shale
850	1159	Red Bed
1159	1193	Anhydrite
1193	1630	Shale
1630	1725	Shale & Lime
1725	2325	Lime, Shale
2325	2580	Shale, Lime
2580	2860	Lime, Shale
2860	3285	Lime
	<u>3285</u>	<u>RTD - D. &amp; A.</u>

RECEIVED  
STATE CORPORATION COMMISSION  
NOV 13 1968  
CONSERVATION DIVISION  
Wichita, Kansas  
11-13-68

-----

8 5/8" 20# new surface casing set @ 209" with 150 sacks Common 2% cc

-----

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Kollman #1 Well, located NW SE NW of Section 20, Township 8 South, Range 16 West, Rooks County, Kansas, as reflected by the records of Leben Drilling, Inc.

Leslie Kite  
Leslie Kite

STATE OF KANSAS    )  
                          ) SS  
COUNTY OF BARTON )

Subscribed and sworn to and before me, a Notary Public, in and for Barton Coutny, Kansas, this 11th day of November, 1968.

Ulanda Nichols  
Ulanda Nichols

My Commission Expires:  
April 1, 1971