

15-163-20392-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

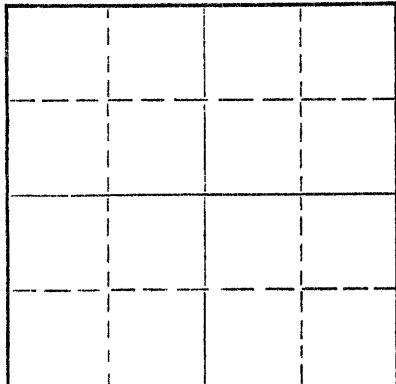

Locate well correctly on above
Section Plat

Rooks _____ County. Sec. 20 Twp. 8S Rge. _____ (E) 16(W)
Location as "NE/CNW/SW" or footage from lines C SE SE SE
Lease Owner Abercrombie Drilling, Inc.
Lease Name GAGER Well No. 1
Office Address 801 Union Center, Wichita, Ks. 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 5, 19 71
Application for plugging filed (verbally) October 5, 19 71
Application for plugging approved (verbally) October 5, 19 71
Plugging commenced October 5, 19 71
Plugging completed October 5, 19 71
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3383 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	241 K. B.	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1st plug set at 650' w/60 sx.
2nd plug set at 215' w/20 sx.
Top plug set at 40' w/10 sx.
Job completed at 2:00 p.m. 10-5-71.

RECEIVED
STATE CORPORATION COMMISSION
OCT 8 1971
CONSERVATION DIVISION
Wichita, Kansas

10-8-71

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.
Address 801 Union Center, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Jerry A. Langrehr (employee of owner) or (owner or operator) of the above-described


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jerry A. Langrehr
801 Union Center, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN to before me this 7th day of October, 19 71

My commission expires February 10, 1975

Beverly Mann
Beverly Mann, Notary Public.



CONTRACTOR'S WELL LOG

15-163-20392-00-00

OPERATOR:	Abercrombie Drilling, Inc.
CONTRACTOR:	Abercrombie Drilling, Inc.
WELL NAME:	GAGER #1
LOCATION:	C SE SE SE, Sec. 20-8S-16W Rooks County, Kansas
GEOLOGIST:	Jack K. Wharton
SPUD DATE:	September 28, 1971
COMPLETION DATE:	October 5, 1971

0.	40	Sand
40	155	Clay & Shale
155	595	Shale
595	605	Sand
605	720	Shale
720	825	Sand
825	1140	Shale
1140	1169	Anhydrite
1169	1645	Shale & Lime
1645	1922	Lime & Shale
1922	2122	Shale & Lime
2122	2724	Lime & Shale
2724	3318	Lime
3318	3383	Lime & Shale
	3383	Rotary Total Depth

Drilled 245' of 12 1/4" hole, set 8-5/8" csg. at 241' K.B. w/150 sx. Sunset cement. Cement circulated. Plug was down at 5:45 p.m. 9-28-71.
Dry and Abandoned

<u>SAMPLE TOPS</u>	<u>ELEVATION</u>
Anhydrite 1140 (+ 728)	1868 K.B.
B/Anhydrite 1169 (+ 699)	1866 D.F.
Topeka 2750 (- 882)	1860 G.L.
Heebner 2972 (-1104)	
Toronto 2993 (-1125)	
Lansing 3015 (-1147)	
Base/K.C. 3244 (-1376)	
Conglomerate 3361 (-1493)	
Arbuckle 3368 (-1500)	

RECEIVED
STATE CORPORATION COMMISSION
OCT 8 1971
CONSERVATION DIVISION
Wichita, Kansas
10-8-71

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)


Jerry A. Langrehr, President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the GAGER #1, C SE SE SE, Section 20-8S-16W, Rooks County, Kansas.

ABERCROMBIE DRILLING, INC.

By: Jerry A. Langrehr
Jerry A. Langrehr, President

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 7th day of October, 1971.

My Commission Expires:
February 10, 1975



Beverly Mann
Beverly Mann, Notary Public