



DUAL INDUCTION LOG

Company	CHIEFTAIN OIL COMPANY, INC.	Company	CHIEFTAIN OIL COMPANY, INC.
Well	PHYE #3	Well	PHYE #3
Field	WHELEN WEST	Field	WHELEN WEST
County	BARBER	County	BARBER
State	KANSAS	State	KANSAS
Location:	SEC 25 TWP 31S RGE 12W GROUND LEVEL Elevation 1586 Log Measured From KELLY BUSHING 12' A.G.L. Drilling Measured From KELLY BUSHING	API # : 15-007-24328-0000 330' FSL & 1915' FWL E/2 - SW - SE - SW	Other Services CDL/CNL MEL
Date	6/21/18		
Run Number	ONE		
Depth Driller	4675		
Depth Logger	4675		
Bottom Logged Interval	4673		
Top Log Interval	00		
Casing Driller	8 5/8"@396'		
Casing Logger	396		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 4,000 PPM	
Density / Viscosity	9.5/66		
pH / Fluid Loss	11.0/9.6		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.600@90F		
Rmf @ Meas. Temp	.450@90F		
Rmc @ Meas. Temp	.720@90F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.443@122F		
Time Circulation Stopped	2.5 HOURS		
Time Logger on Bottom	1:15 P.M.		
Maximum Recorded Temperature	122F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	ROGER MARTIN	RYAN MOLZ	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
MEDICINE LODGE, KS., N. ON HWY 183 TO "WELL RD.", 1E. TO CURVE, 3/4S., E. INTO AT BLUE GATE



MAIN SECTION


Database File: 2655ddn.db
Dataset Pathname: pass3.5
Presentation Format: dil2
Dataset Creation: Thu Jun 21 15:23:59 2018 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:600


0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1

0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50

1000	CILD (mmho/m)	0
------	---------------	---

50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

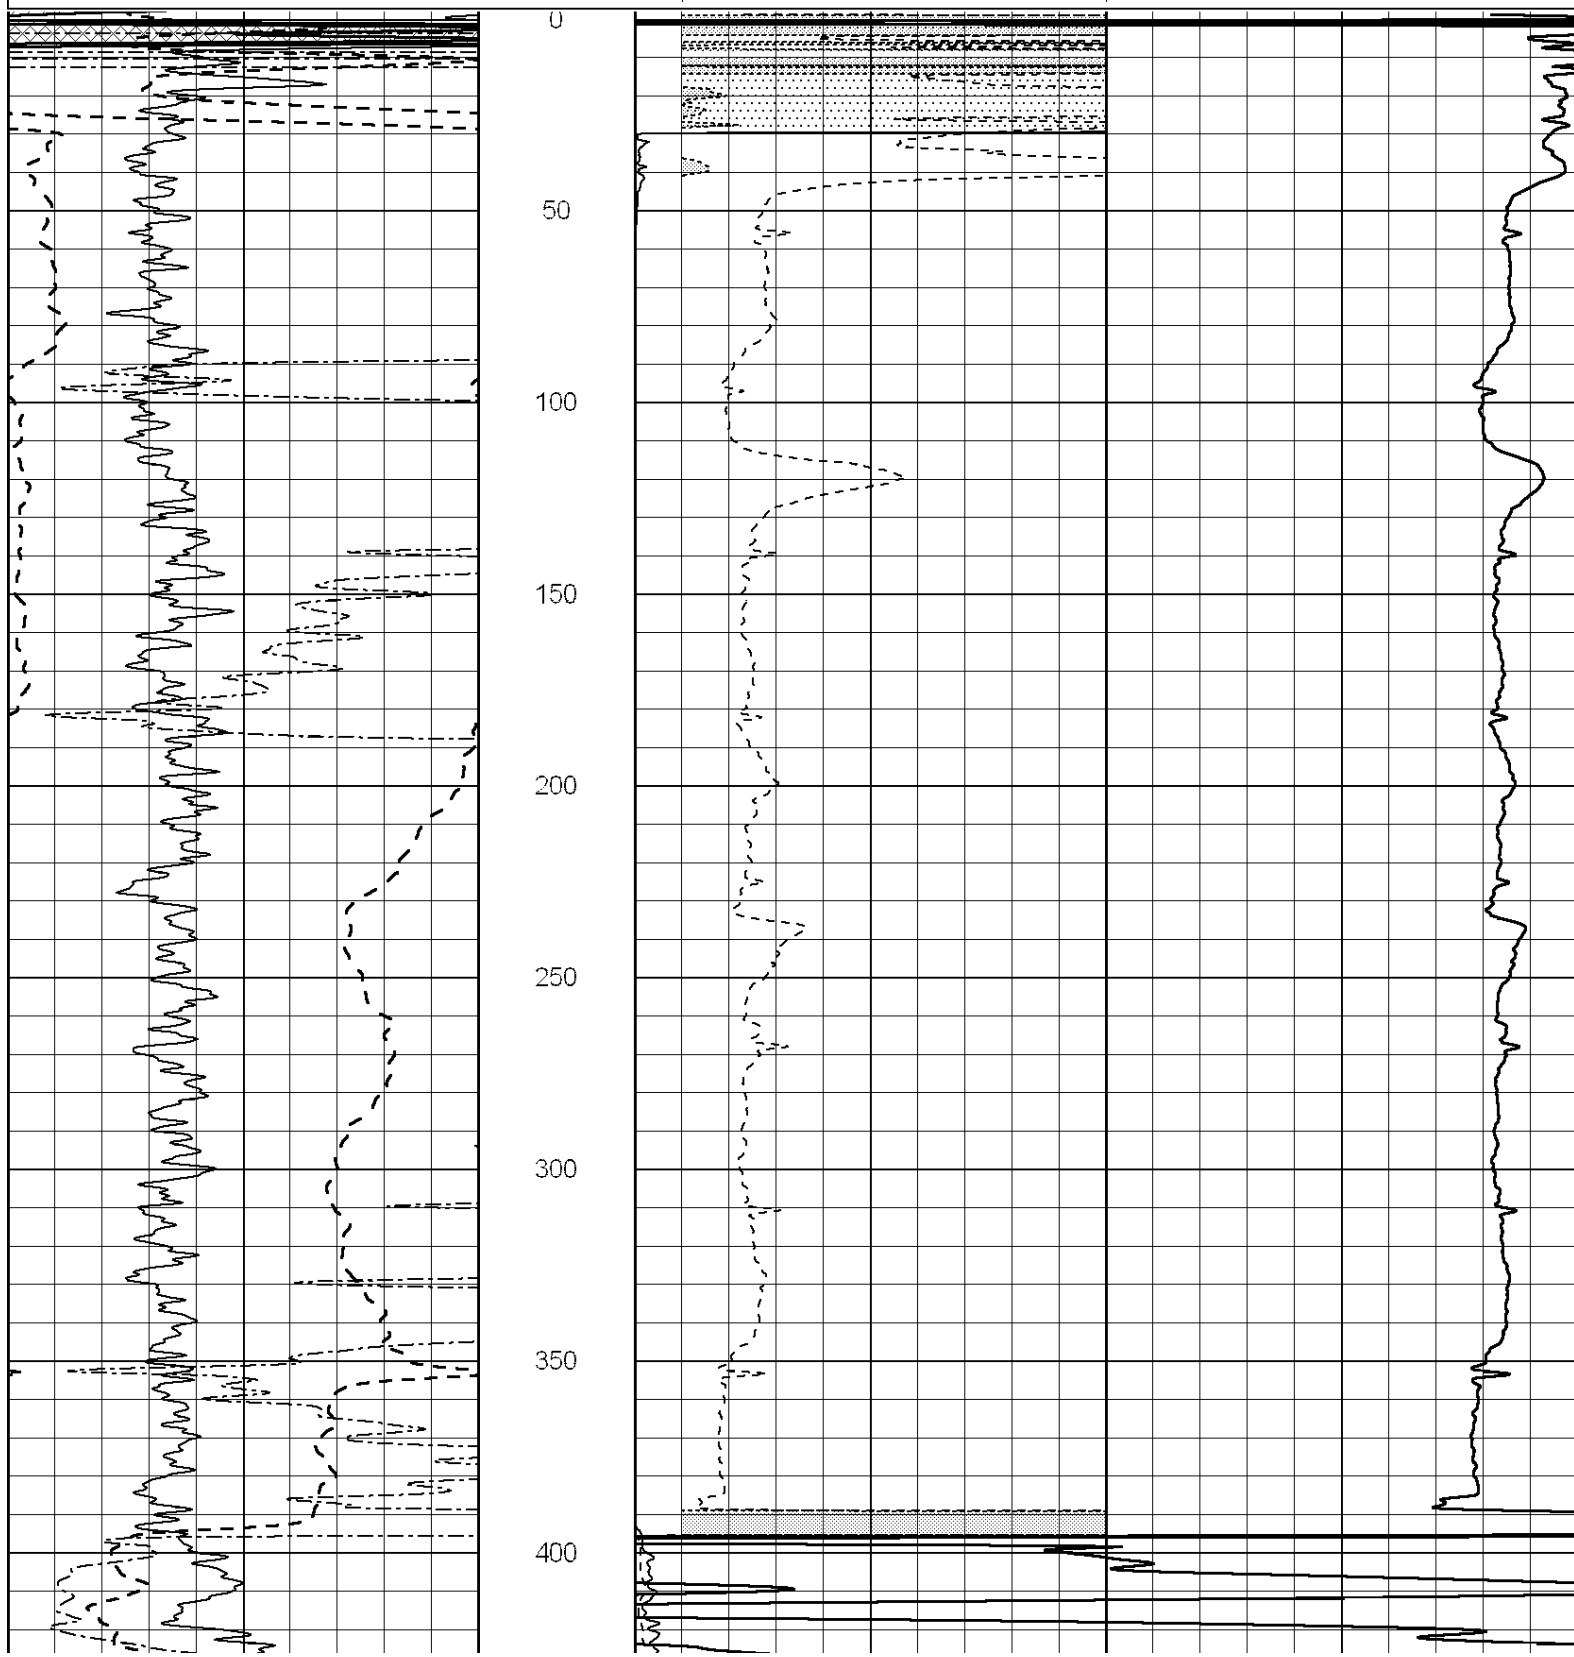

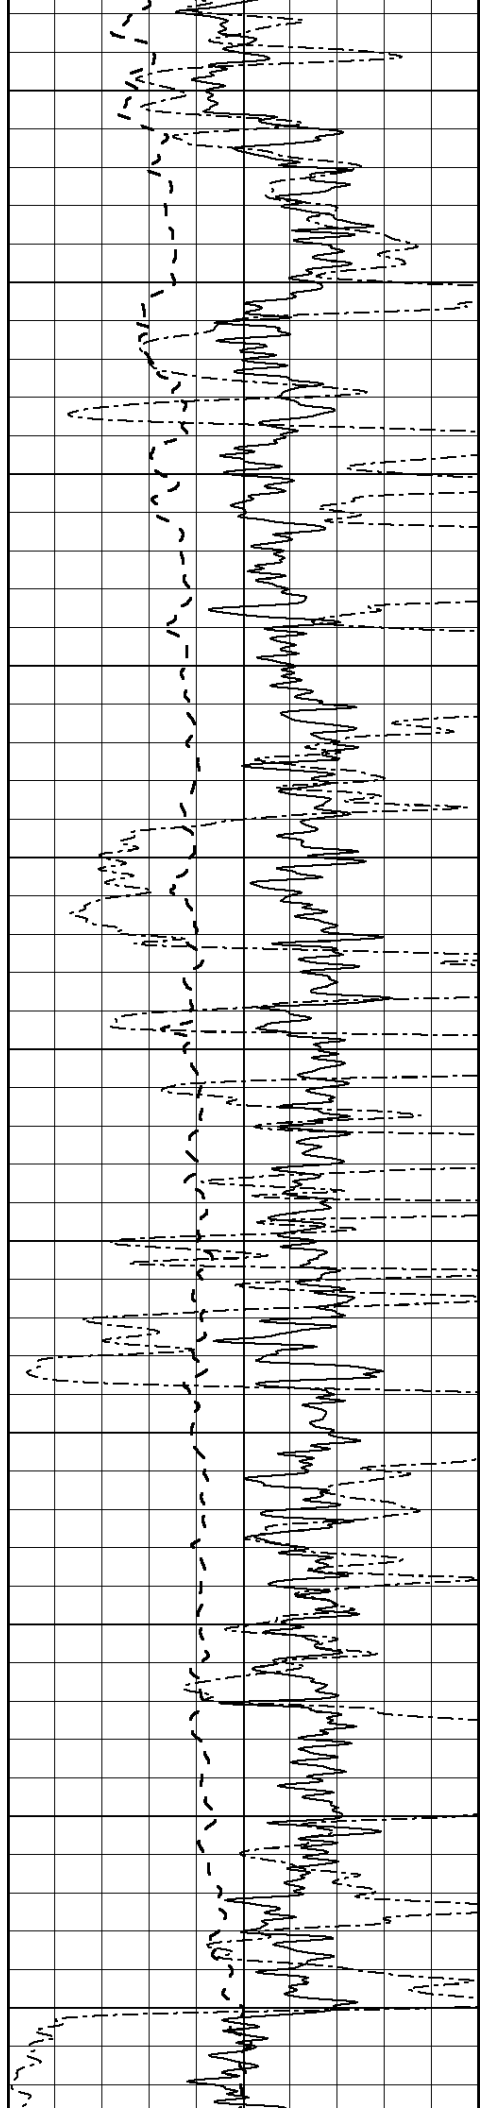

450

500

550

600

650

700


750


800

850

900

950

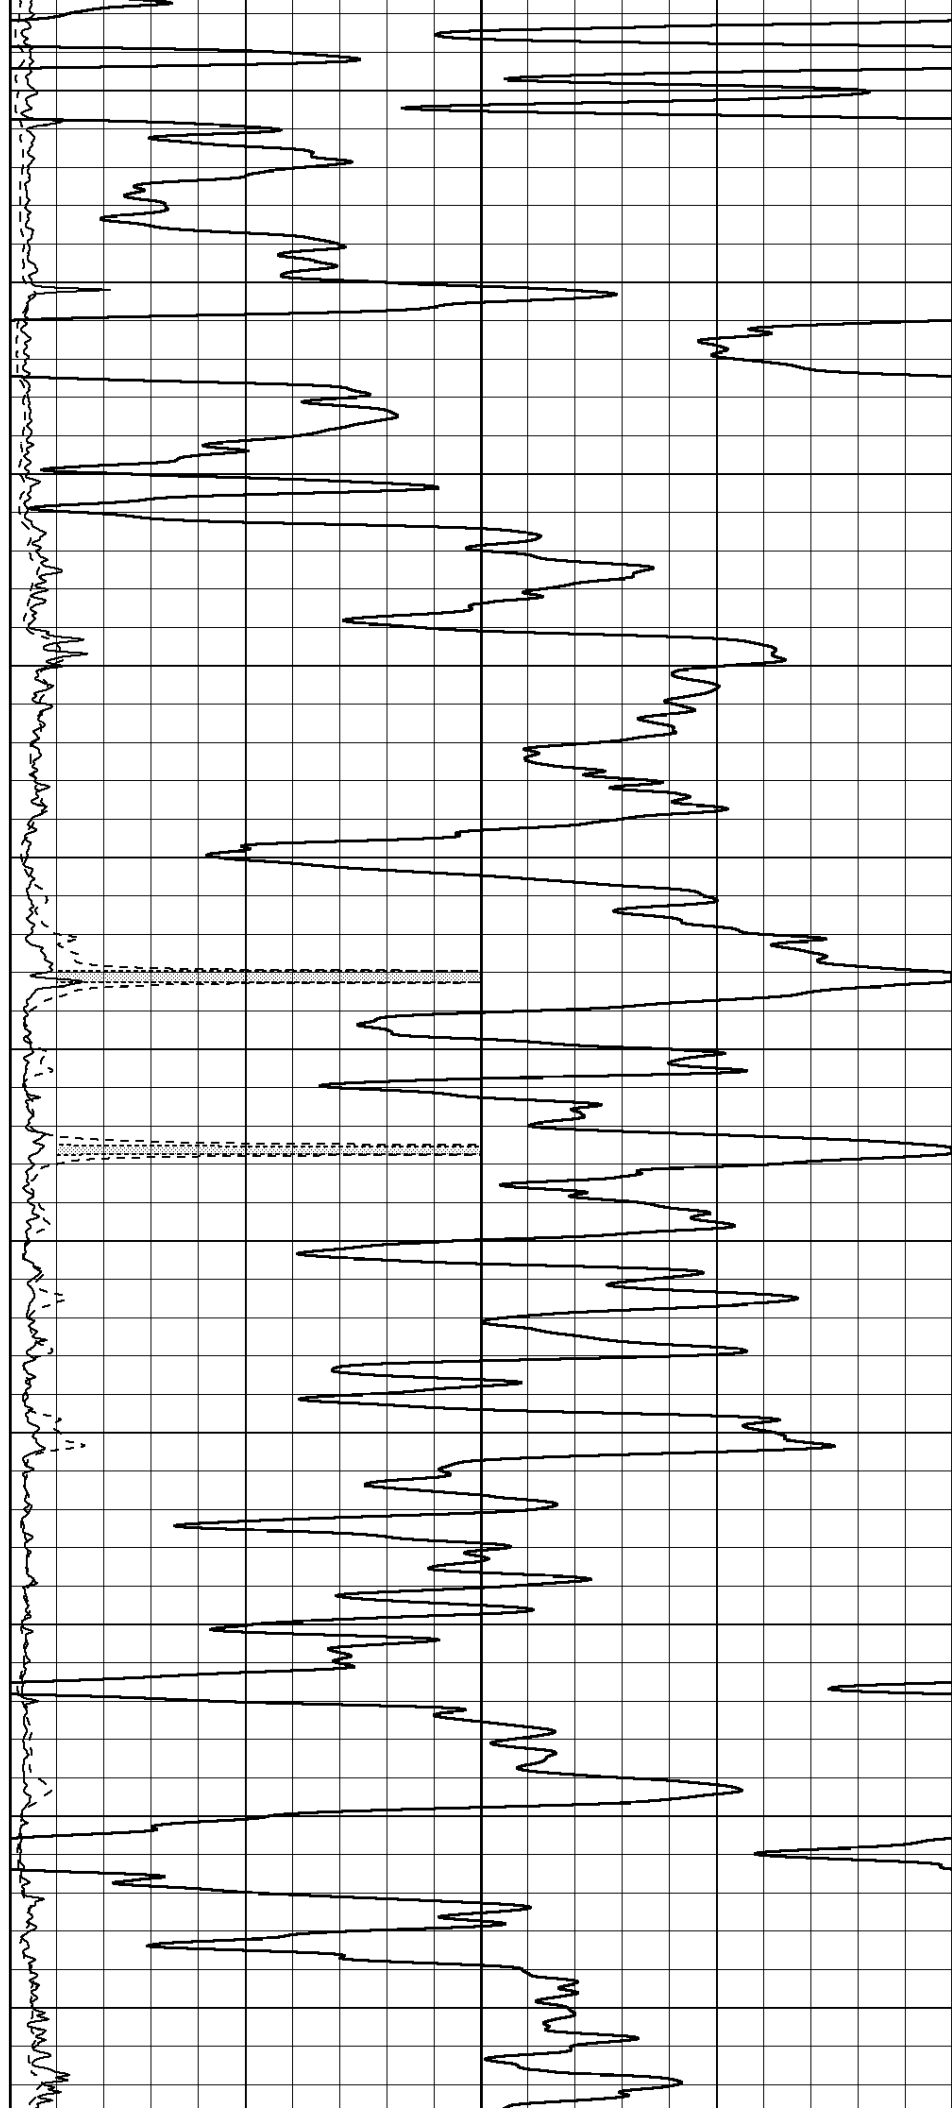

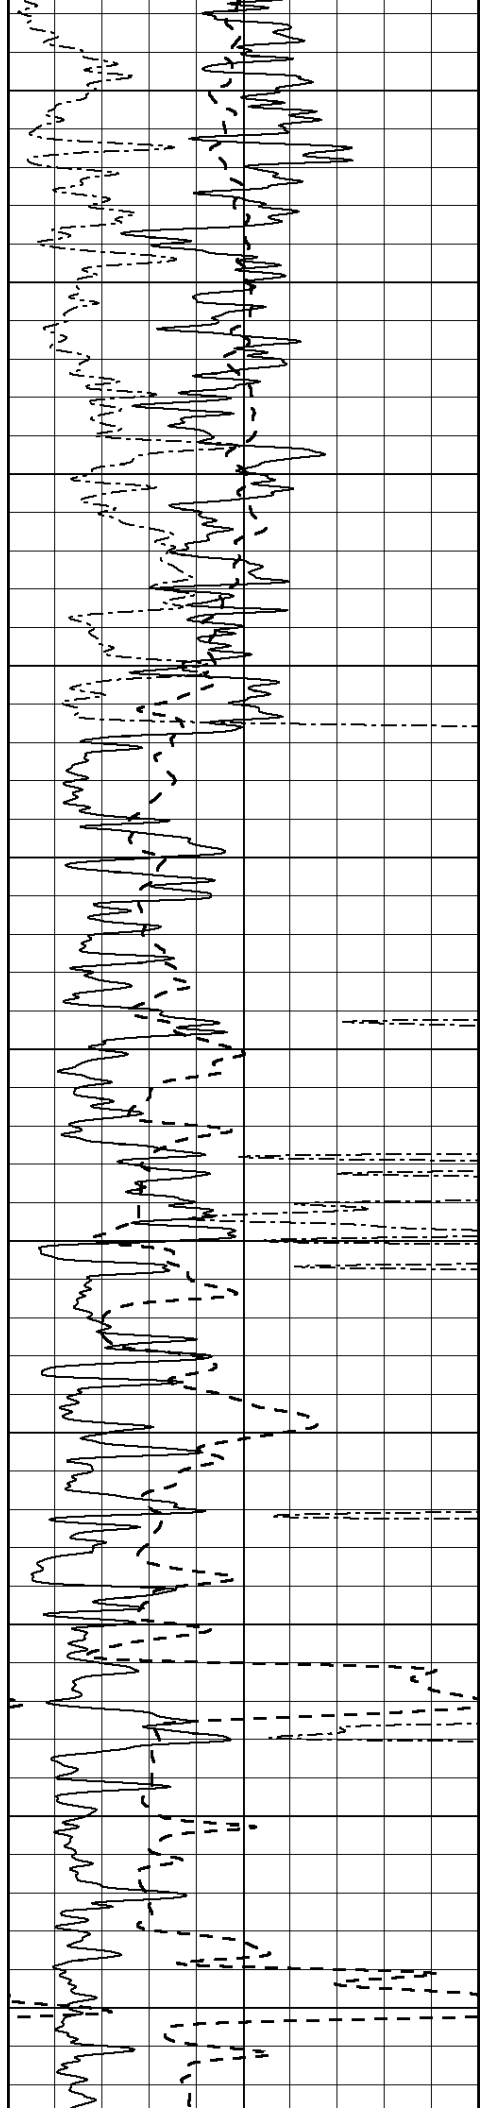

1000

1050

1100

1150

1200

1250


1300


1350

1400

1450

1500

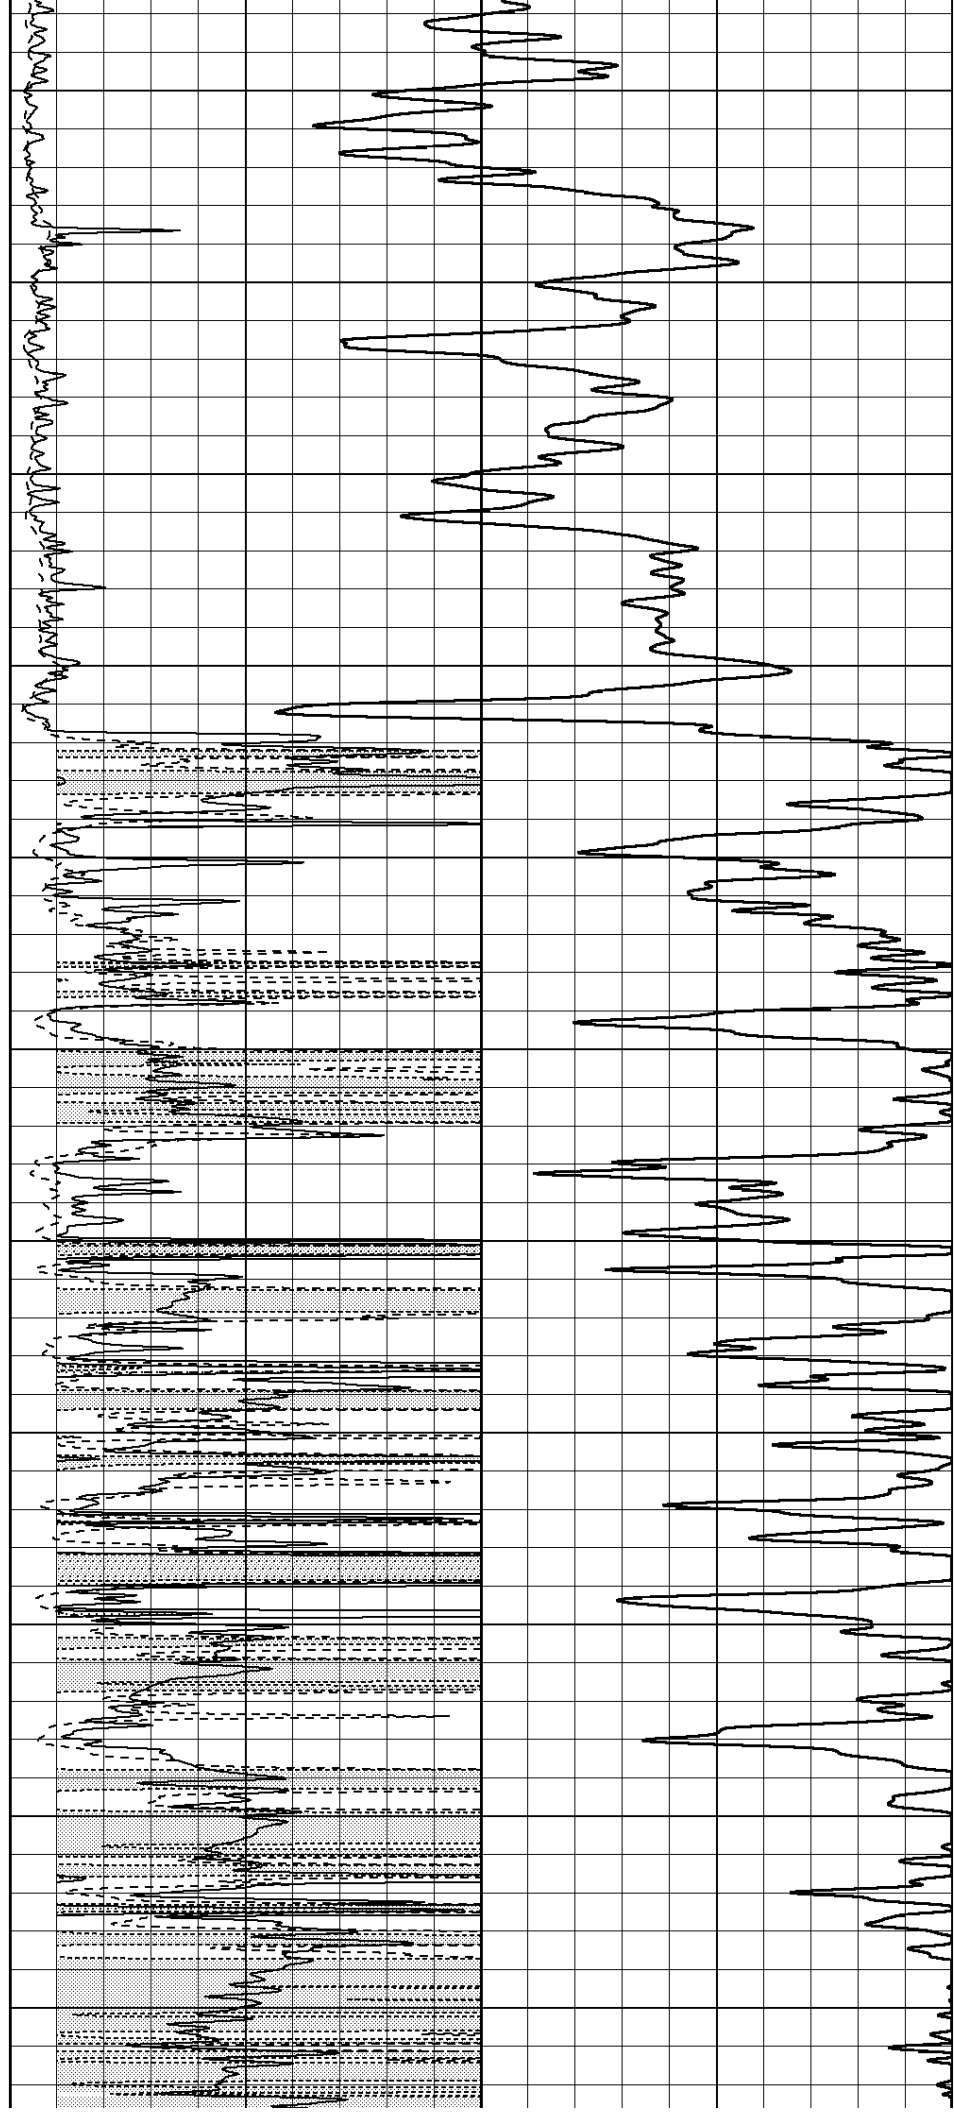

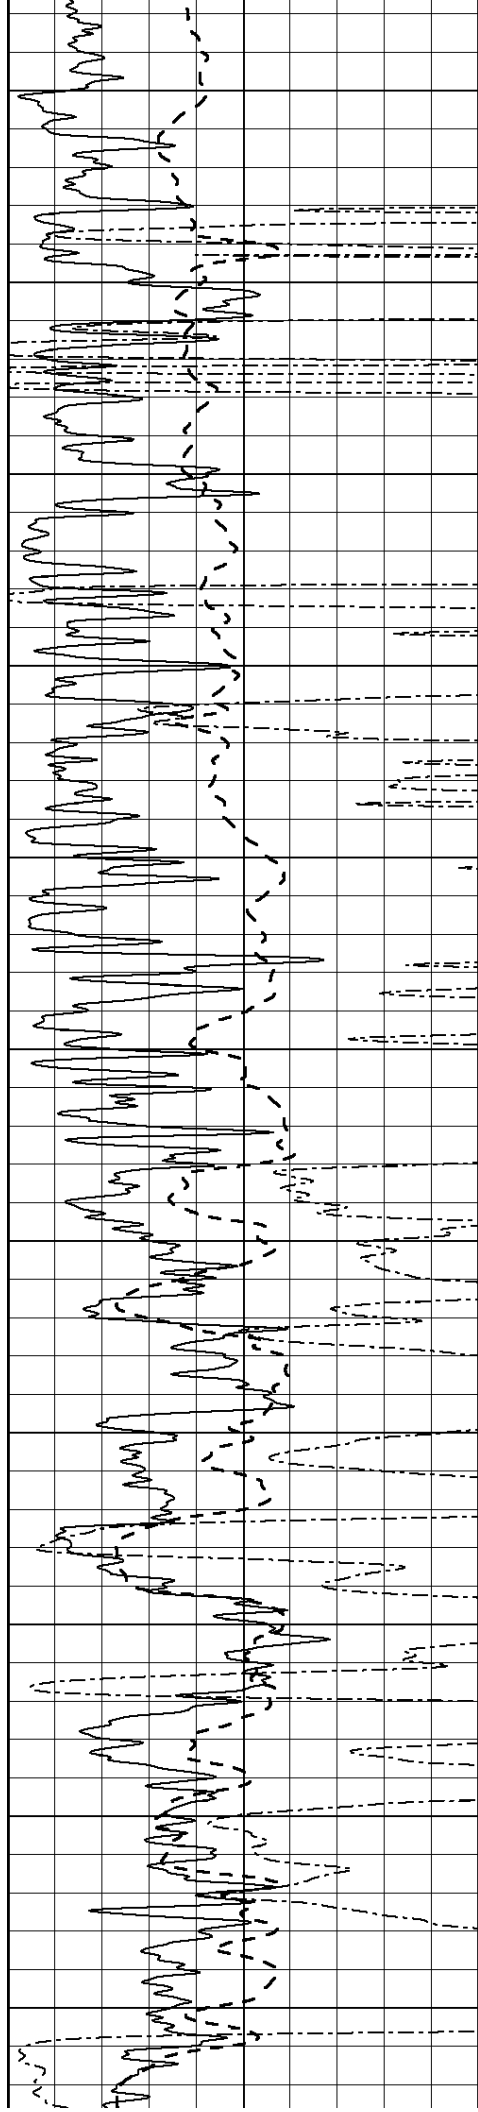

1550

1600

1650

1700

1750

1800


1850


1900

1950

2000

2050

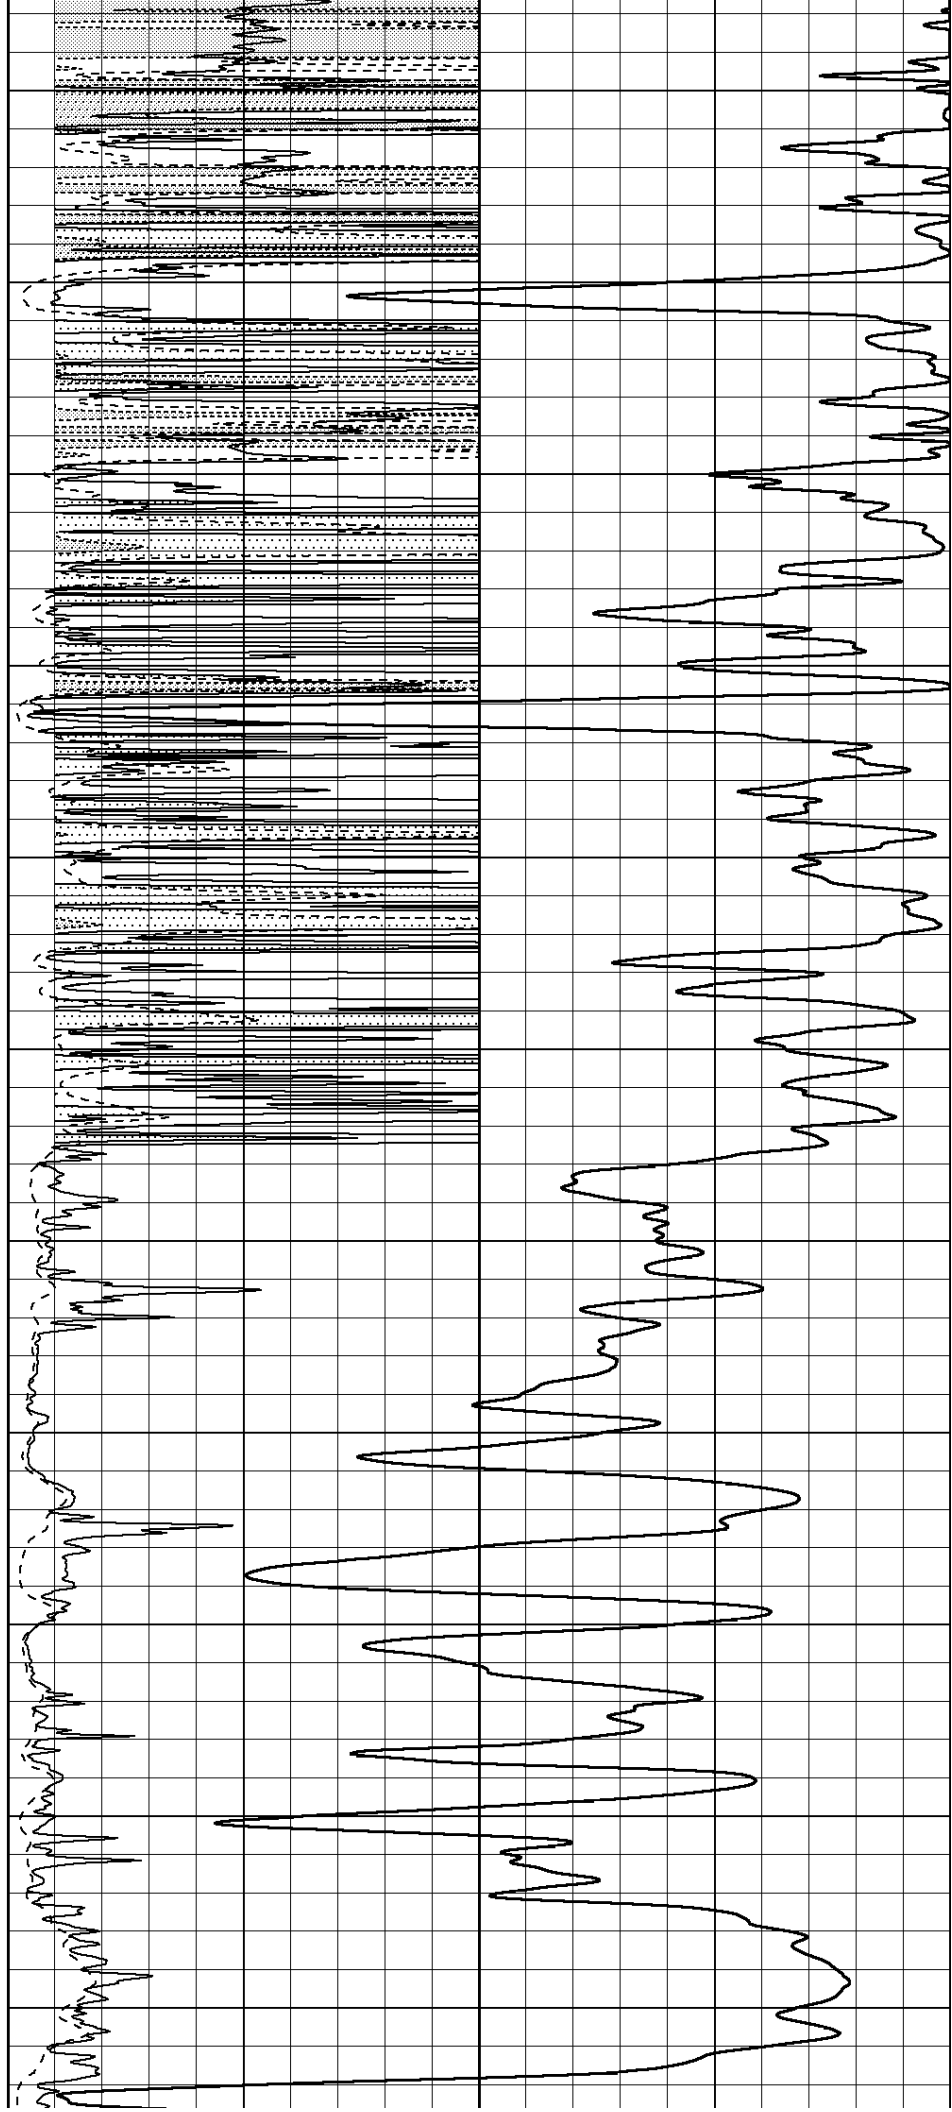

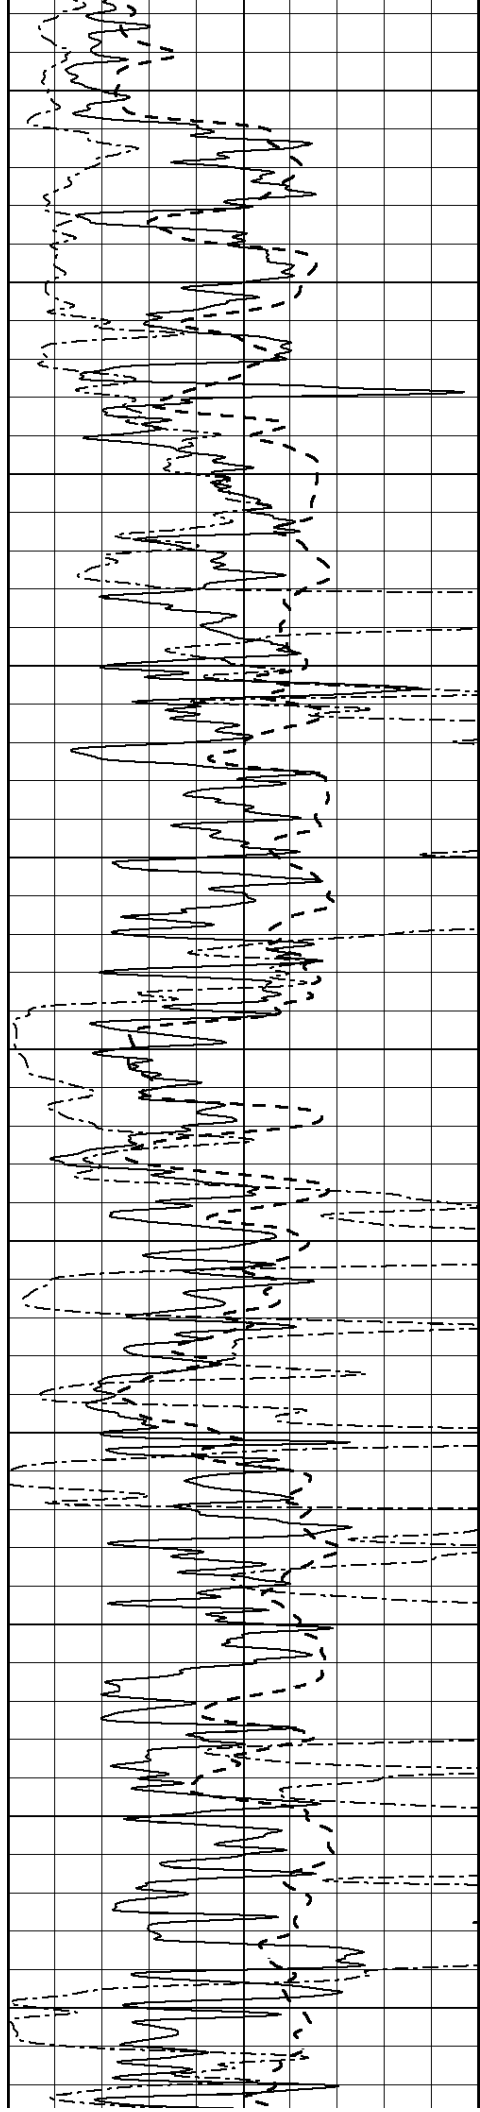

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

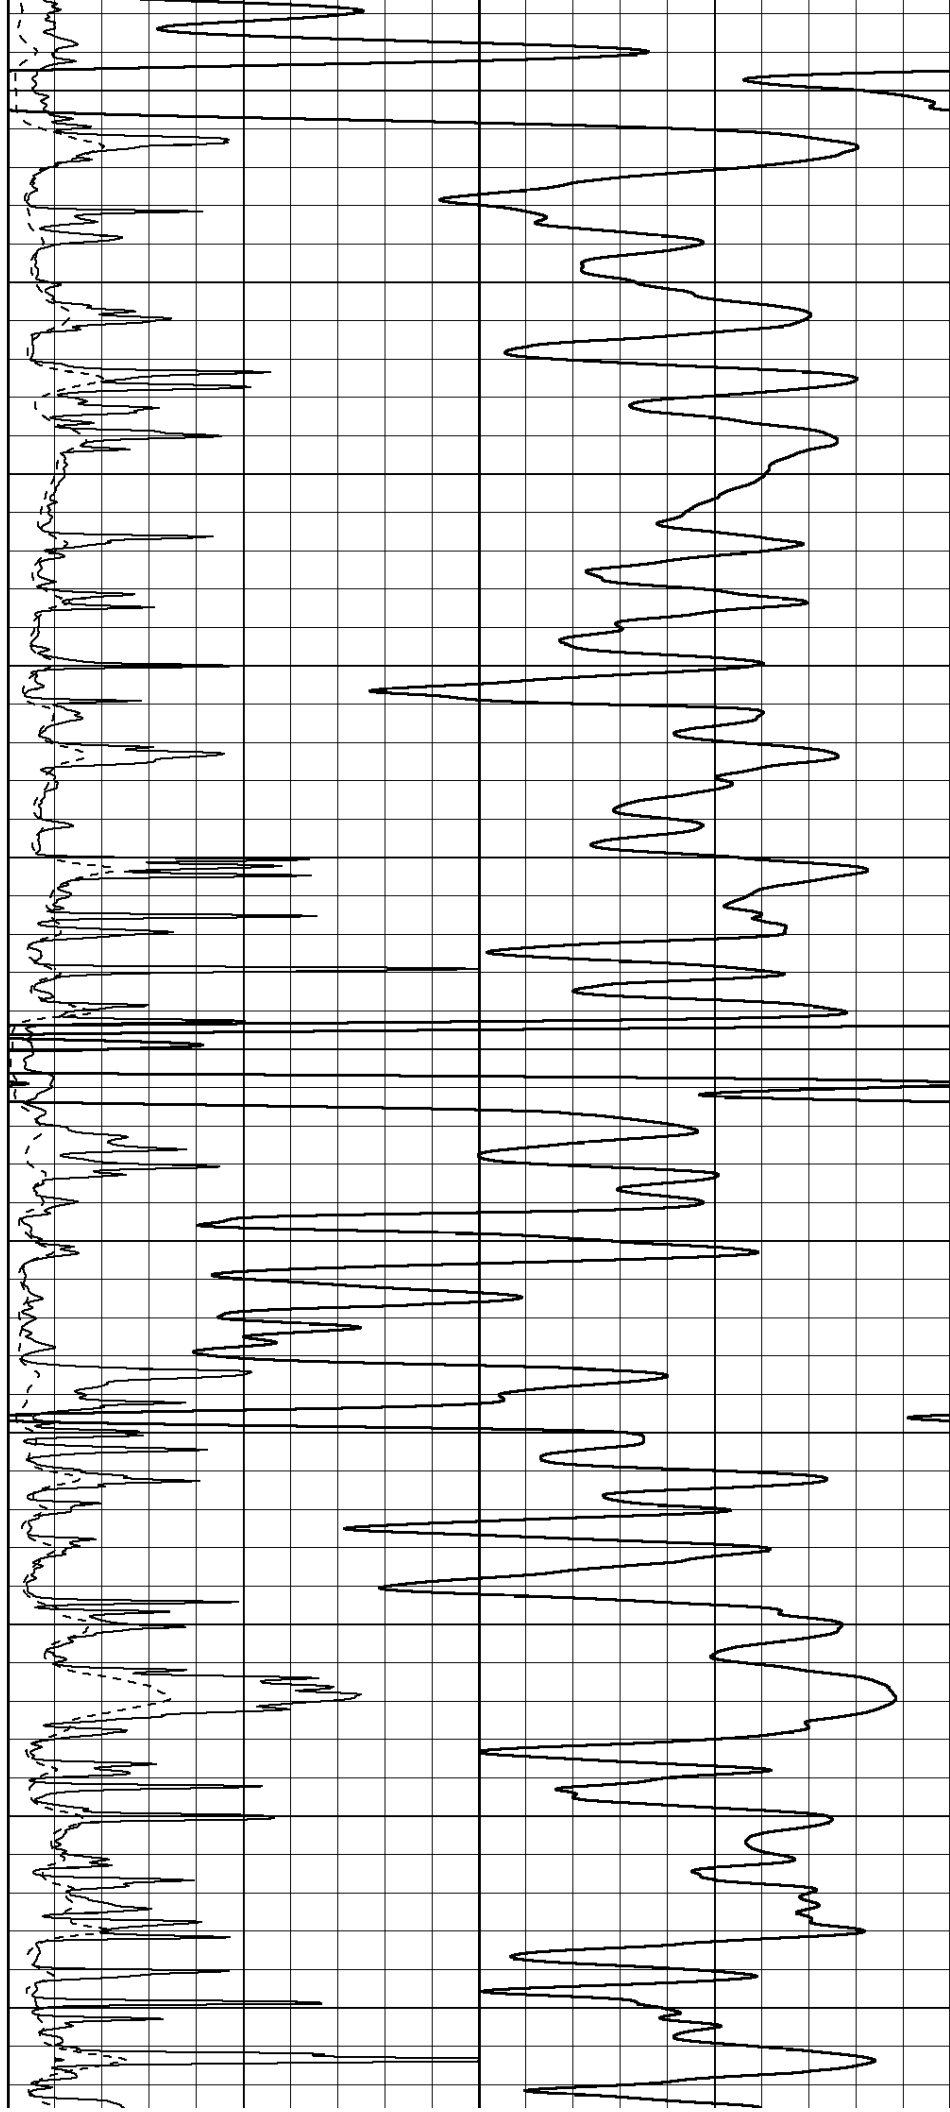

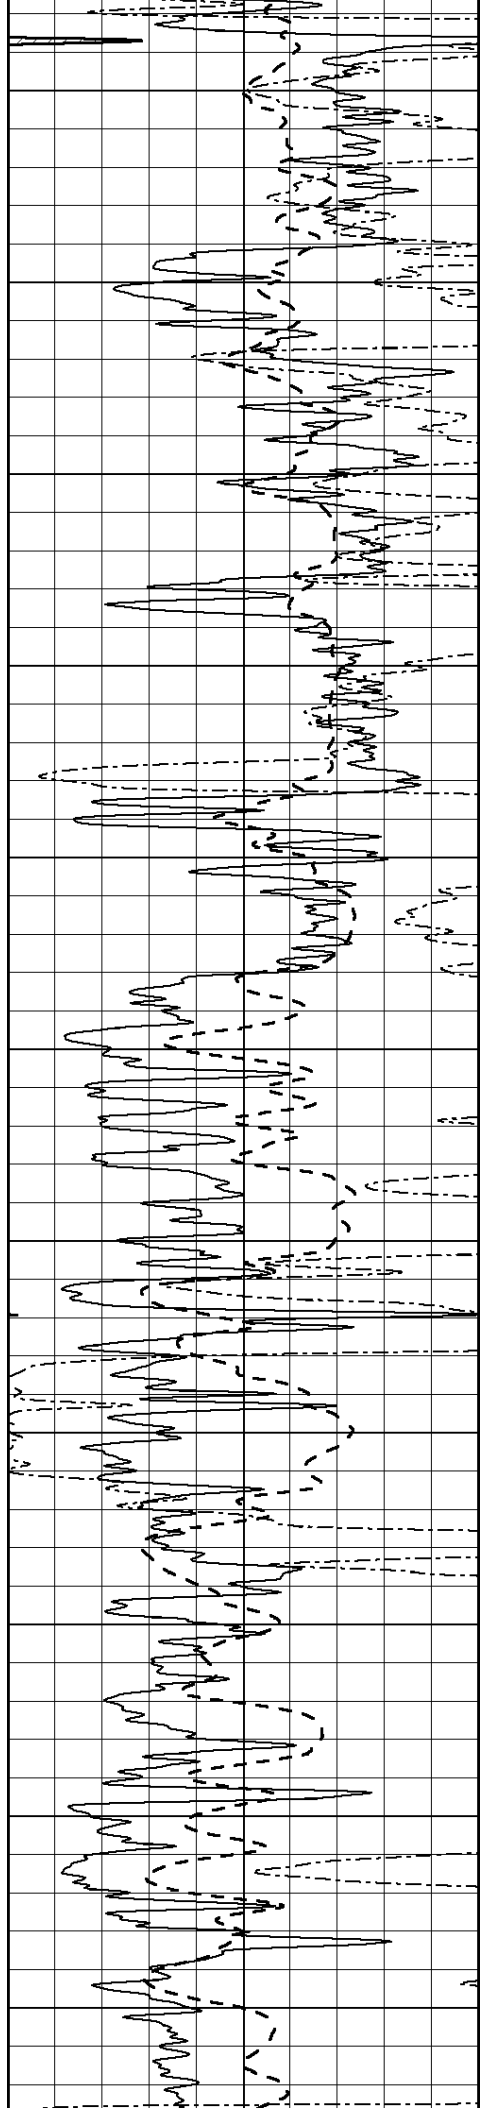

2650

2700

2750

2800

2850

2900



2950


3000

3050

3100

3150

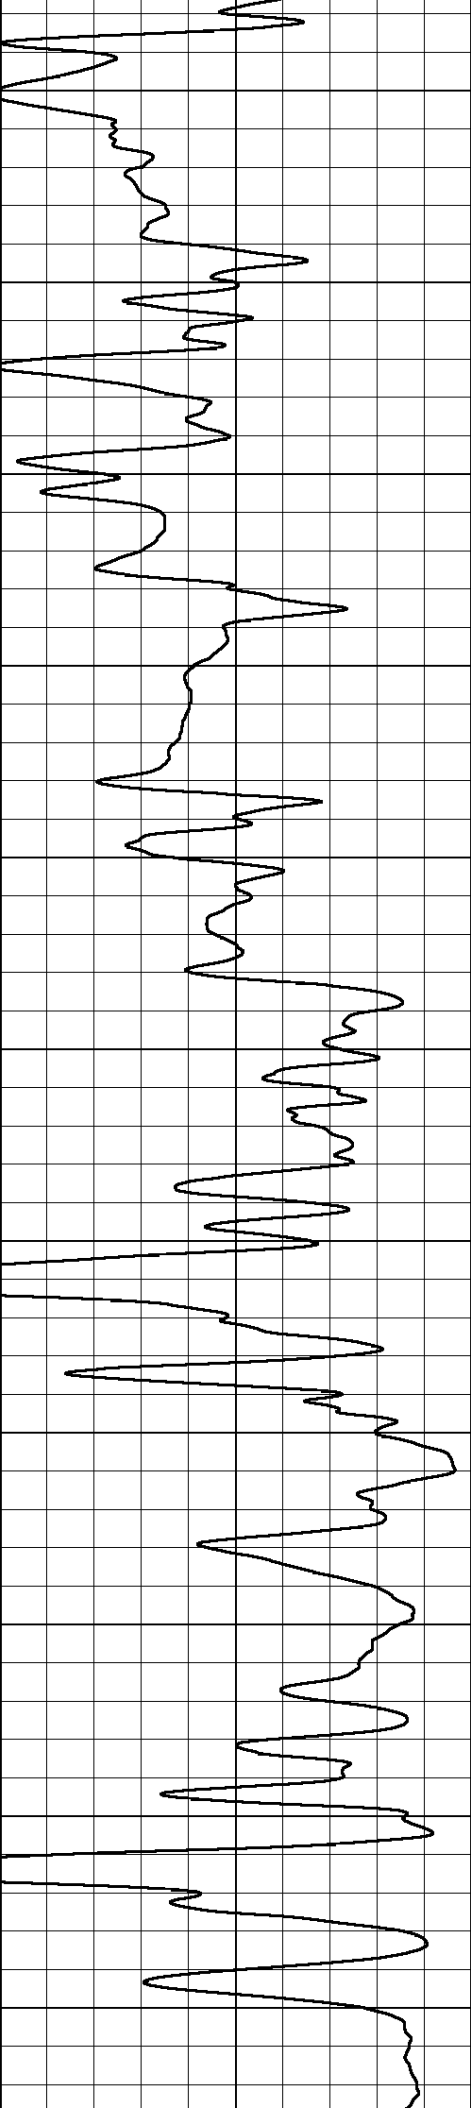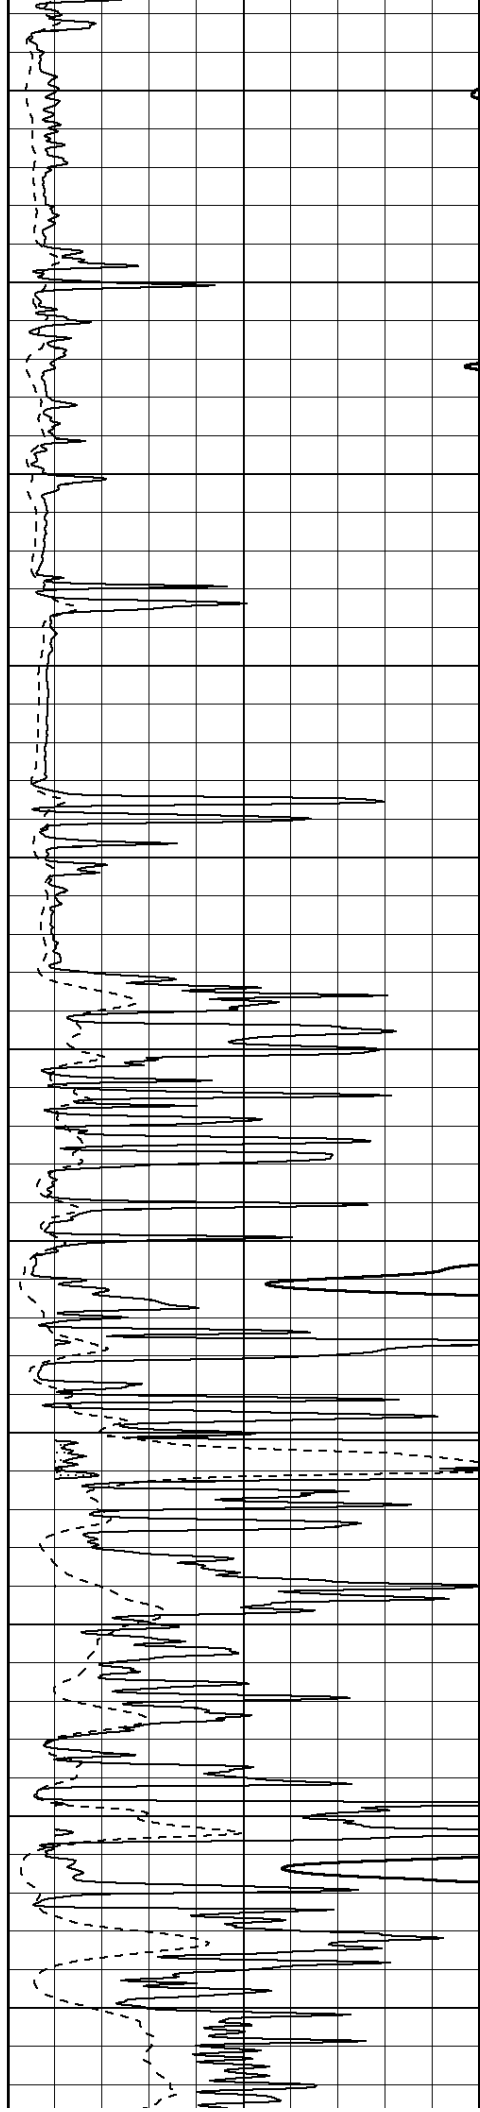

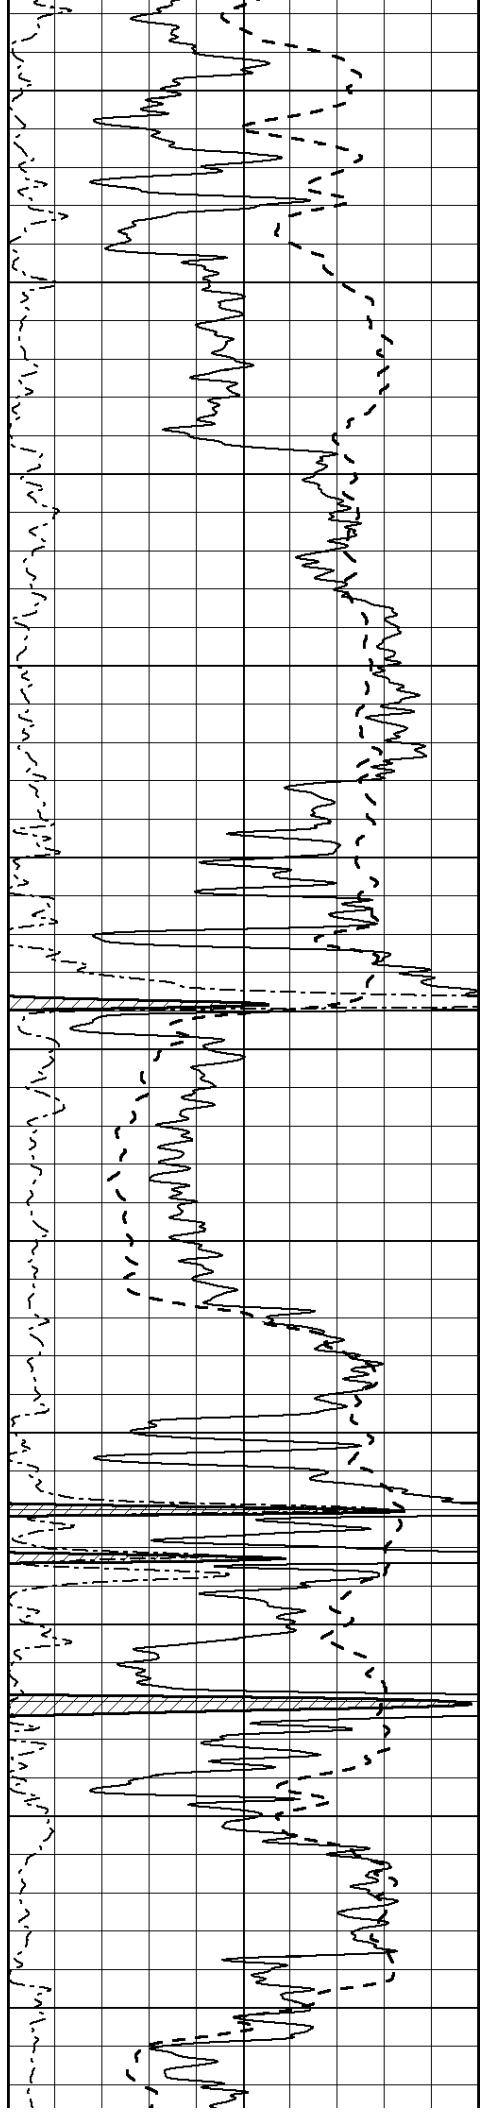

3200

3250

3300

3350

3400

3450


3500


3550

3600

3650

3700

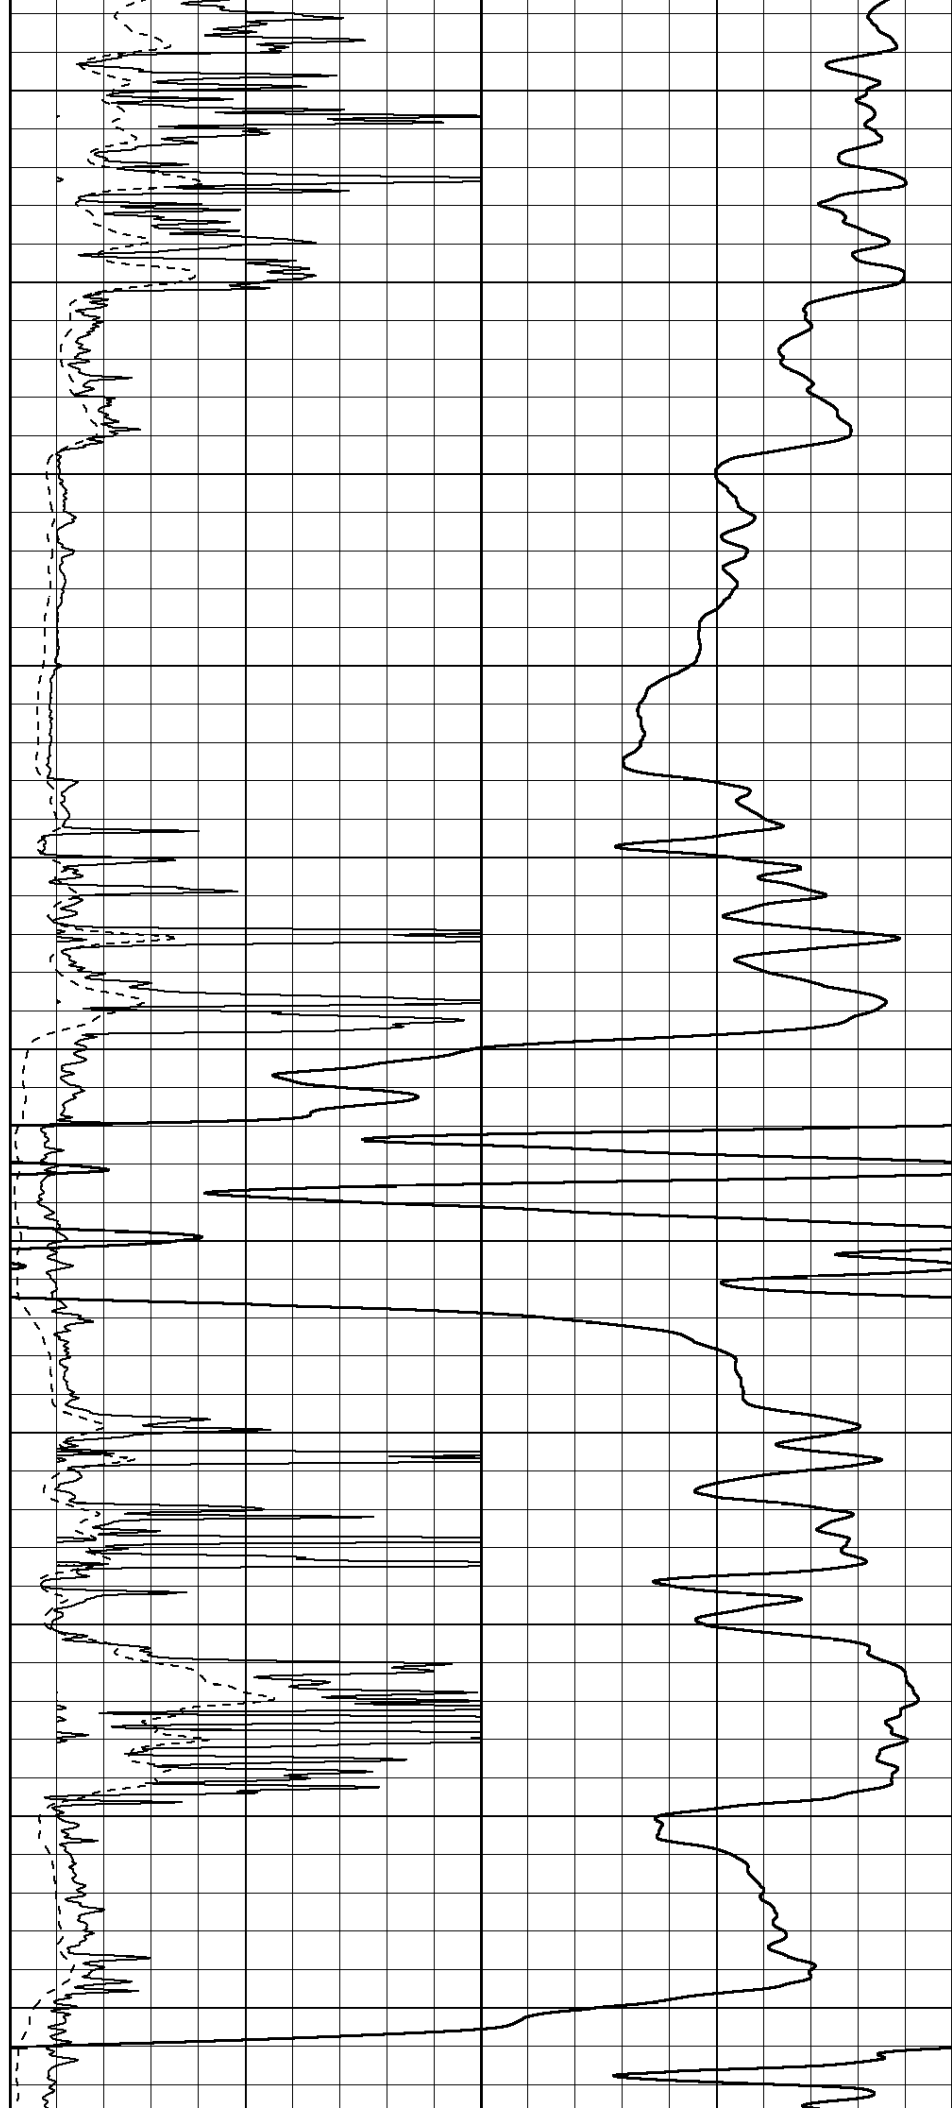

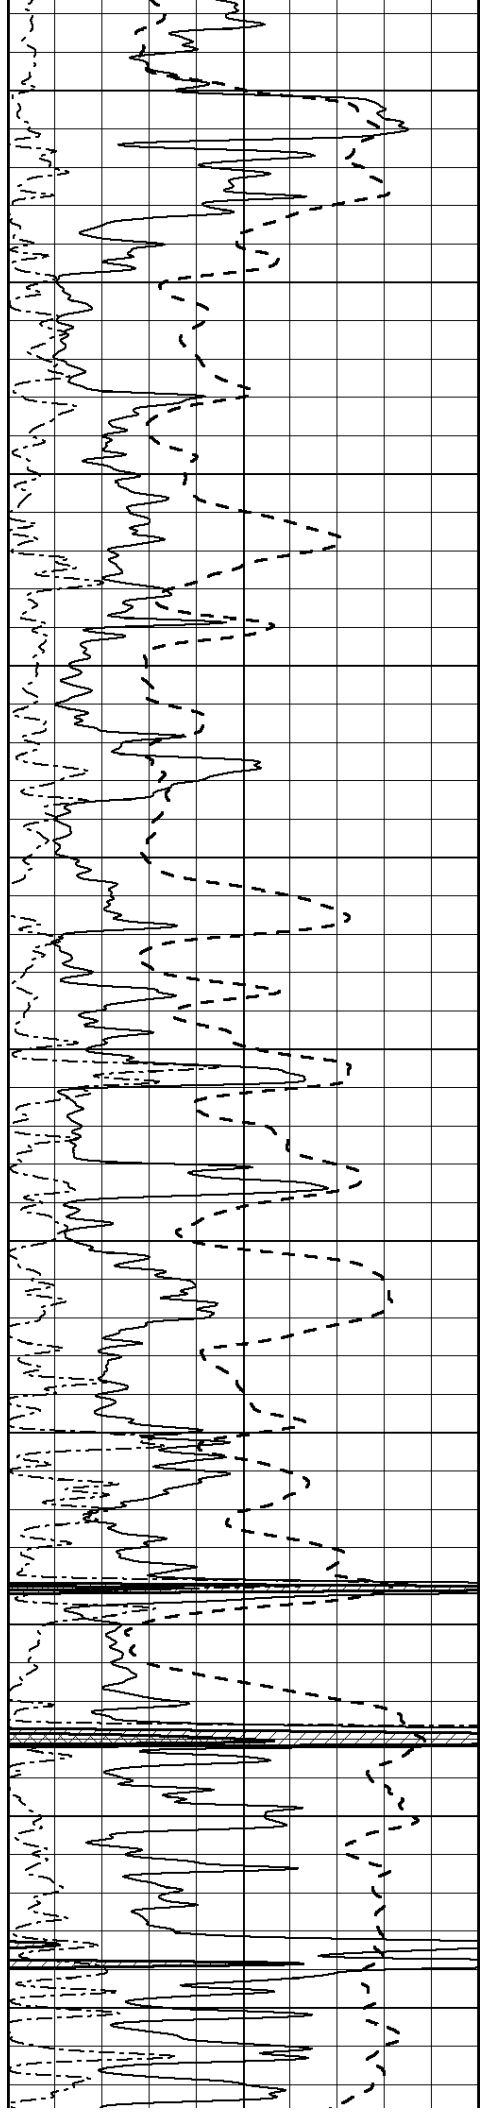

3750

3800

3850

3900

3950

4000


4050



4100

4150

4200

4250

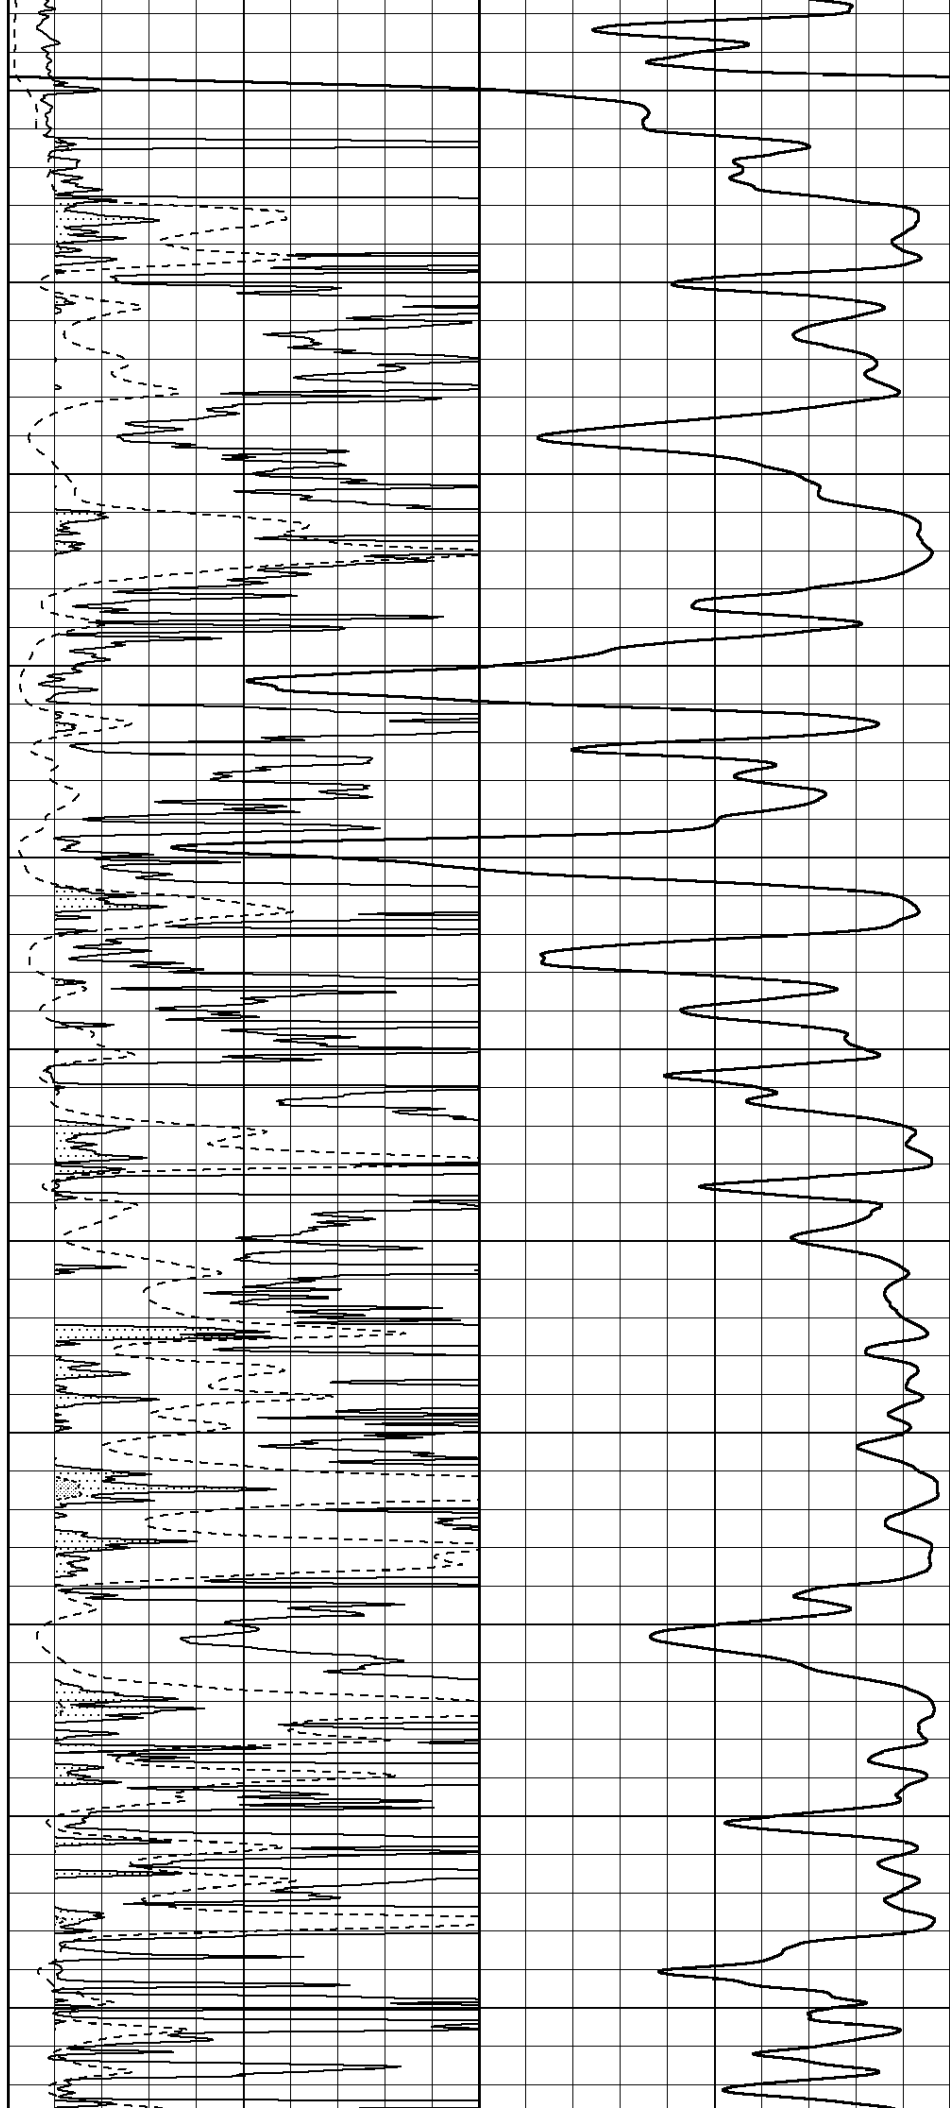


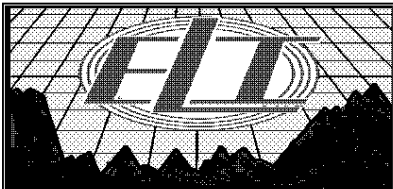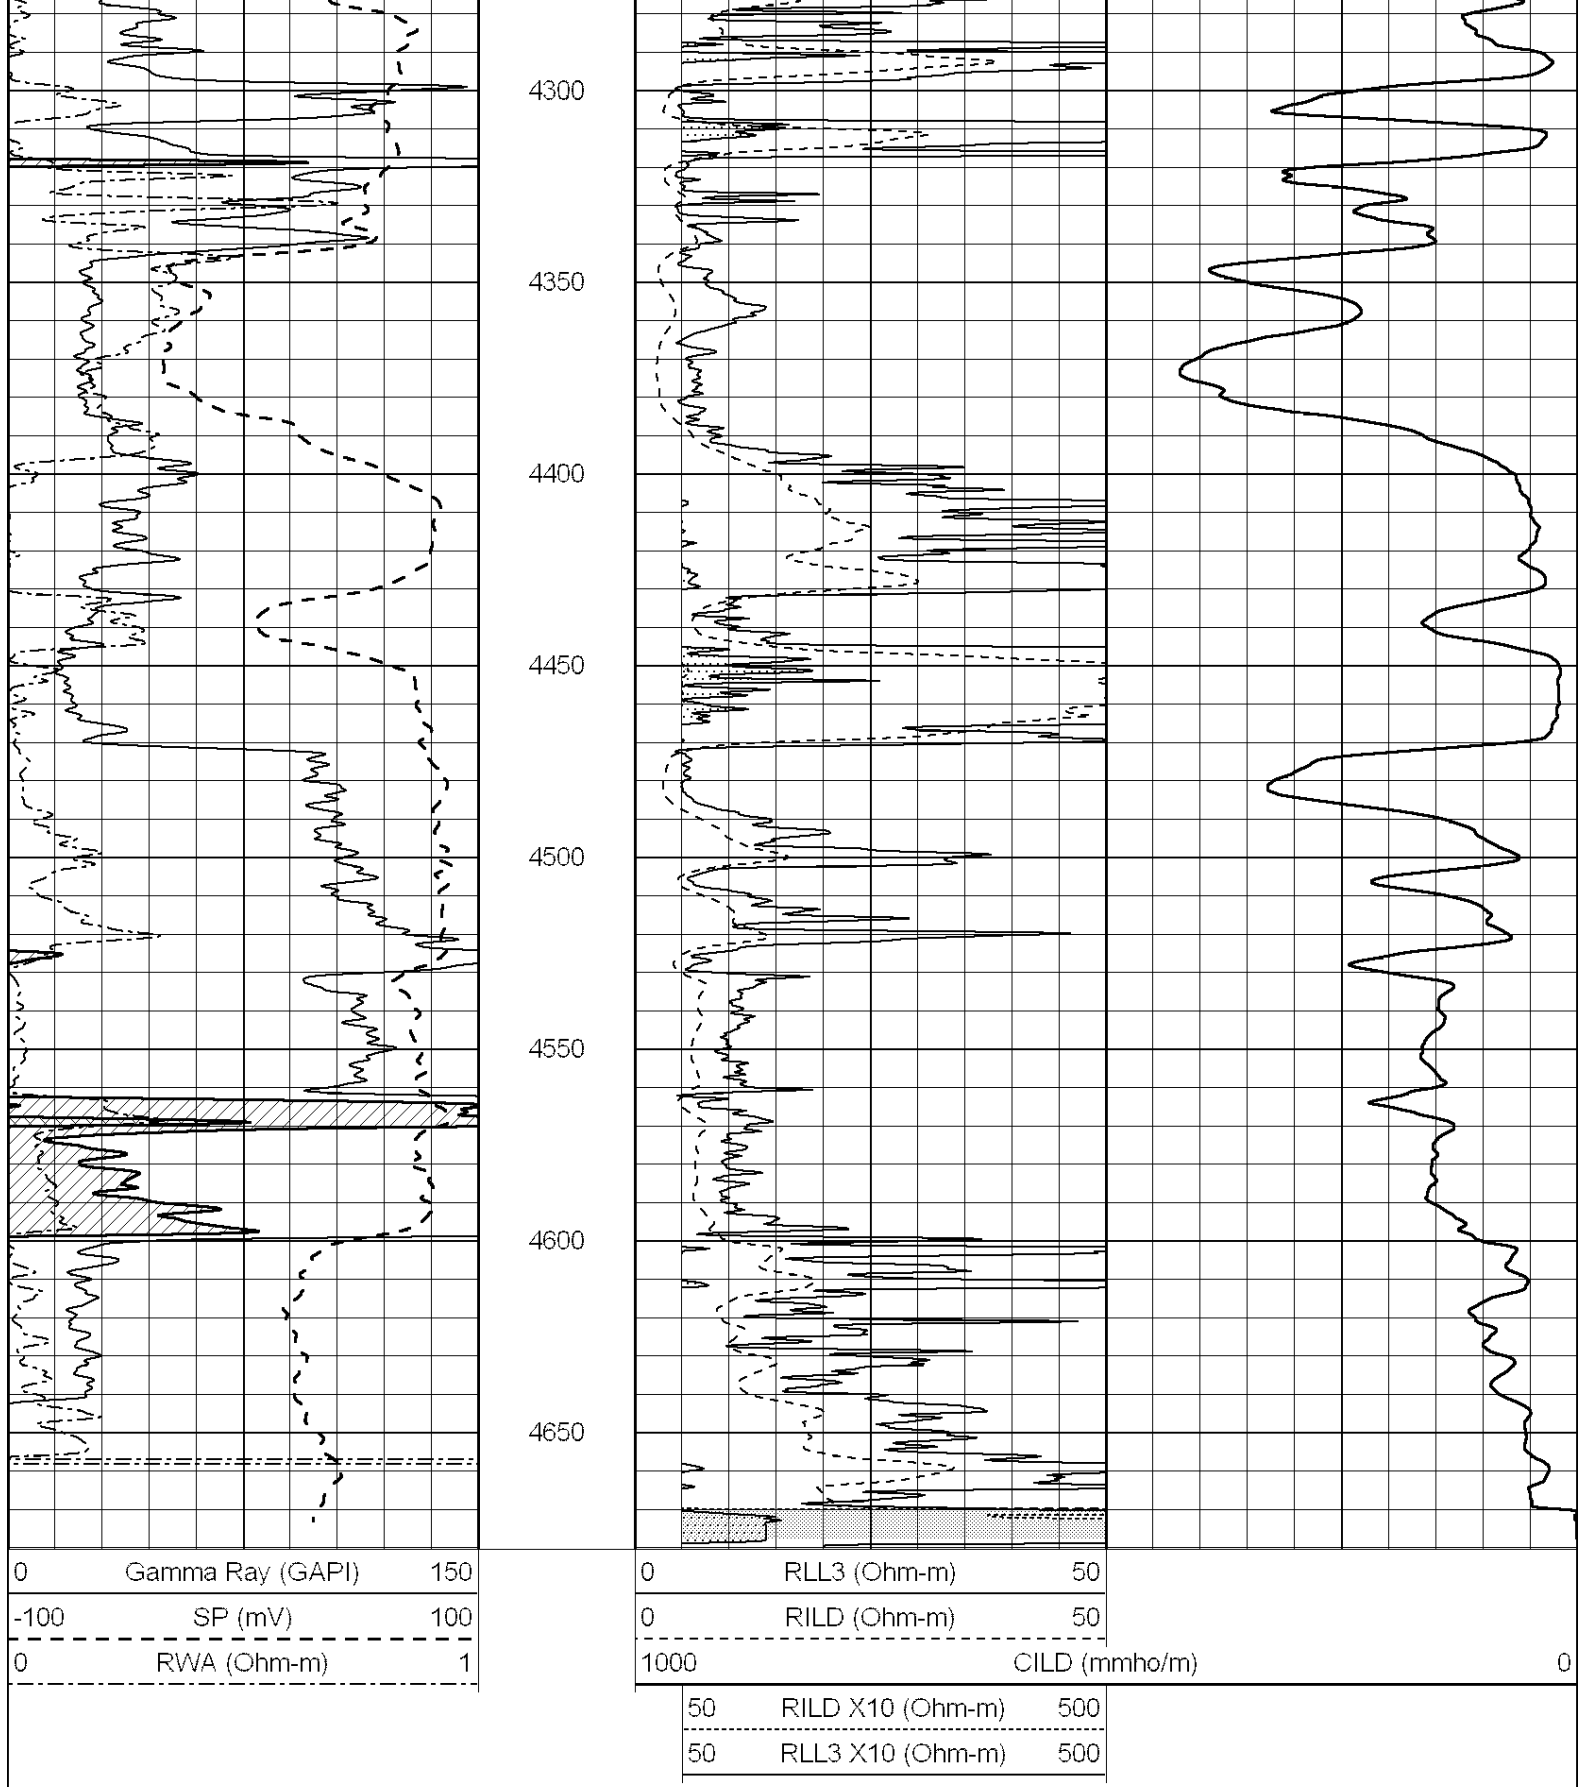

MAIN SECTION

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

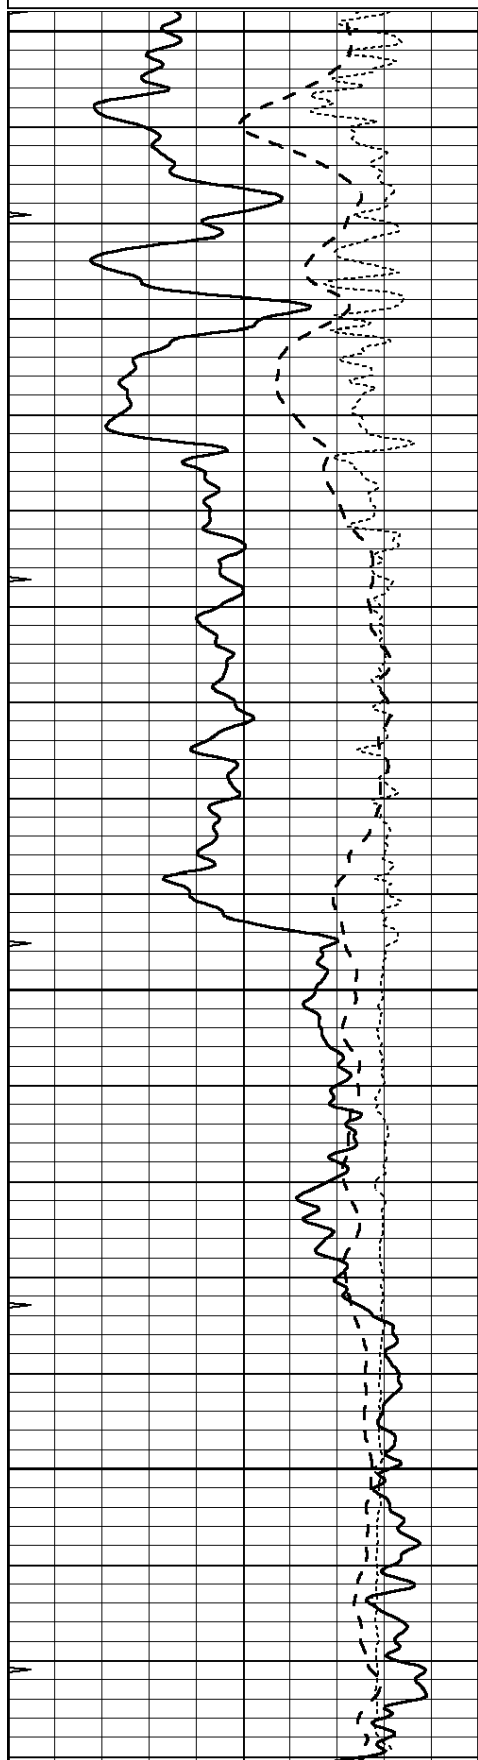



3200

3250

3300

3350

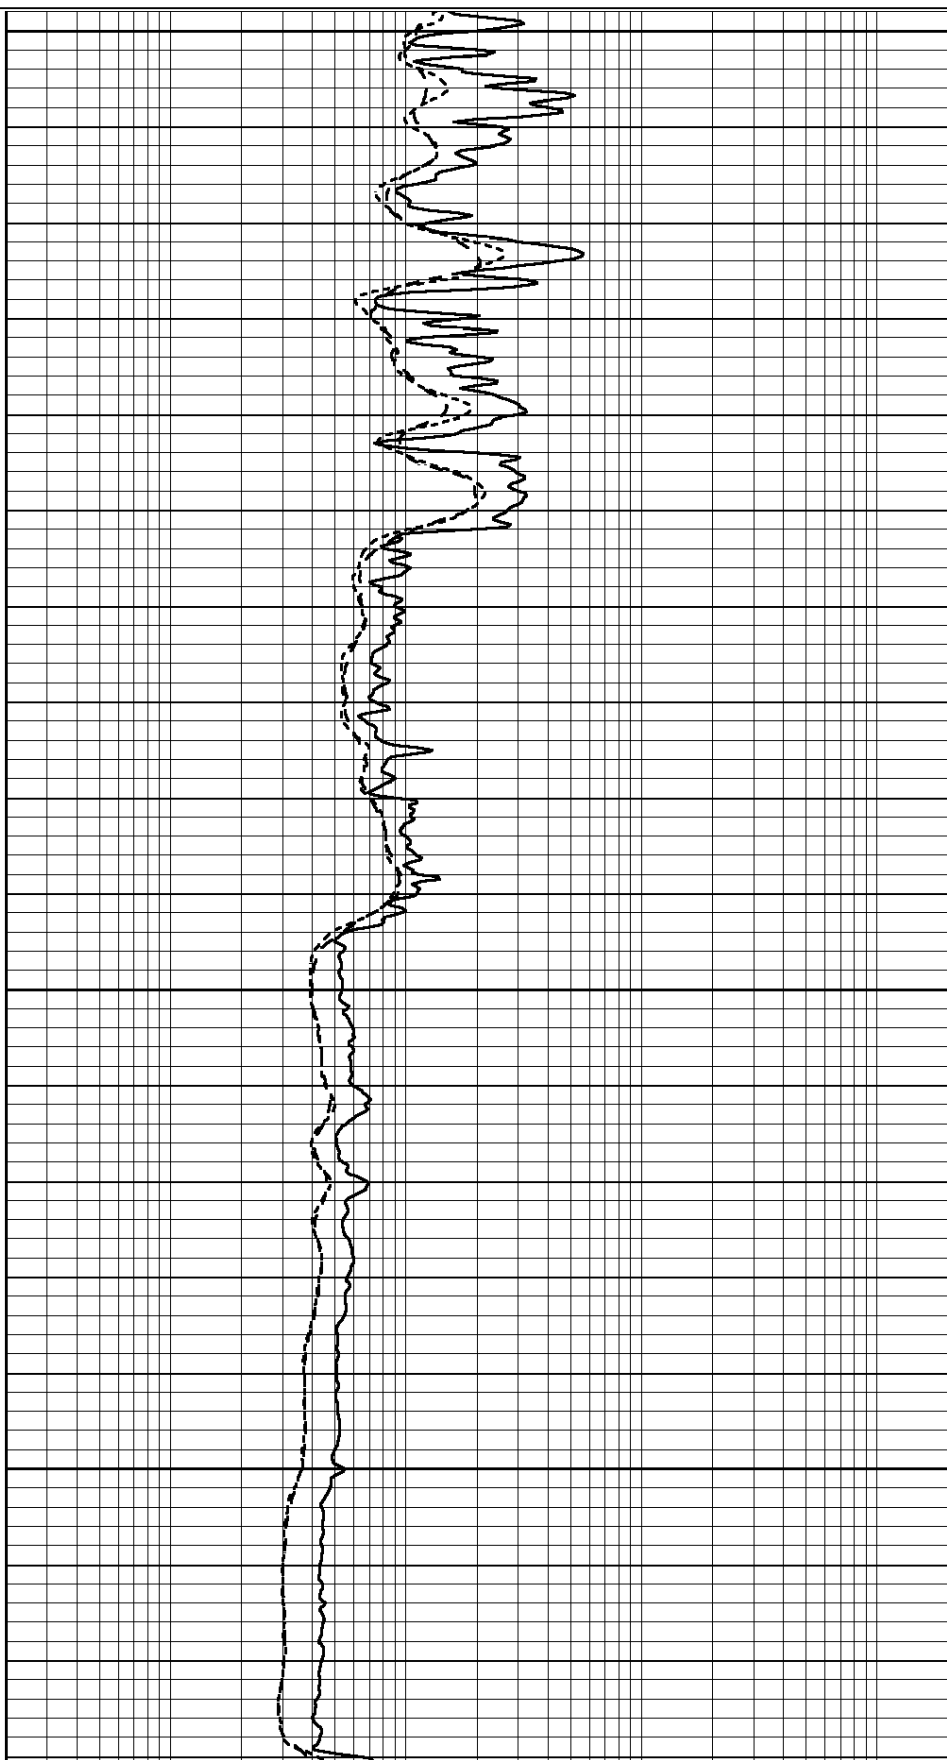

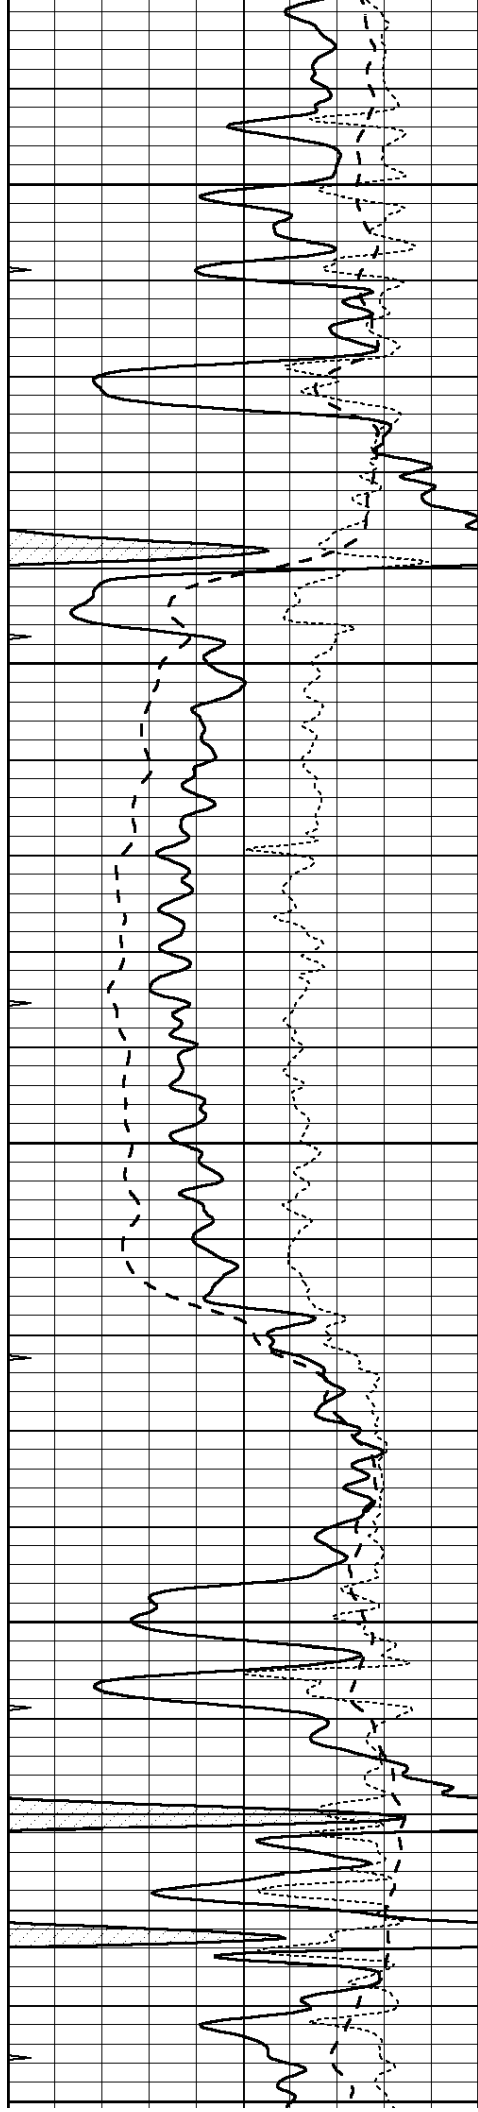


3400


3450

3500

3550

3600

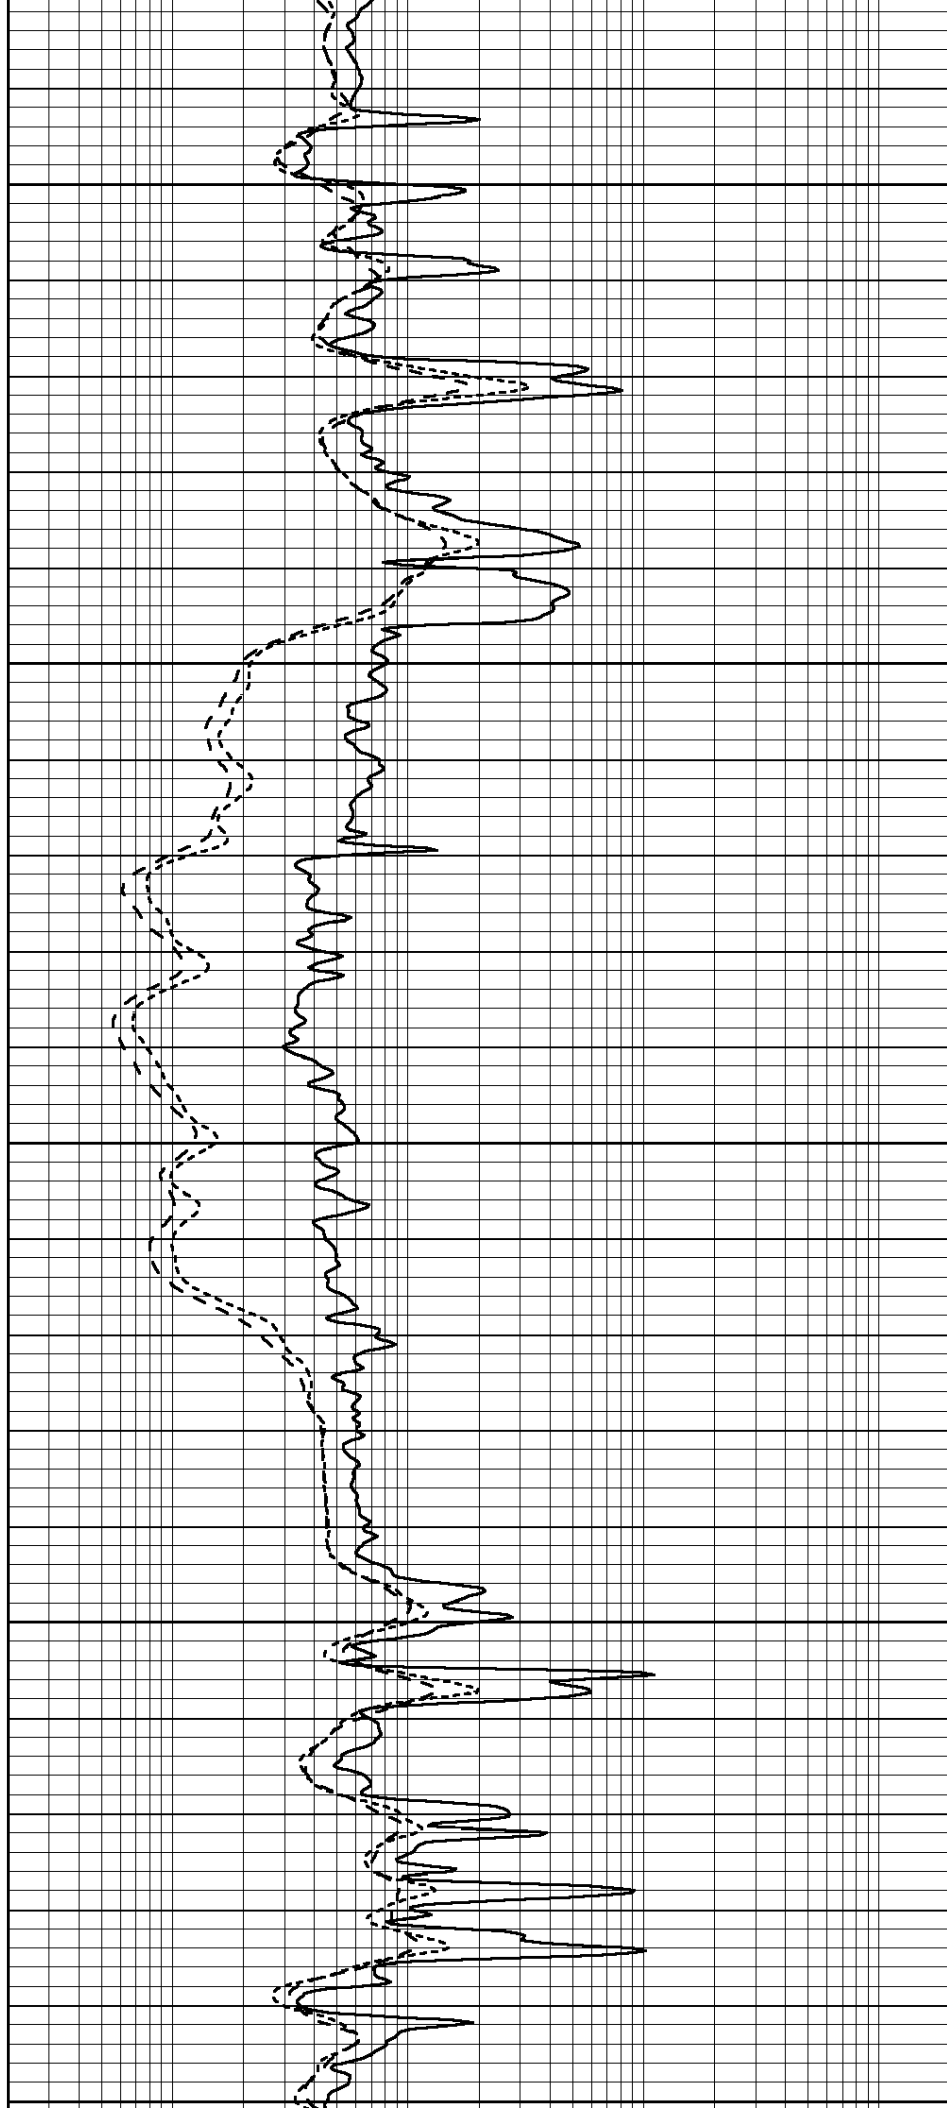

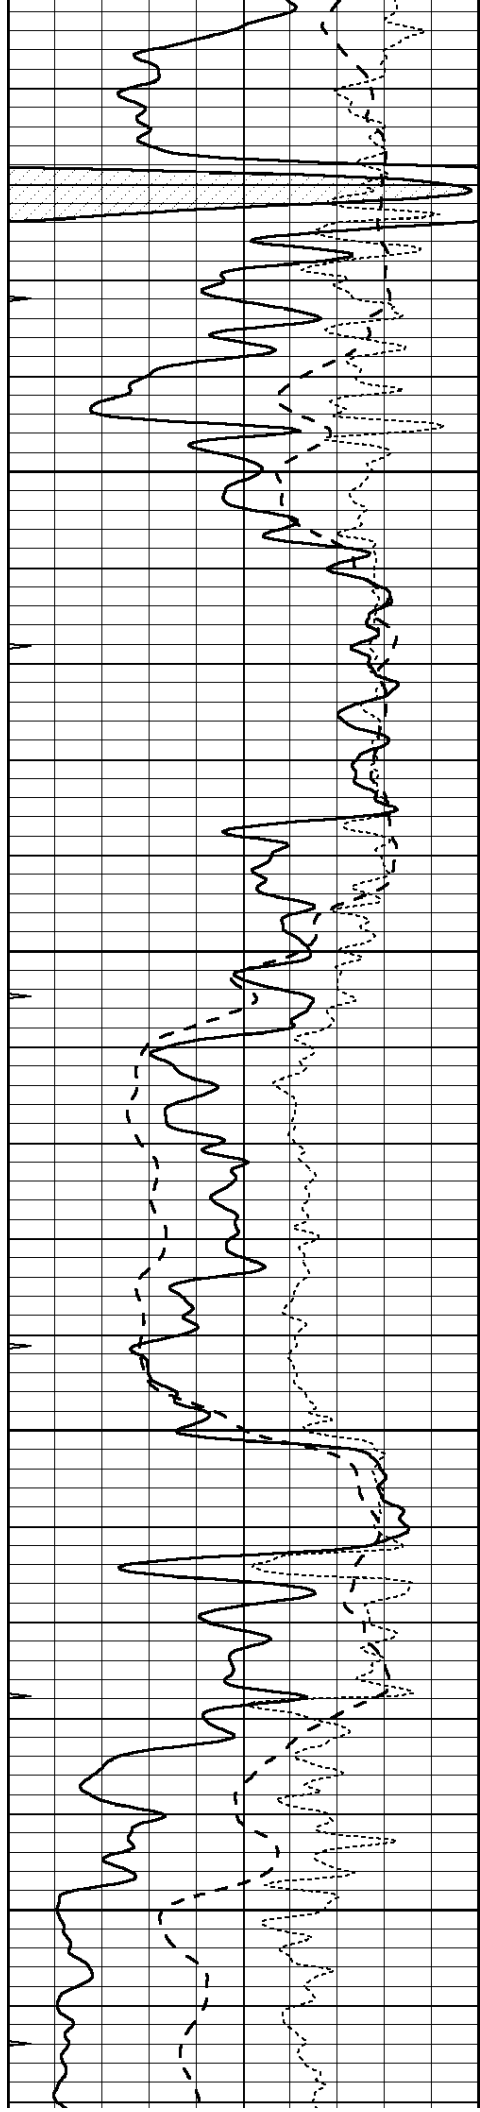



3650

3700

3750

3800

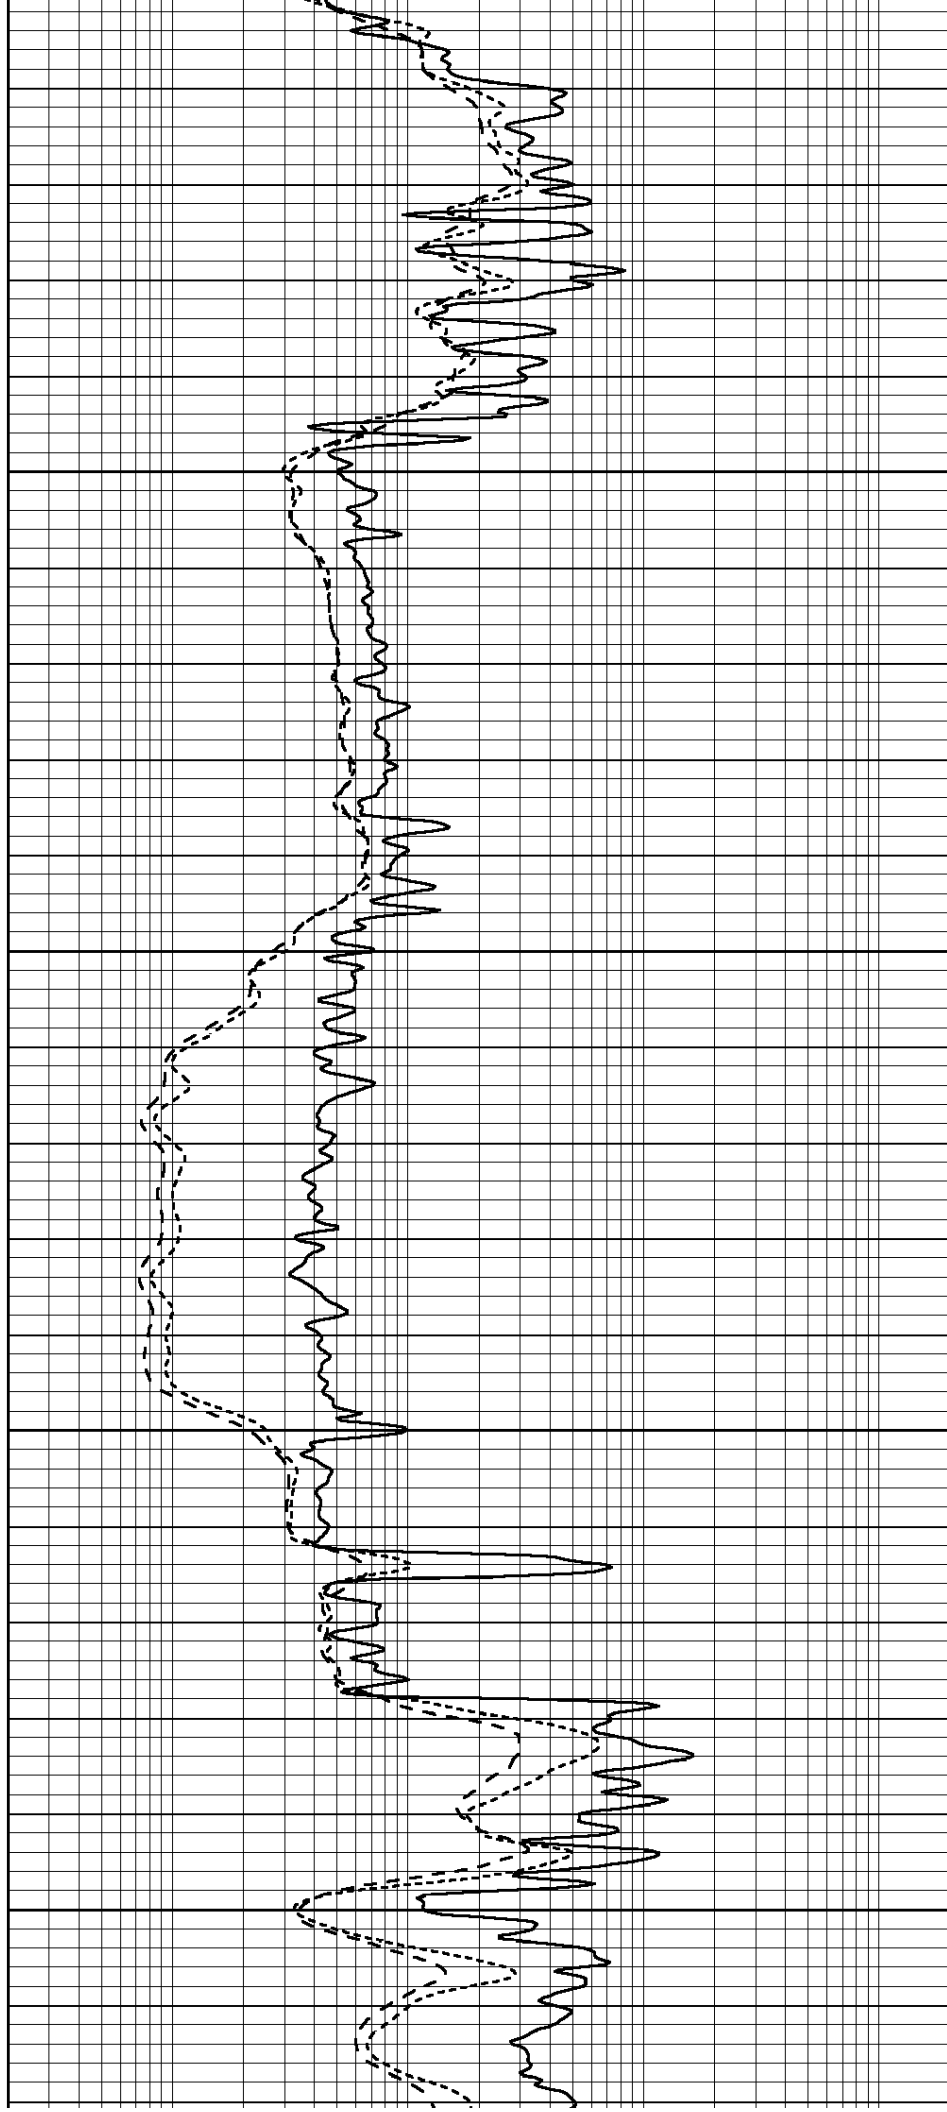

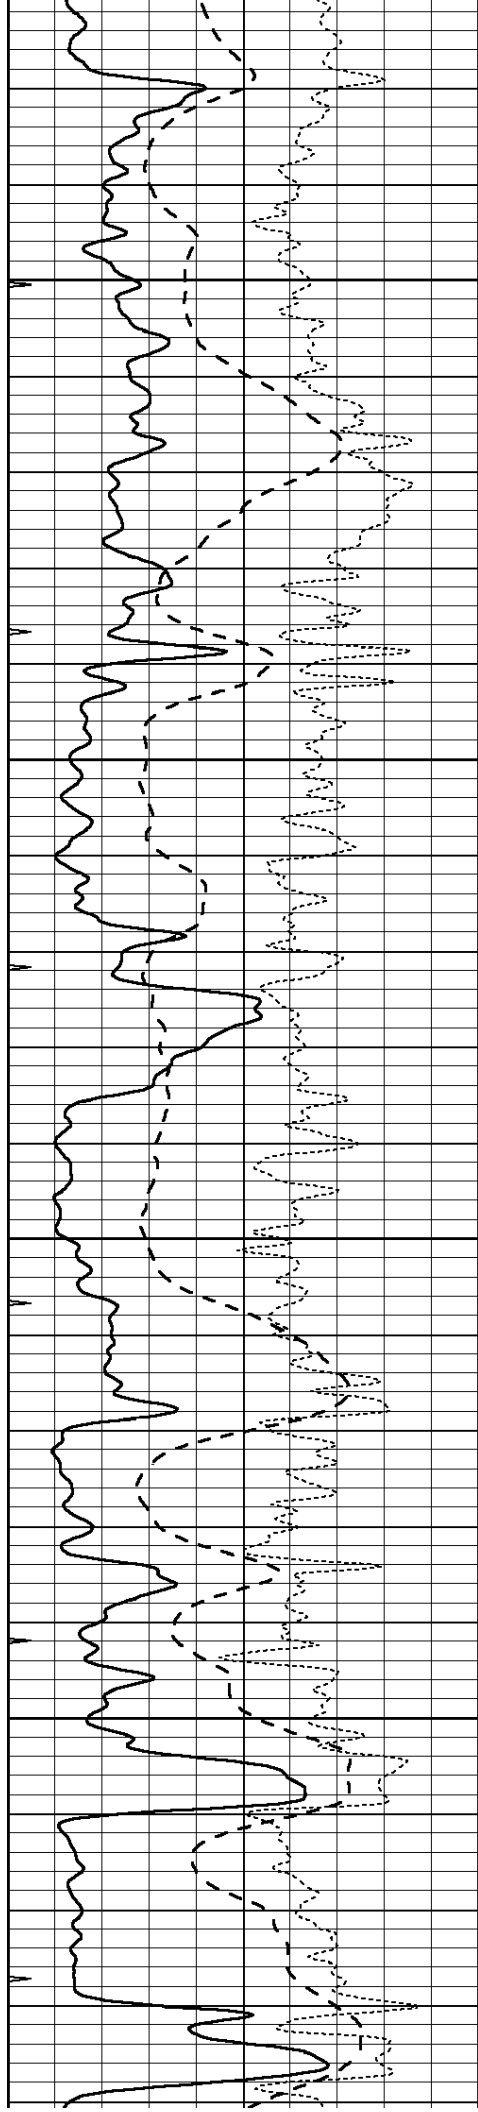



3850

3900

3950

4000

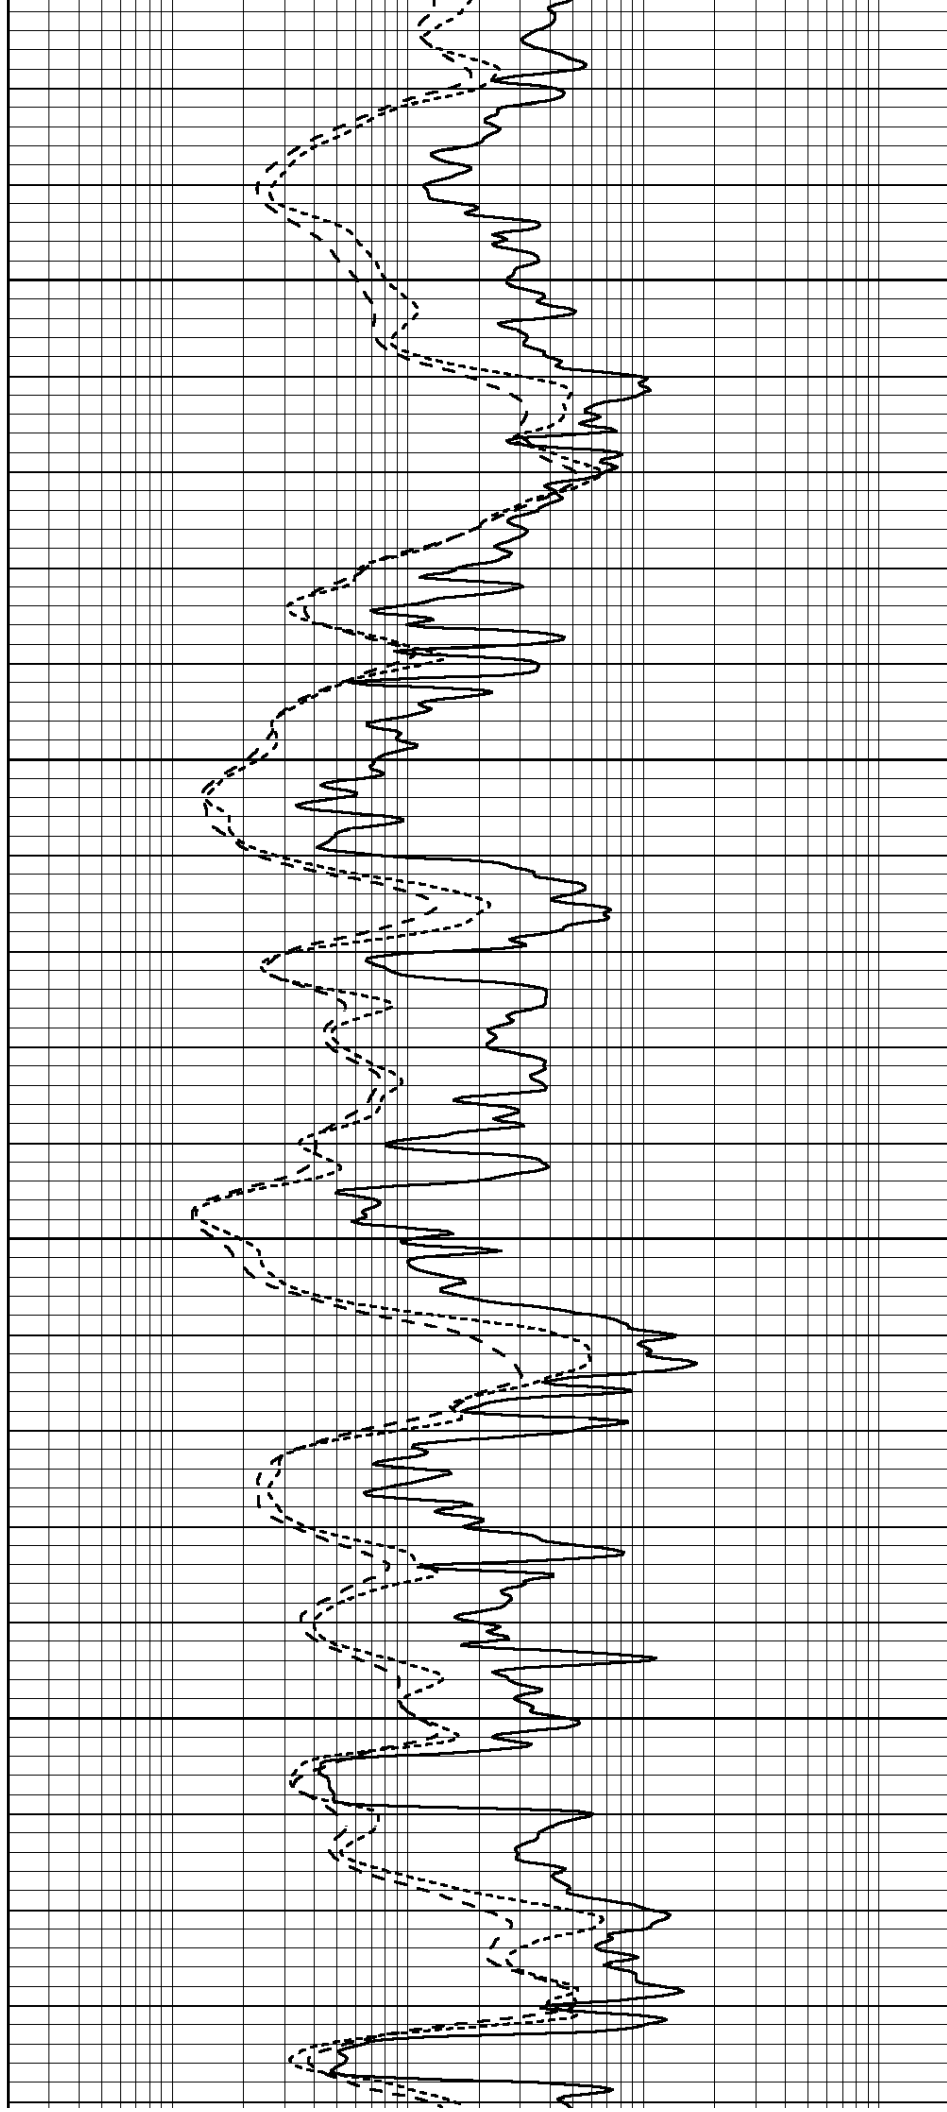

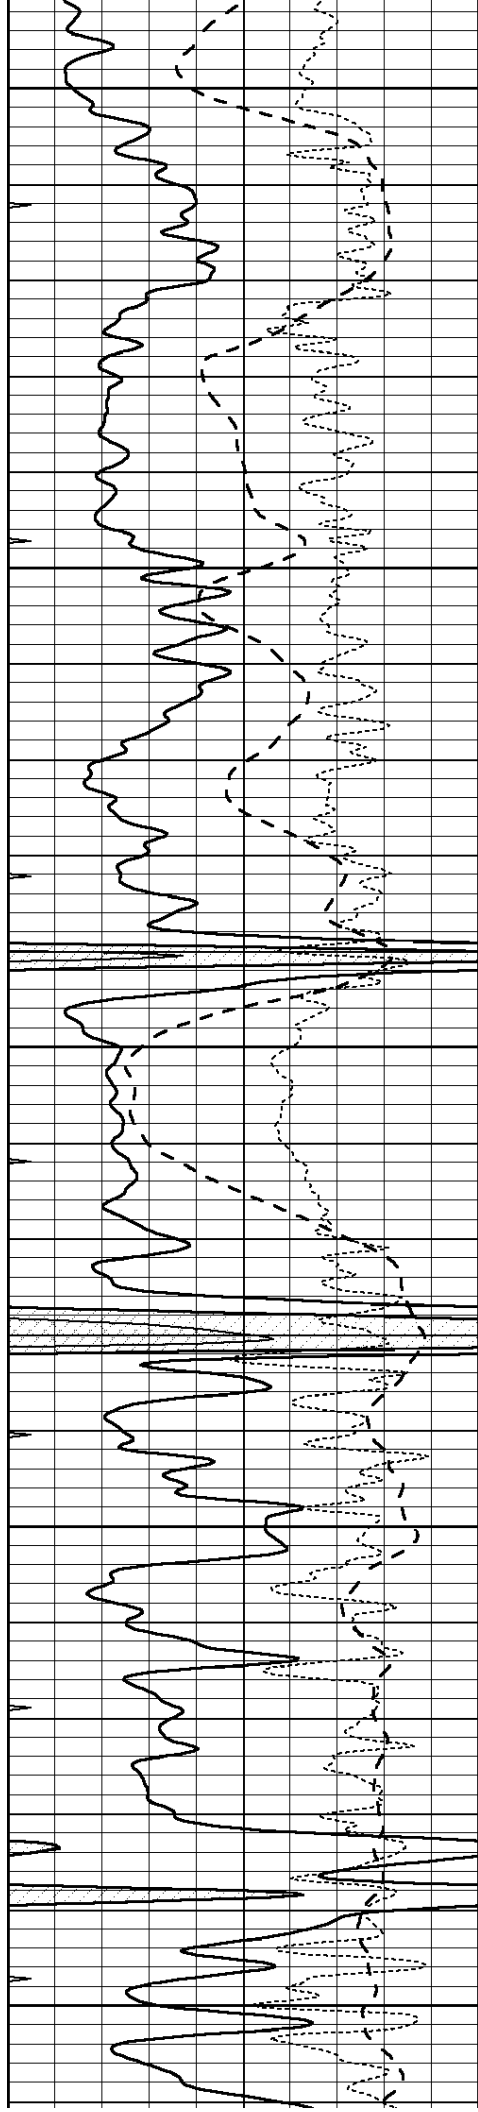


4050


4100

4150

4200

4250

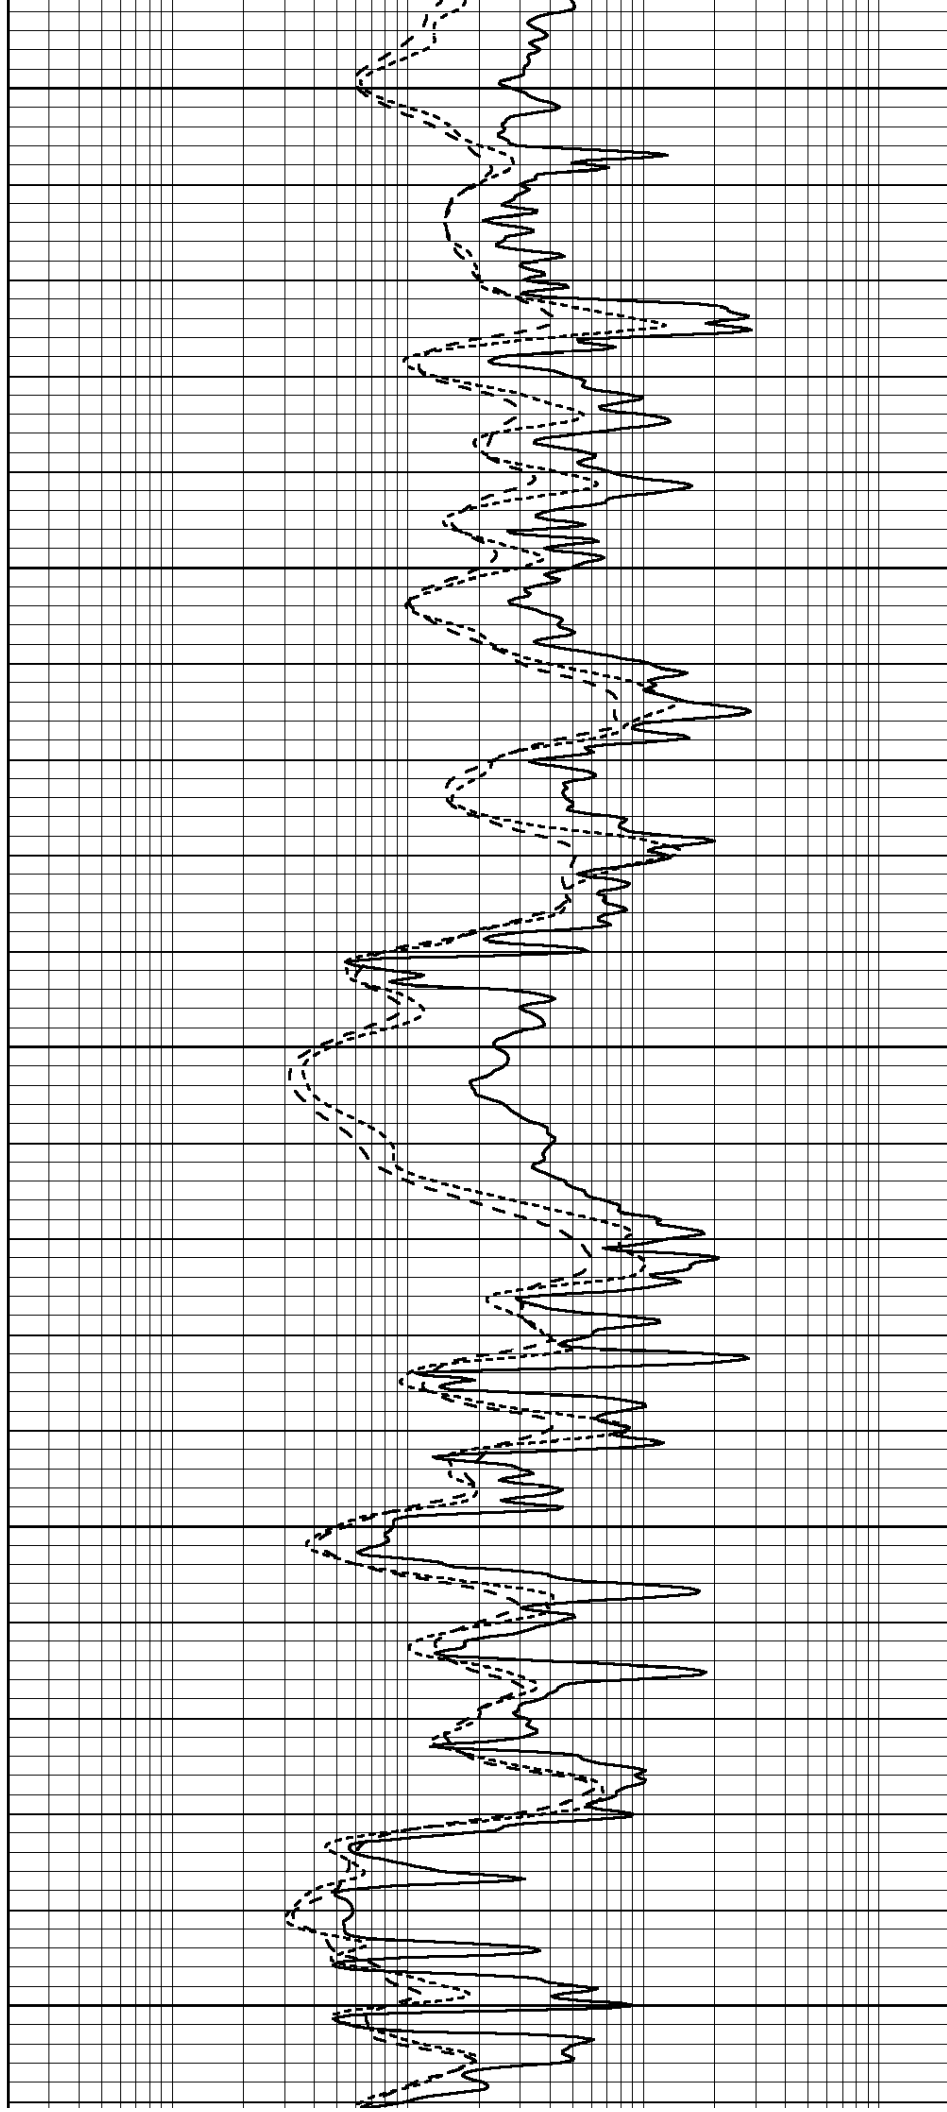

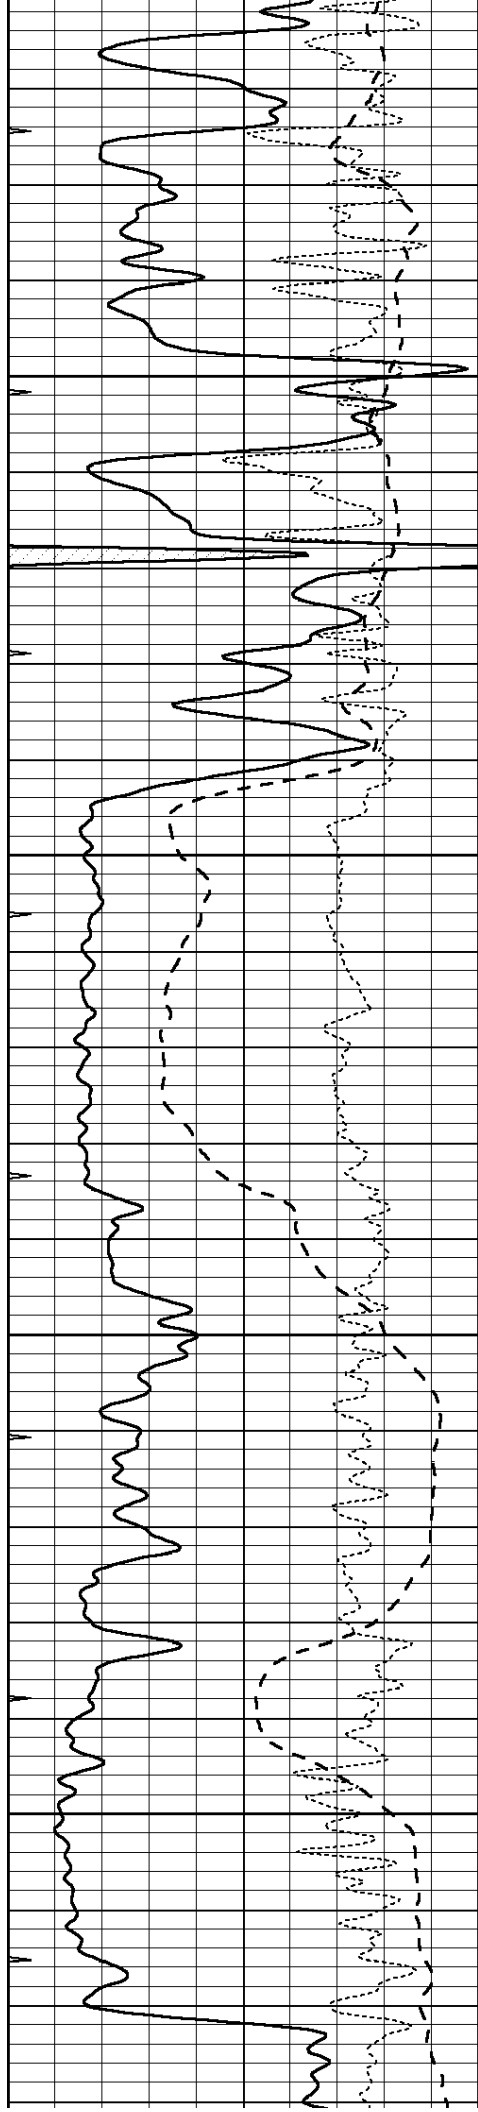



4300

4350


4400

4450

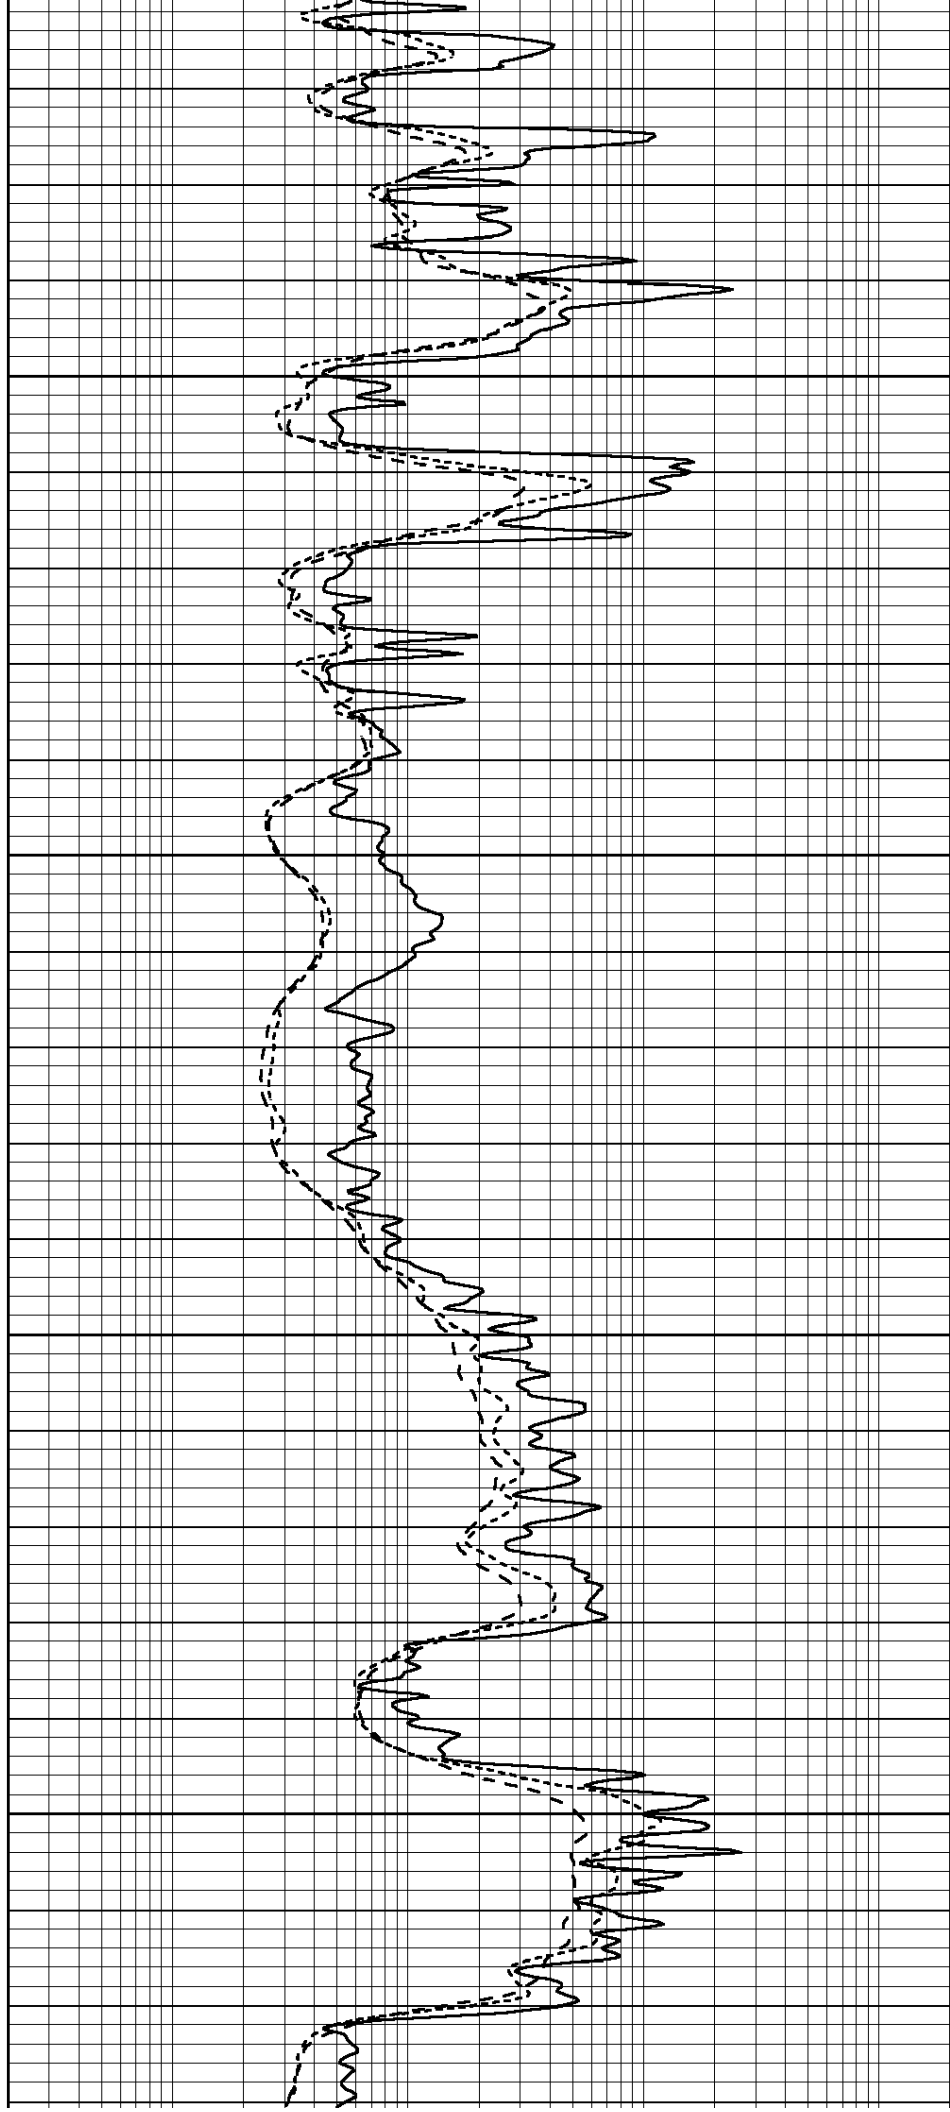


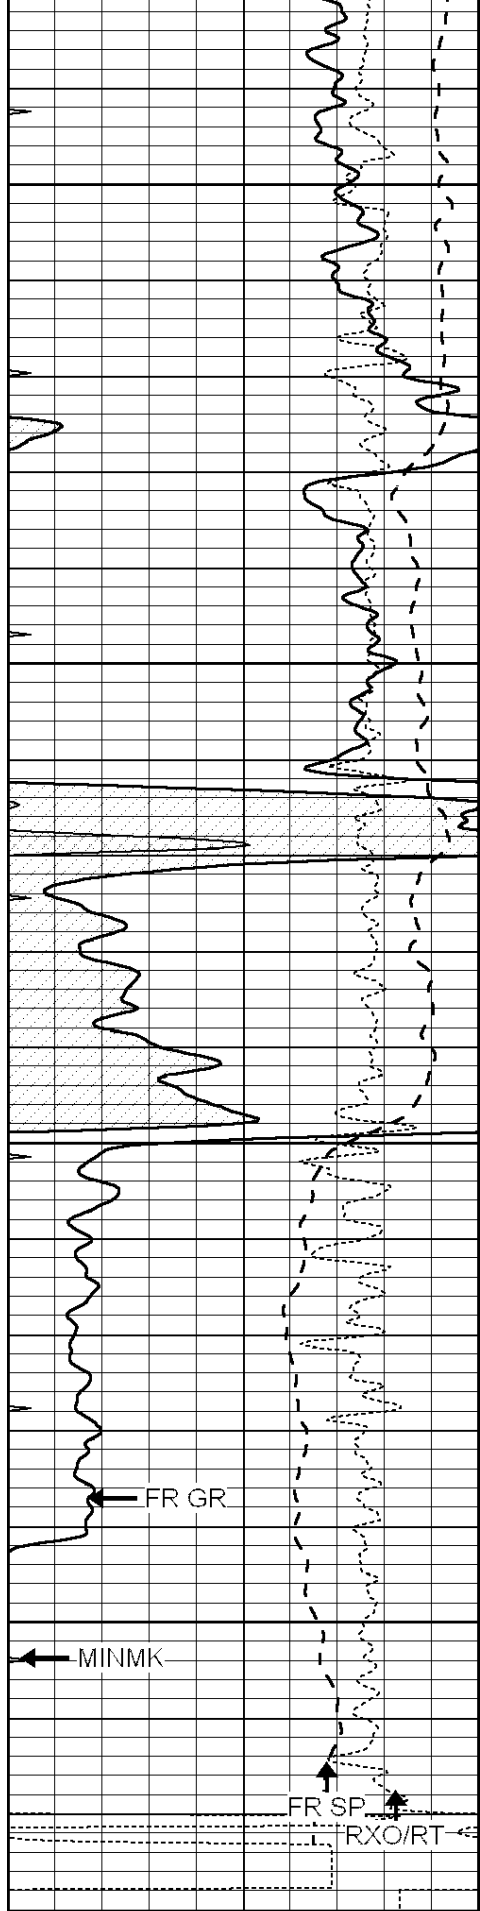

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

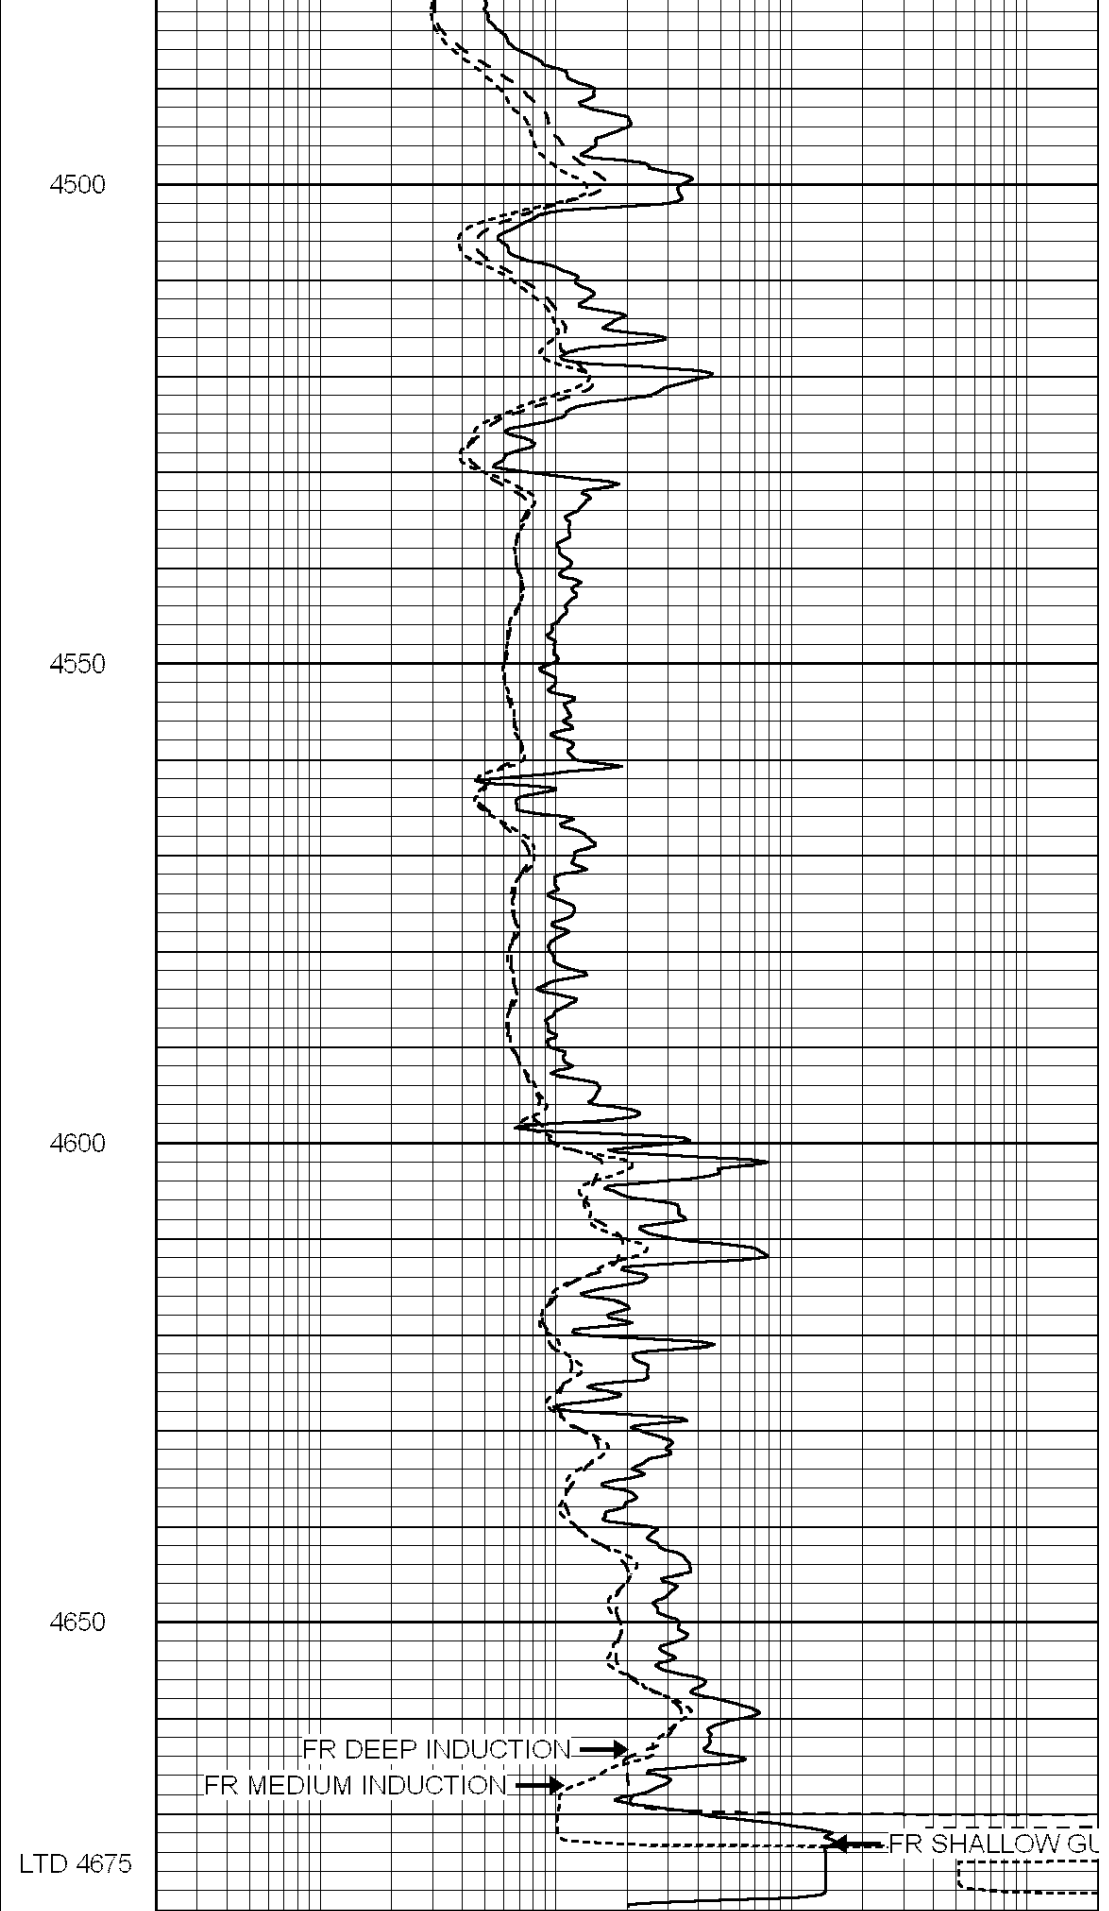

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

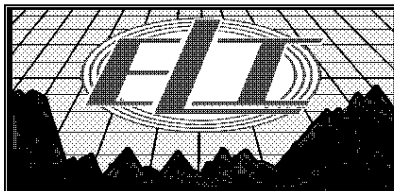


REPEAT SECTION

Database File: 2655ddn.db
Dataset Pathname: pass2.4
Presentation Format: _dil
Dataset Creation: Thu Jun 21 14:01:01 2018 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

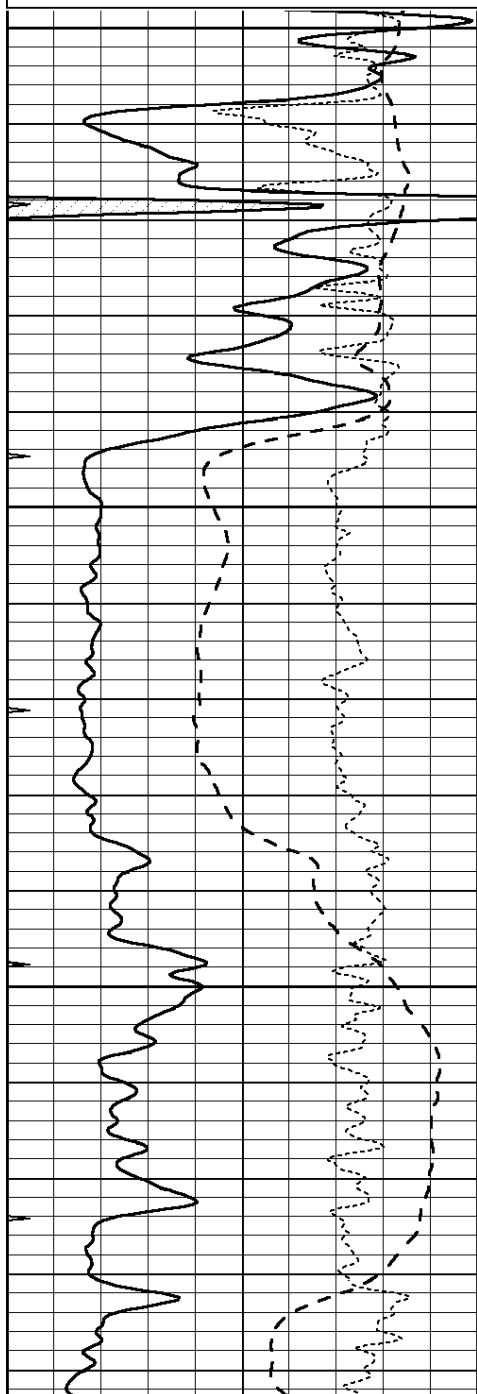


4300

4350

4400

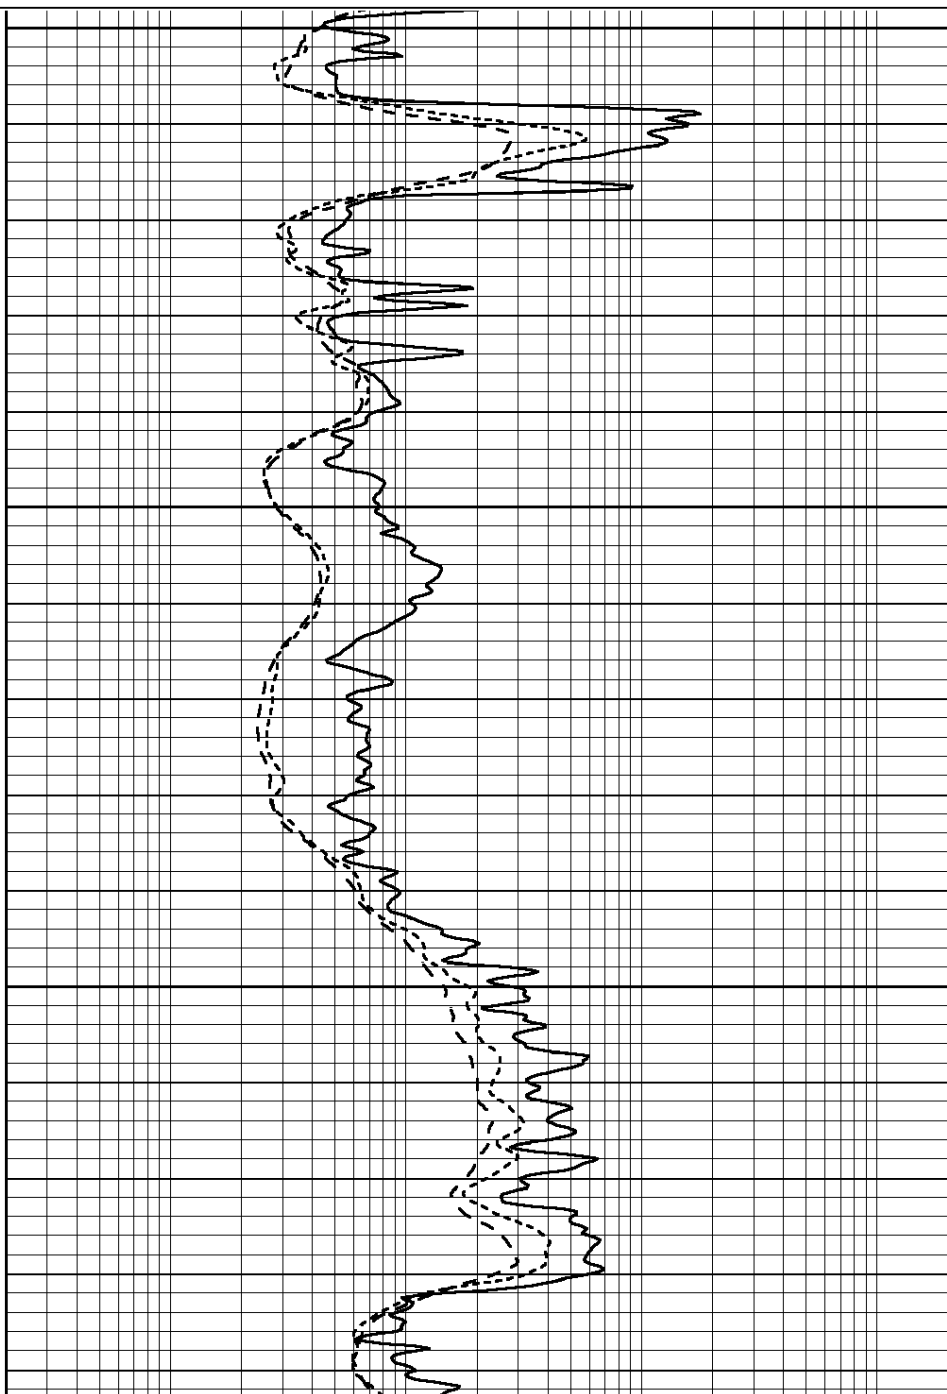

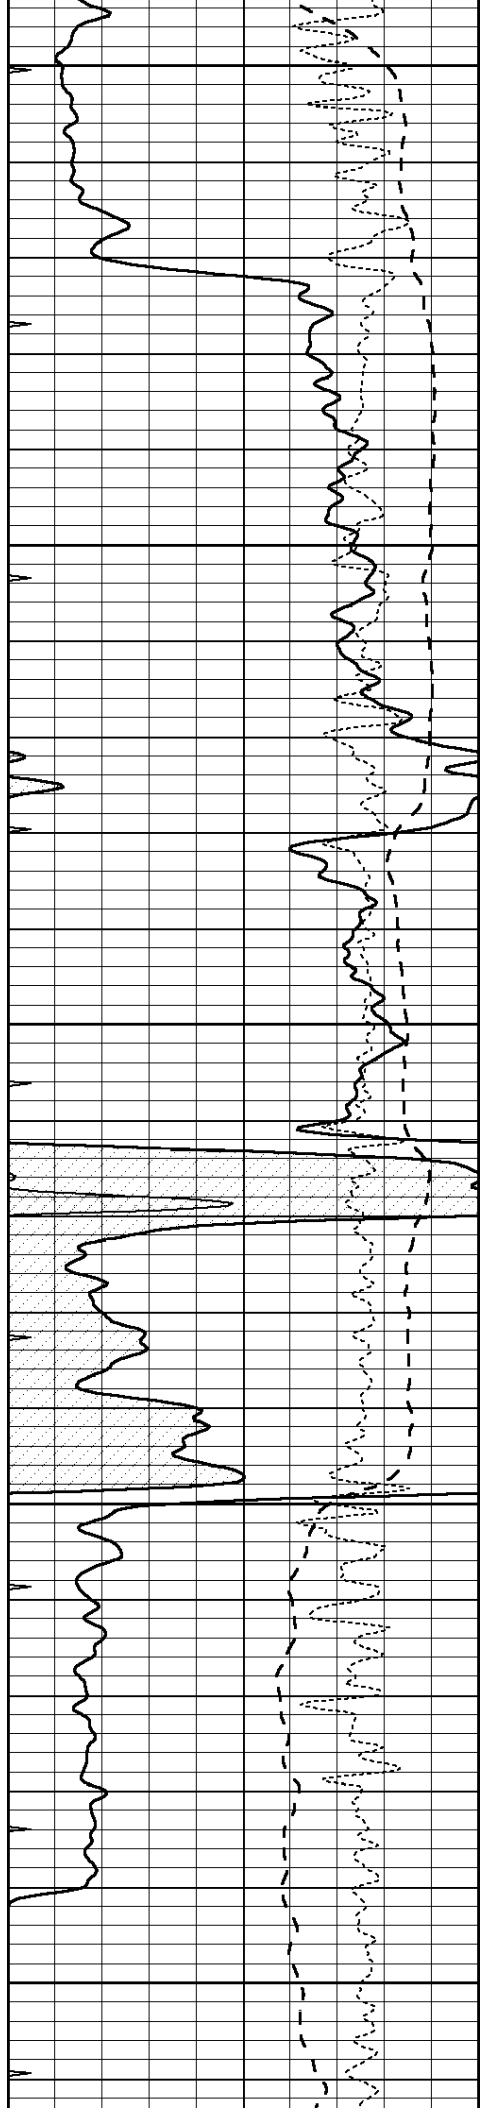


4450


4500

4550

4600

4650

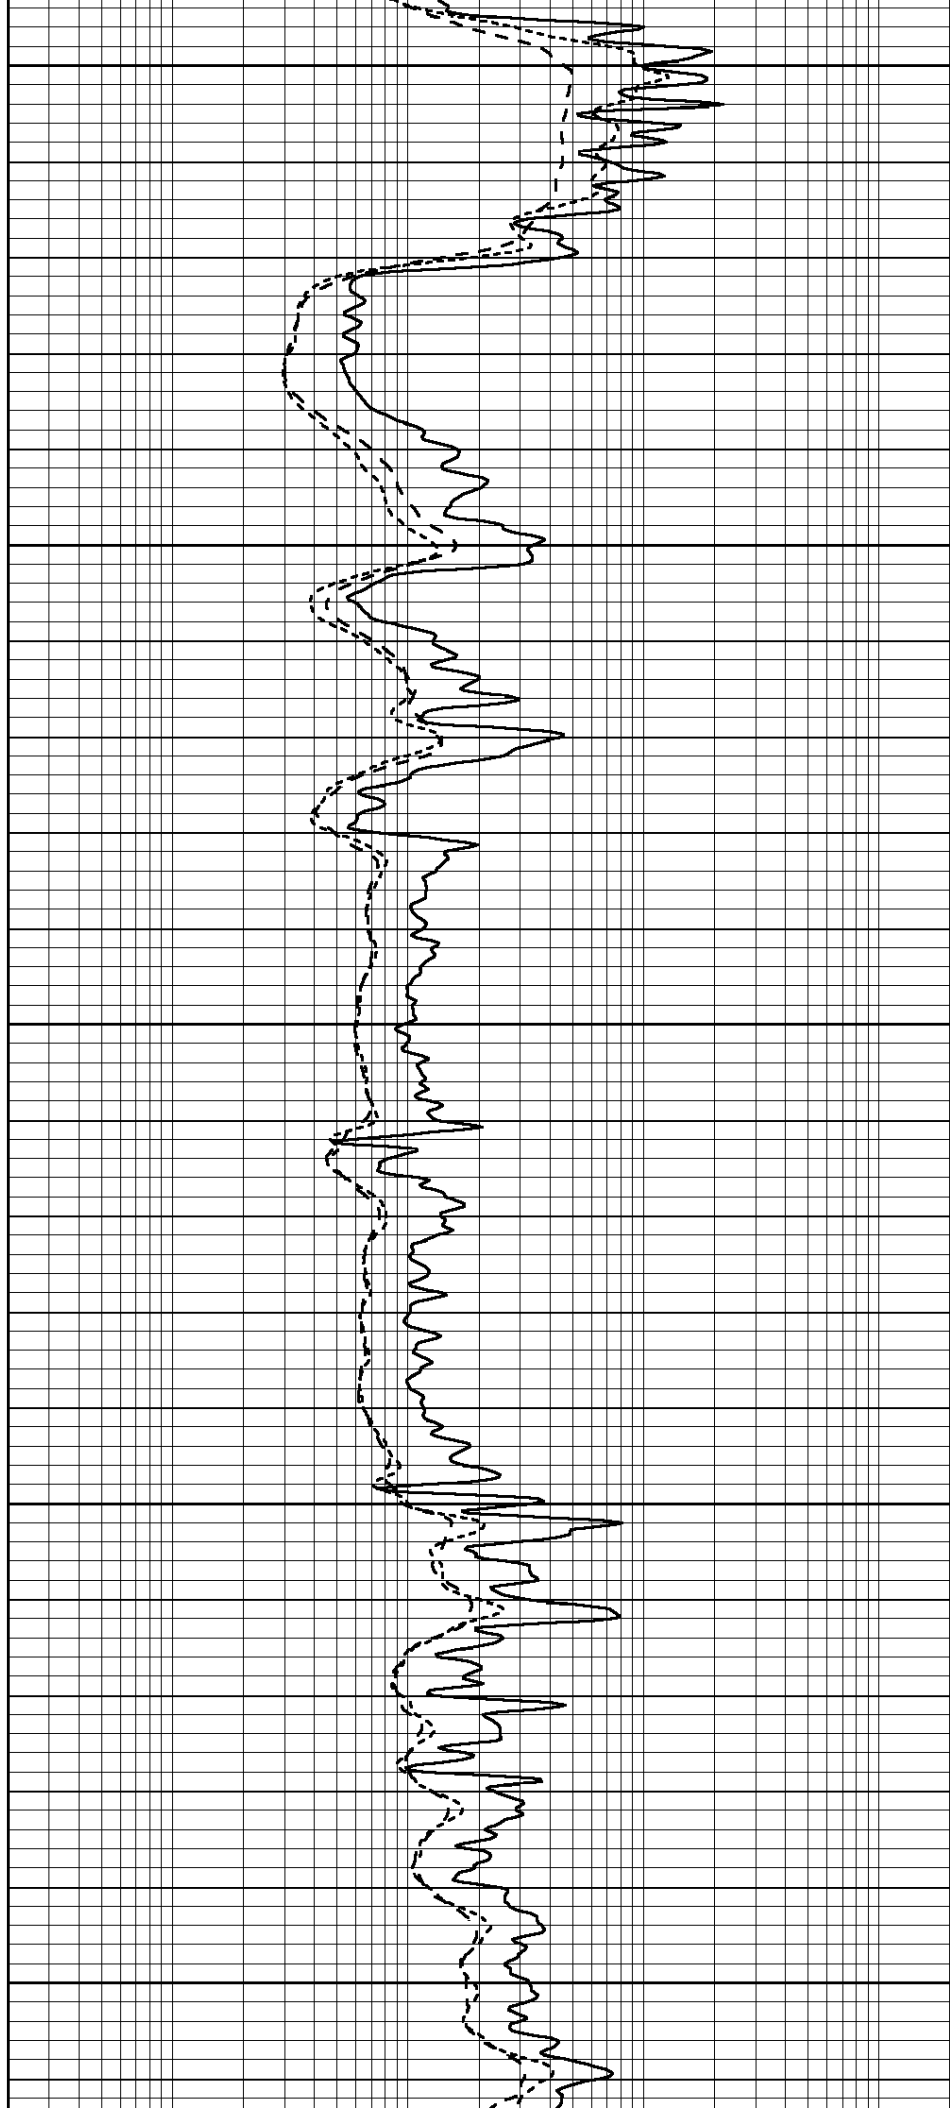

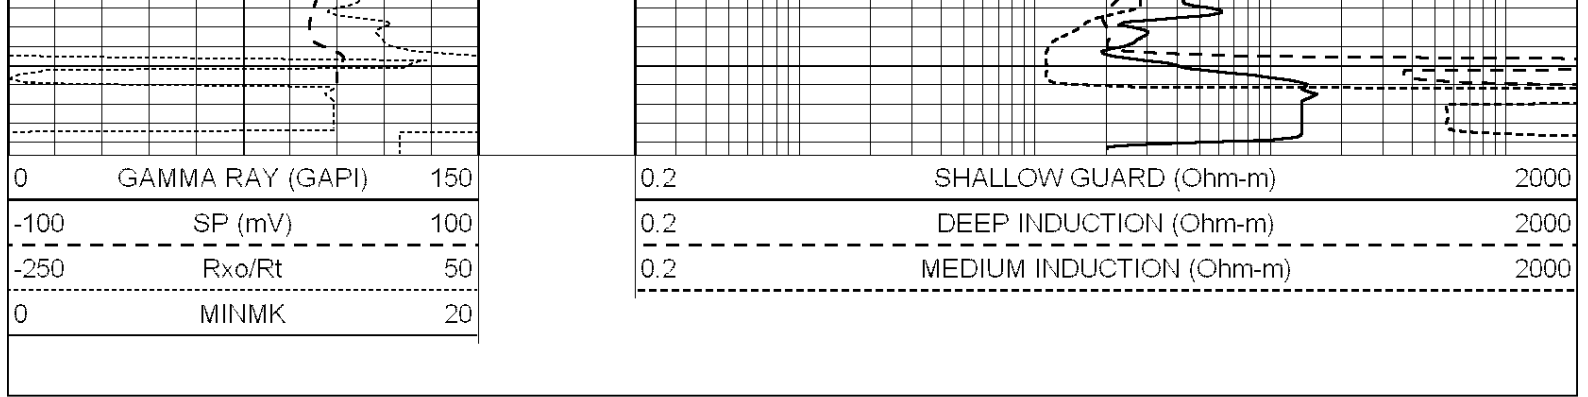

Calibration Report									
Database File:		1598ddn.db							
Dataset Pathname:		pass4							
Dataset Creation:		Wed Aug 30 02:13:00 2017 by Log SOC 120430							
Dual Induction Calibration Report									
Serial-Model:					PROBE7-DILG				
Surface Cal Performed:					Wed Aug 30 00:06:33 2017				
Downhole Cal Performed:					Mon Jul 28 12:02:56 2008				
After Survey Verification Performed:					Mon Jul 28 12:02:56 2008				
Surface Calibration									
		Readings			References			Results	
Loop:	Air	Loop		Air	Loop		m	b	
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	620.000	0.000	
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-44.000	
Internal:	Zero	Cal		Zero	Cal		m	b	
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256	
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102	
Downhole Calibration									
		Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'	
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000	
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000	
LL3		7.500	V		1400.000	Ohm-m			
		0.000	V		20.000	Ohm-m			
		-7.200	V		4000.000	mmho-m			
After Survey Verification									
		Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'	
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000	
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000	
LL3		1.000	Ohm-m		1.000	Ohm-m			
		0.000	Ohm-m		0.000	Ohm-m			
		1.000	mmho-m		1.000	mmho-m			
Litho Density Calibration Report									
Serial: 002					Model: PRB				
Master Calibration					Performed Mon Aug 21 11:27:42 2017				
Background		Magnesium		Aluminum		Sandstone			
0.000		0.000		0.000		0.000			

Window 1	837.1	10632.5	2945.1	12110.1	cps
Window 2	772.0	9117.4	2570.1	10197.3	cps
Window 3	631.7	4669.0	1481.9	5042.9	cps
Window 4	187.0	187.5	185.9	189.9	cps
Long Space	0.0	8345.4	1798.1	9425.3	cps
Short Space	1.1	1927.9	1285.9	2050.2	cps
Rho		1.7100	2.5960	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	
Rib Angle	: 45.2	Rib Slope	: 1.008	Density/Spine Ratio	: 0.558
Spine Angle	: 75.2	Spine Slope	: 3.790	Spine Intercept	: -19.6

Before Survey Verification			Performed Wed Dec 31 18:00:00 1969		
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification			Performed Wed Dec 31 18:00:00 1969		
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report					
--	--	--	--	--	--

Serial Number:		070808			
Tool Model:		Probe			

PRE-SURVEY VERIFICATION					
Detector	Readings		Measured	Target	
Short Space		cps			
Long Space		cps	pu		pu

POST-SURVEY VERIFICATION					
Detector	Readings		Measured	Target	
Short Space		cps			
Long Space		cps	pu		pu

Gamma Ray Calibration Report					
------------------------------	--	--	--	--	--

Serial Number:		070558			
Tool Model:		OPEN_GR			
Performed:		Wed May 31 00:09:32 2017			
Calibrator Value:		1.0	GAPI		

Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2800	GAPI/cps