



MICRO LOG

Company	RL INVESTMENT	Company	RL INVESTMENT
Well	BEAGLEY TRUST # 1-22	Well	BEAGLEY TRUST # 1-22
Field	UNKNOWN	Field	UNKNOWN
County	LOGAN	County	LOGAN
State	KANSAS	State	KANSAS
Location:	AP1 # : 15-109-21546-00-00		Other Services CDL/CNL/DIL
Permanent Datum	904 FSL & 1414 FWL		
Log Measured From	SEC 22 TWP 11S RGE 32W		
Drilling Measured From	GROUND LEVEL Elevation 3017'		Elevation K.B. 3024 D.F. 3022 G.L. 3017
Date	05/08/18		
Run Number	TWO		
Depth Driller	4662		
Depth Logger	4663		
Bottom Logged Interval	4661		
Top Log Interval	3700		
Casing Driller	8 5/8@ 220		
Casing Logger	220		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.3/52		
pH / Fluid Loss	7.6/10.5		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.2@72		
Rmt @ Meas. Temp	.90@72		
Rmc @ Meas. Temp	1.44@72		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.70@122		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	122F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	PAT DEENIHAN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS
OAKLEY WEST EXIT SOUTH TO 40,
3 MORE SOUTH, EAST INTO.




MAIN PASS

Database File: 2424ddn.db
Dataset Pathname: pass5.1
Presentation Format: _micro
Dataset Creation: Wed May 09 01:41:41 2018
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

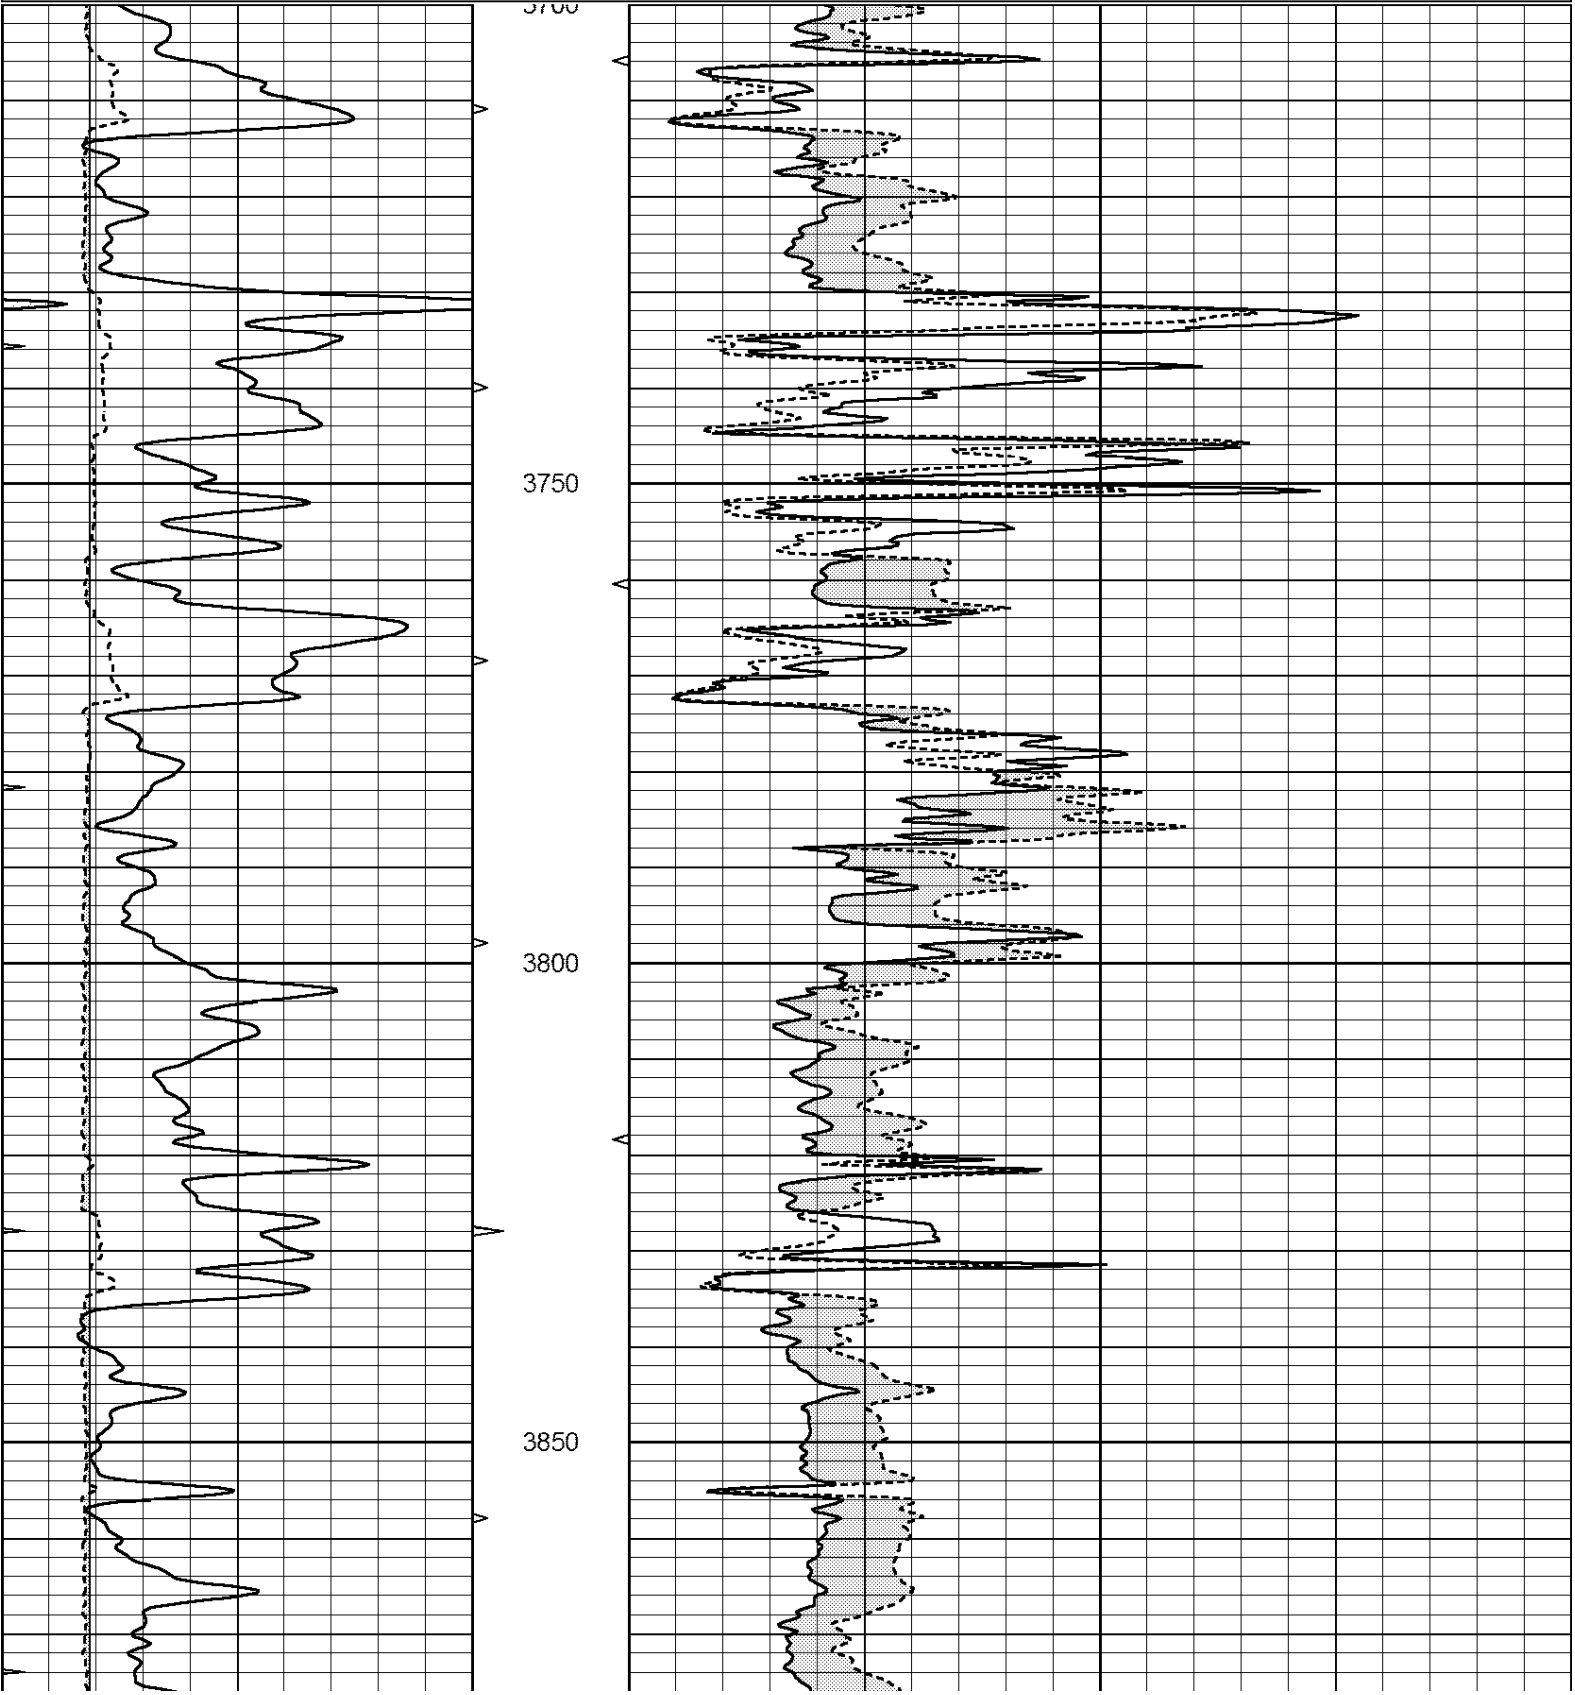

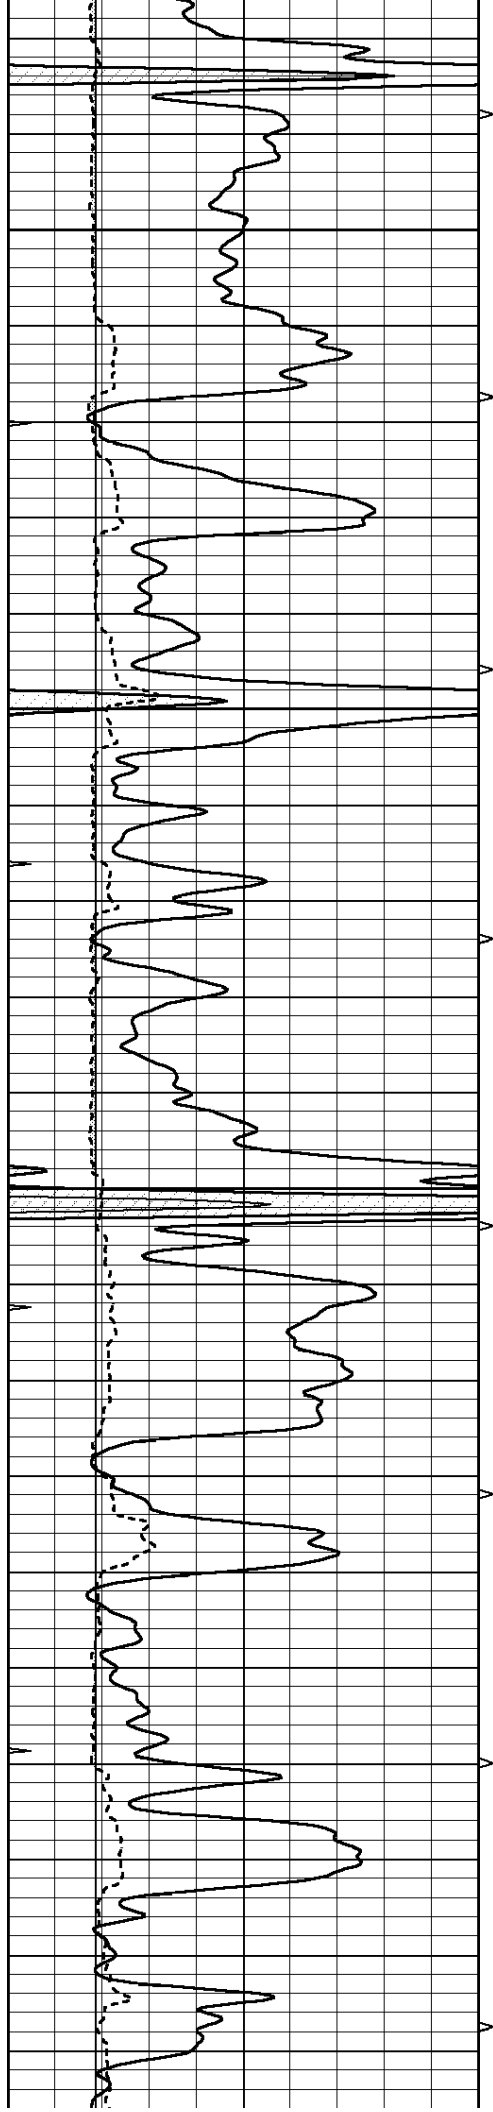



3900

3950

4000

4050

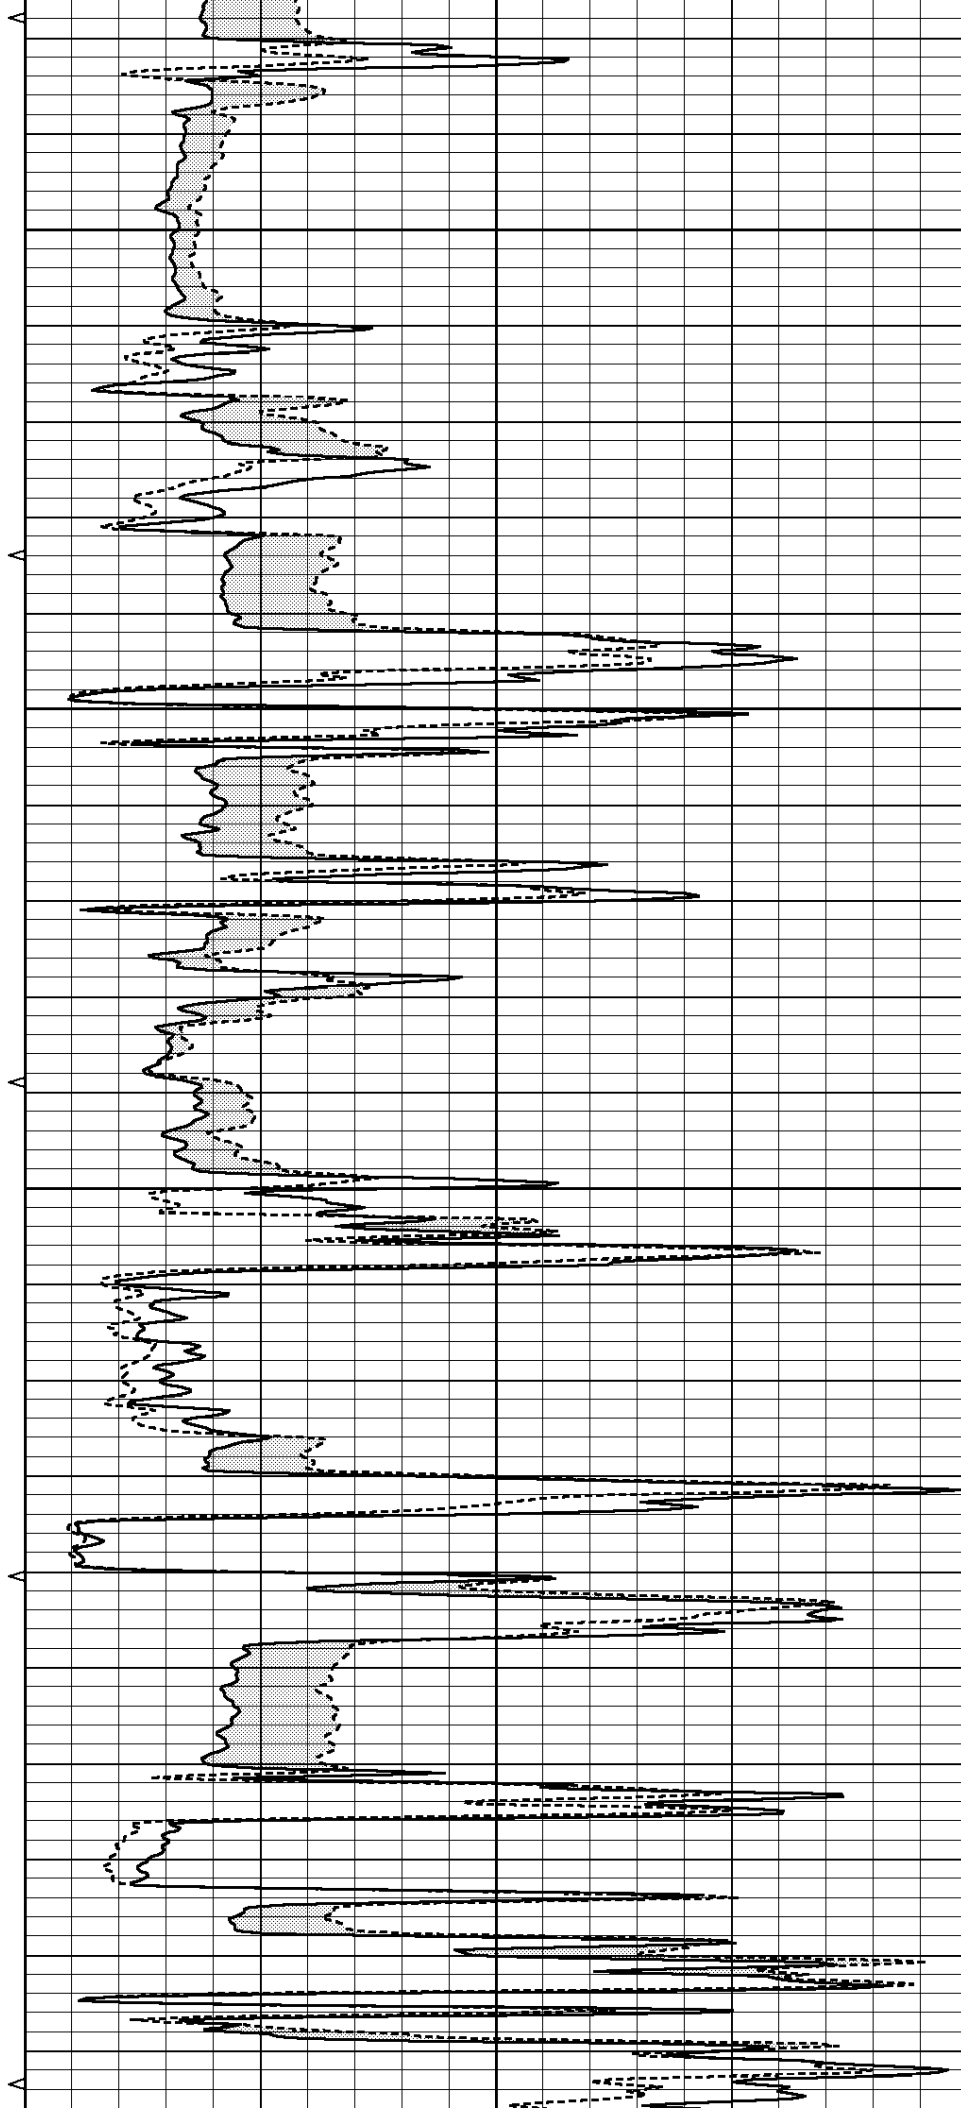

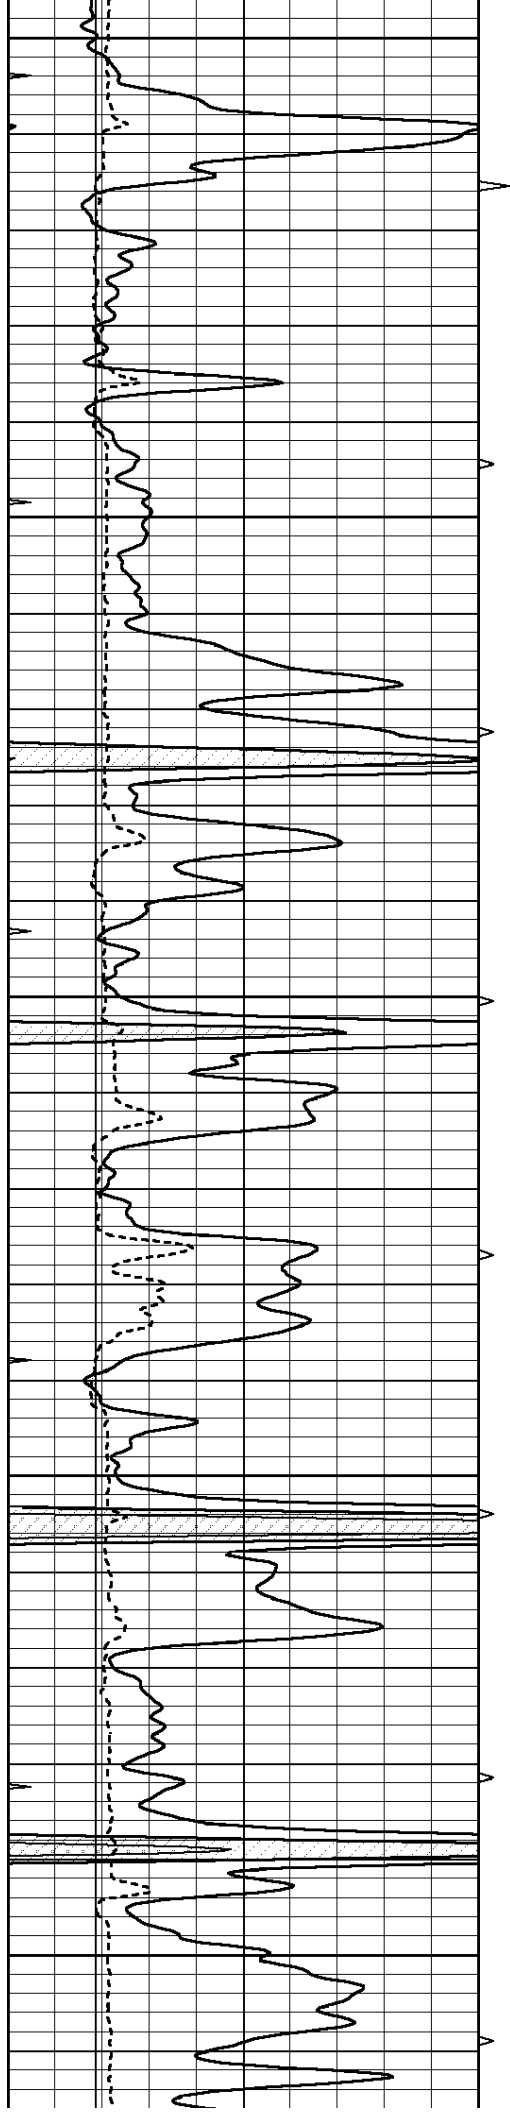


4100


4150

4200

4250

4300

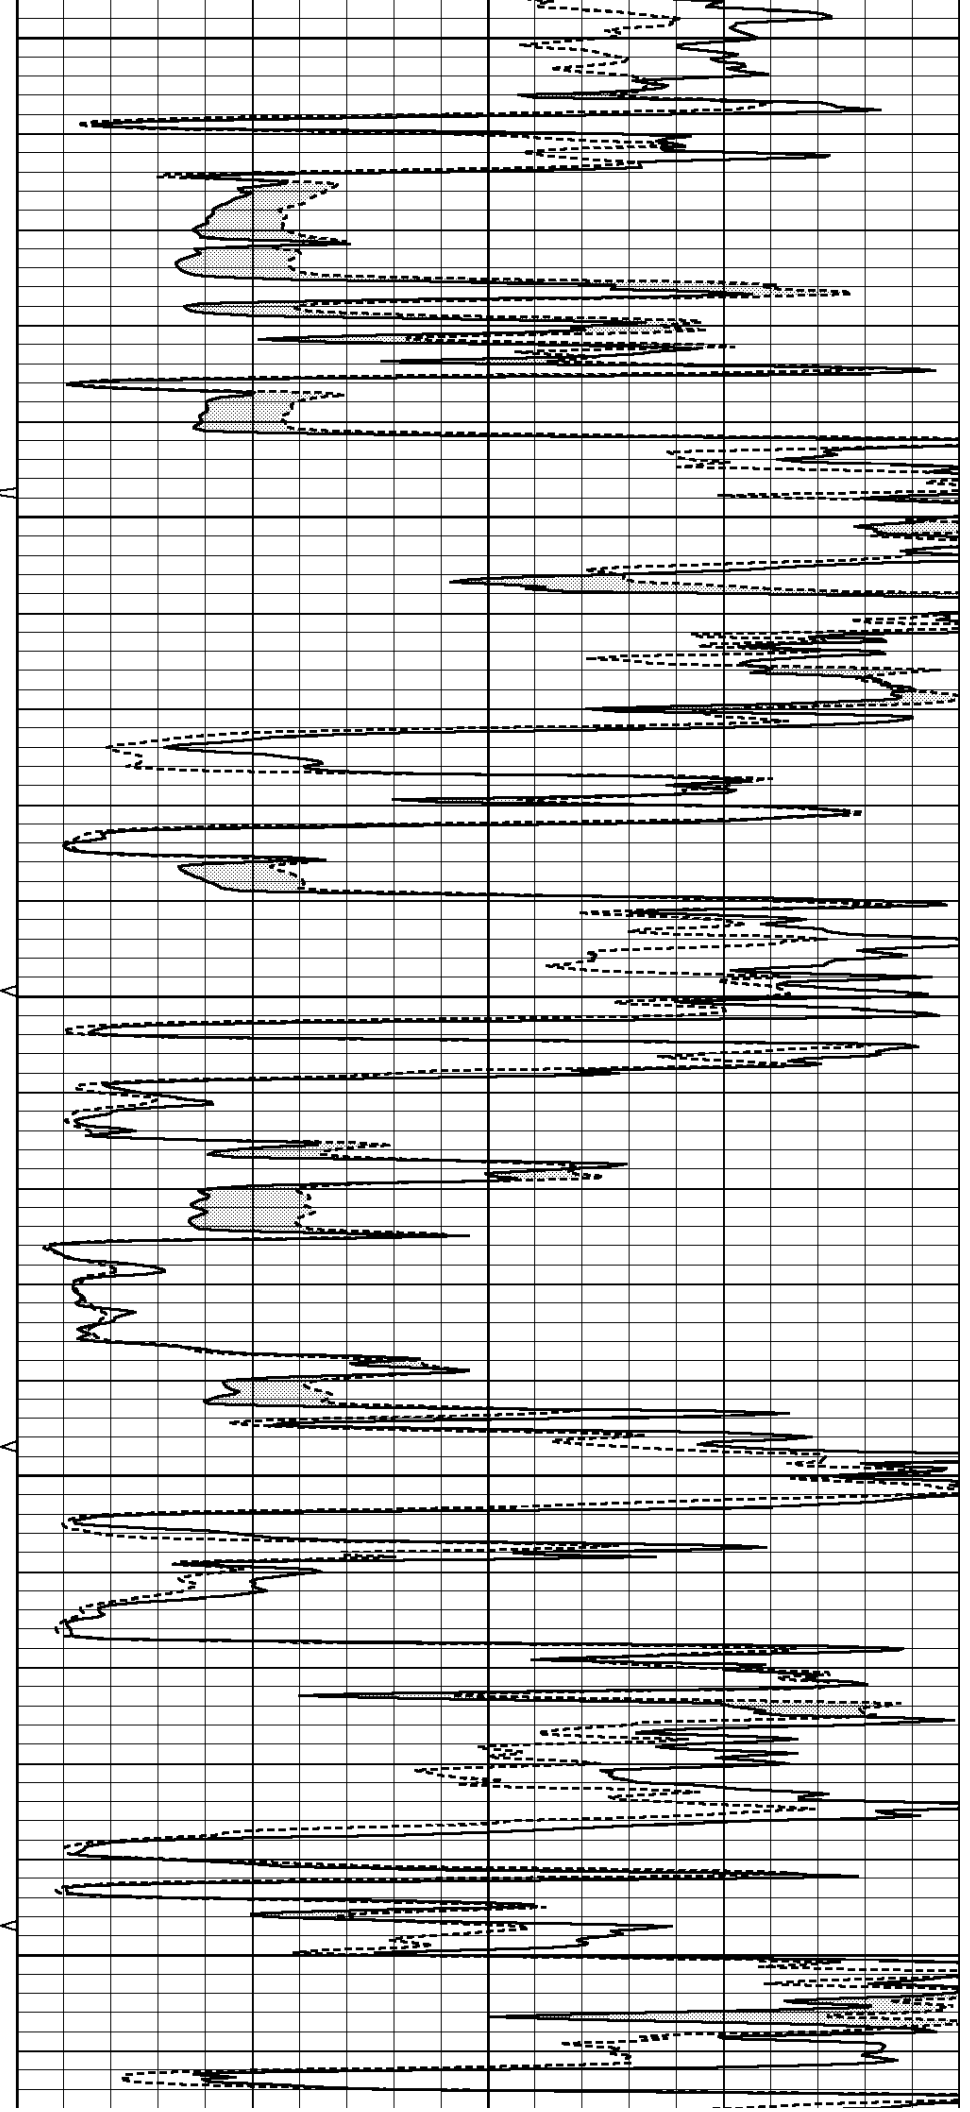

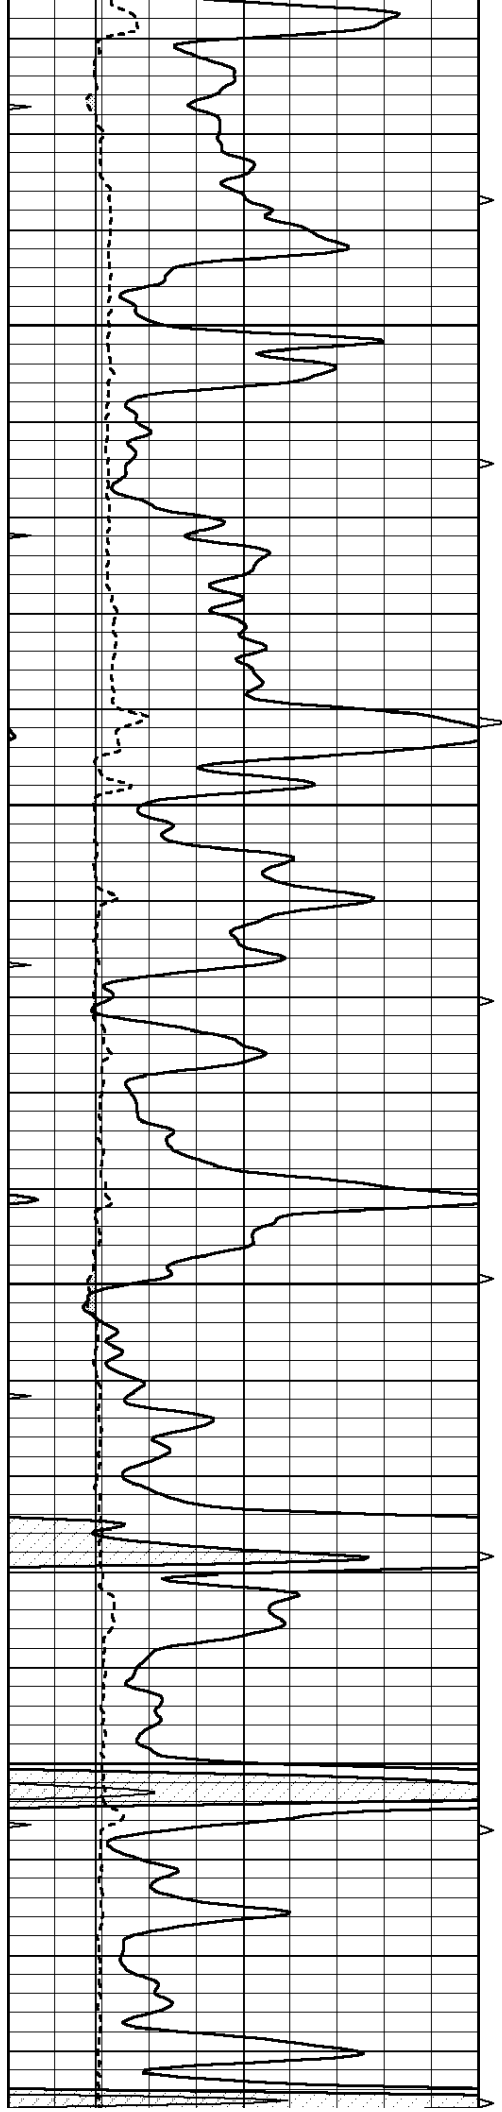




4350

4400

4450


4500

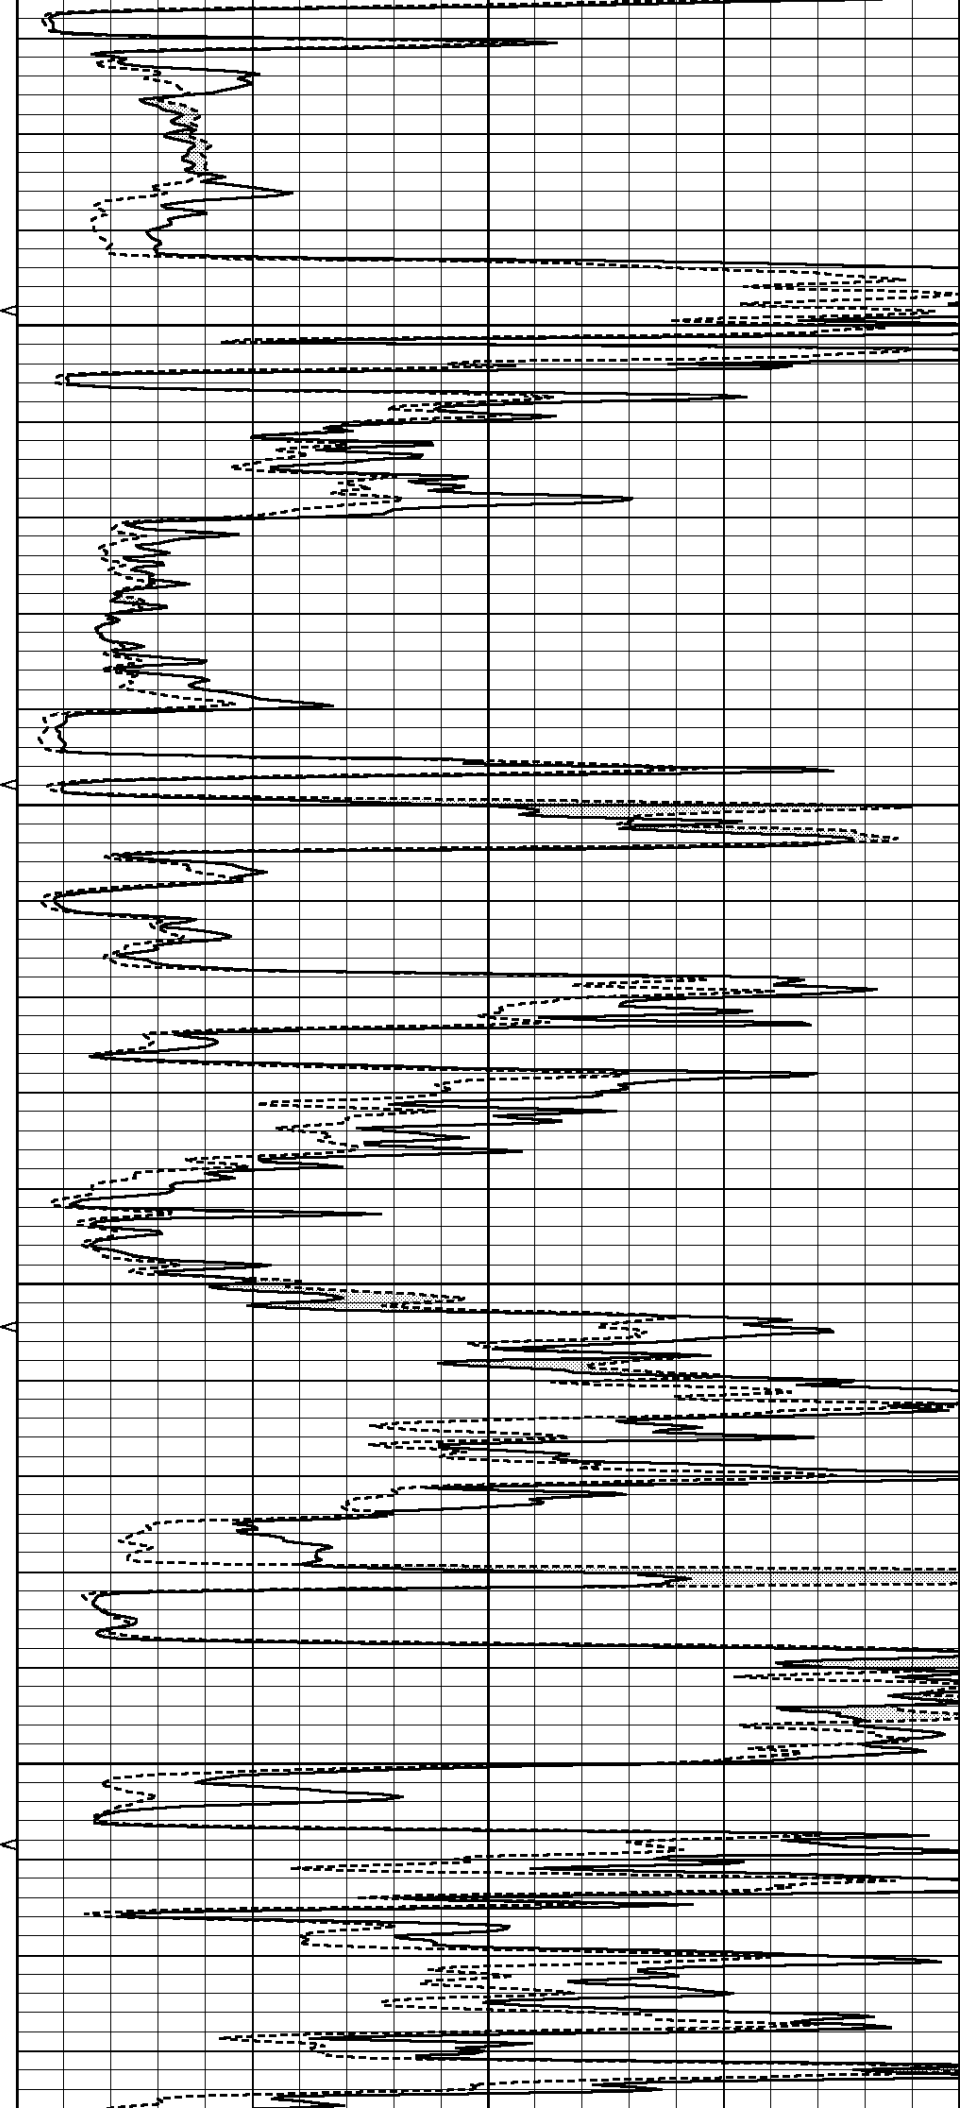


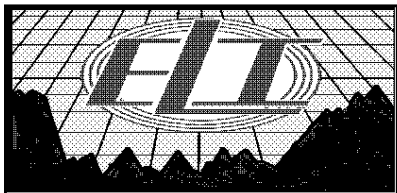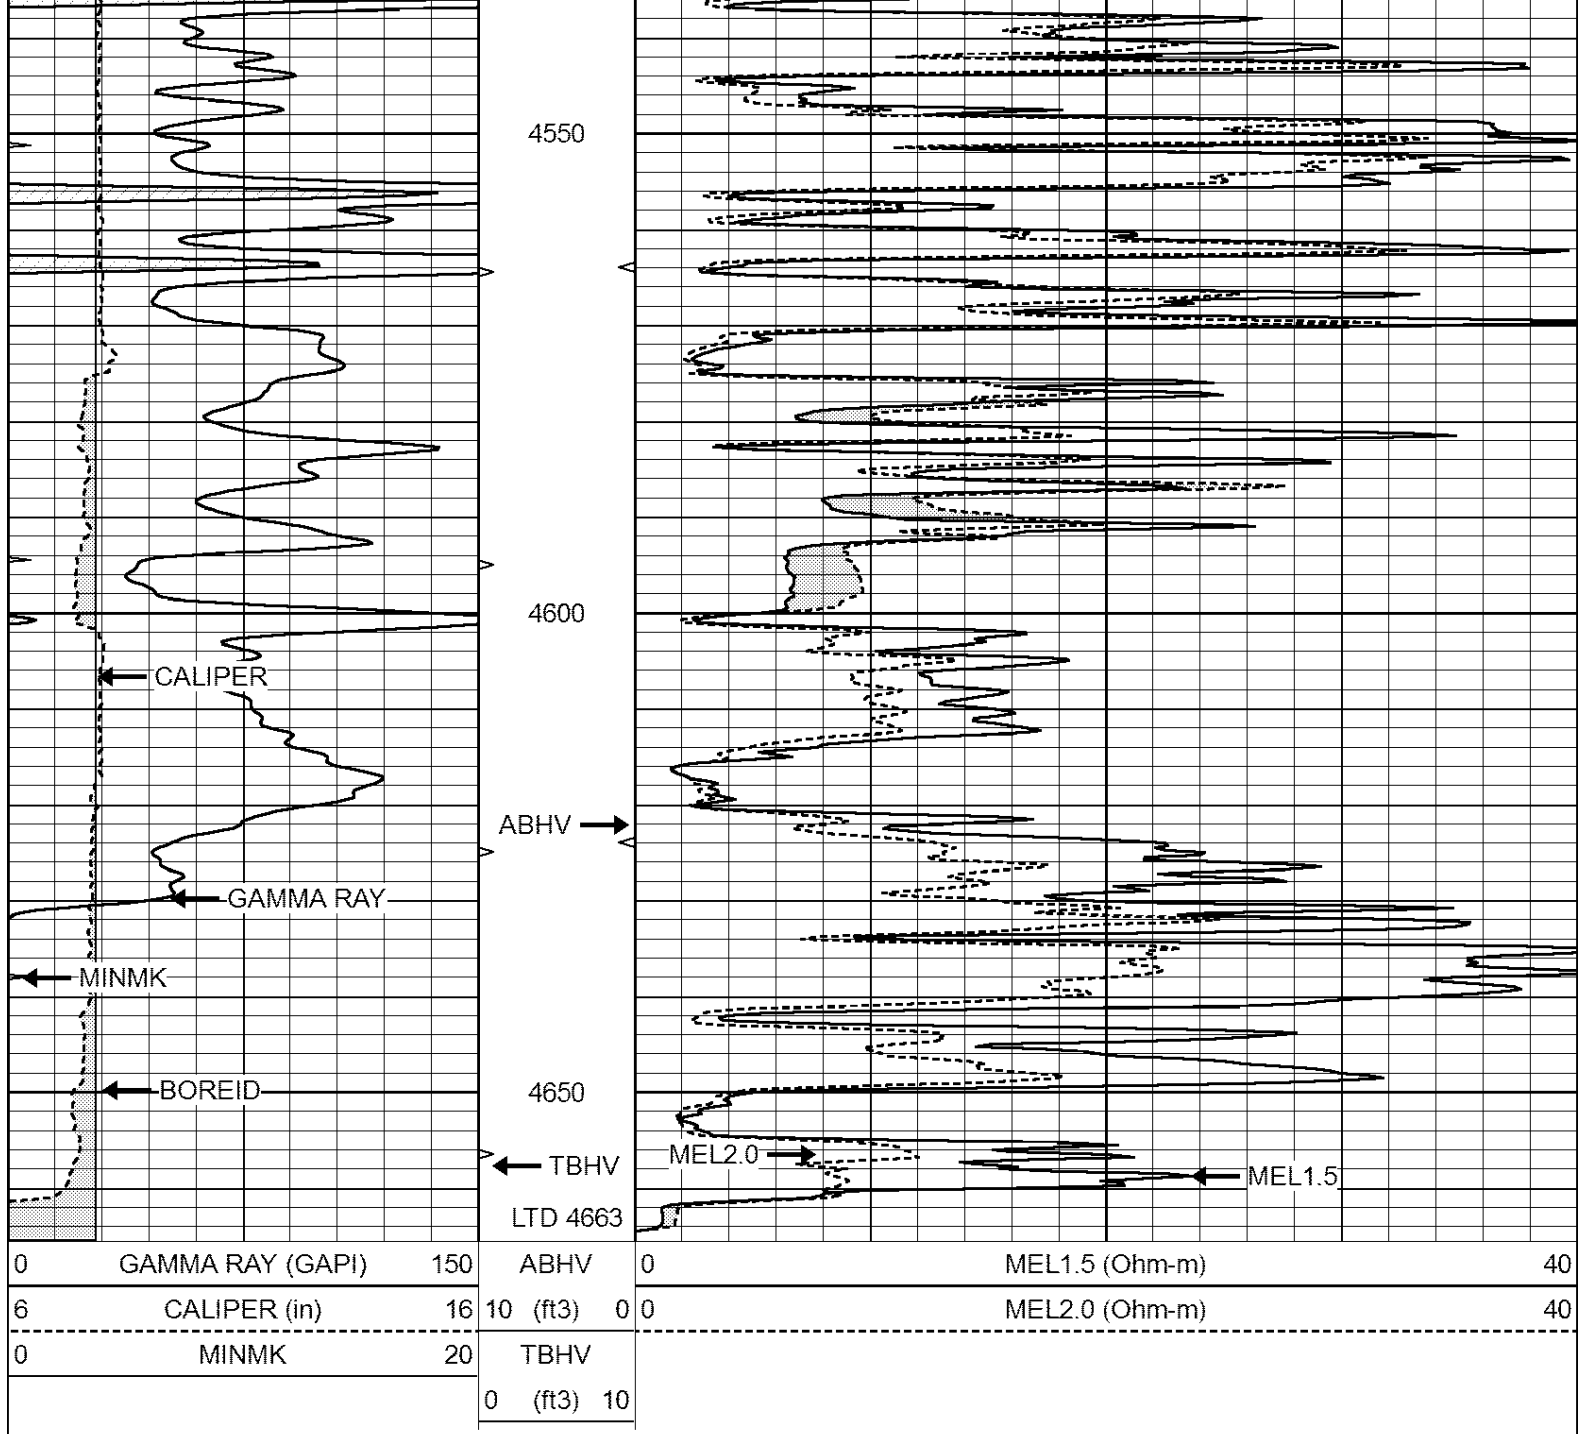

REPEAT SECTION

Database File: 2424ddn.db
 Dataset Pathname: pass4.1
 Presentation Format: _micro
 Dataset Creation: Wed May 09 01:46:56 2018 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

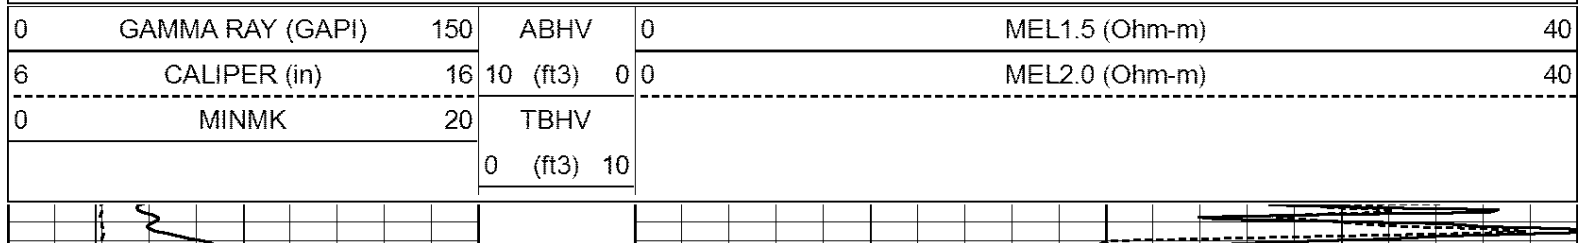

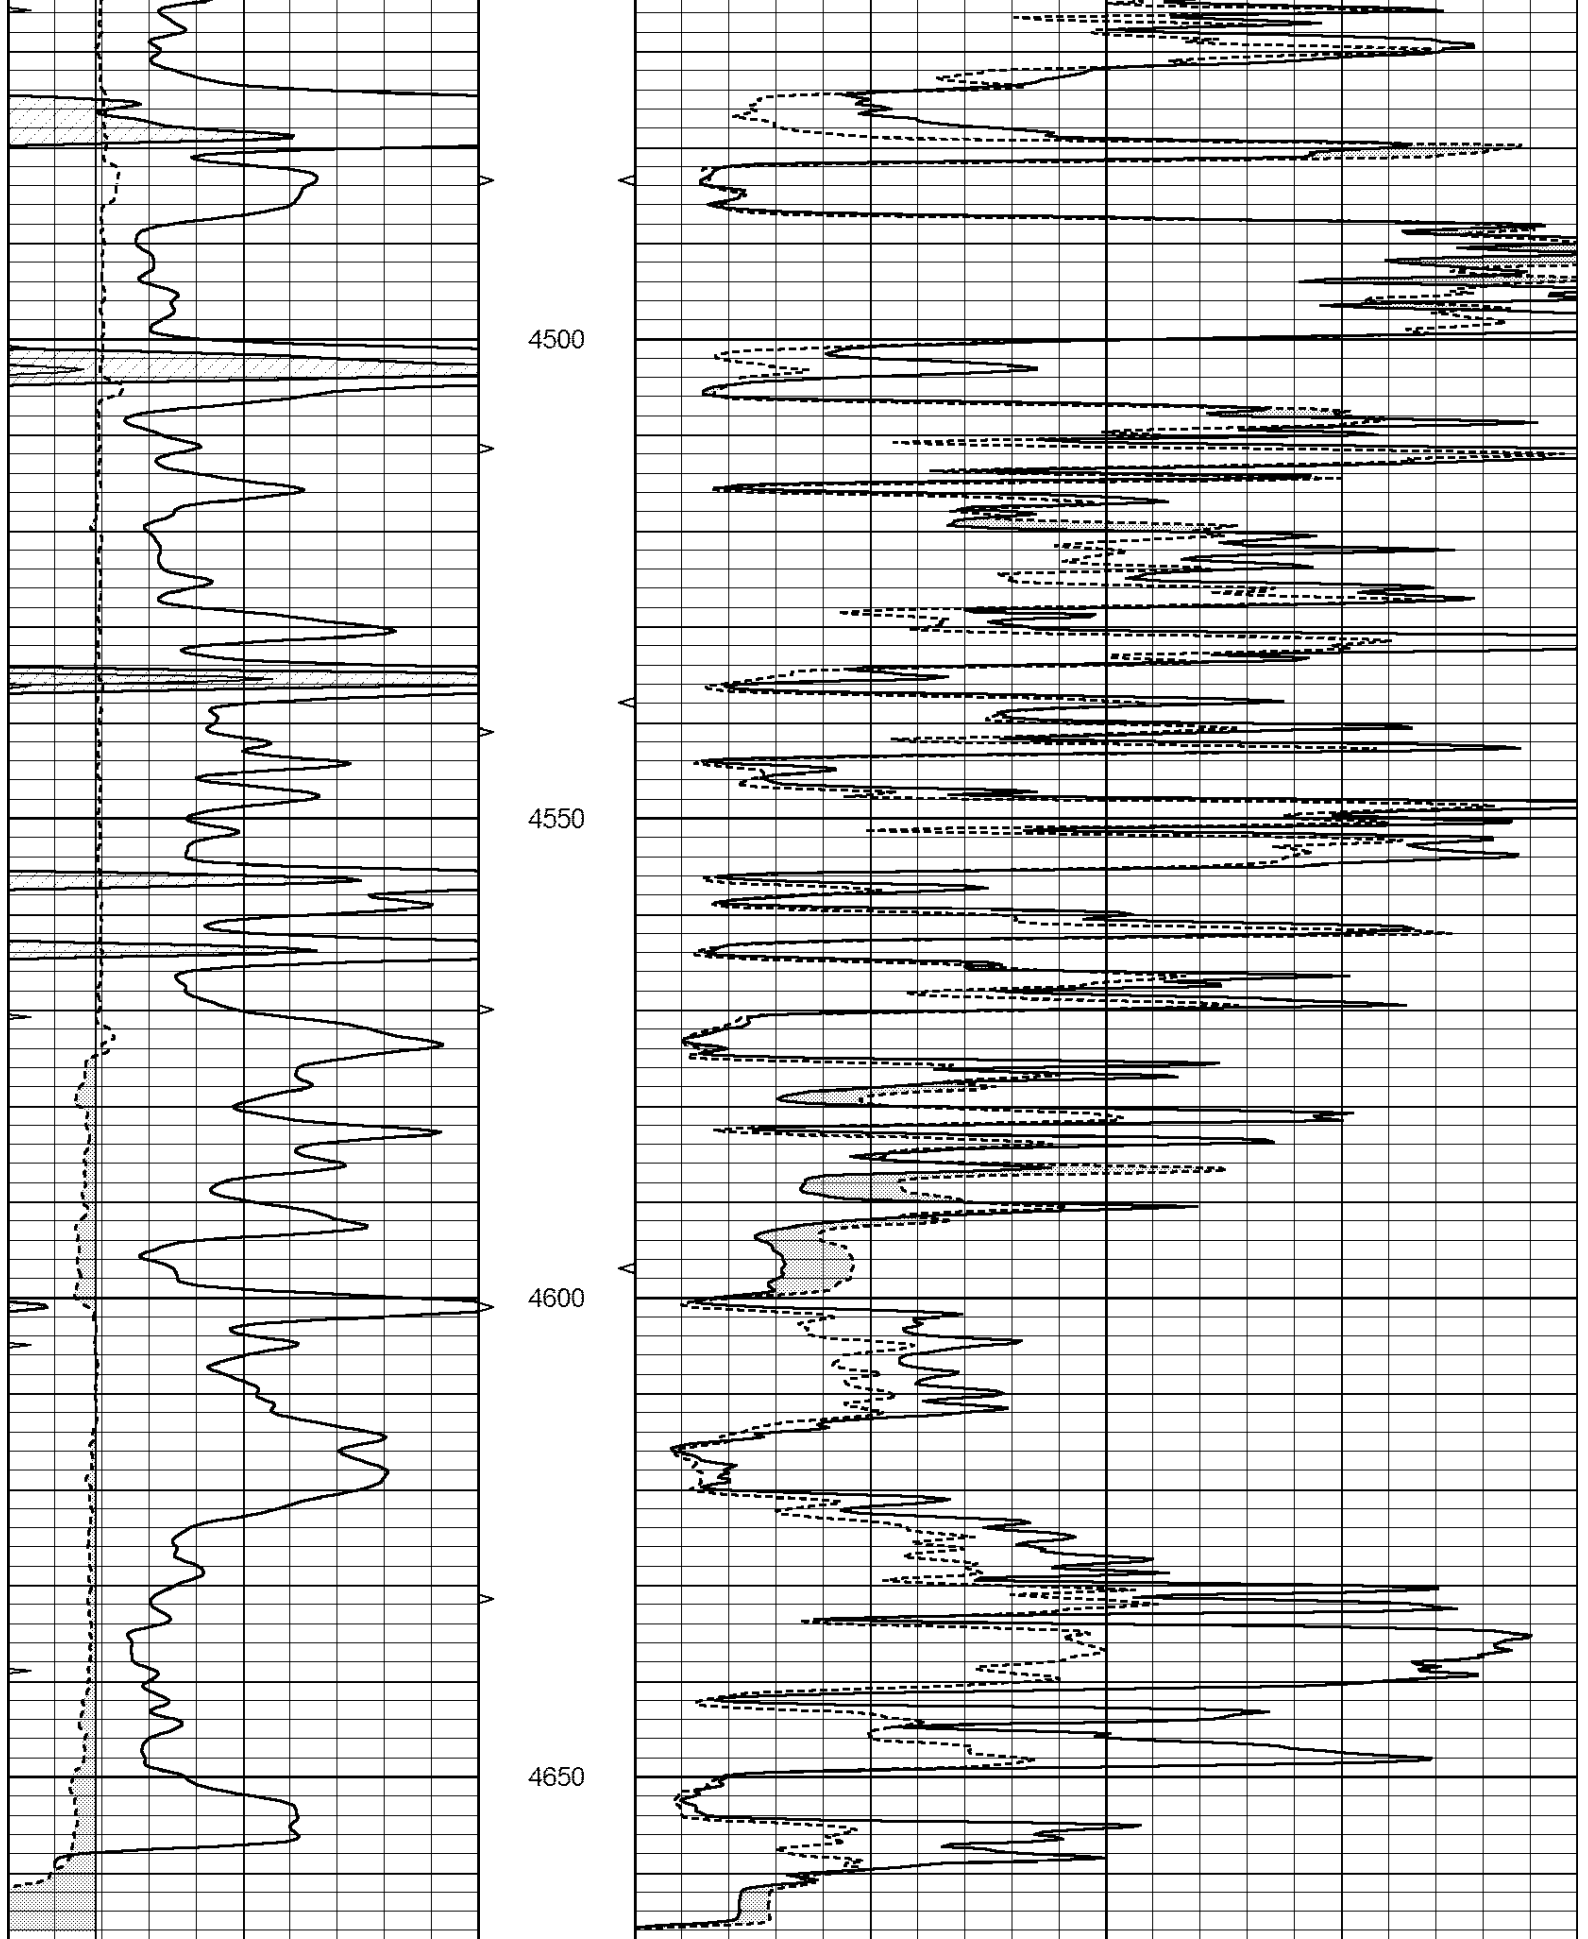

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

Calibration Report

Database File: 2424ddn.db
 Dataset Pathname: pass4.1
 Dataset Creation: Wed May 09 01:46:56 2018 by Calc Open-Cased 090629

MICRO Calibration Report

Serial Number: MICRO6
 Tool Model: PROBE
 Performed: Wed May 09 00:54:36 2018

Caliper Calibration: Gain=26.621 Offset=0.453
 References Low Cal High Cal
 7.000 14.000
 Readings 0.217 0.478

1.5" Calibration: Gain=32.075 Offset=-0.400
 References Low Cal High Cal
 0.000 20.000
 Readings 0.004 1.196

2" Calibration: Gain=45.000 Offset=-1.000
 References Low Cal High Cal
 0.000 20.000
 Readings 0.006 0.913

Gamma Ray Calibration Report

Serial Number: GR2
 Tool Model: OPEN
 Performed: Wed Mar 14 06:10:12 2018

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
 Calibrator Reading: 1.0 cps

Sensitivity: 0.9500 GAPI/cps