



DUAL INDUCTION LOG

Company	MULL DRILLING CO., INC.		
Well	JOHNSON FARMS #1-18		
Field	SPIVEY-GRABS-BASIL		
County	KINGMAN		
State	KANSAS		
Location:	AP1 # : 15-095-22323-00-00 1650' FNL & 990' FEL		
Permanent Datum	GROUND LEVEL	Elevation	1471
Log Measured From	KELLY BUSHING 7' A.G.L.		
Drilling Measured From	KELLY BUSHING		
SEC 18	TWP 30S	RGE 7W	
Other Services	CDL/CNL/MEL	SONIC	
Elevation			
KB. 1478			
D.F. 1476			
G.L. 1471			
Date	06/26/18		
Run Number	ONE		
Depth Driller	4300		
Depth Logger	4302		
Bottom Logged Interval	4300		
Top Log Interval	00		
Casing Driller	8 5/8" @ 215		
Casing Logger	215		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.6/55		
pH / Fluid Loss	9.5/10.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.80@74		
Rmt @ Meas. Temp	.60@74		
Rmc @ Meas. Temp	.96@74		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.49@119		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	119F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	LOGAN WALKER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

DIRECTIONS
SPIVEY KS SOUTH TO 150 TH EAST 2 1/4 MILES,
NORTH INTO.




MAIN PASS


Database File: 2687pe.db
Dataset Pathname: pass3MAIN
Presentation Format: _dil2
Dataset Creation: Tue Jun 26 14:13:31 2018
Charted by: Depth in Feet scaled 1:600


0	Gamma Ray (GAPI)	150
-100	SP (mV)	100

0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50
1000	CILD (mmho/m)	0
50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

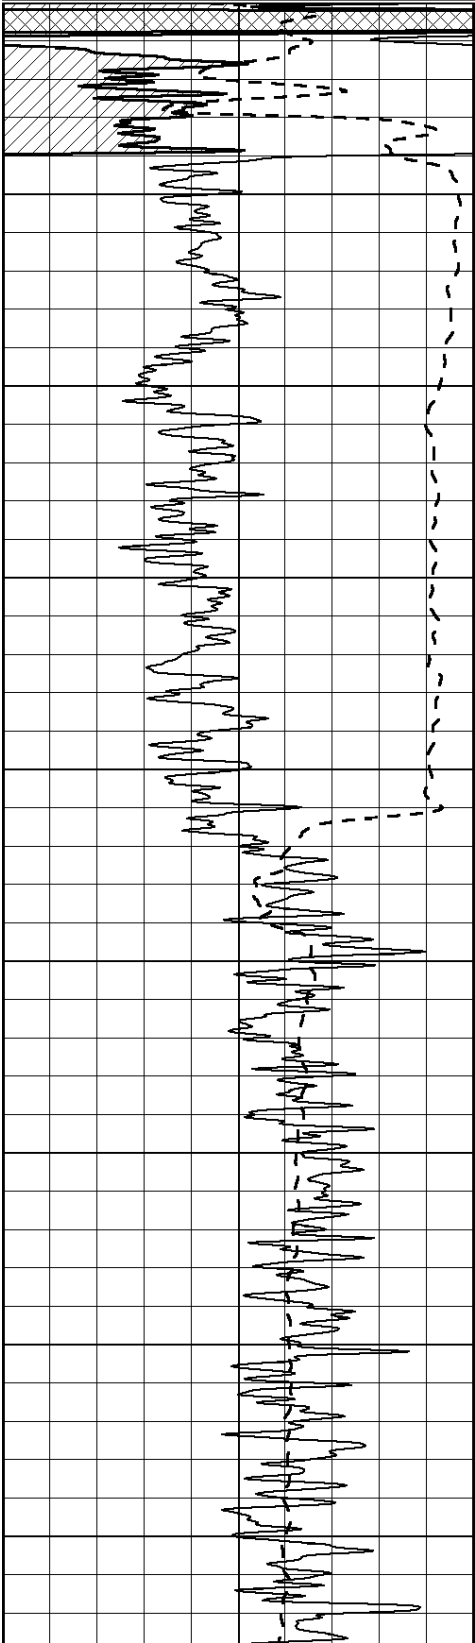




0
50
100
150
200
250
300
350
400


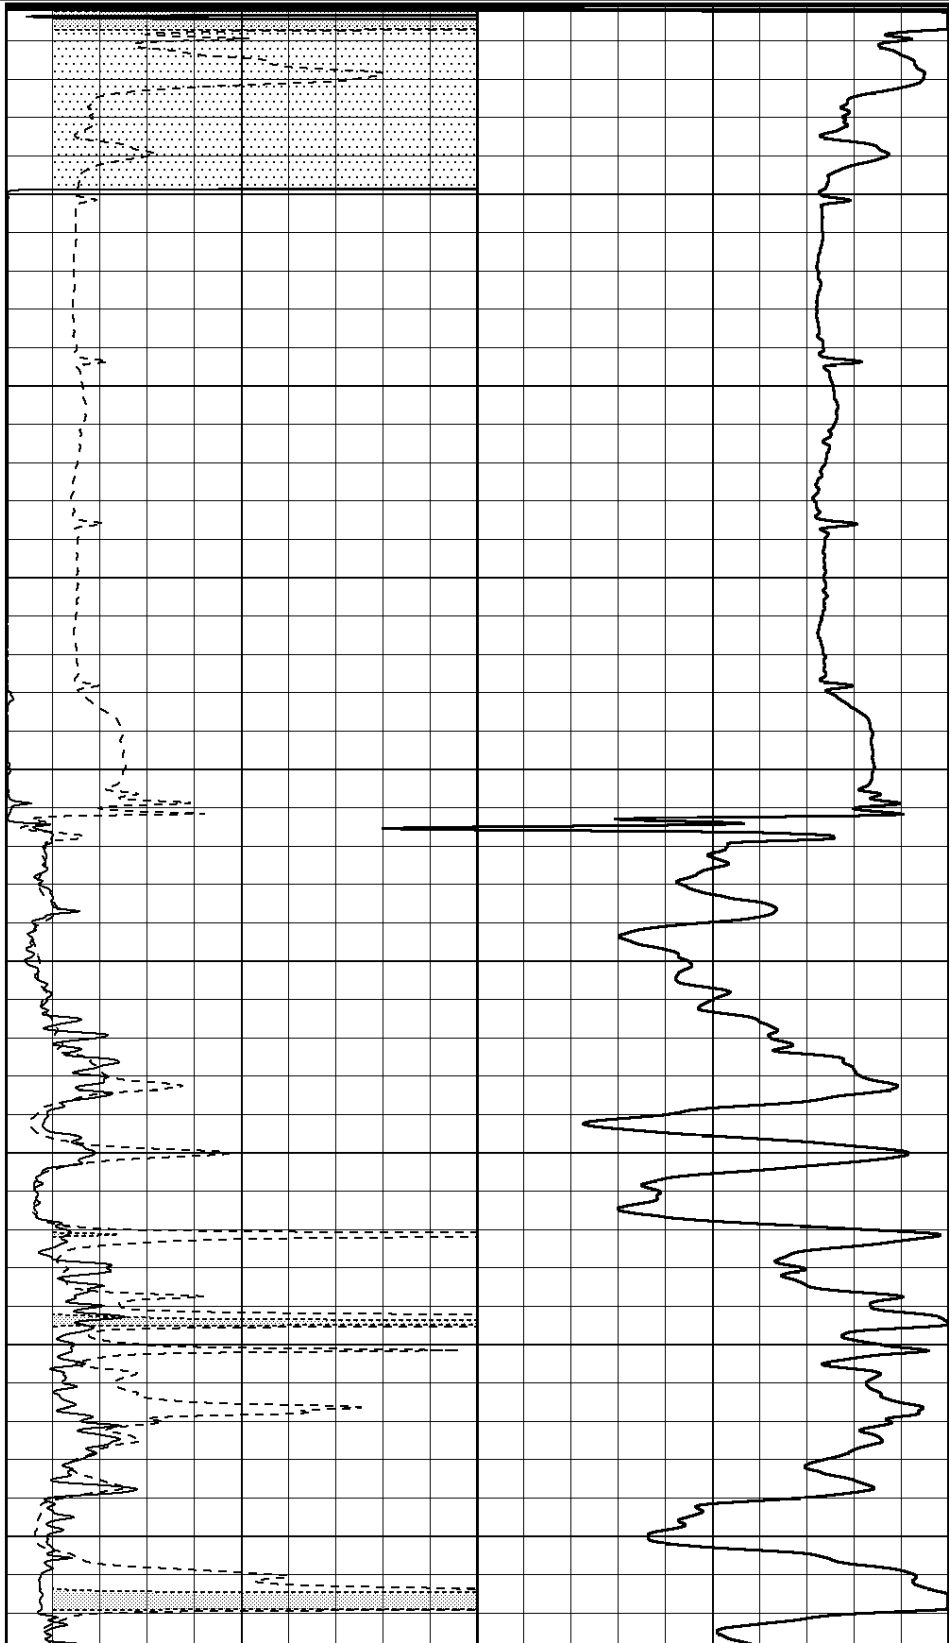


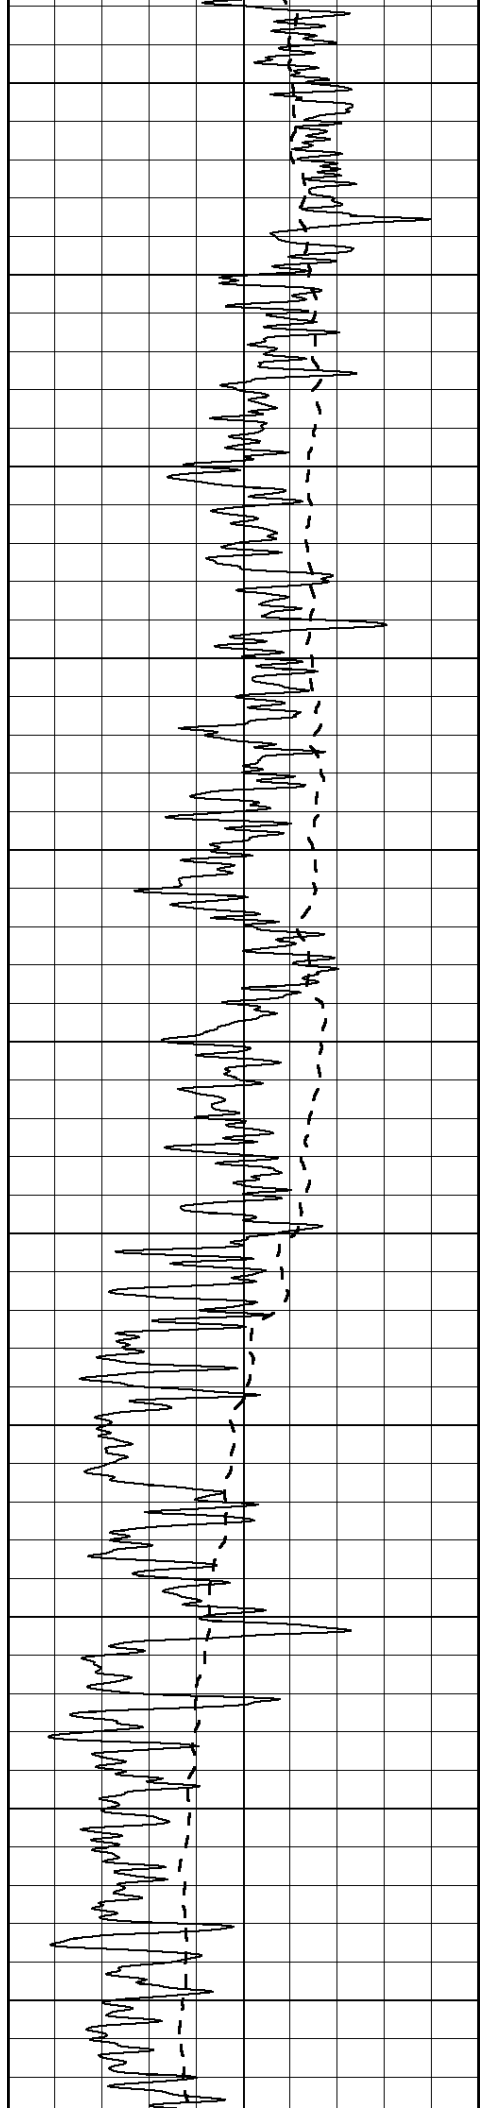

450
500
550
600
650
700
750
800
850
900
950

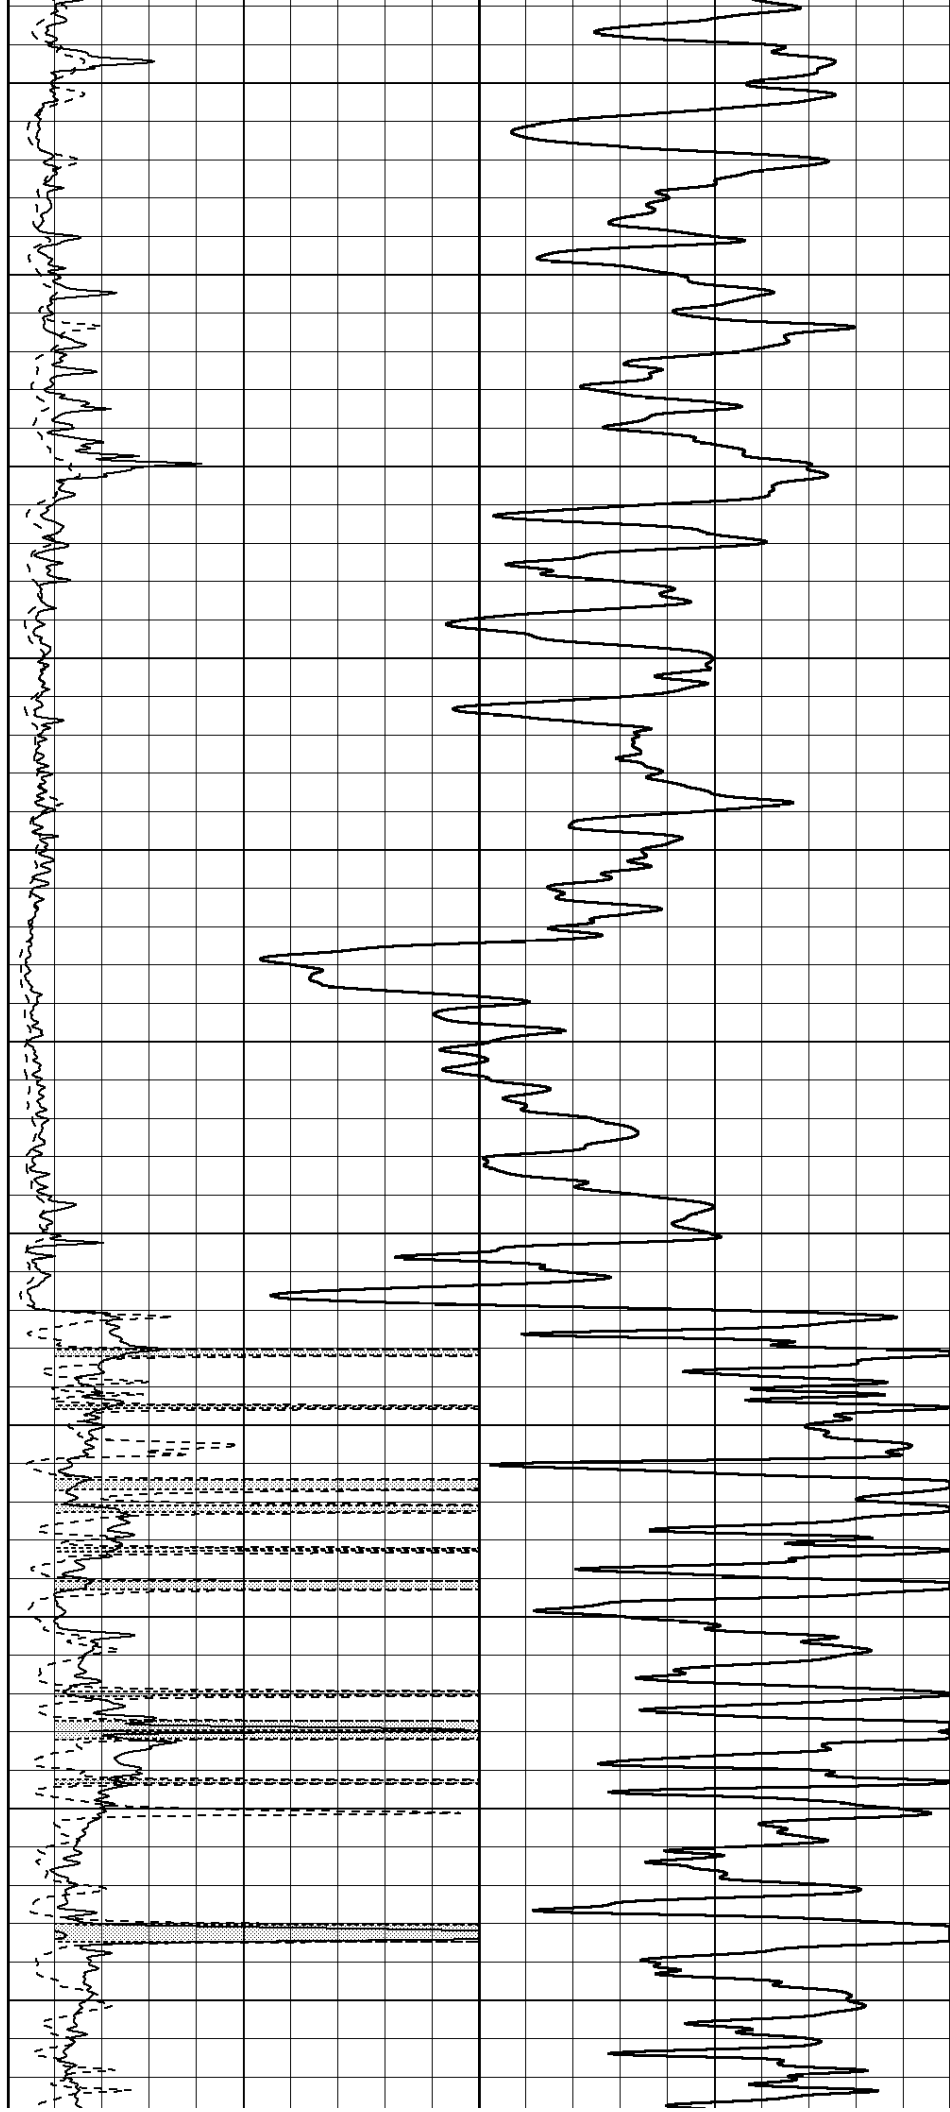

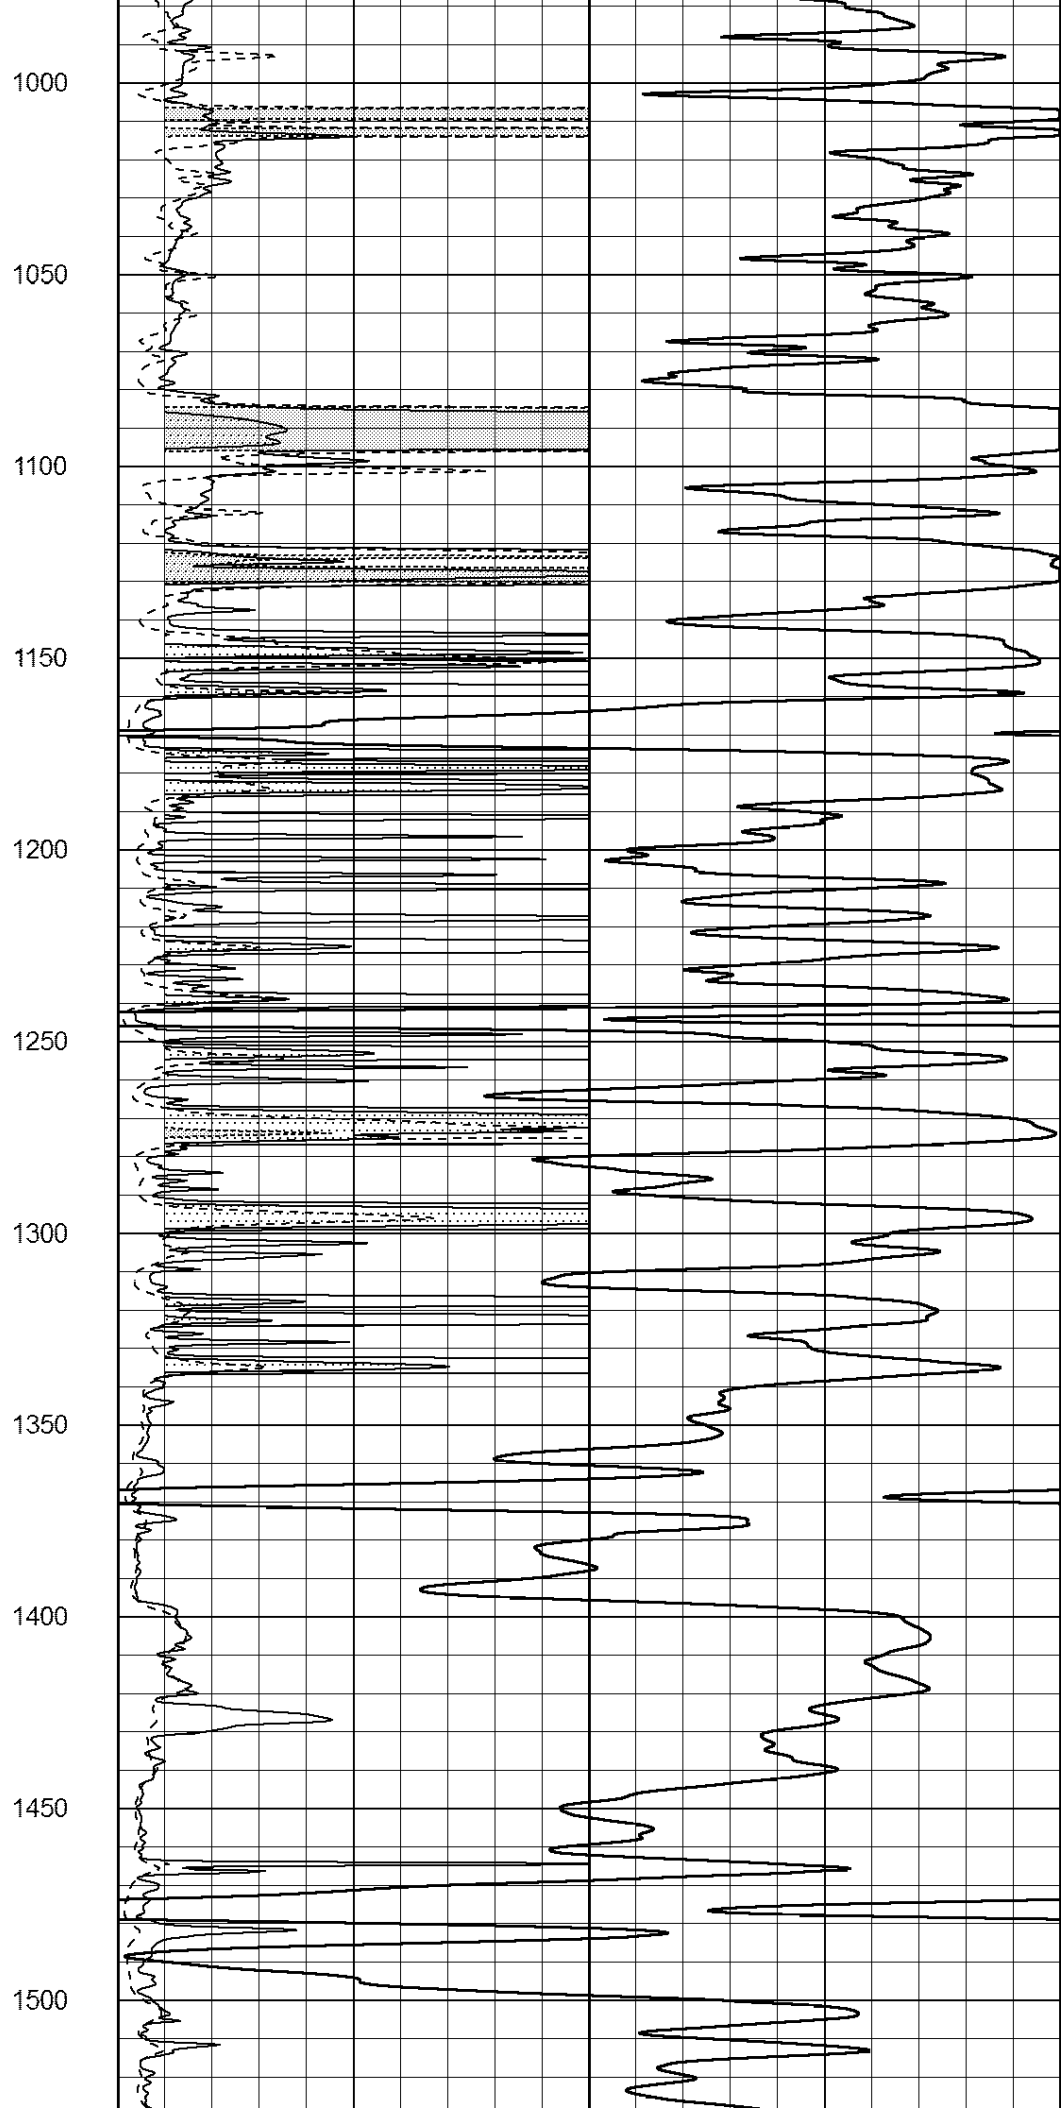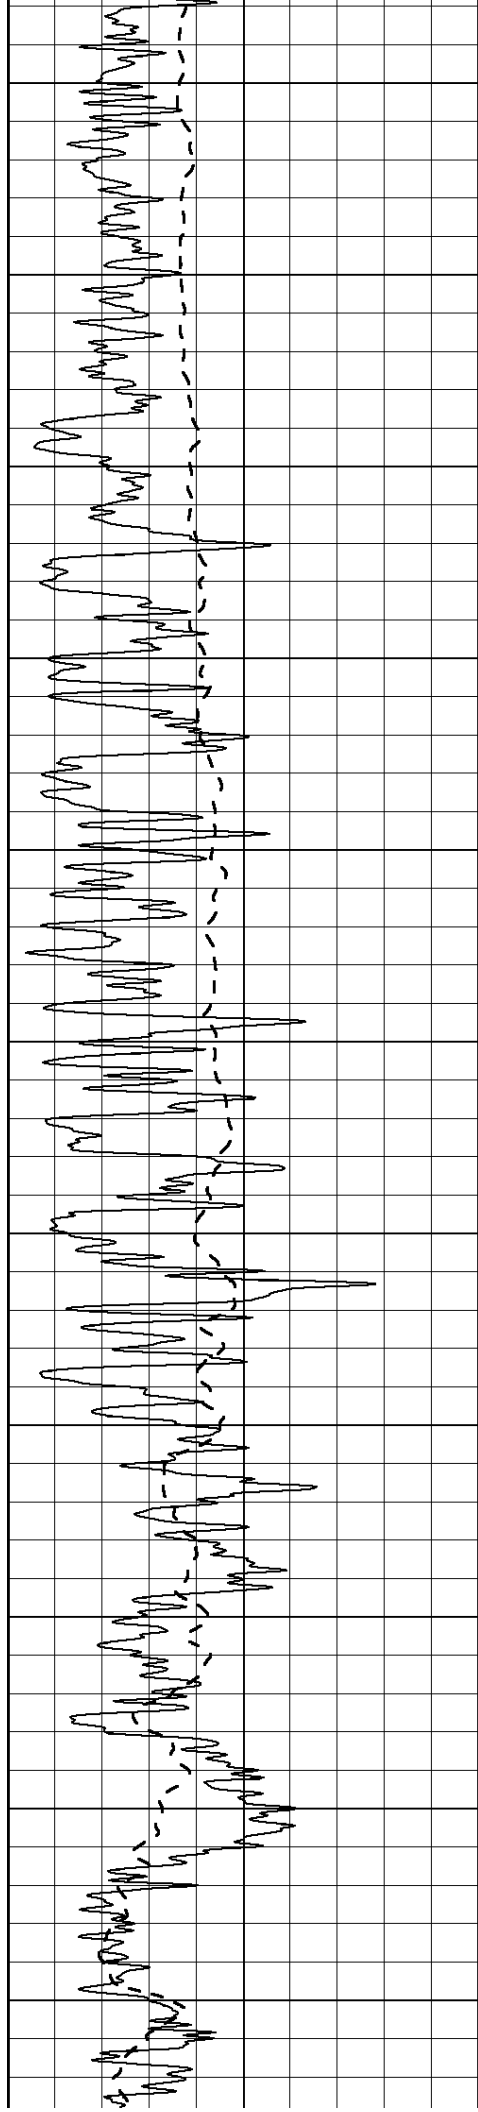

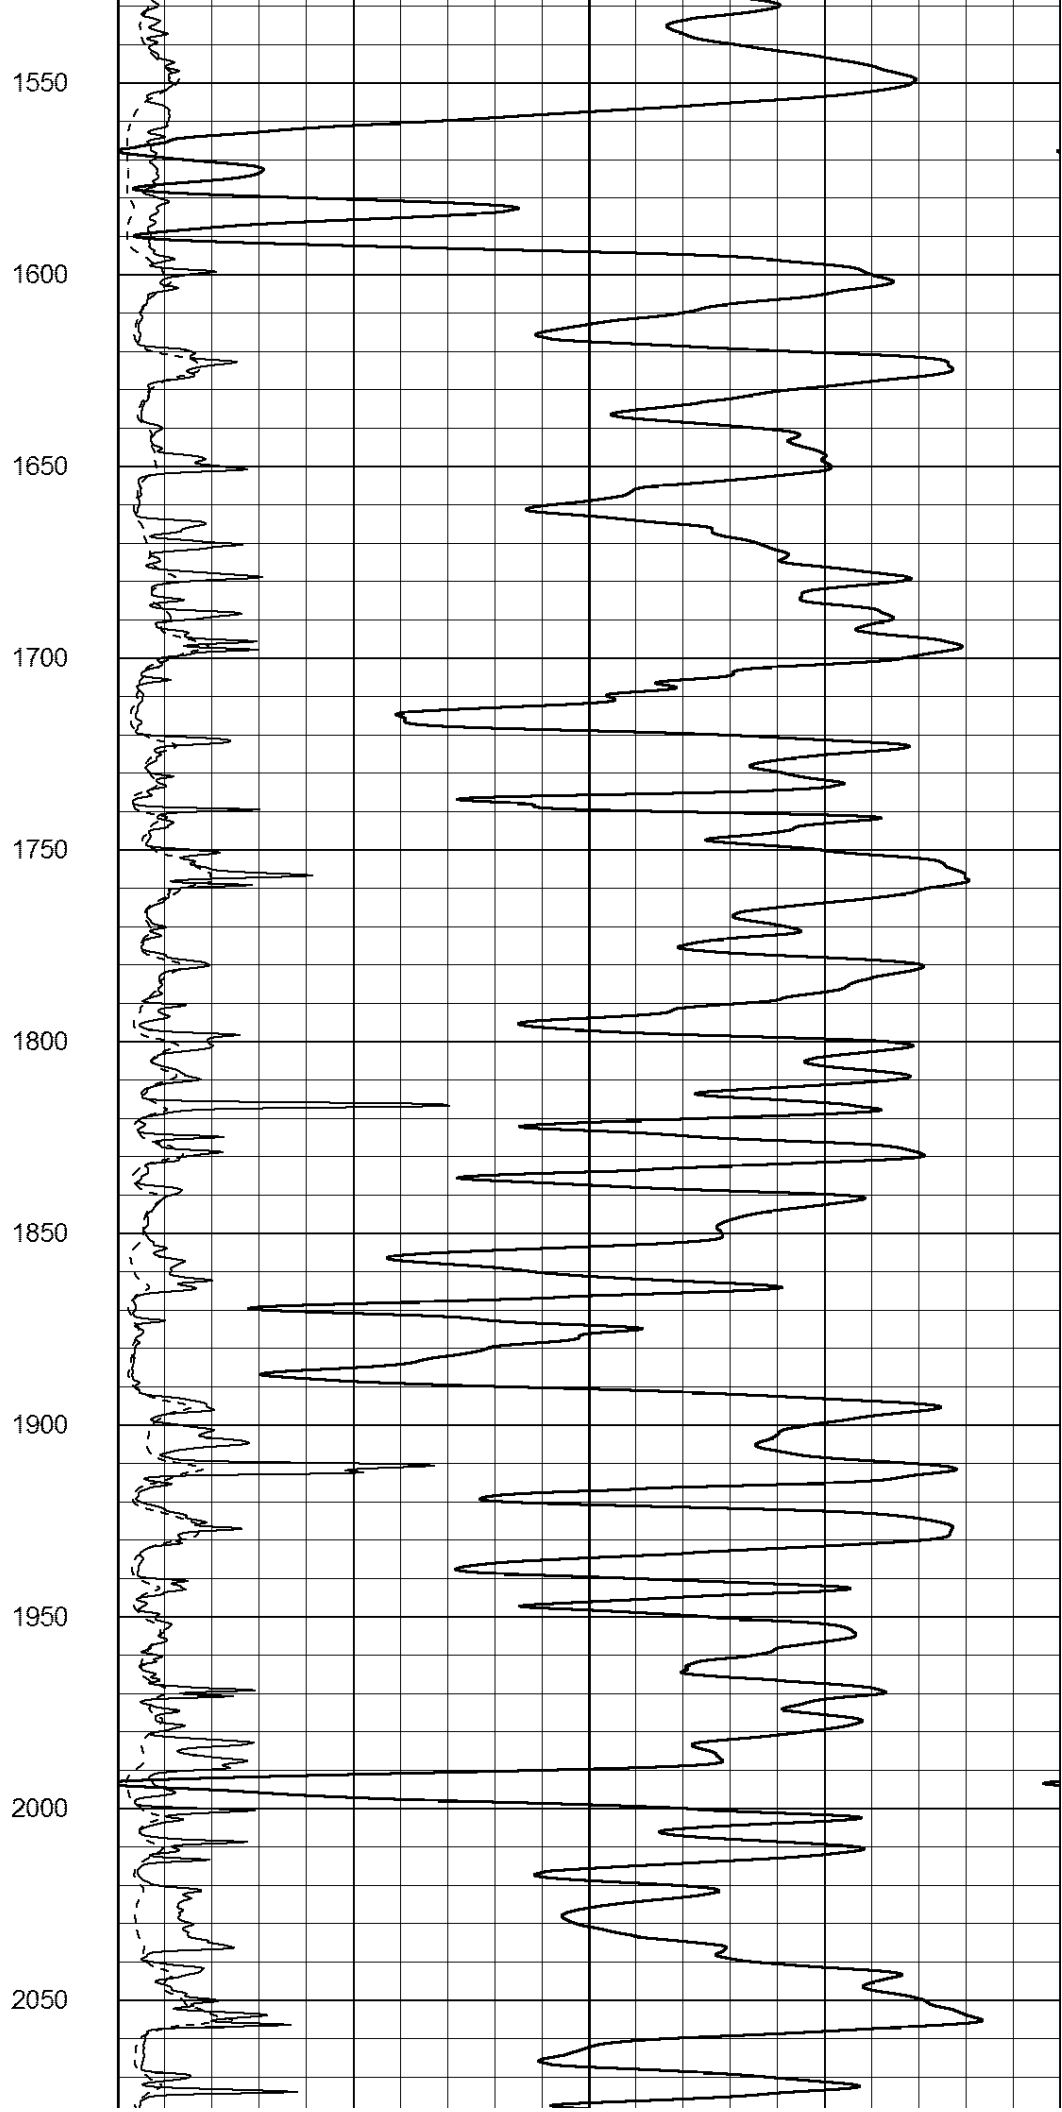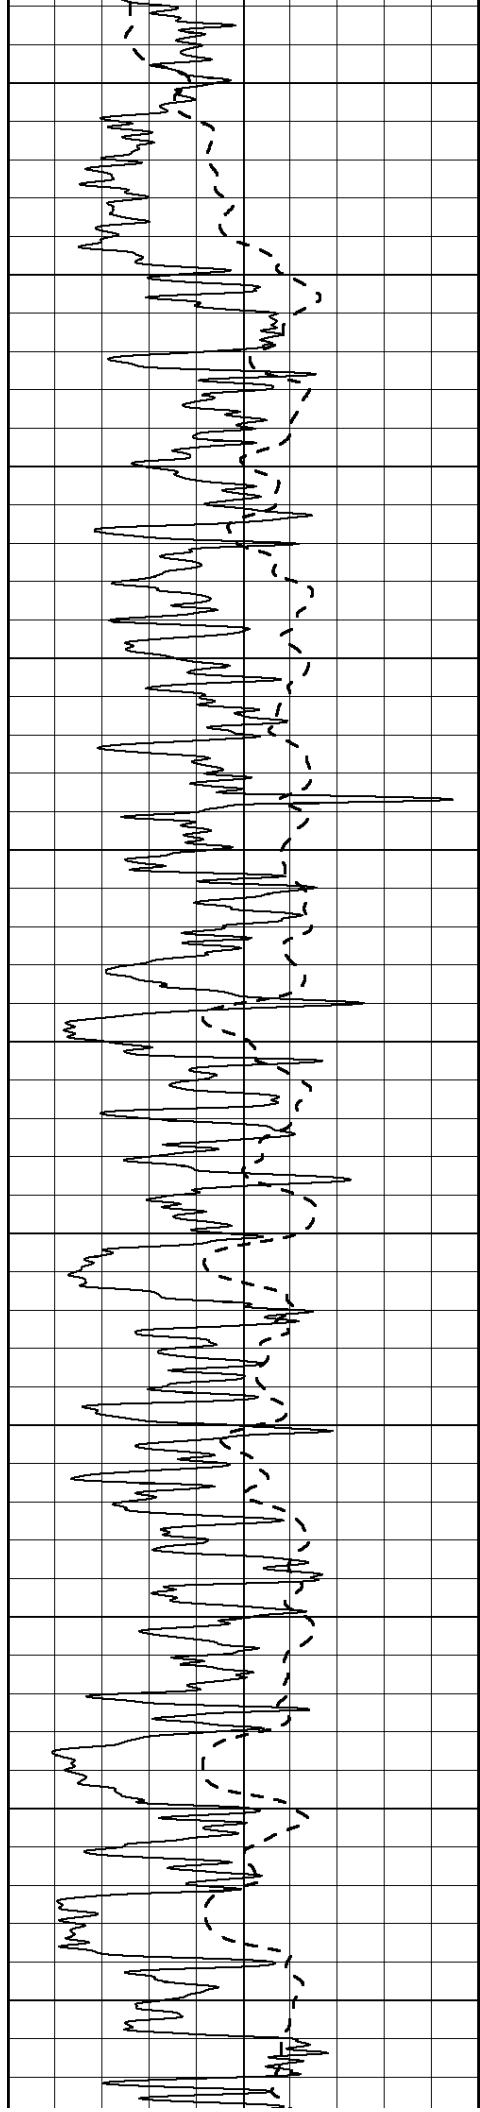

2100

2150

2200

2250

2300

2350



2400



2450


2500

2550

2600

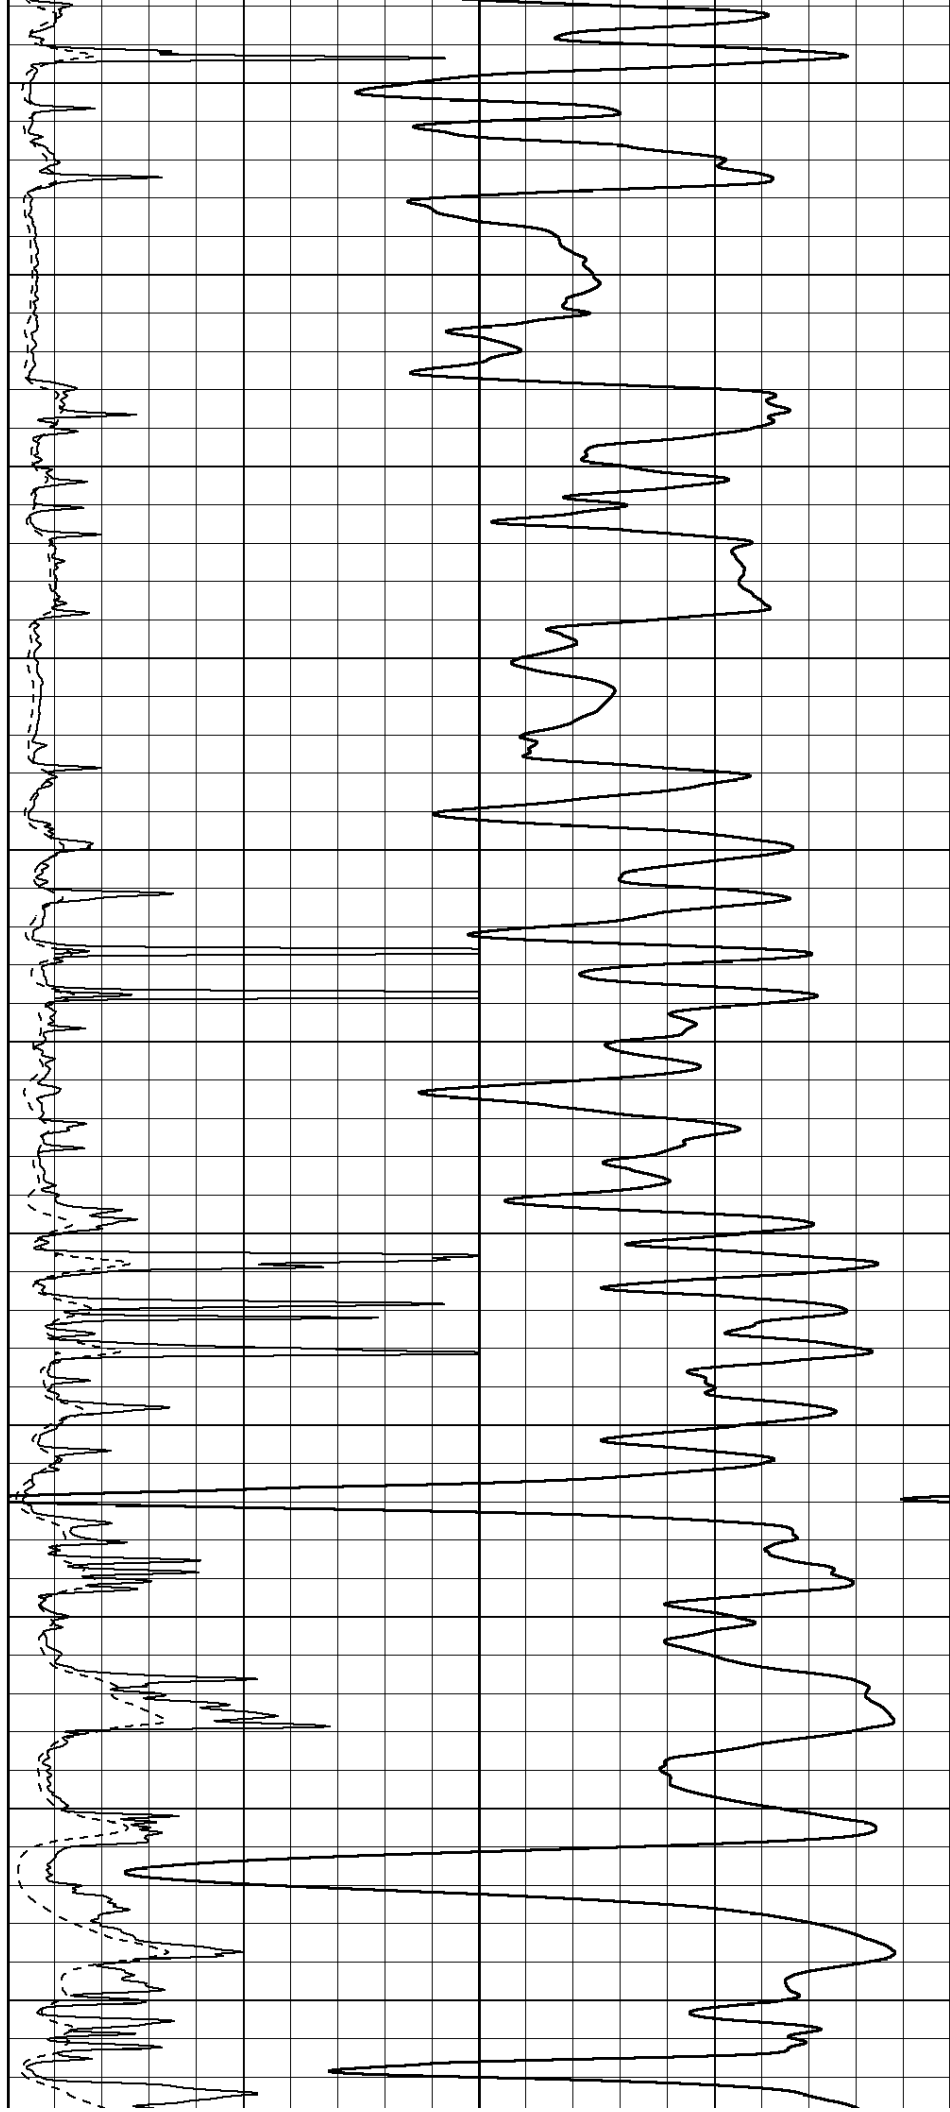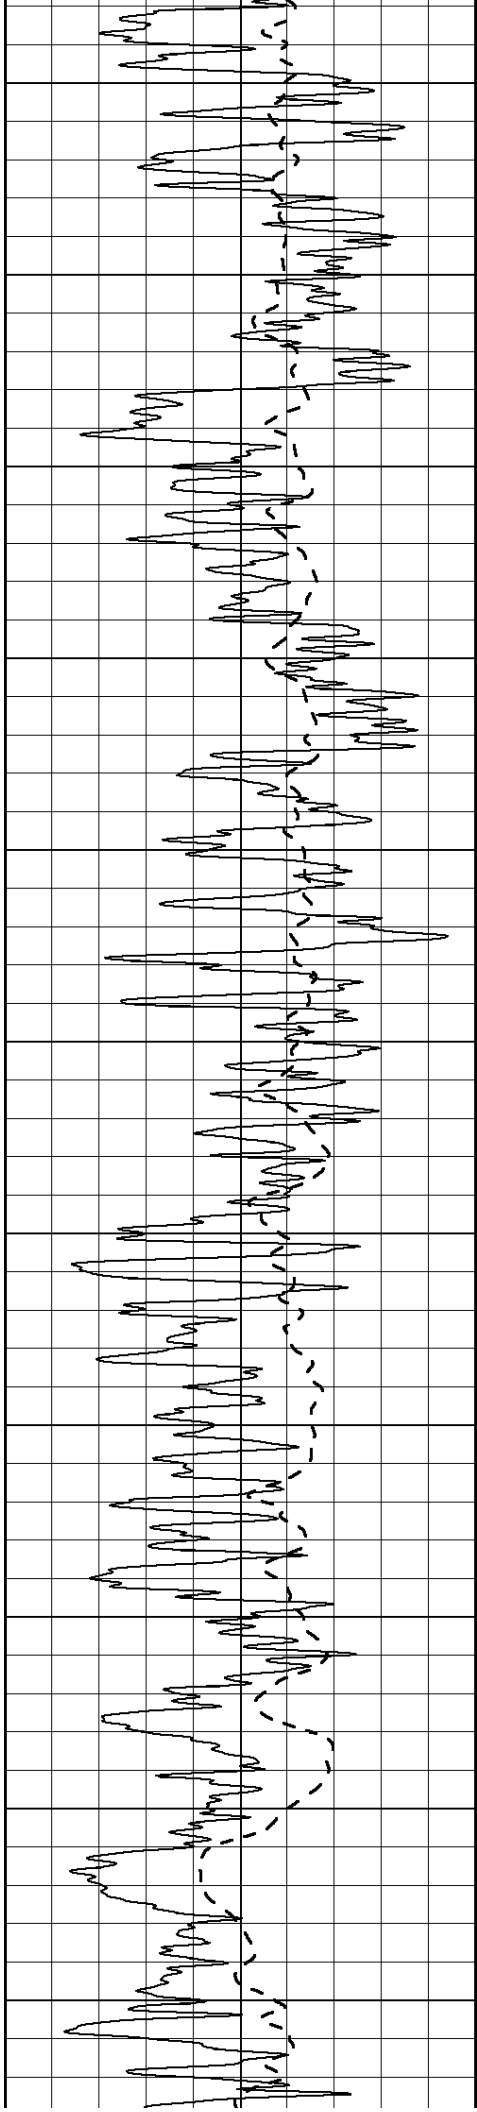

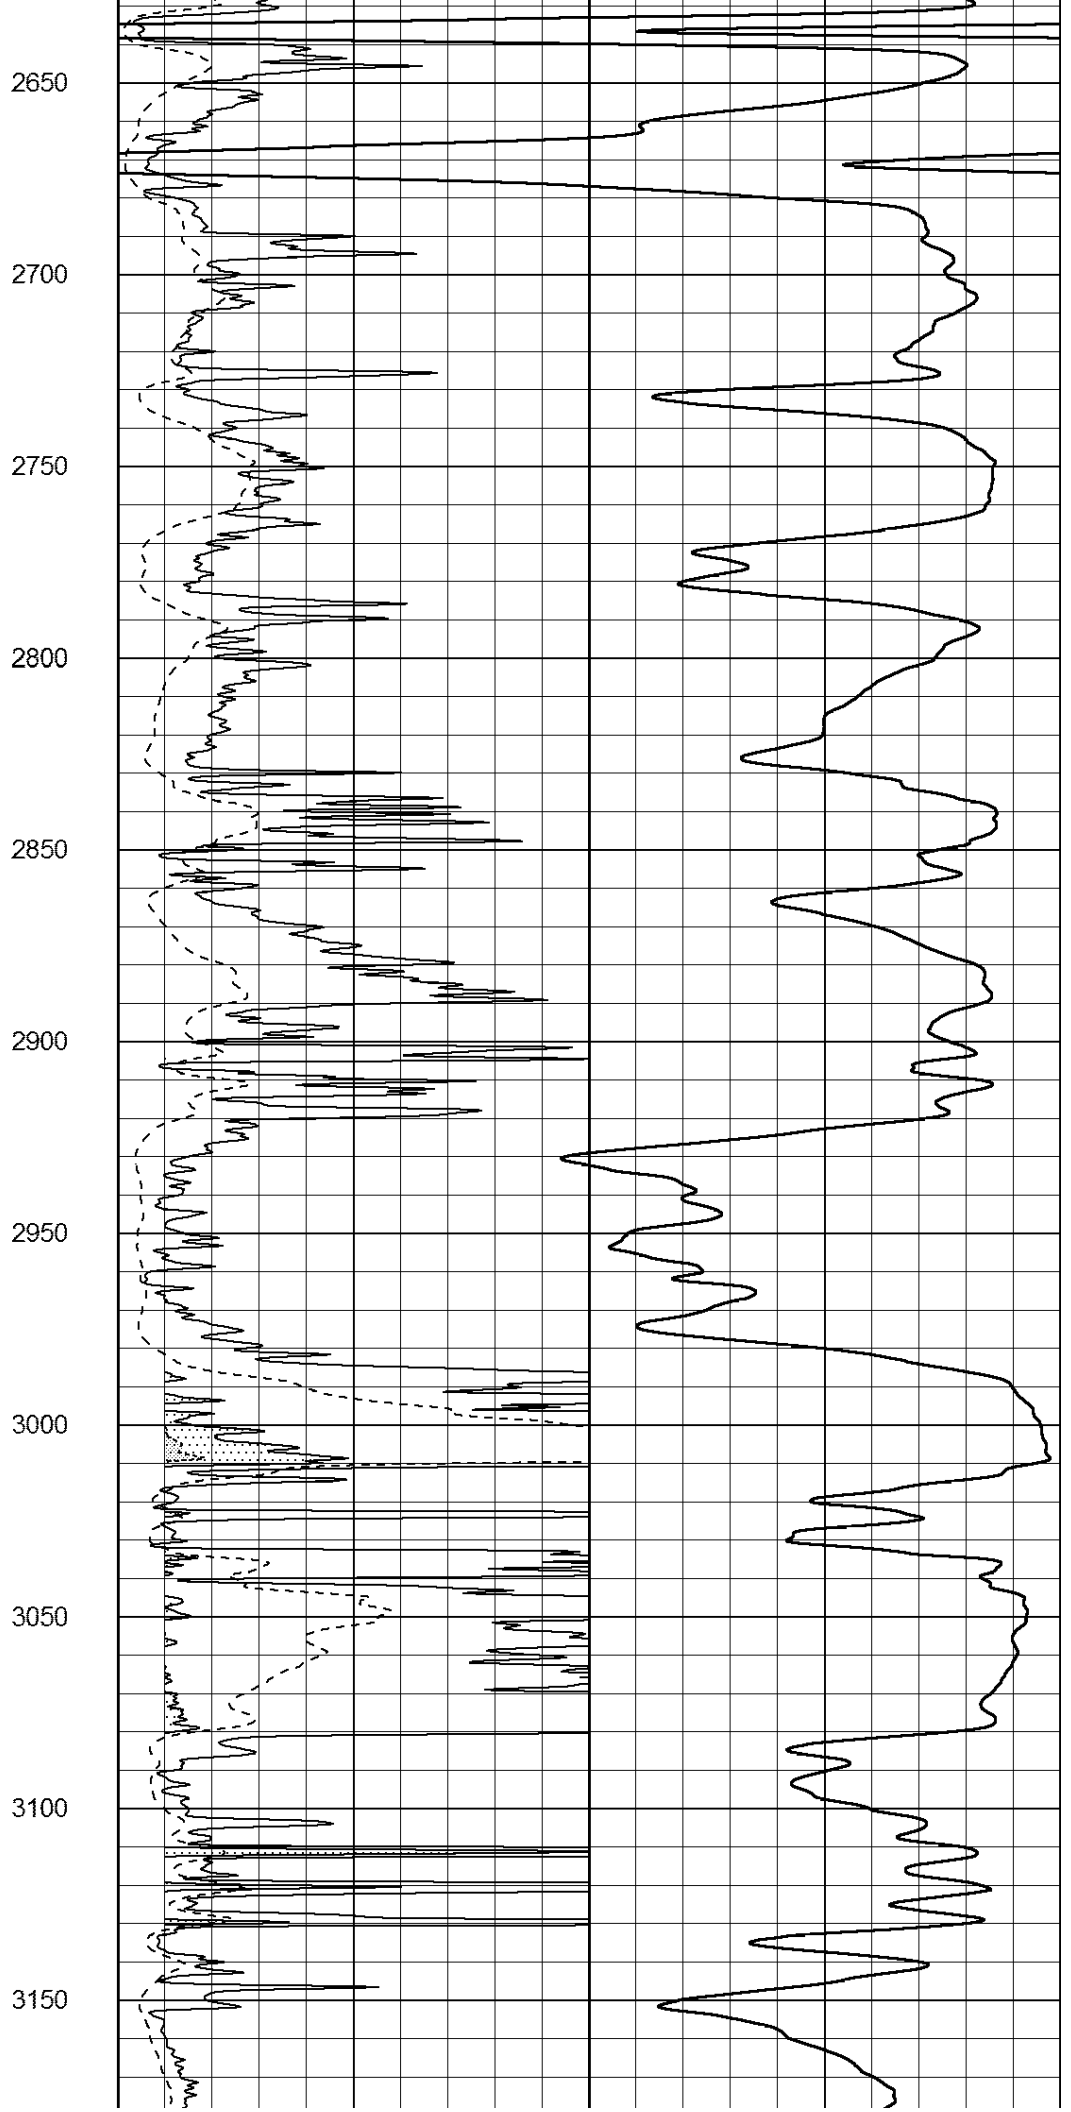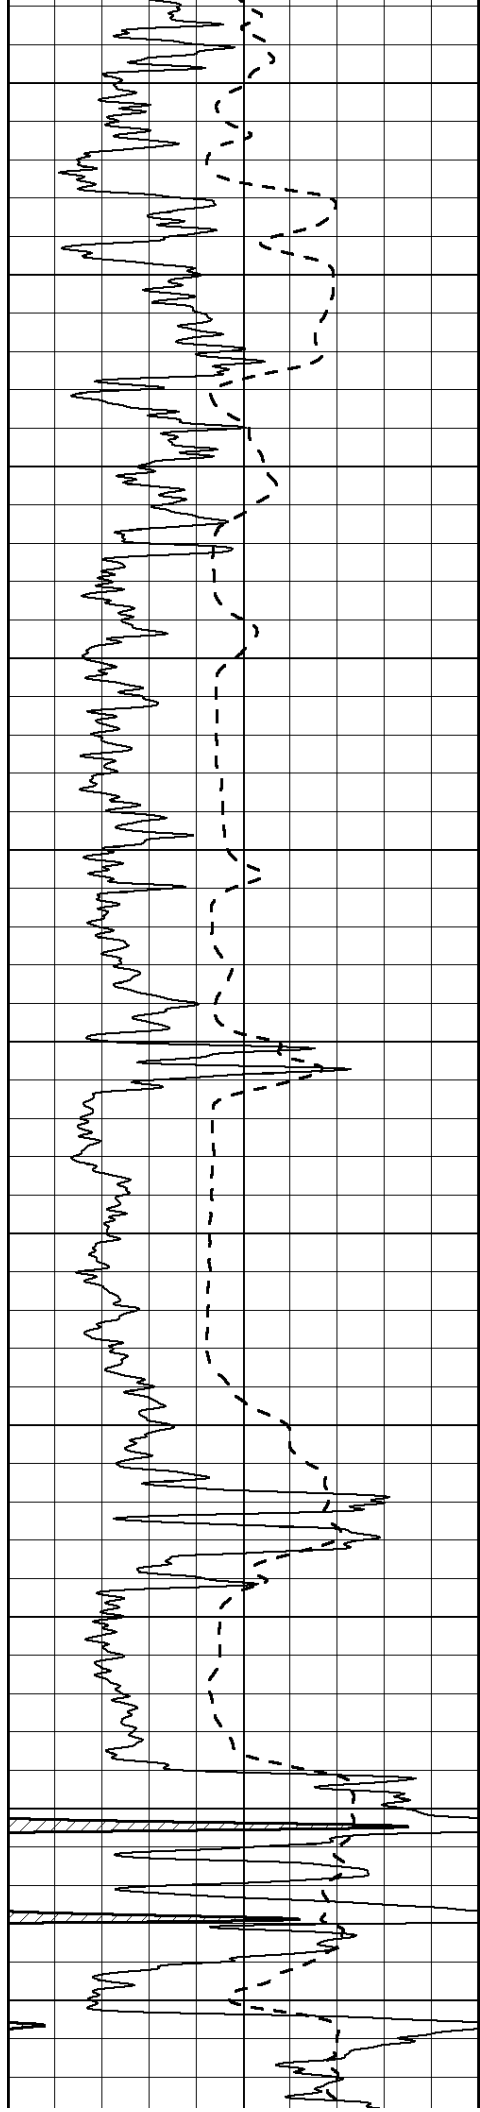

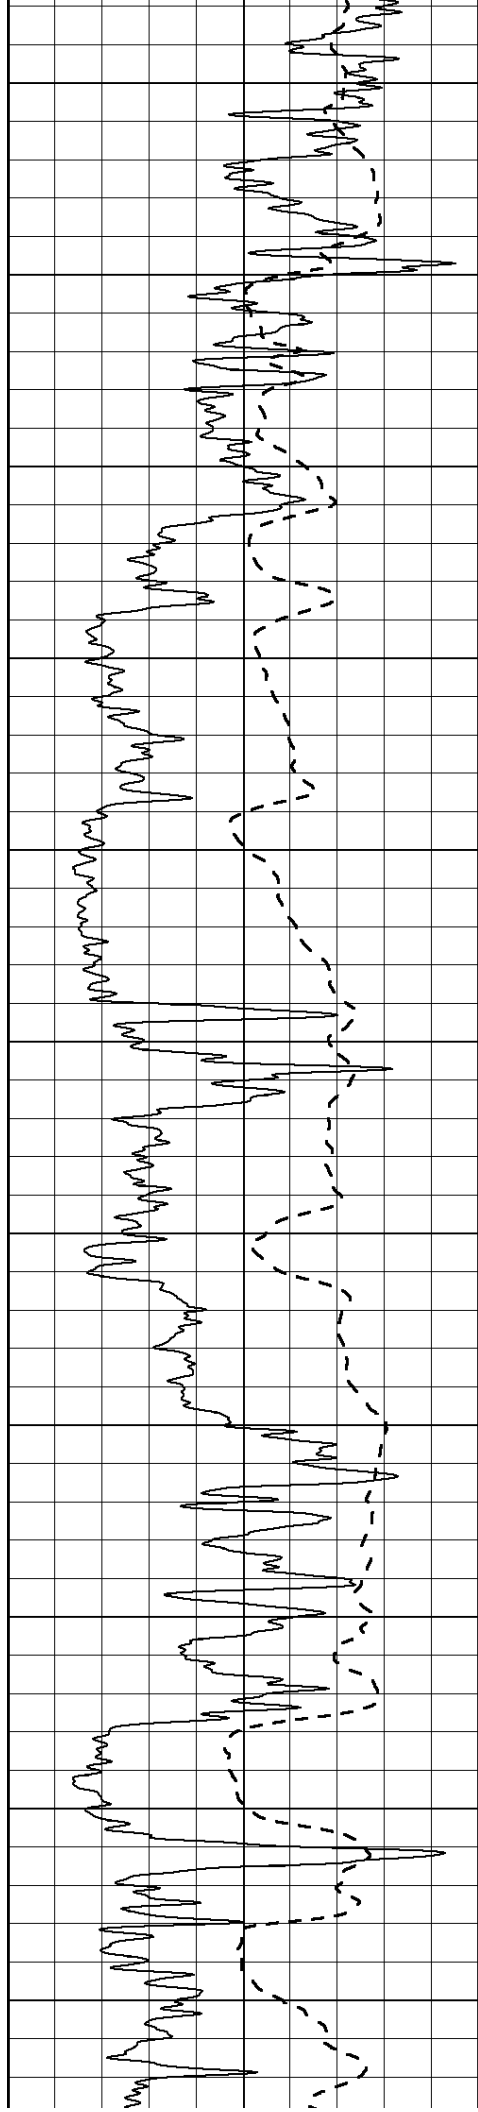

3200

3250

3300

3350

3400

3450


3500


3550

3600

3650

3700

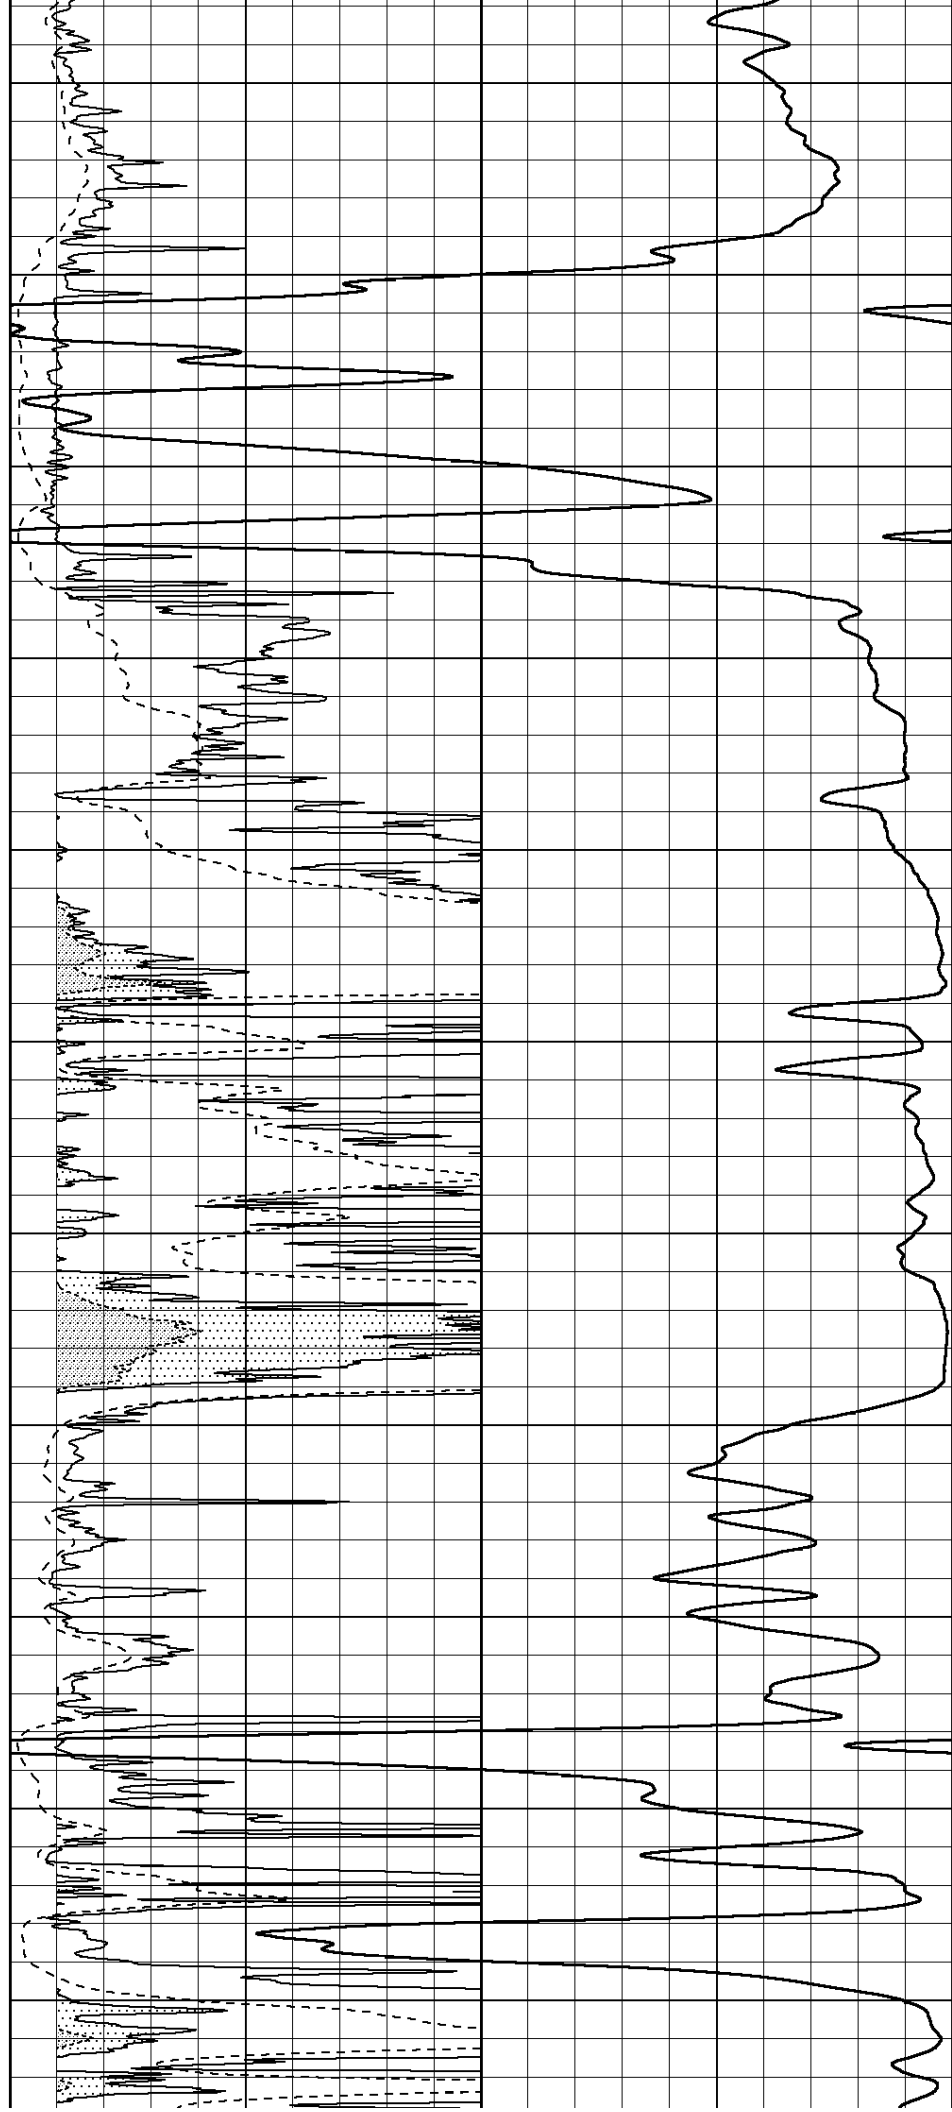

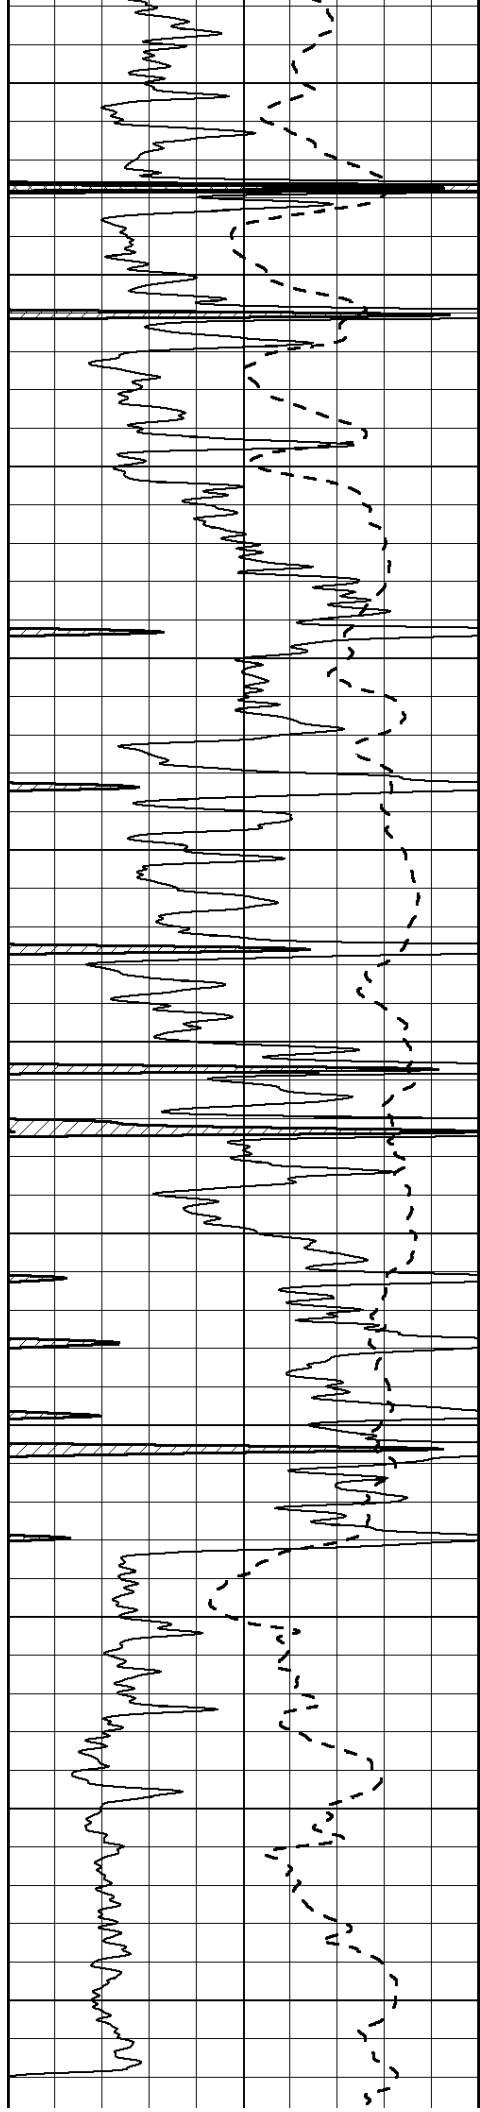

3750

3800

3850

3900

3950

4000



4050



4100

4150

4200

4250

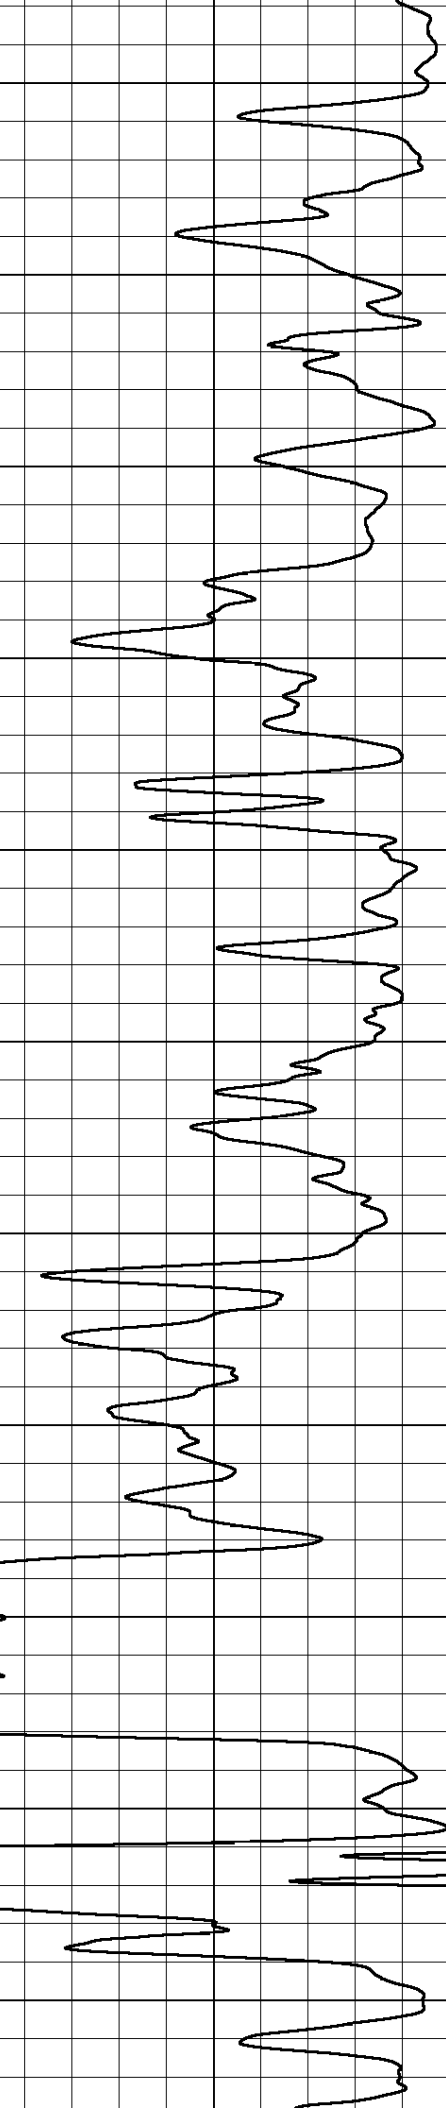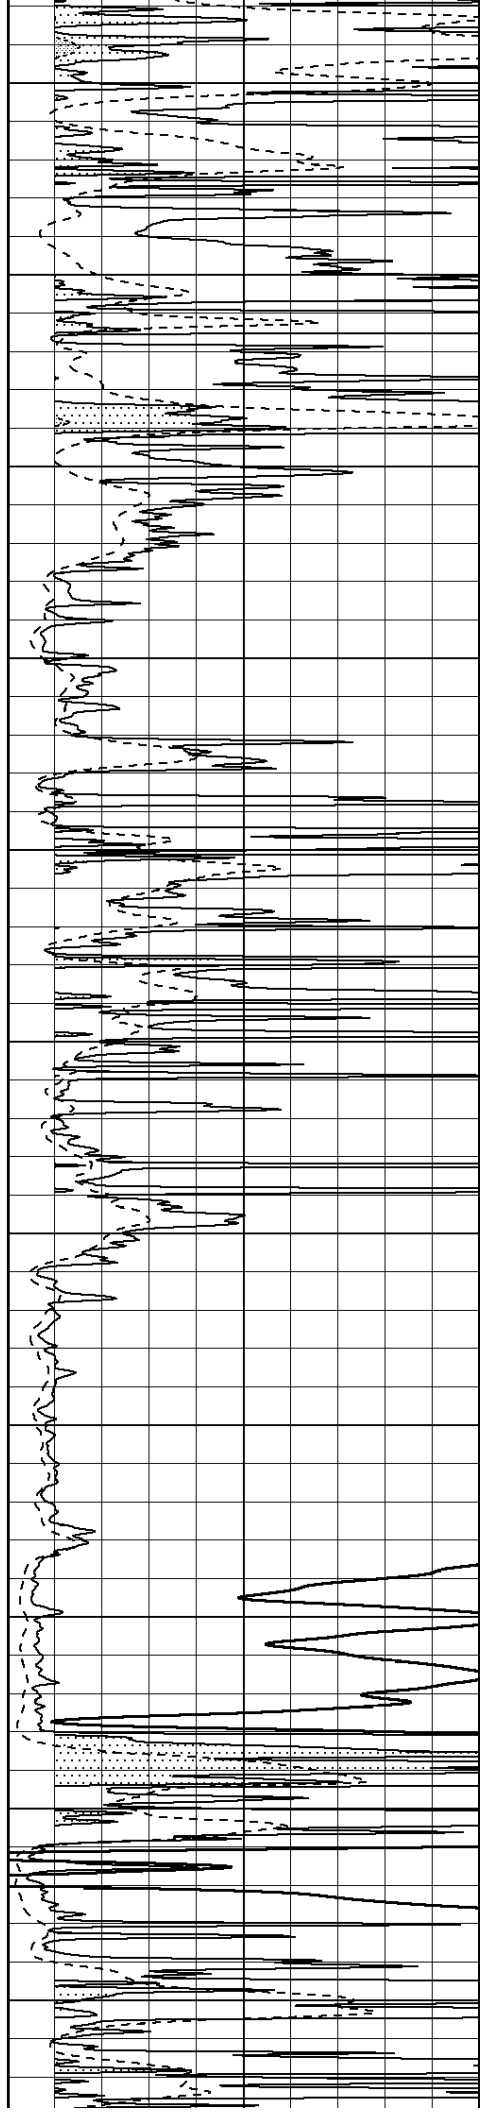

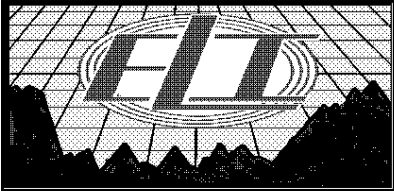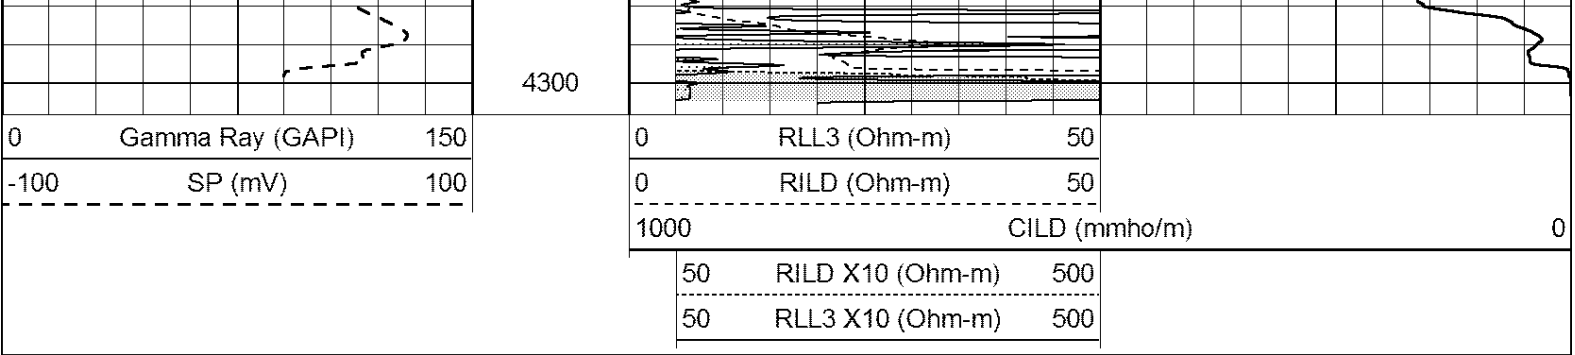


MAIN PASS

Database File: 2687pe.db
Dataset Pathname: pass3MAIN
Presentation Format: _dil
Dataset Creation: Tue Jun 26 14:13:31 2018
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

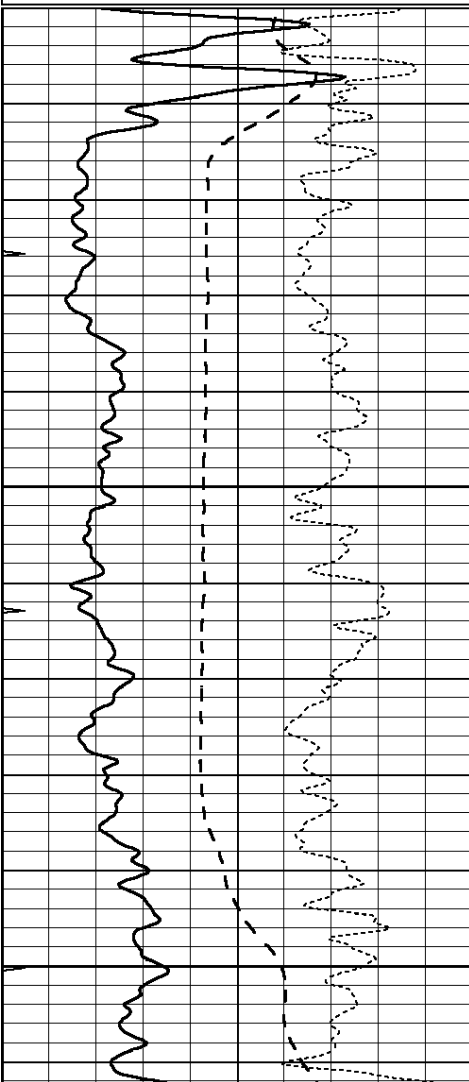


2900

2950

3000

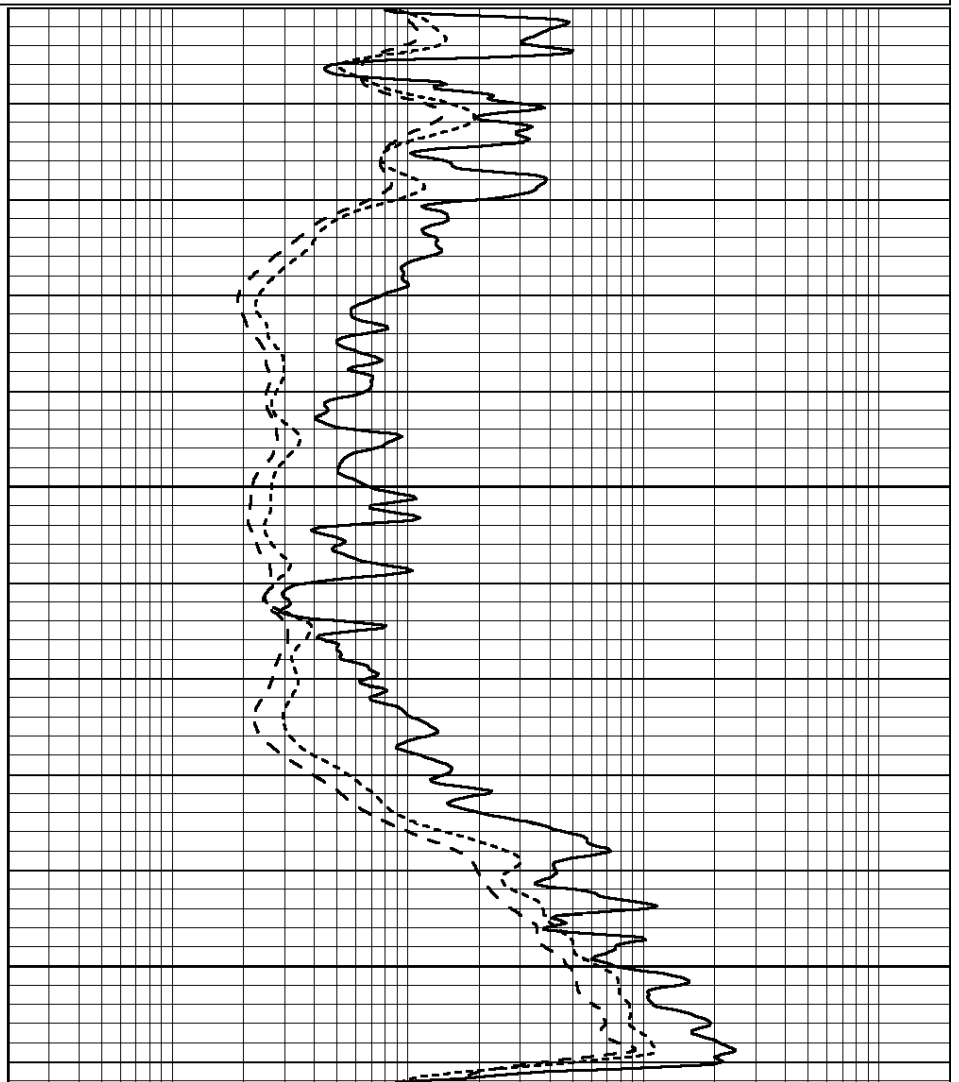

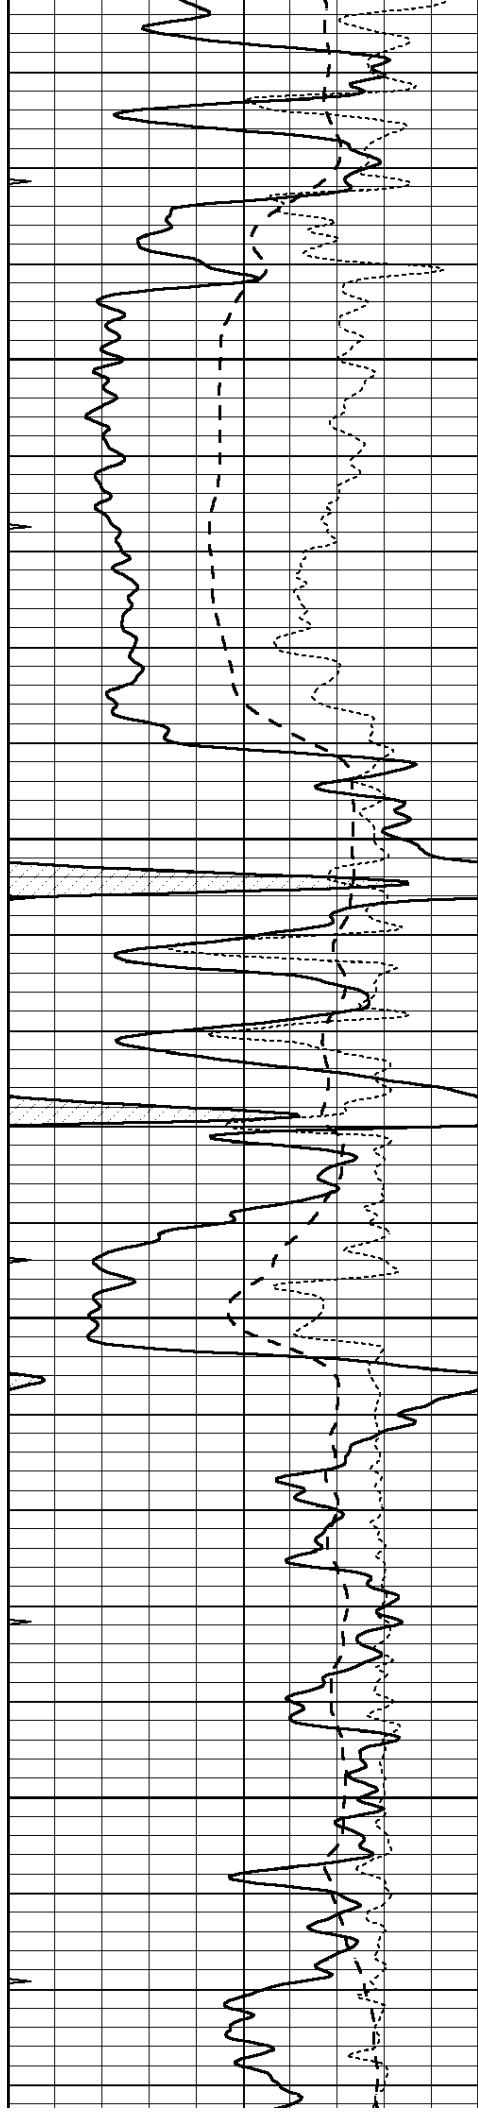



3050

3100

3150

3200

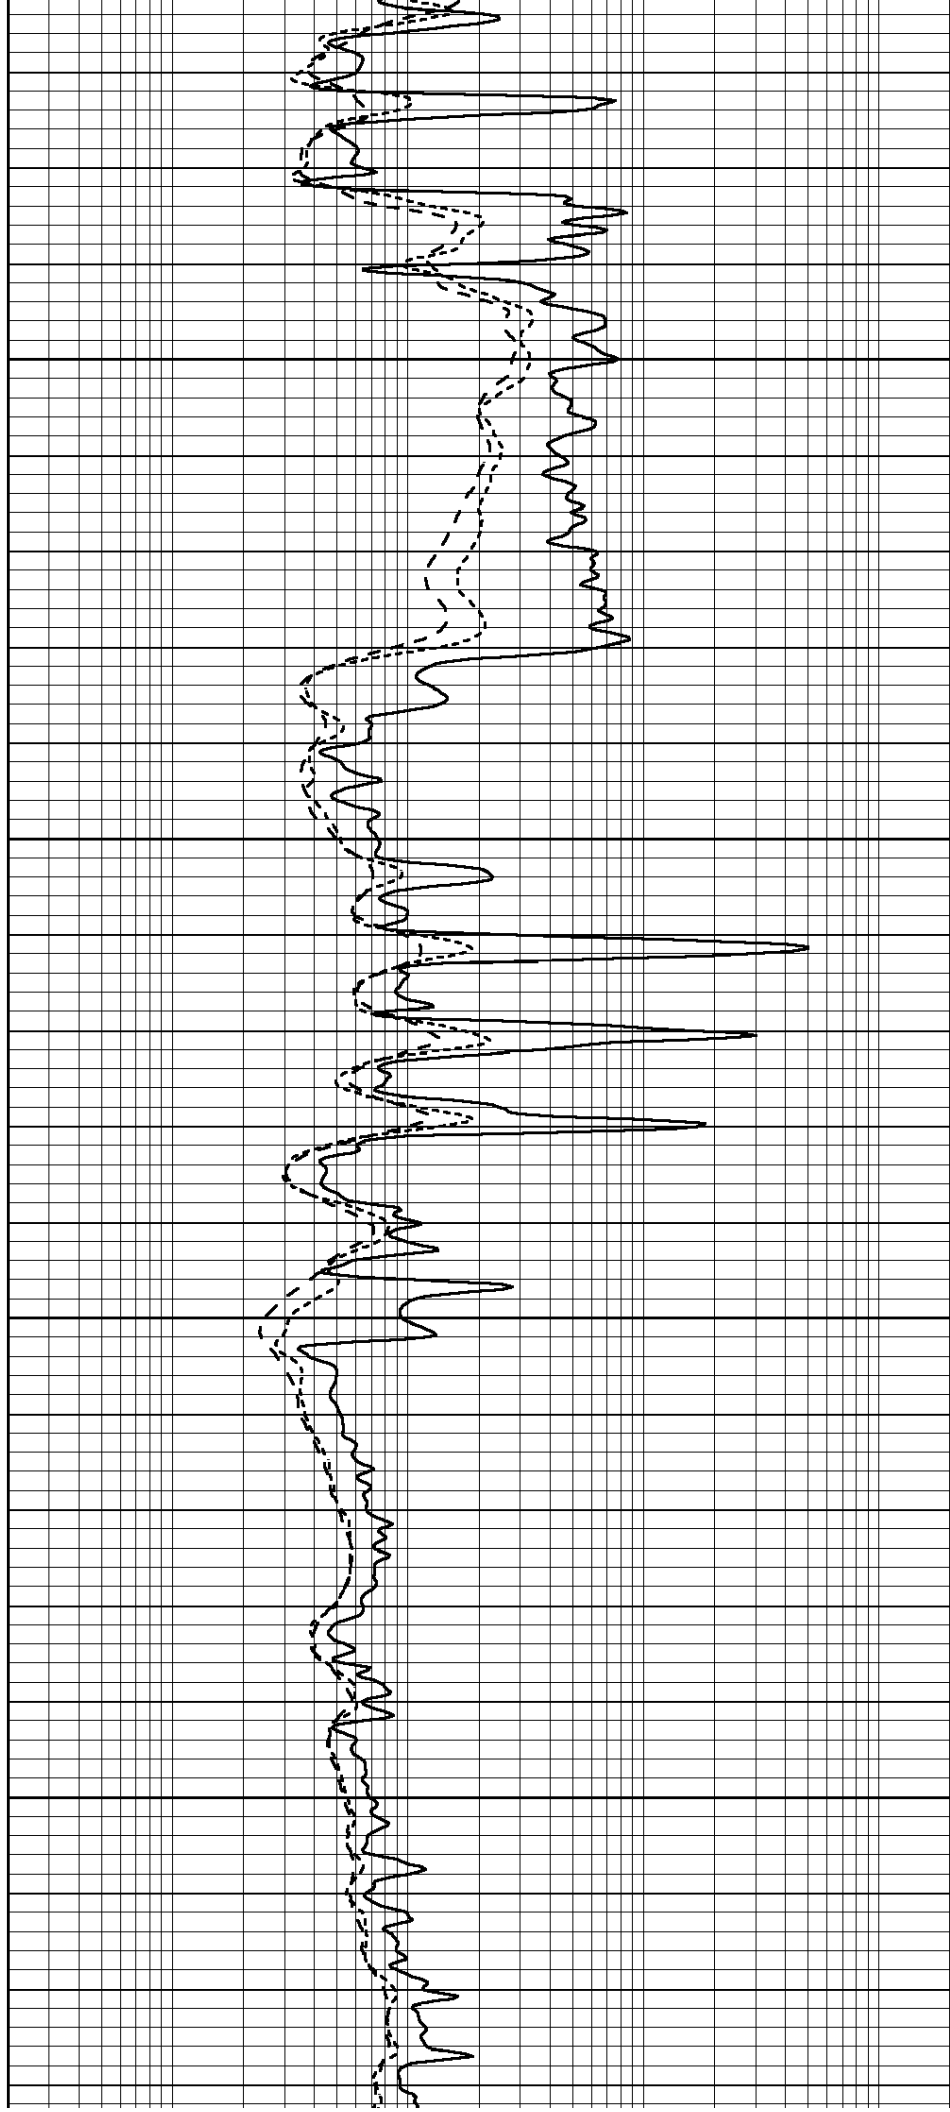

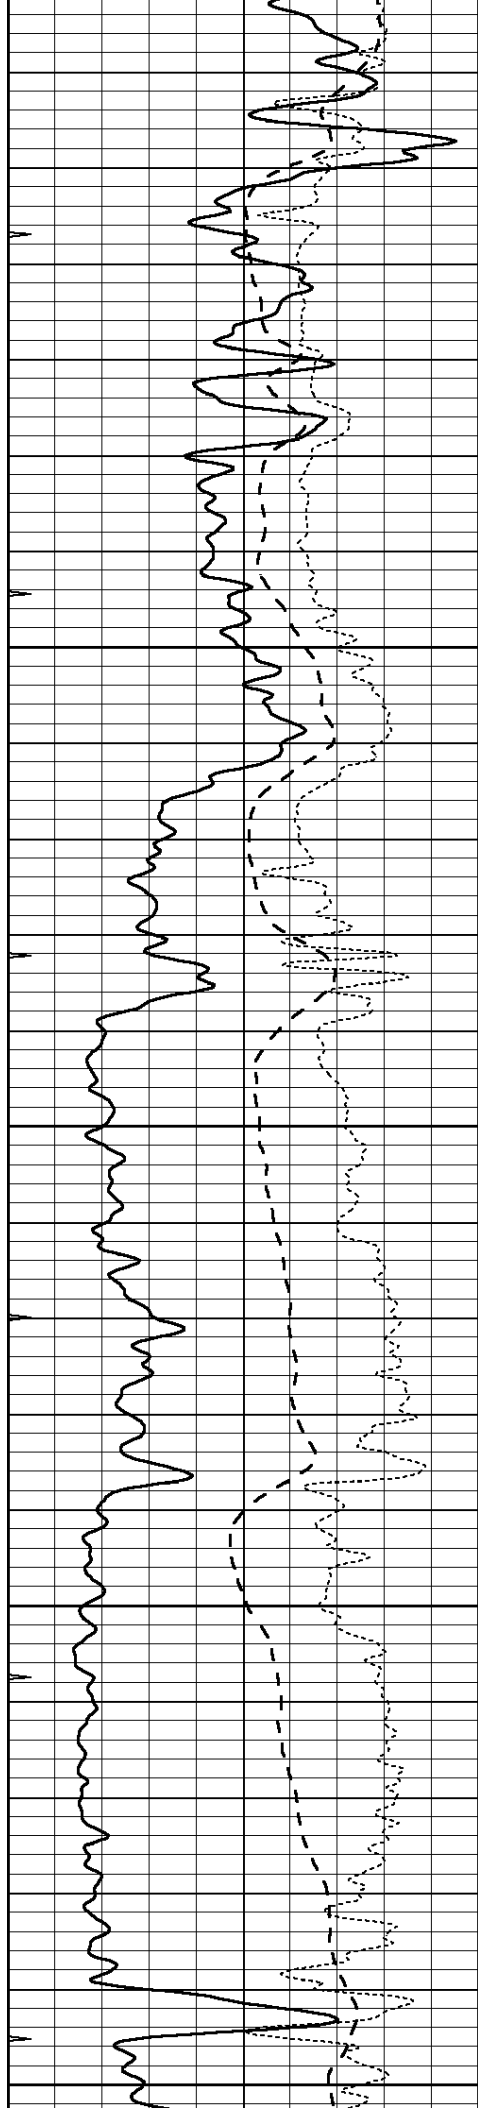


3250


3300

3350

3400

3450

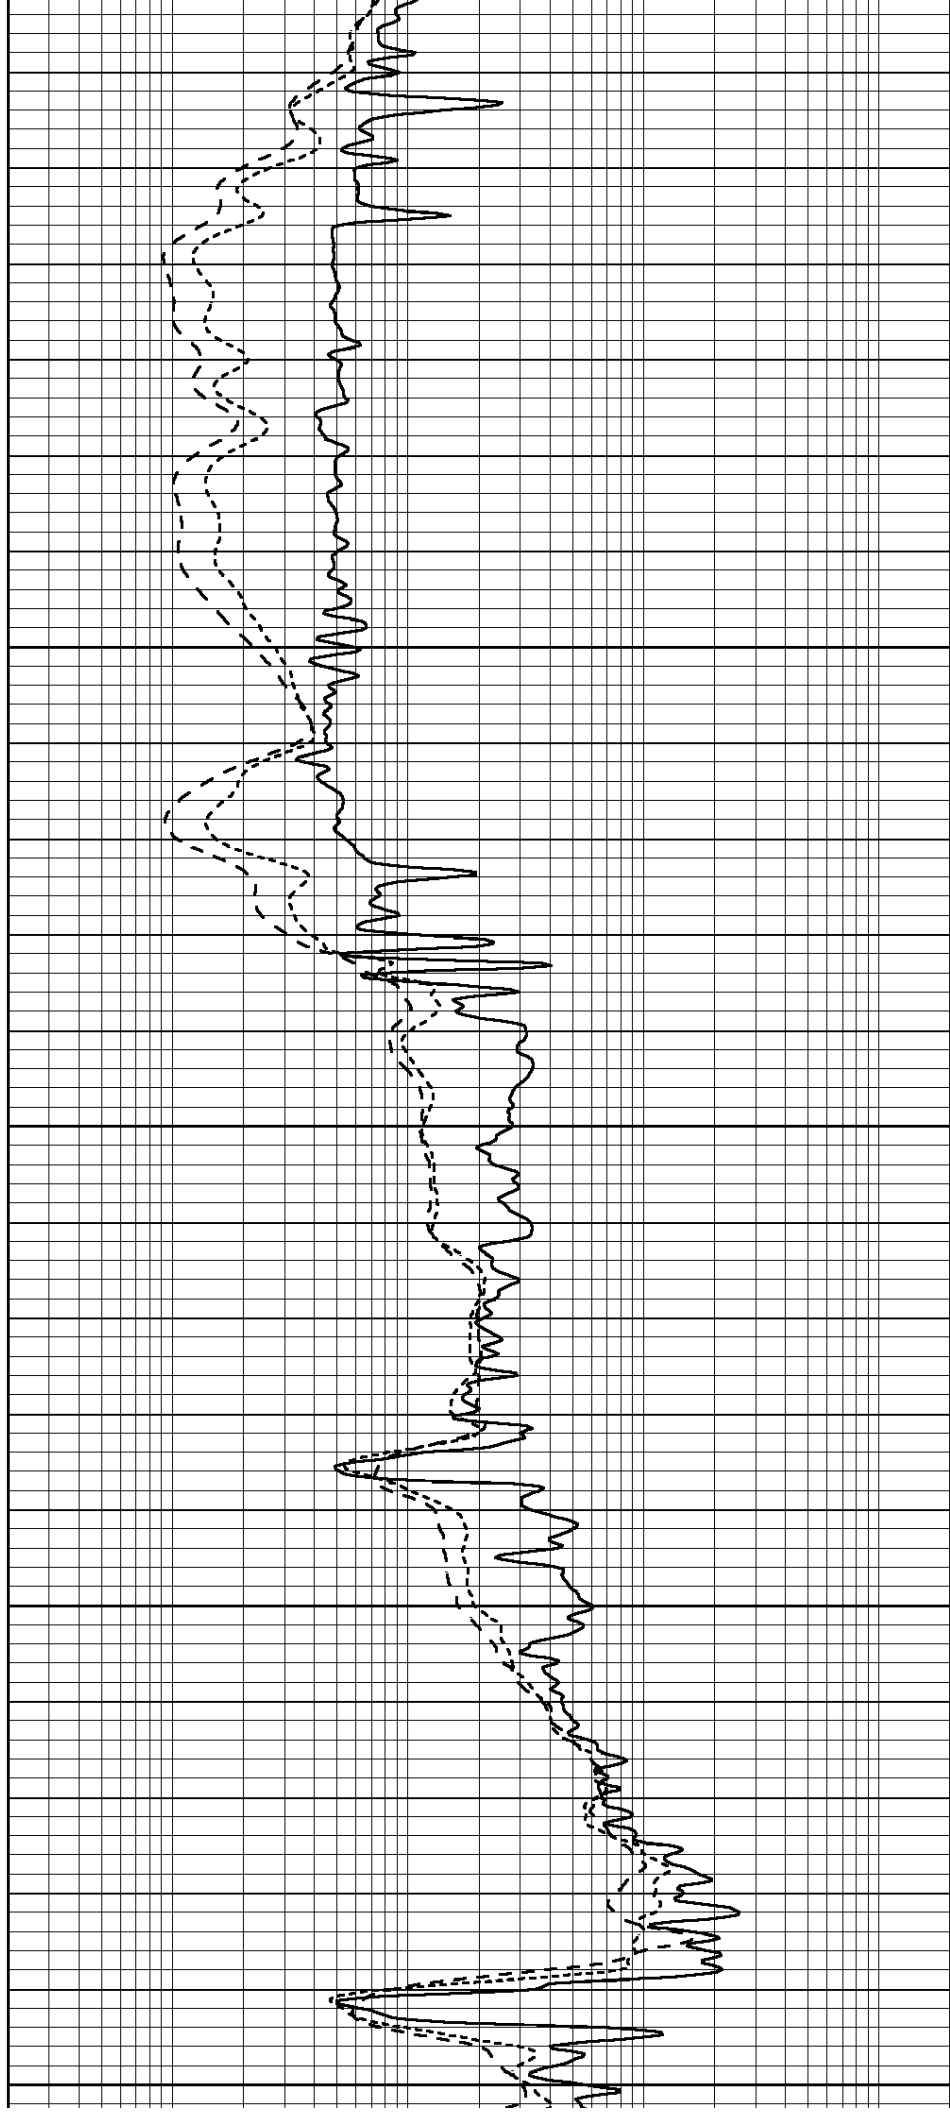

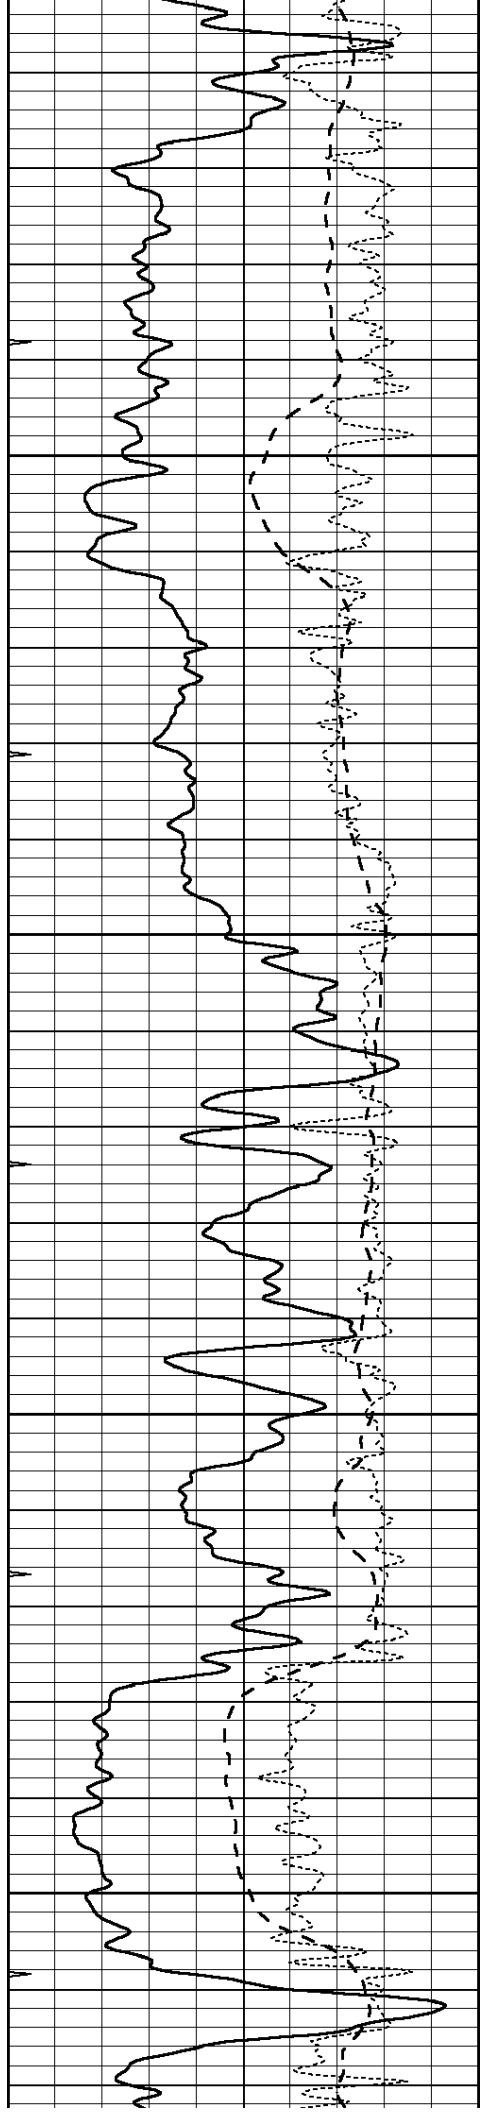



3500

3550

3600

3650

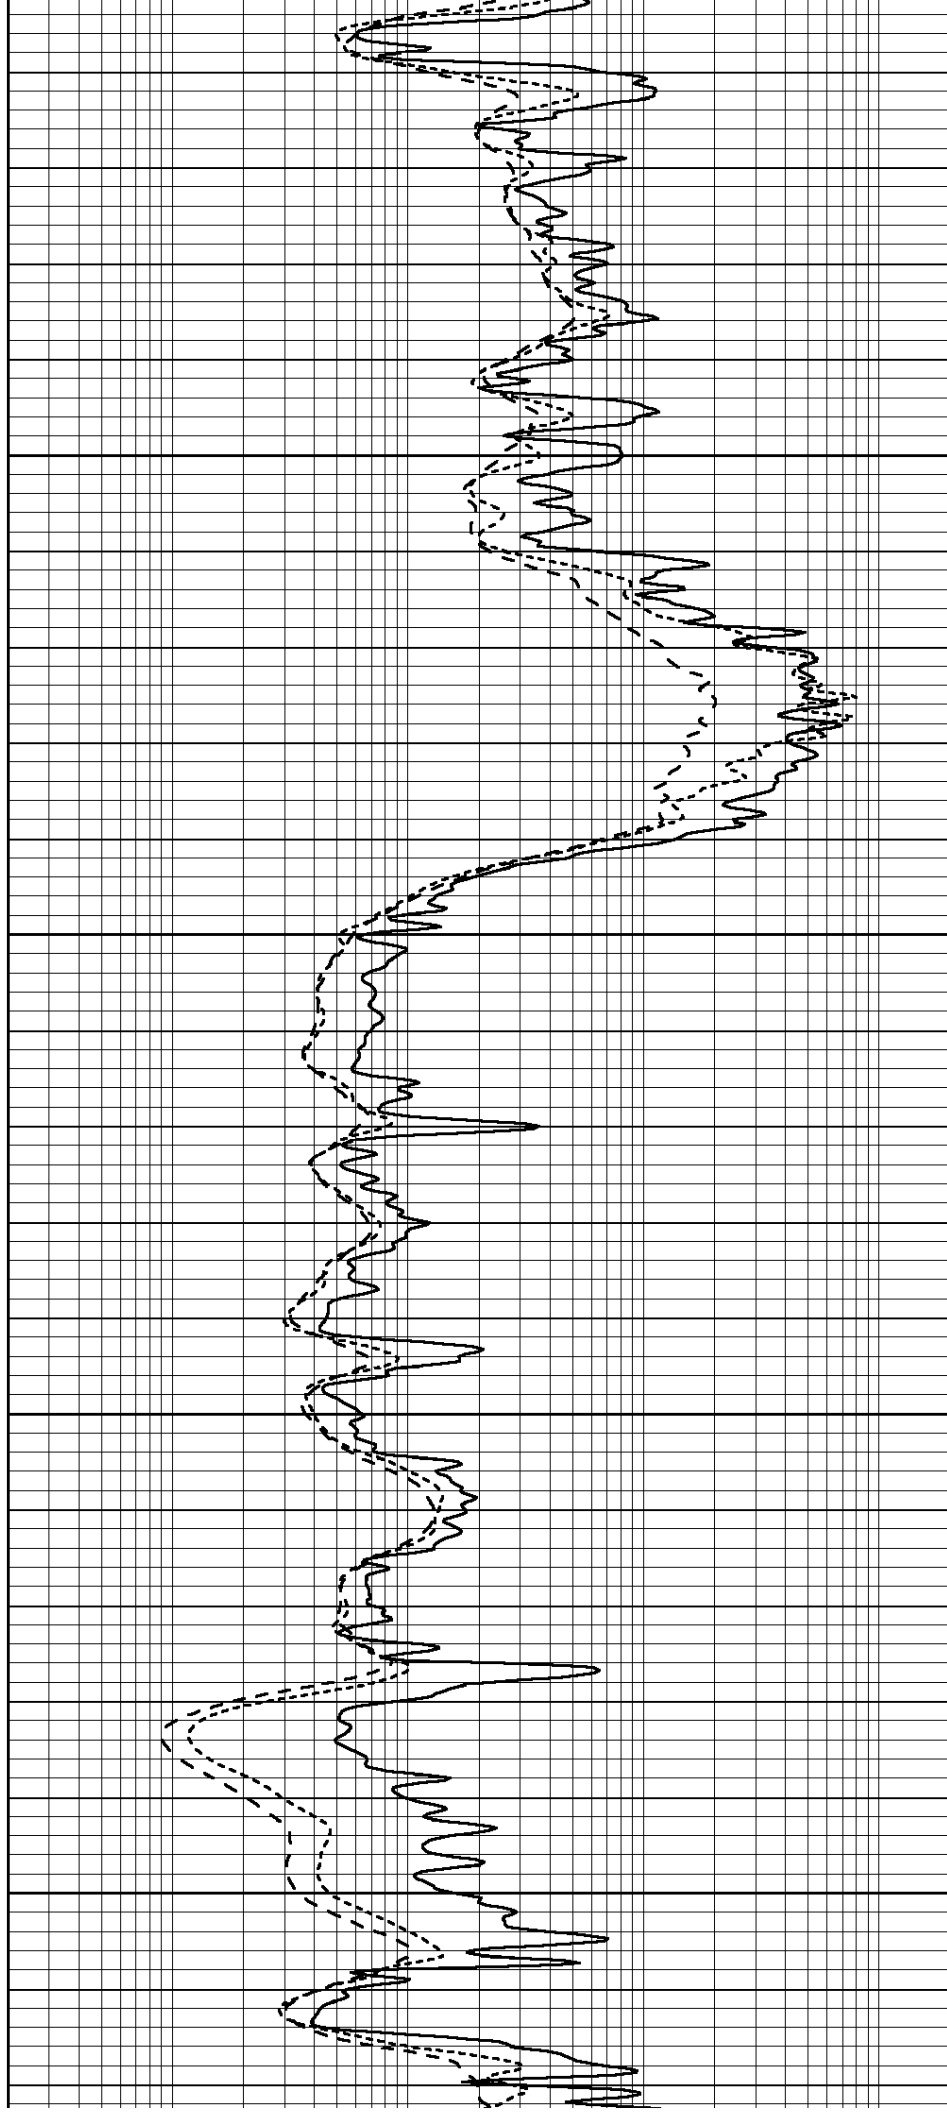

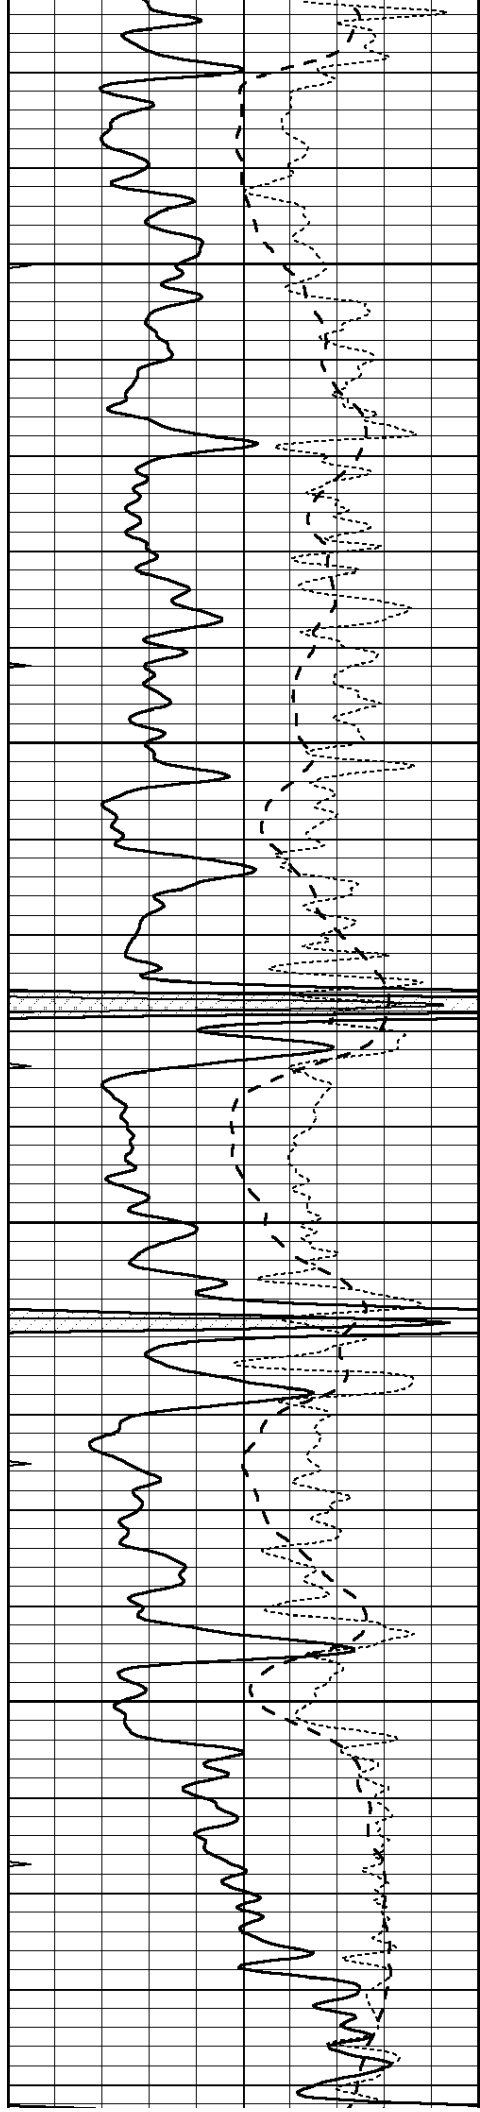



3700

3750

3800

3850

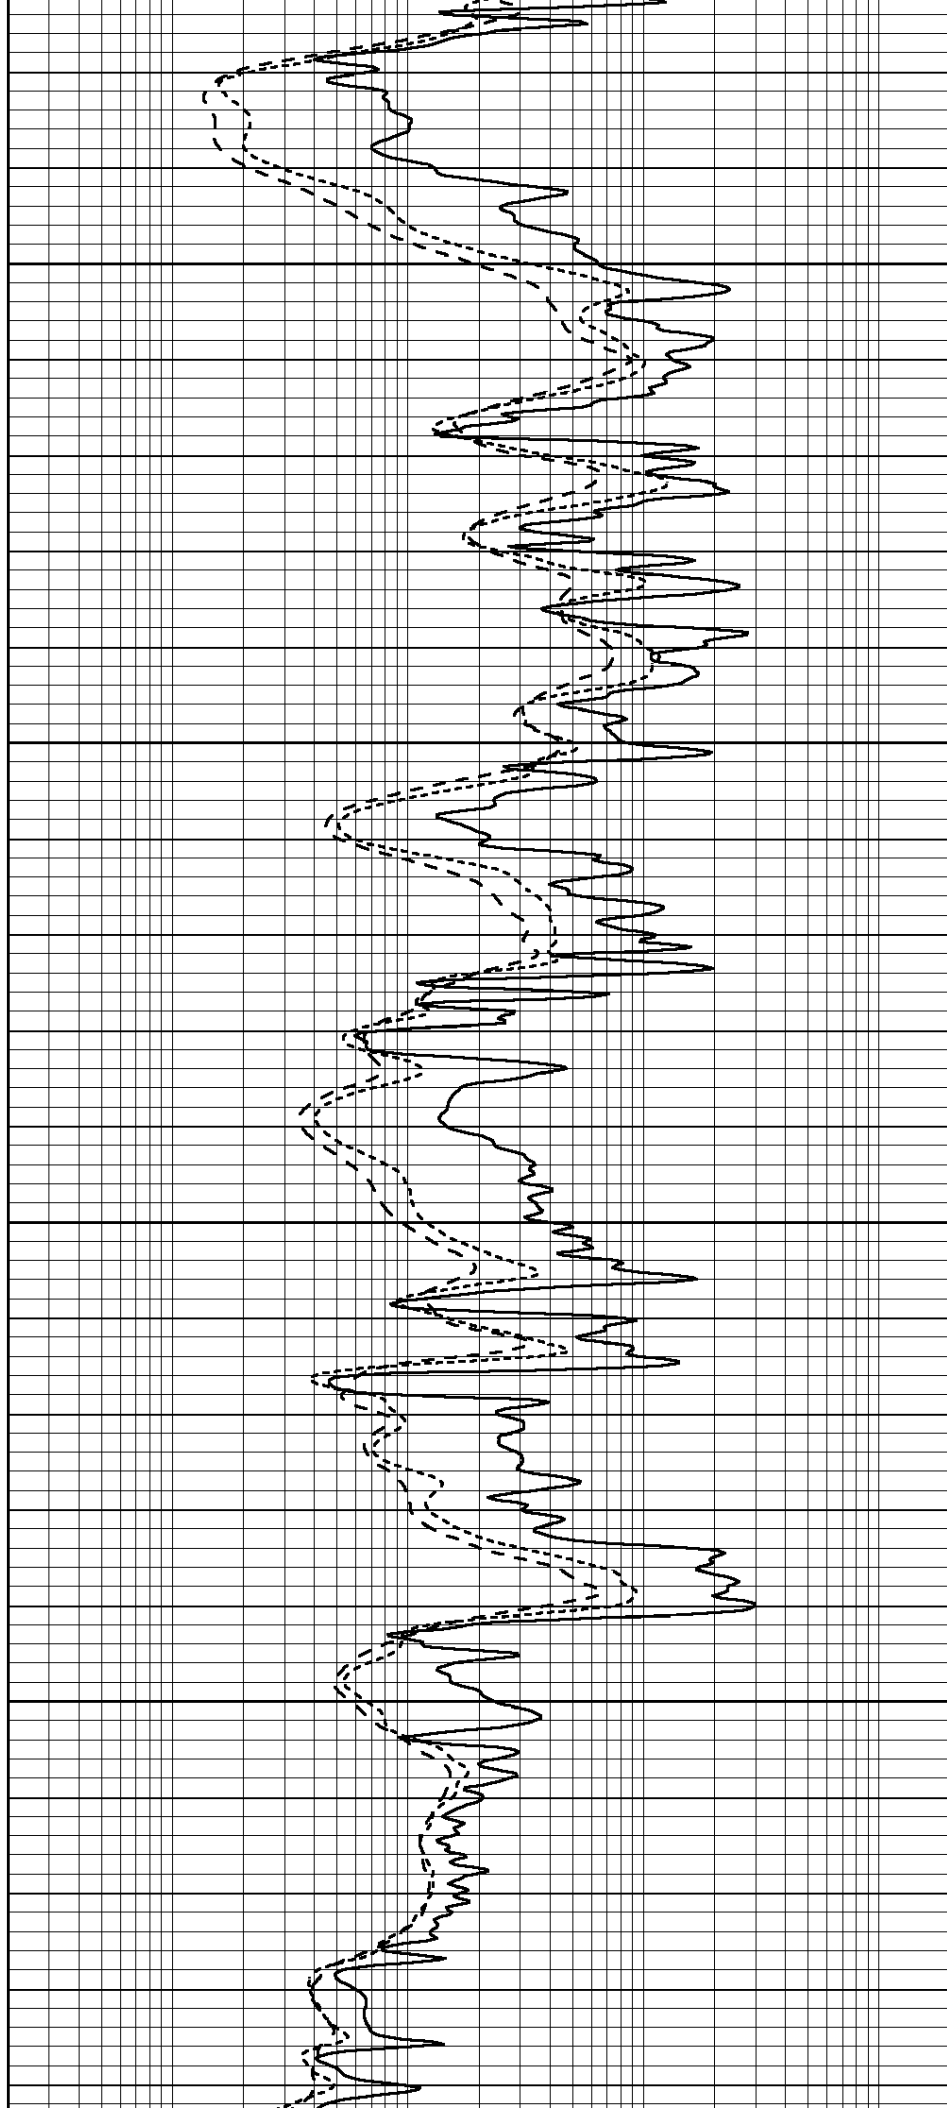

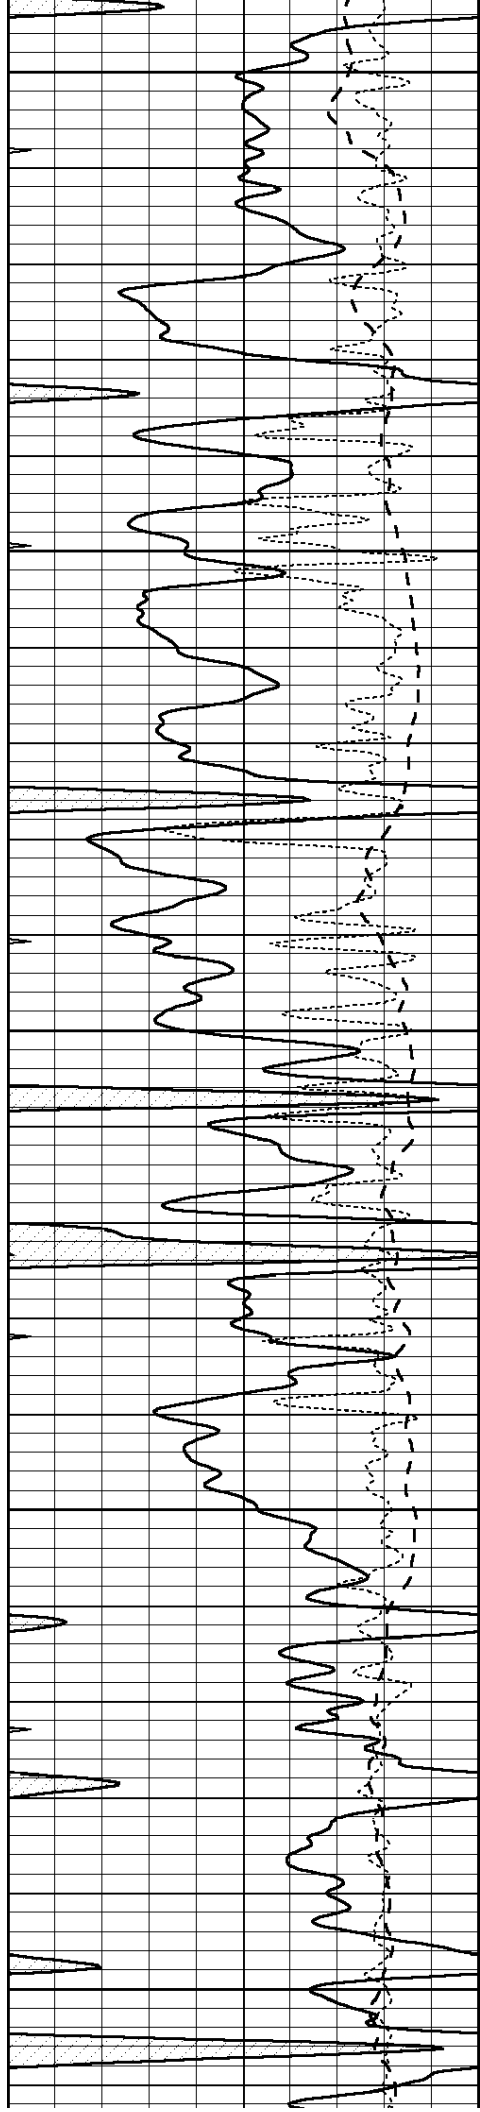


3900


3950

4000


4050

4100

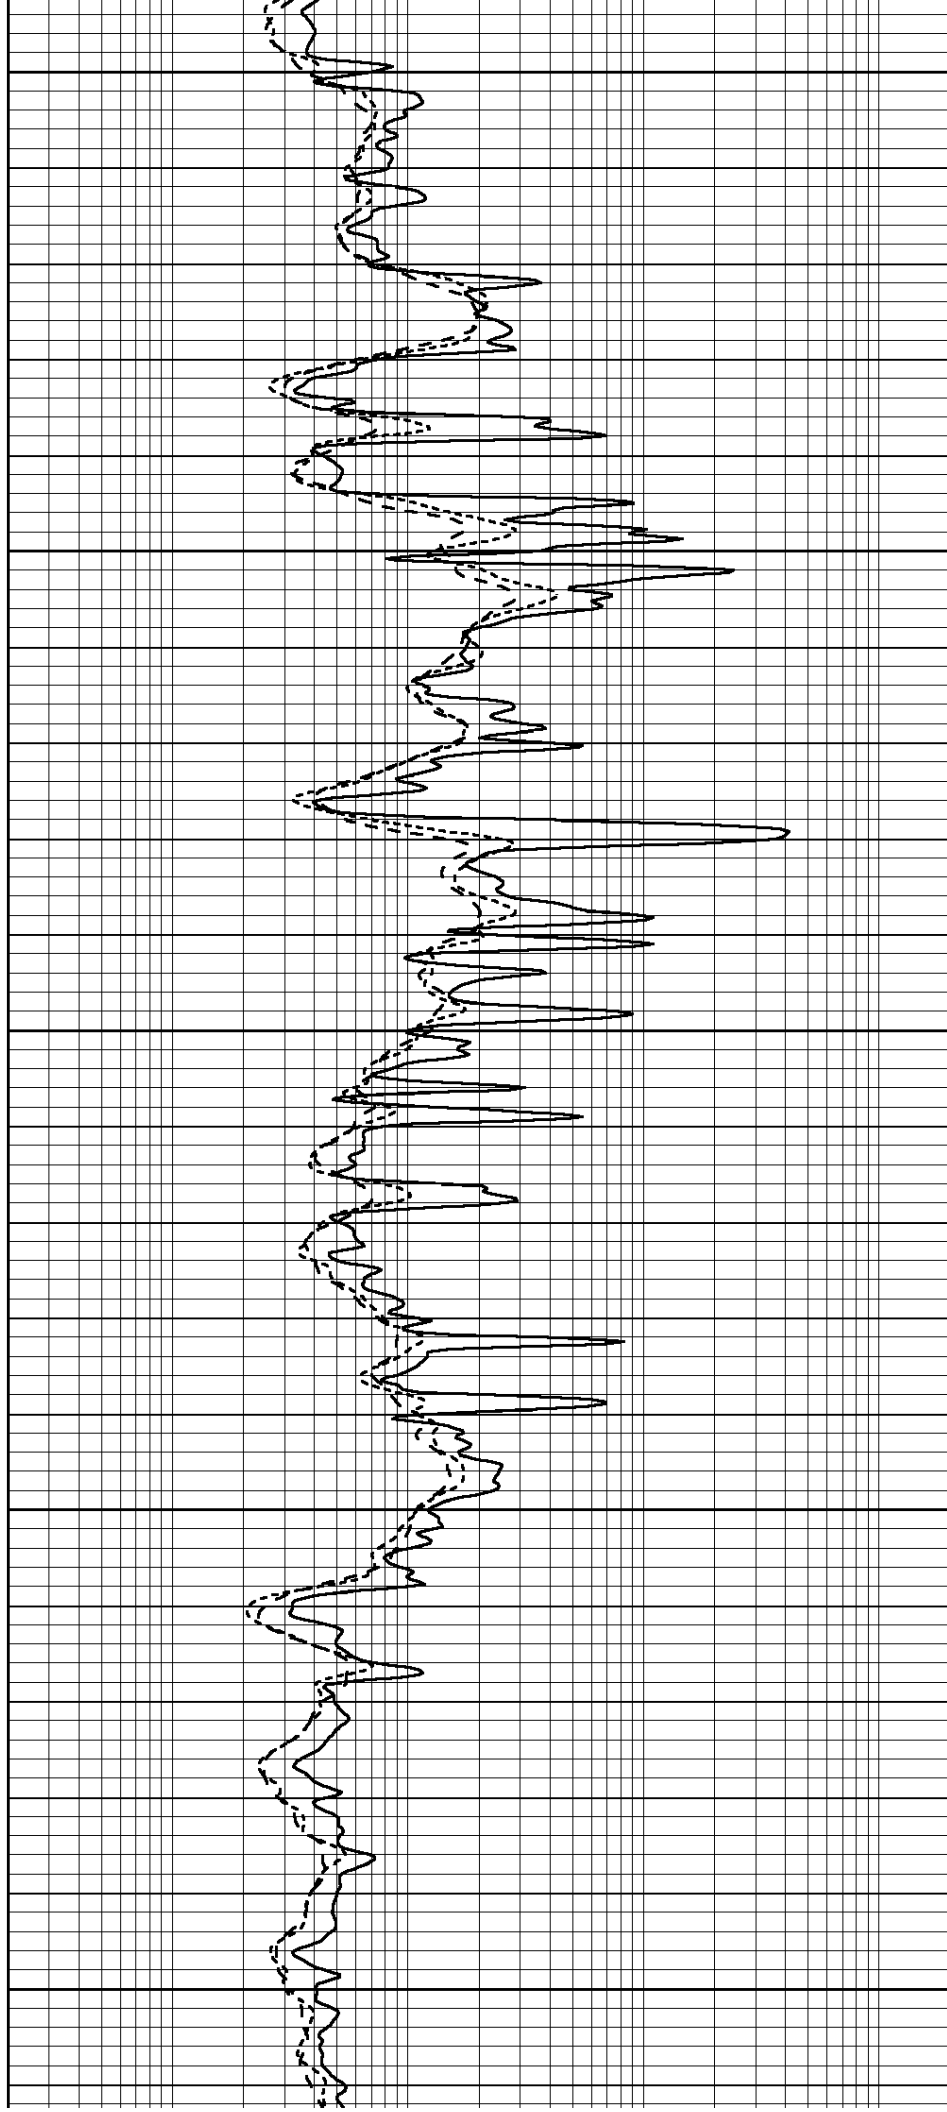


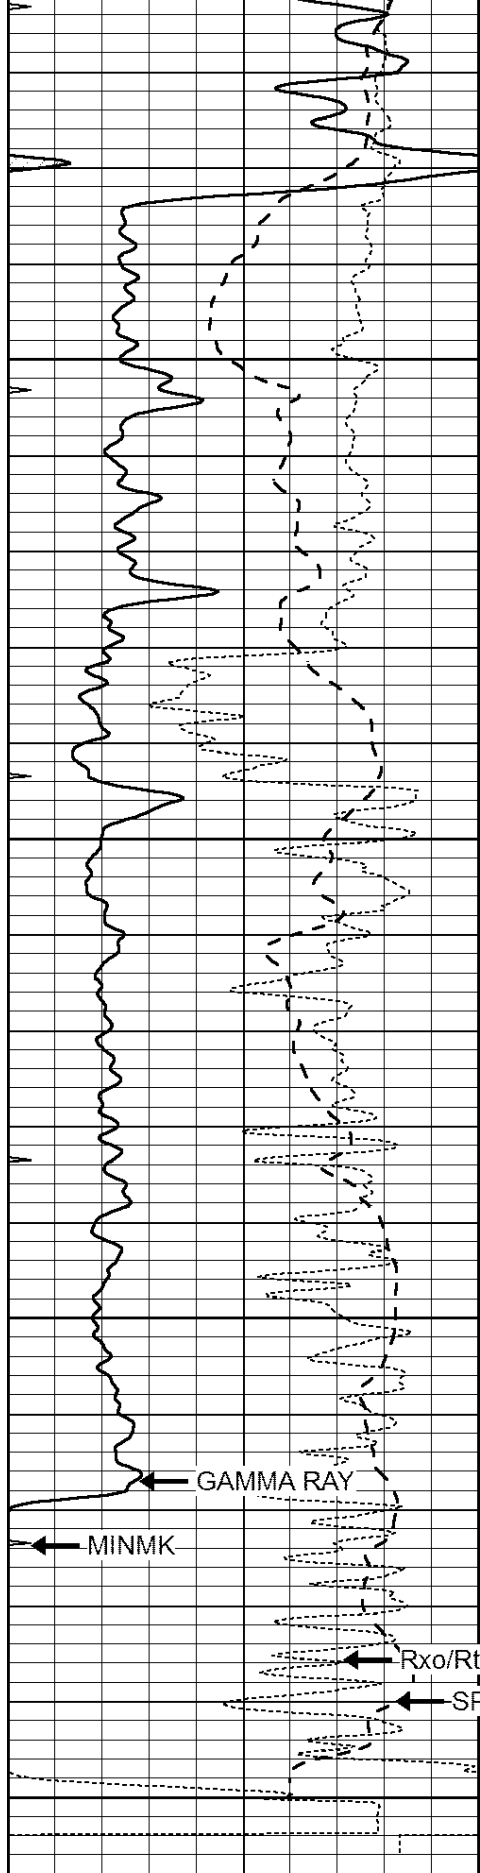

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

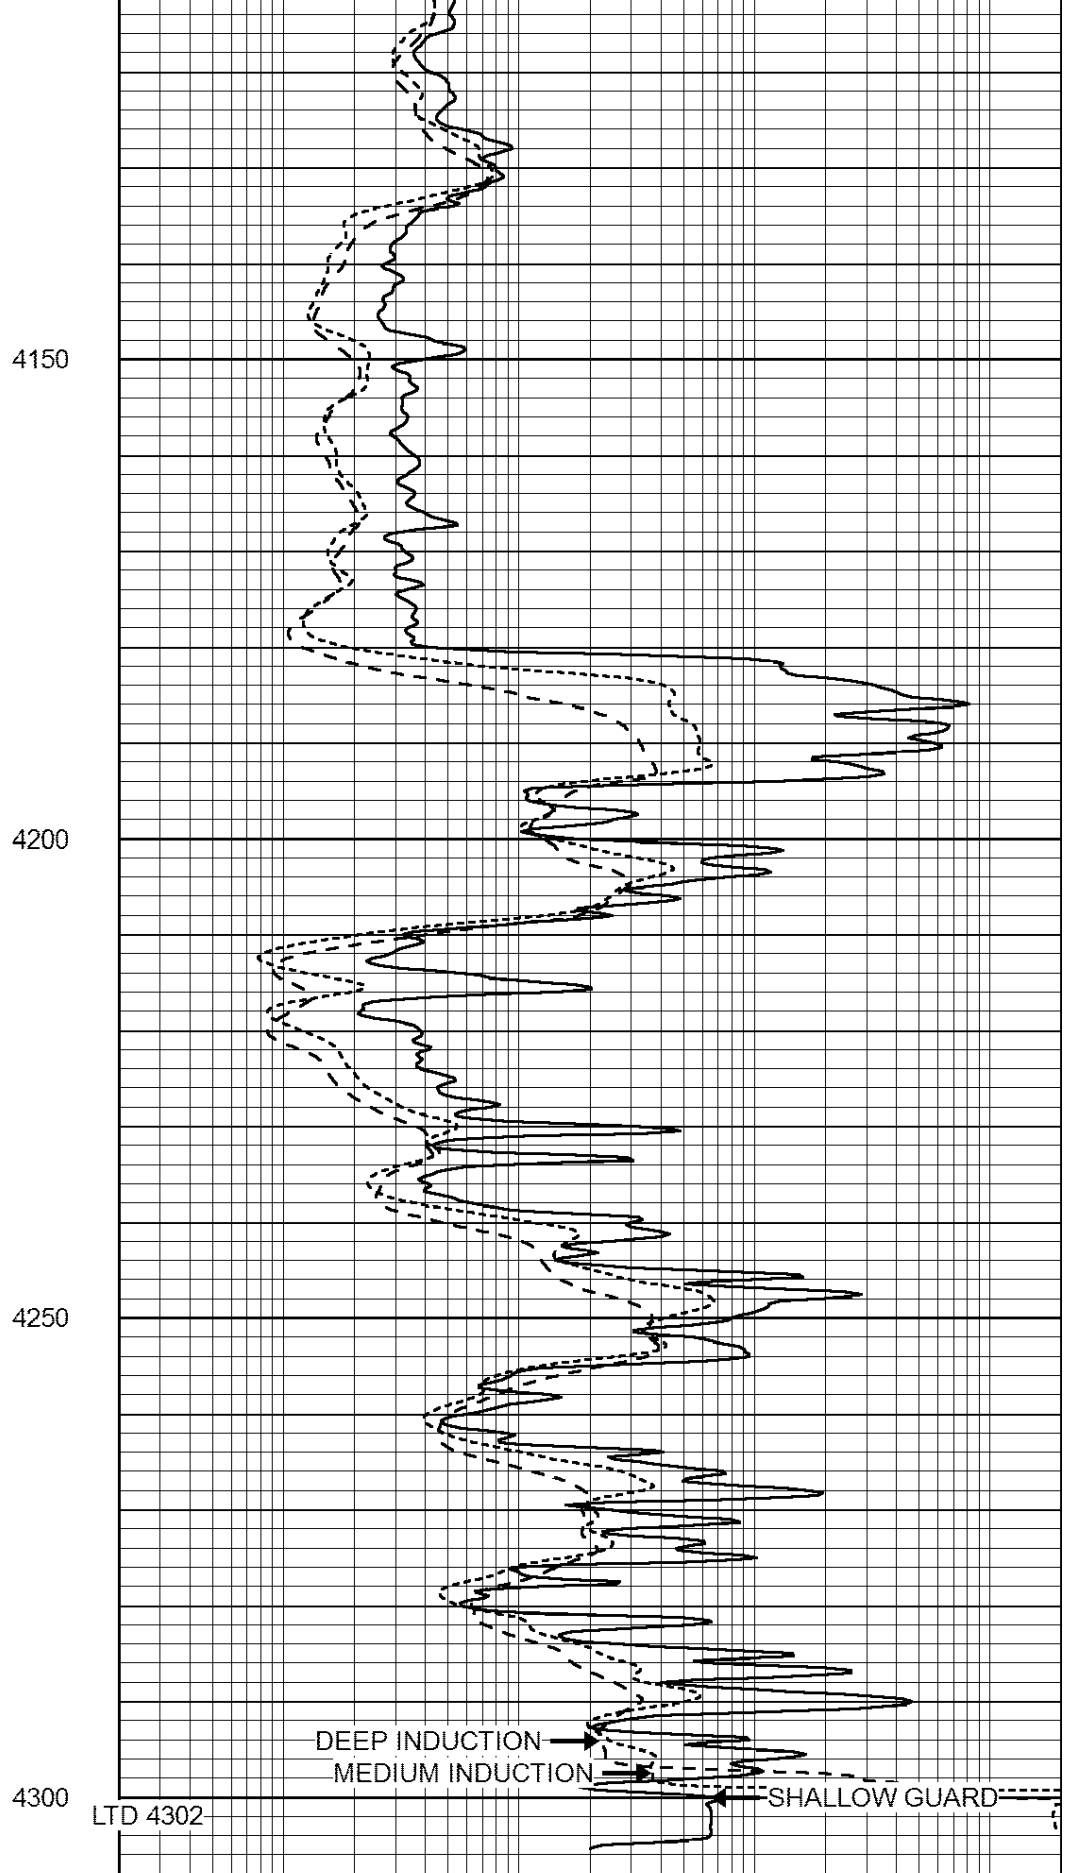

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

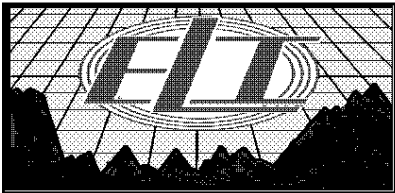


REPEAT SECTION

Database File: 2687pe.db
Dataset Pathname: pass2RP
Presentation Format: _dil
Dataset Creation: Tue Jun 26 14:39:06 2018
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

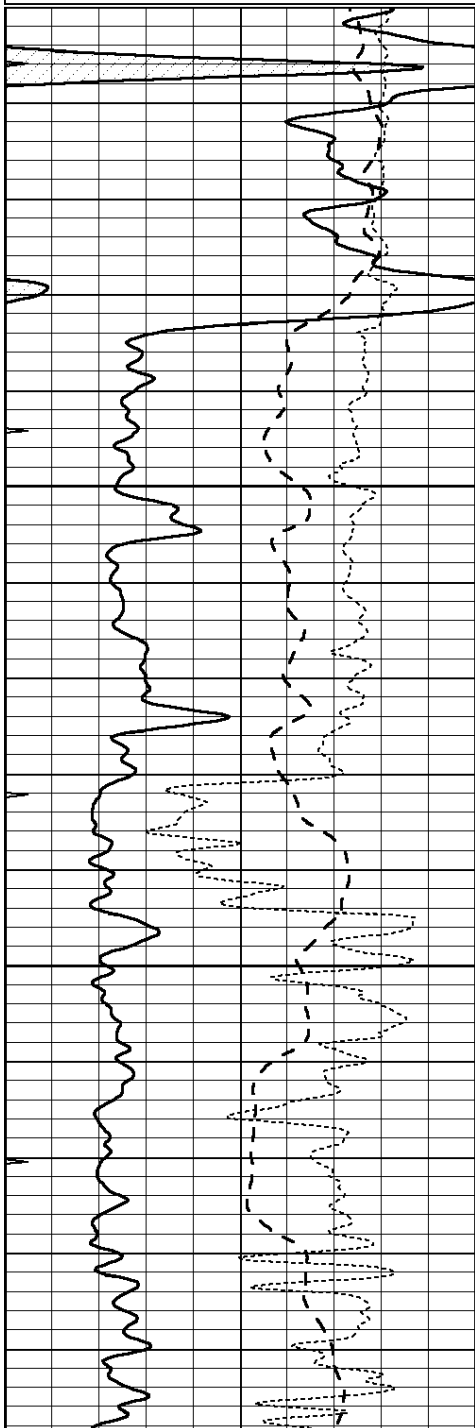


4100

4150

4200

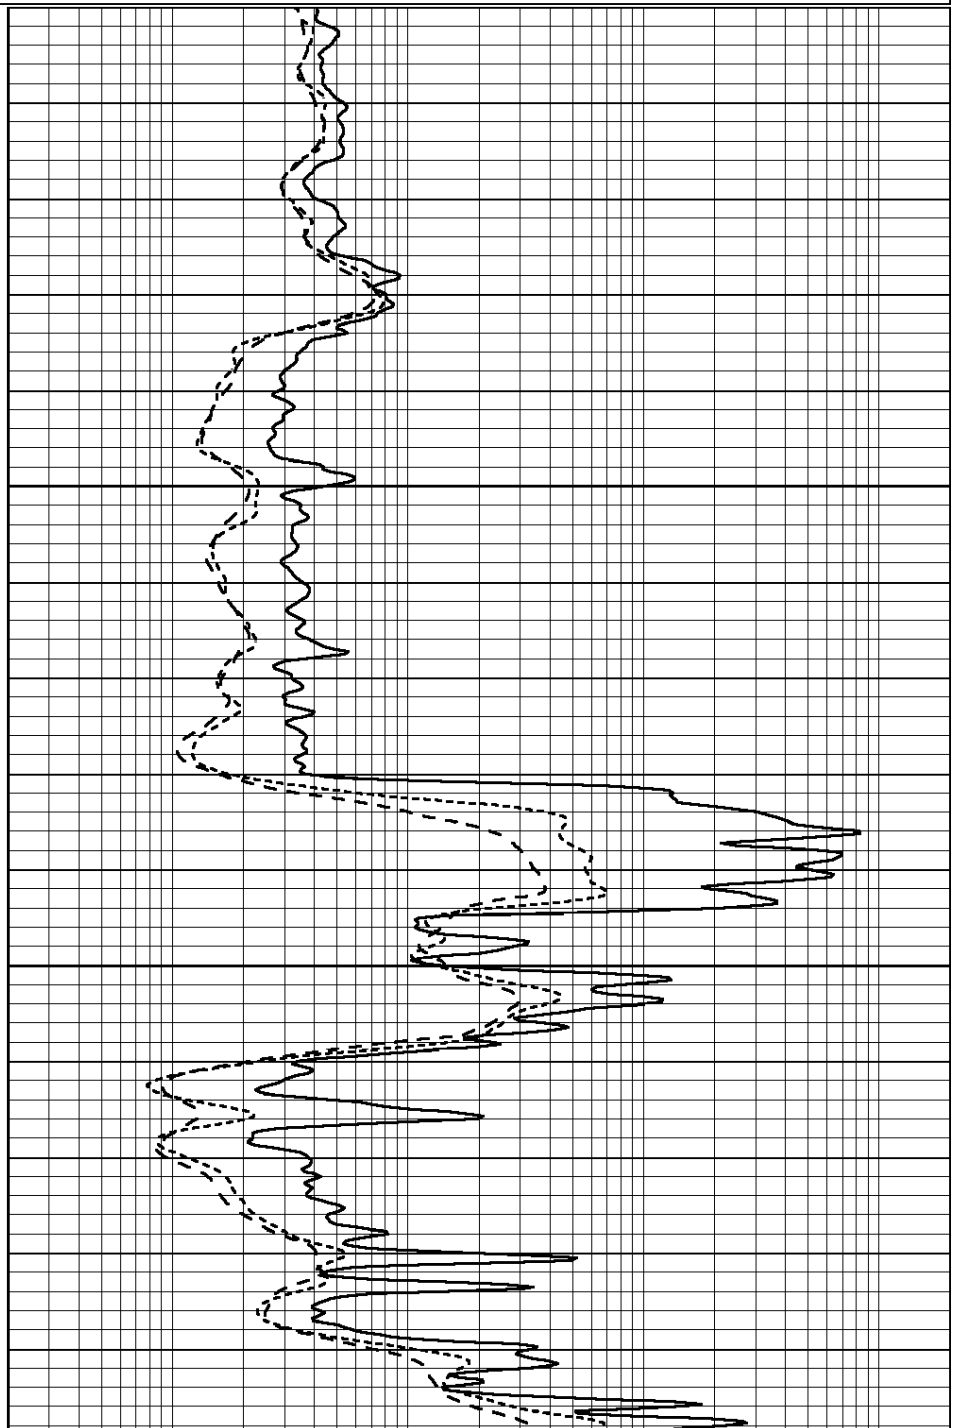

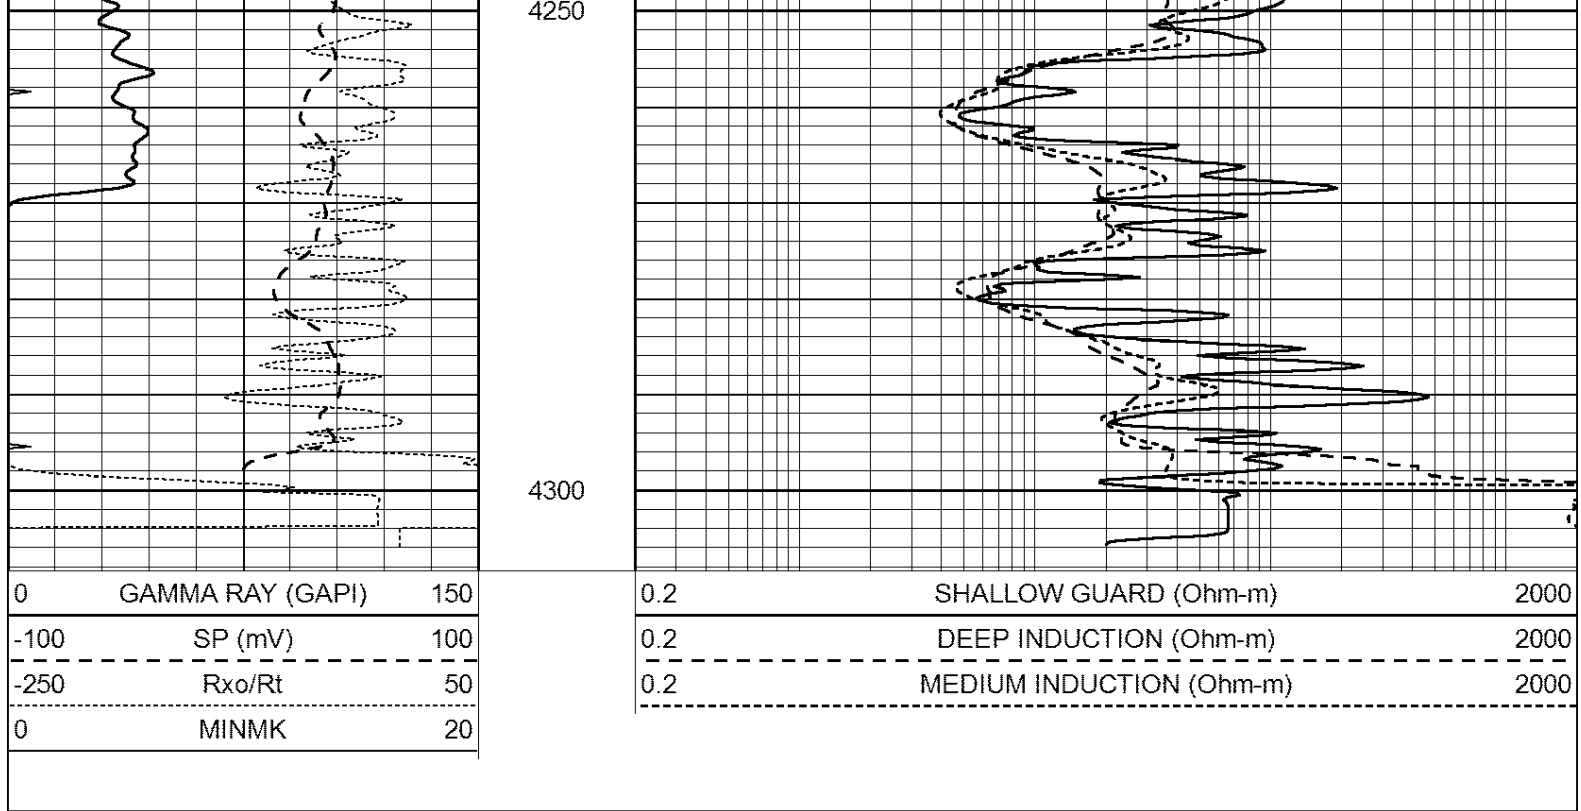

Calibration Report									
Database File:		pe2.db							
Dataset Pathname:		pass2							
Dataset Creation:		Mon Aug 21 11:58:02 2017 by Log Open-Cased 090629							
Dual Induction Calibration Report									
Serial-Model:		PROBE8-DILG							
Surface Cal Performed:		Mon Aug 21 11:58:18 2017							
Downhole Cal Performed:		Mon Aug 21 11:58:21 2017							
After Survey Verification Performed:		Mon Aug 21 11:58:23 2017							
Surface Calibration									
Readings				References			Results		
Loop:	Air	Loop		Air	Loop		m	b	
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	0.000	
Medium	0.029	0.796	V	0.000	464.000	mmho/m	590.000	-12.000	
Internal:	Zero	Cal		Zero	Cal		m	b	
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619	
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739	
Downhole Calibration									
Readings				References			Results		
	Zero	Cal		Zero	Cal		m'	b'	
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000	
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000	
LL3		7.500	V		1500.000	Ohm-m			
		0.000	V		20.000	Ohm-m			
		-7.200	V		3800.000	mmho-m			
After Survey Verification									
Readings				Targets			Results		
	Zero	Cal		Zero	Cal		m'	b'	

Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report

Serial: 002 Model: PRB

Master Calibration		Performed Mon Aug 21 11:56:41 2017						
	Background	Magnesium	Aluminum	Sandstone				
Window 1	833.6	7394.2	2287.3	8111.8	cps			
Window 2	768.9	6322.3	1995.6	6800.0	cps			
Window 3	621.5	3261.9	1186.4	3380.9	cps			
Window 4	184.2	185.7	184.9	184.8	cps			
Long Space	0.0	5553.4	1226.6	6031.1	cps			
Short Space	1.2	1307.5	903.9	1387.7	cps			
Rho		1.7100	2.5900	1.3800	g/cc			
Pe		0.0000	2.5700	1.5500				
Rib Angle	: 46.3	Rib Slope	: 1.045	Density/Spine Ratio	: 0.566			
Spine Angle	: 76.3	Spine Slope	: 4.090	Spine Intercept	: -20.7			

Before Survey Verification		Performed Wed Dec 31 18:00:00 1969						
Window 1	0.0	0.0	0.0	0.0	cps			
Window 2	0.0	0.0	0.0	0.0	cps			
Window 3	0.0	0.0	0.0	0.0	cps			
Window 4	0.0	0.0	0.0	0.0	cps			
Long Space	0.0	0.0	0.0	0.0	cps			
Short Space	0.0	0.0	0.0	0.0	cps			
Measured Rho		0.0000	0.0000	0.0000	g/cc			
Measured Correction		0.0000	0.0000	0.0000	g/cc			
Measured Pe			0.0000	0.0000				

After Survey Verification		Performed Wed Dec 31 18:00:00 1969						
Window 1	0.0	0.0	0.0	0.0	cps			
Window 2	0.0	0.0	0.0	0.0	cps			
Window 3	0.0	0.0	0.0	0.0	cps			
Window 4	0.0	0.0	0.0	0.0	cps			
Long Space	0.0	0.0	0.0	0.0	cps			
Short Space	0.0	0.0	0.0	0.0	cps			
Measured Rho		0.0000	0.0000	0.0000	g/cc			
Measured Correction		0.0000	0.0000	0.0000	g/cc			
Measured Pe			0.0000	0.0000				

Compensated Neutron Calibration Report

Serial Number:	6I
Tool Model:	G

CALIBRATION						
Detector	Readings	Target	Normalization			
Short Space	1.00 cps	1.00 cps	1.0000			
Long Space	1.00 cps	1.00 cps	1.0000			

PRE-SURVEY VERIFICATION

	Detector	Readings	Measured	Target
1)	Short Space	cps		
	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	
3)	Short Space	cps		
	Long Space	cps	pu	

POST-SURVEY VERIFICATION

	Detector	Readings	Measured	Target
1)	Short Space	cps		
	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	pu
3)	Short Space	cps		
	Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number:	GR6	
Tool Model:	OPEN	
Performed:	Mon Aug 21 11:59:01 2017	
Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	276.0	cps
Sensitivity:	0.5500	GAPI/cps