

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-119-20309-00-01  
Spot: SE Sec/Twnshp/Rge: 30-33S-28W  
1320 feet from S Section Line, 1320 feet from E Section Line  
Lease Name: MOHLER UNIT Well #: 14  
County: MEADE Total Vertical Depth: 6020 feet

Operator License No.: 5055  
Op Name: C. H. TODD, INC.  
Address: 1000 N. TYLER SUITE 100  
WICHITA, KS 67212

String	Size	Depth (ft)	Pulled (ft)	Comment
PKR		5647		
PROD	4.5	6013	1404	WITH 300 SX CMT
SURF	8.625	1488		WITH 800 SX CMT

\$195.65

Well Type: EOR UIC Docket No: E26993.2 Date/Time to Plug: 06/23/2006 10:00 AM  
Plug Co. License No.: 6454 Plug Co. Name: CHEYENNE WELL SERVICE, INC.  
Proposal Rcvd. from: DAVID PAULEY Company: C.H. TODD Phone: (316) 264-7566

Proposed Plugging Method: PUMP 15 SX GEL. PLUG AT 1500' WITH 50 SX CMT. PLUG AT 660' WITH 50 SX CMT. PLUG AT 40' WITH 15 SX CMT.

Plugging Proposal Received By: JERRY W. STAPLETON WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 06/24/2006 12:01 PM KCC Agent: STEVE DURRANT

Actual Plugging Report:

\*NOTE: 1ST SET OF PLUGS HAD TO BE WASHED OUT DUE TO HOLE LOCATED IN TUBING. 6/23/06: RAN TUBING TO 5550' & PUMP 50 SX CMT. 6/24/06: 1ST PLUG RUN TUBING TO 1400' & PUMP 50 SX CMT. 2ND PLUG PULL TUBING TO 650' & PUMP 50 SX CMT. 3RD PLUG PULL TUBING TO 40' & PUMP 15 SX CMT.

Perfs:


Top	Bot	Thru	Comments
5707	6008		
5600	5644		

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: TBG

INVOICED  
6-28-06  
2006061863

District: 01

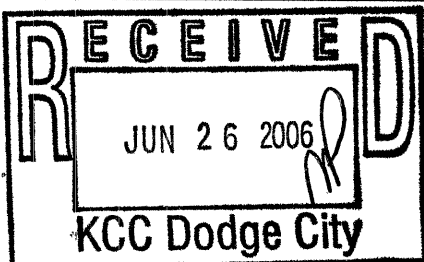

Signed

*Steve Durrant*

(TECHNICIAN)

RECEIVED  
JUN 28 2006  
KCC WICHITA

Form CP-2/3

PKT