



MICRO LOG

Company GLOBE OPERATING, INC.

Well WILLIAMS #5

Field SMALLWOOD

County STAFFORD State KANSAS

Location: API # : 15-185-24072-0000

1640' FNL & 960' FEL

Other Services
CDL/CNL
DIL

SEC 11 TWP 22S RGE 14W

Elevation

Permanent Datum GROUND LEVEL Elevation 1926
Log Measured From KELLY BUSHING 8' A.G.L.
Drilling Measured From KELLY BUSHING

K.B. 1934
D.F. 1932
G.L. 1926

Date 10/11/20

Run Number TWO

Depth Driller 3835

Depth Logger 3833

Bottom Logged Interval 3831

Top Log Interval 3200

Casing Driller 8 5/8" @ 357'

Casing Logger 356

Bit Size 7 7/8

Type Fluid in Hole CHEMICAL MUD CHLORIDES 9300 PPM

Density / Viscosity 9.2/54

pH / Fluid Loss 10.5/10.8

Source of Sample FLOWLINE

Rm @ Meas. Temp .40 @ 80F

Rmf @ Meas. Temp .30 @ 80F

Rmc @ Meas. Temp .48 @ 80F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .27 @ 115F

Time Circulation Stopped 2 HOURS

Time Logger on Bottom 111F

Maximum Recorded Temperature 115F

Equipment Number 3802

Location HAYS, KANSAS

Recorded By JASON CAPPELLUCCI

Witnessed By CHAD COUNTS

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
RADIUM, KS. - 4 EAST ON HWY 19 - 1/2 SOUTH - WEST INTO





MAIN SECTION


Database File	5230ddn.db
Dataset Pathname	pass7.1
Presentation Format	_micro
Dataset Creation	Sun Oct 11 23:33:56 2020
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

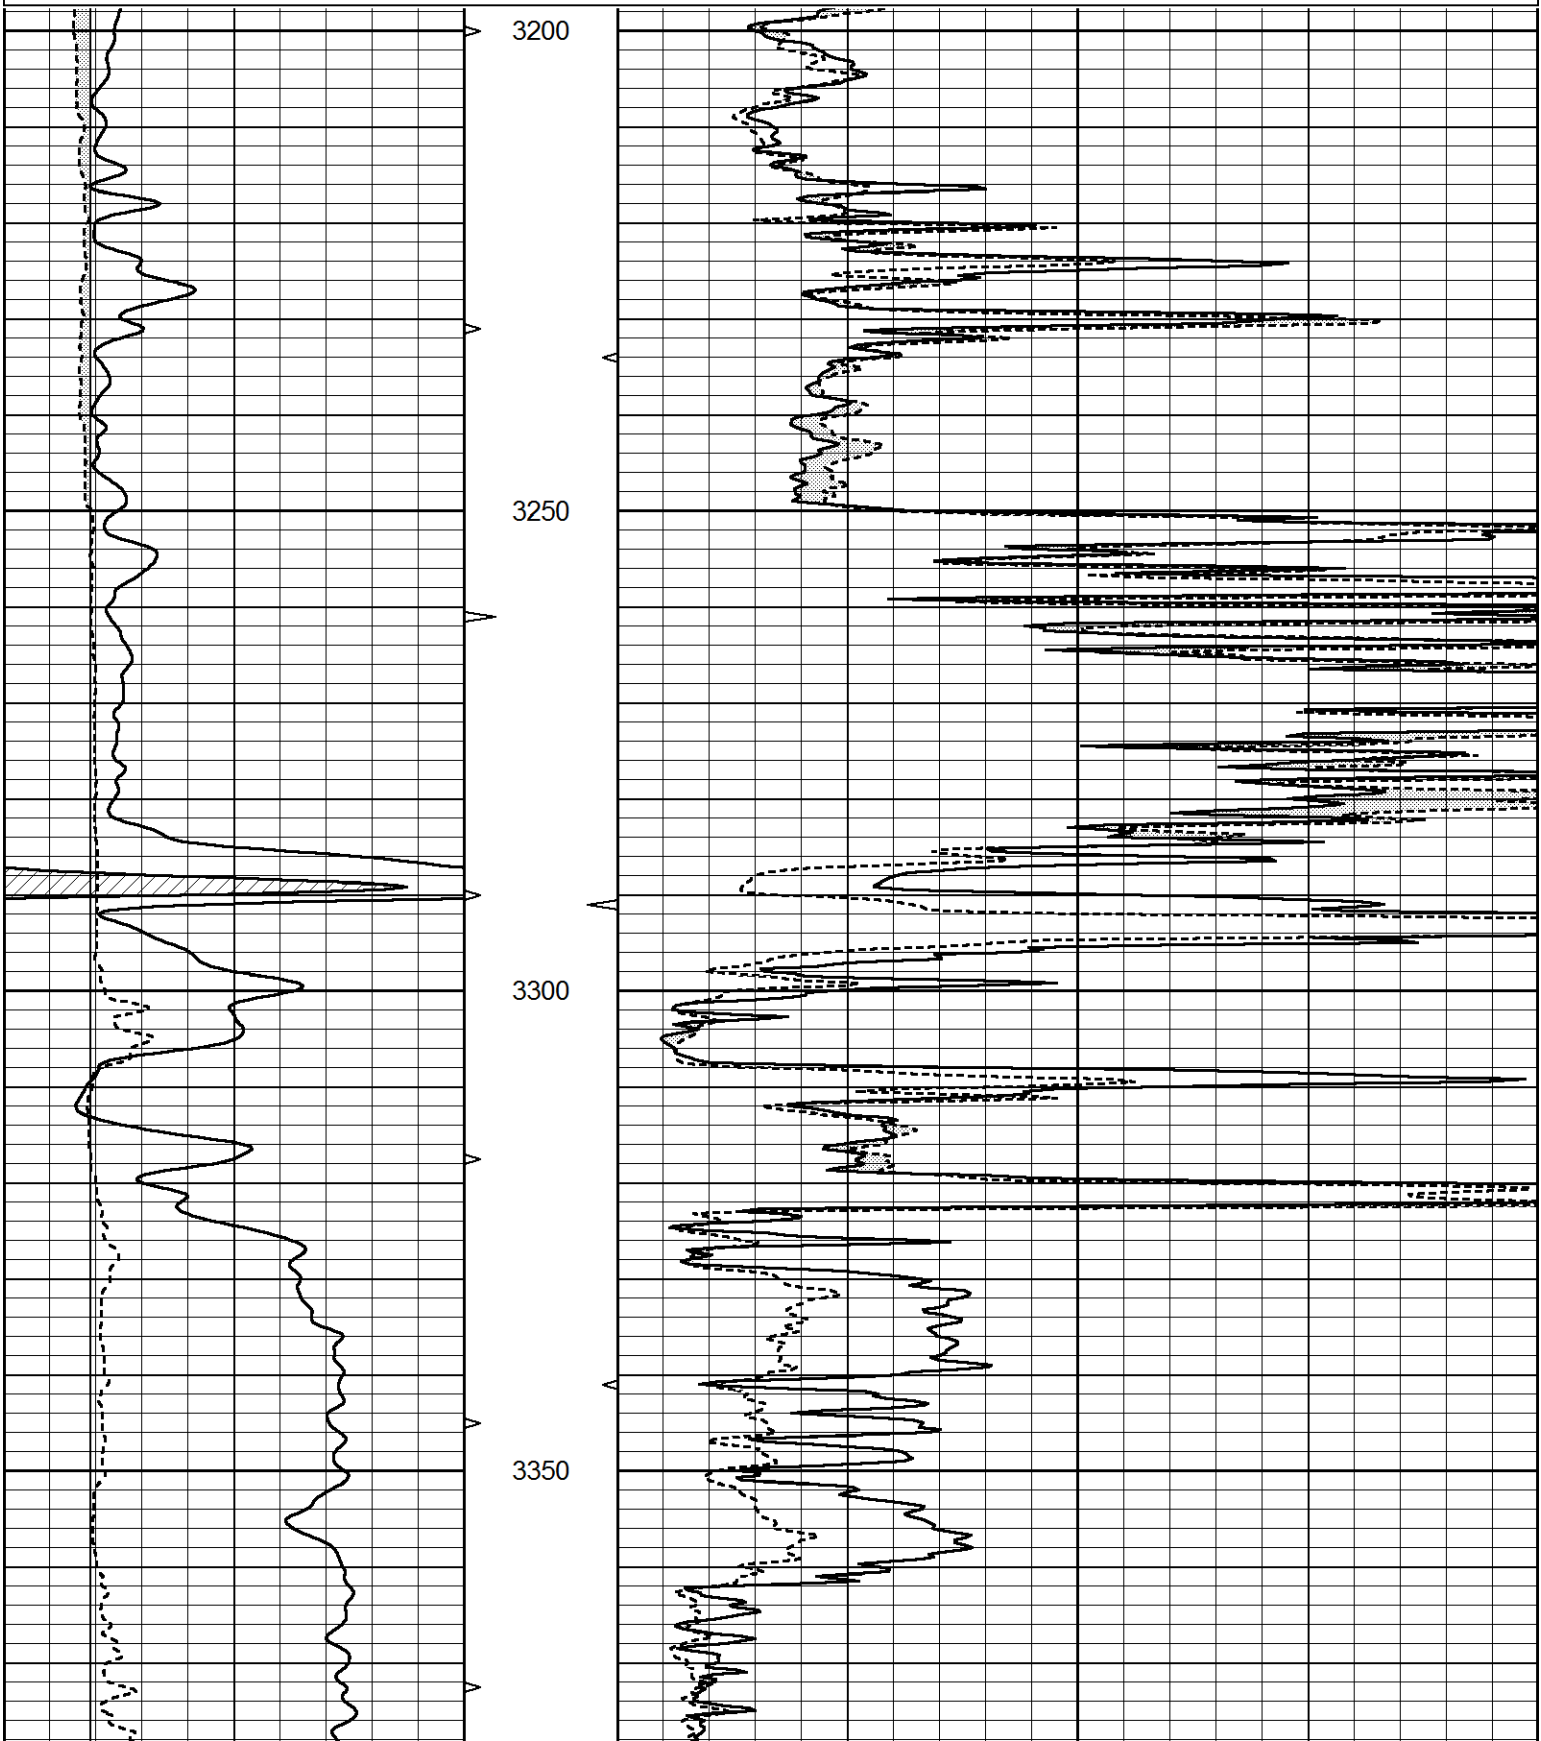


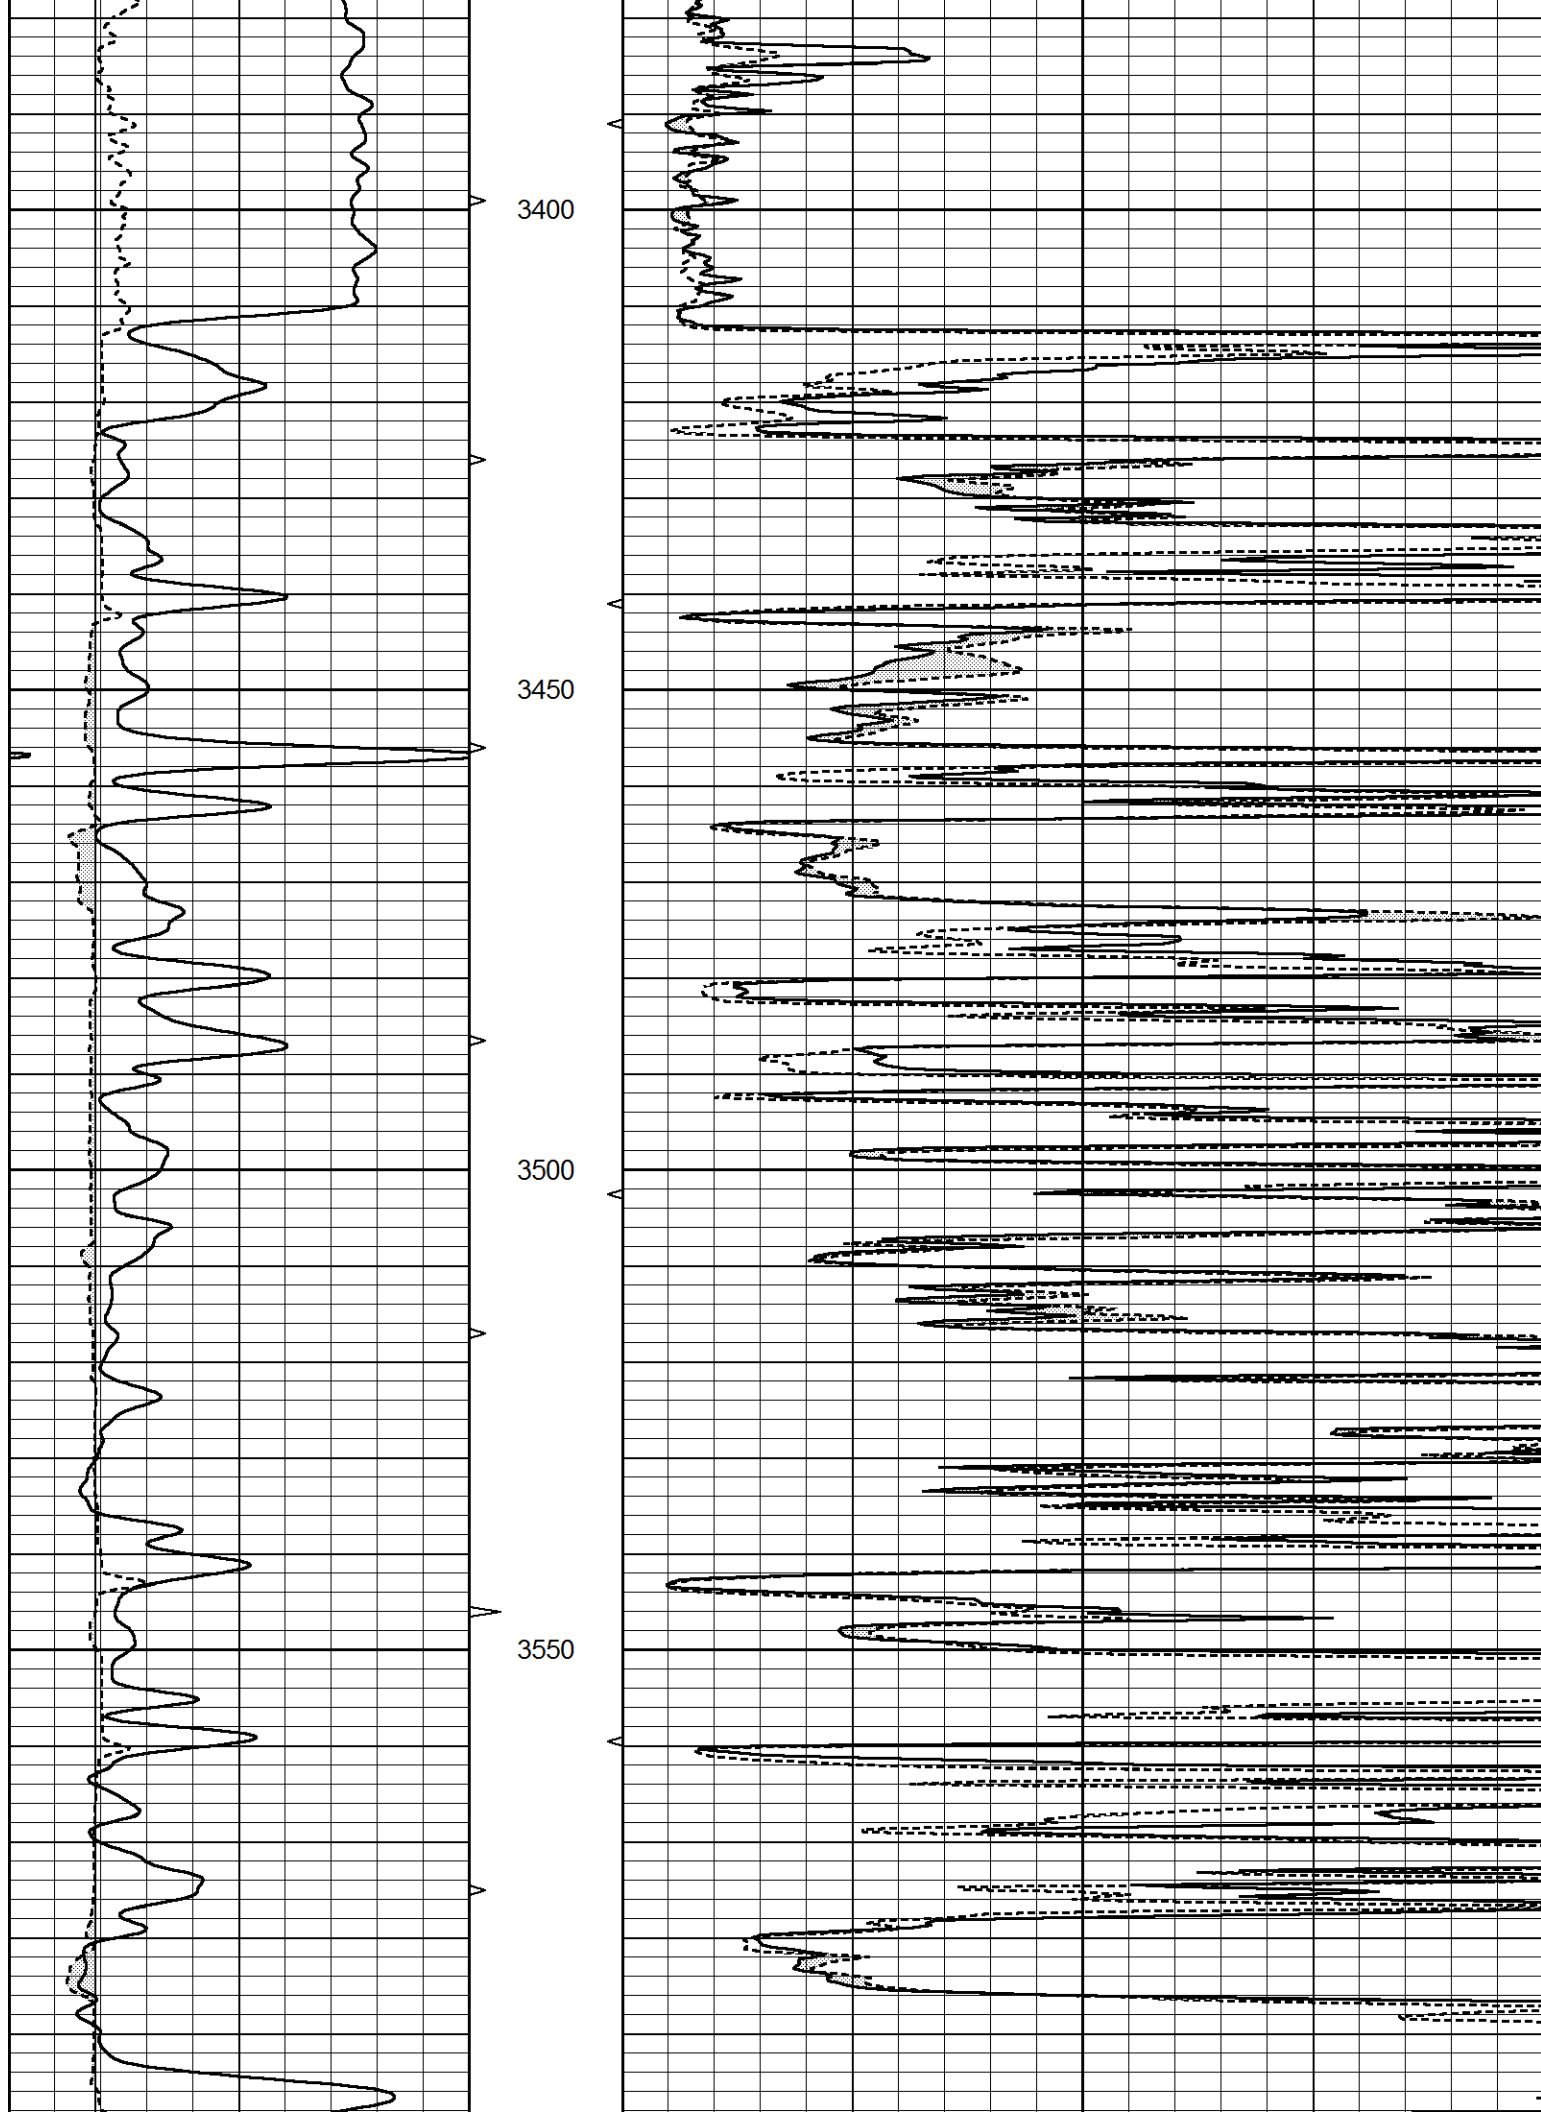


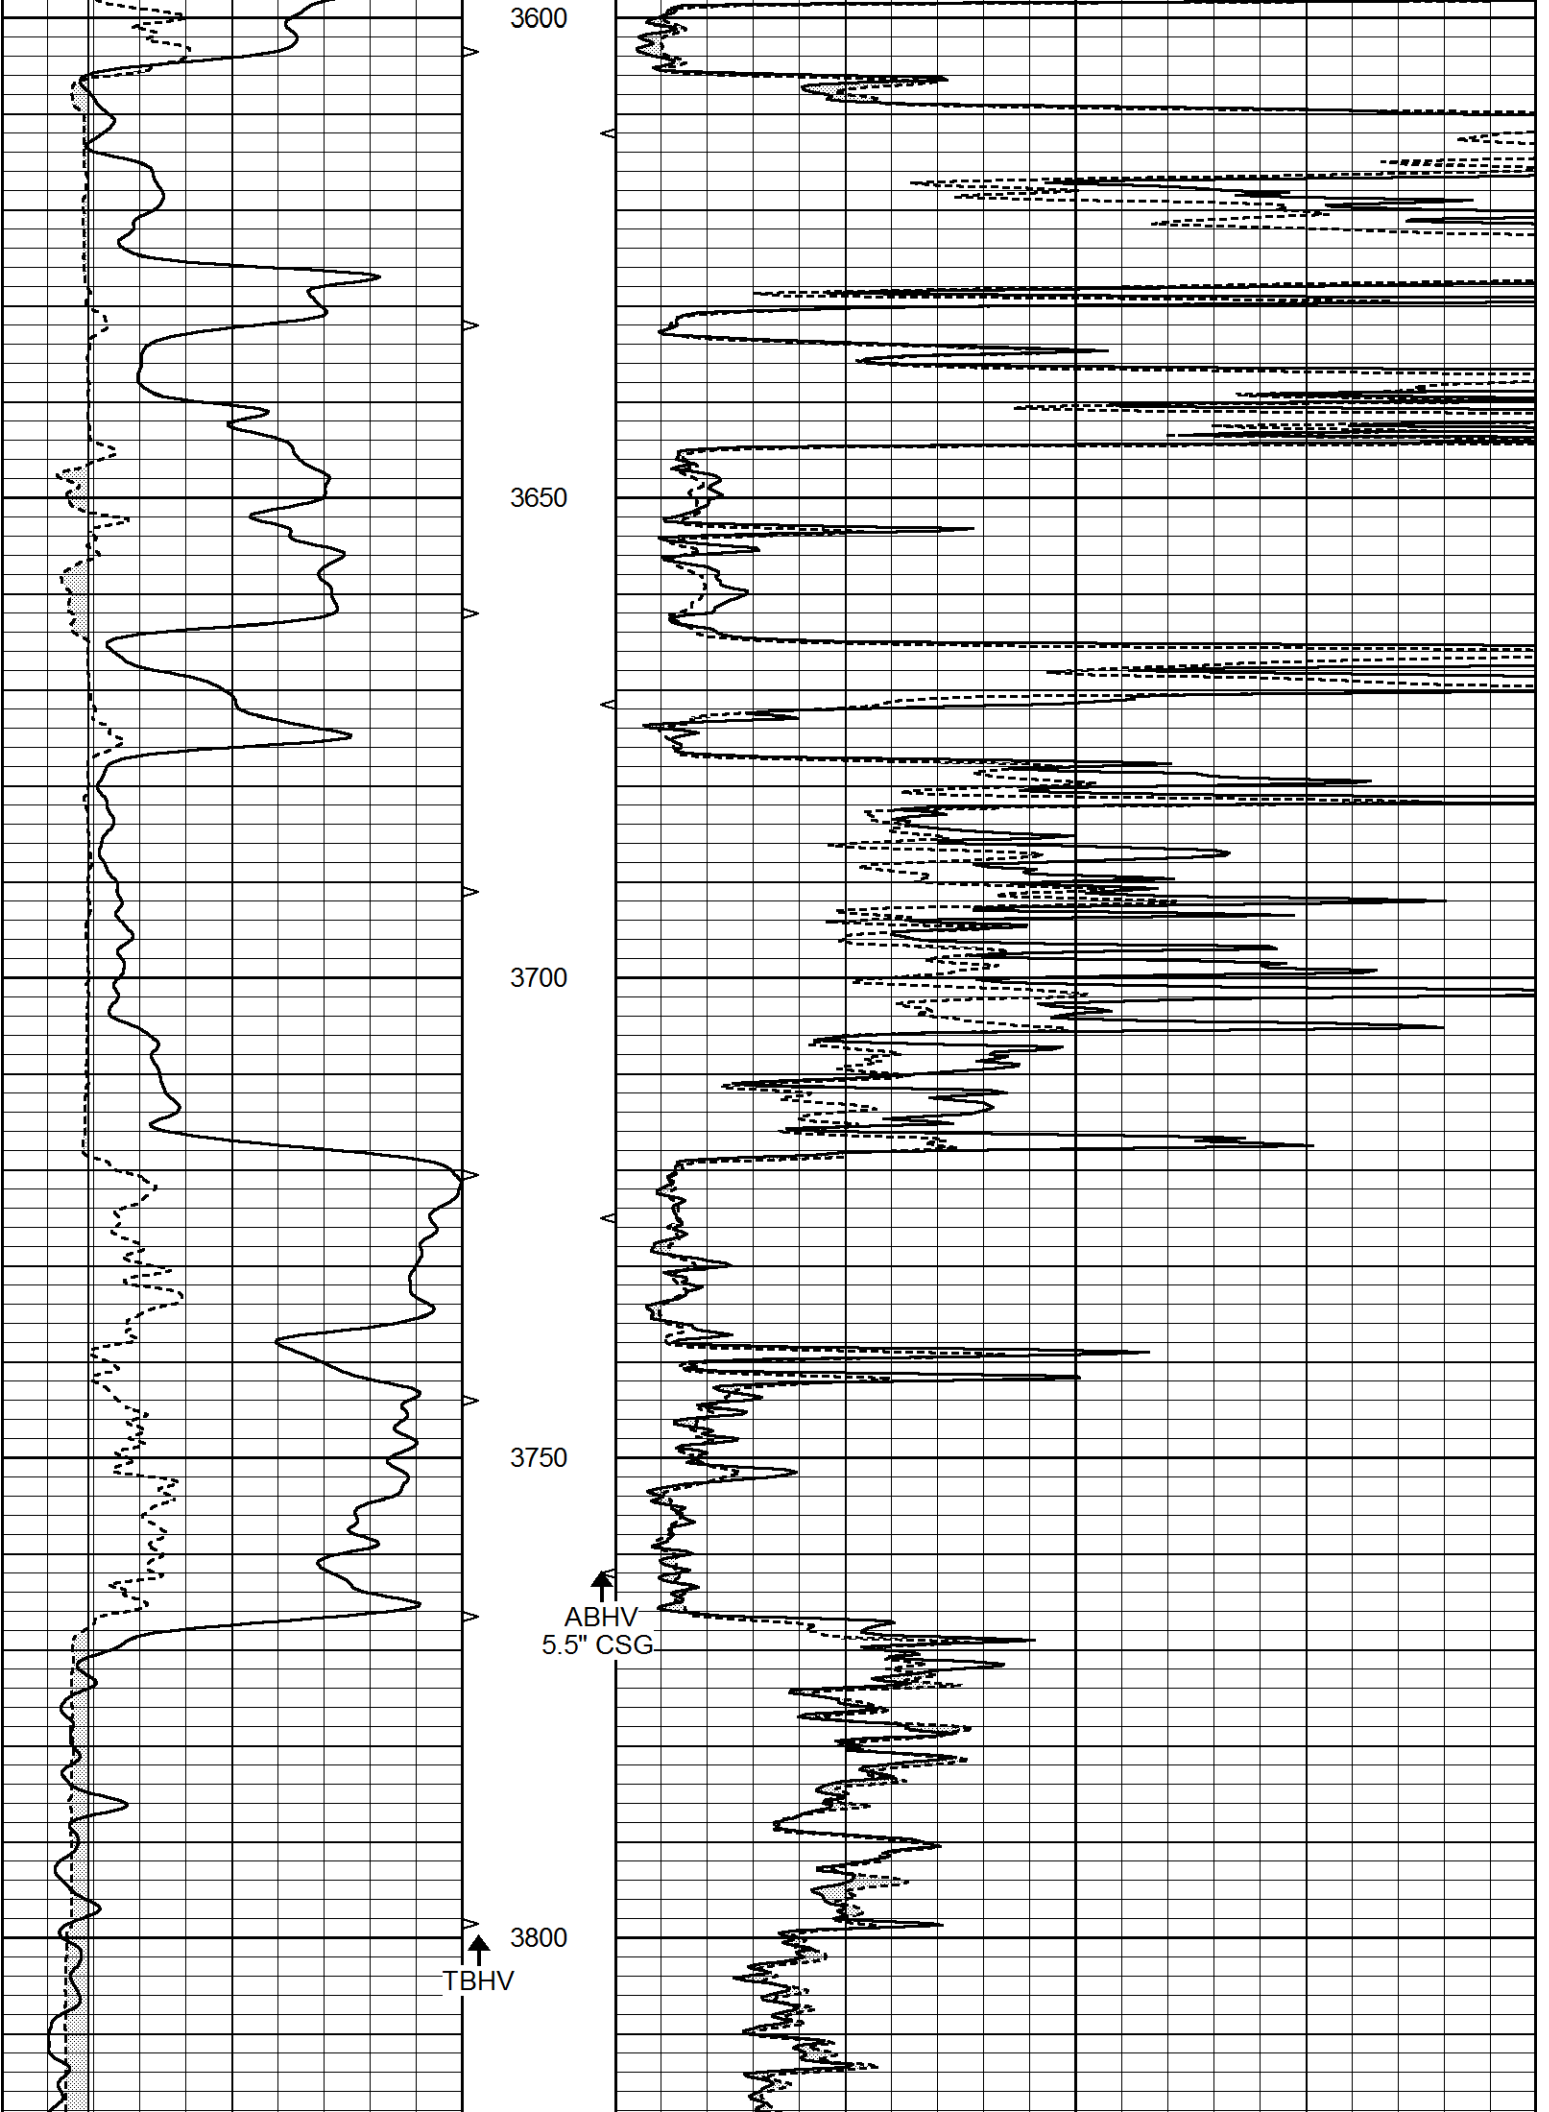


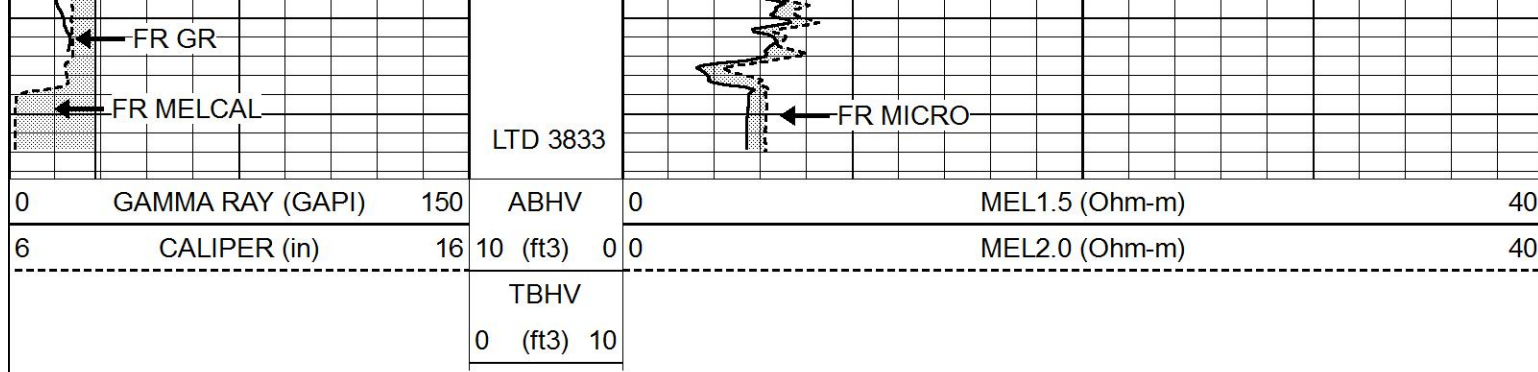

REPEAT SECTION

Database File 5230ddn.db
 Dataset Pathname pass6.1
 Presentation Format _micro
 Dataset Creation Sun Oct 11 23:23:11 2020
 Charted by Depth in Feet scaled 1:240

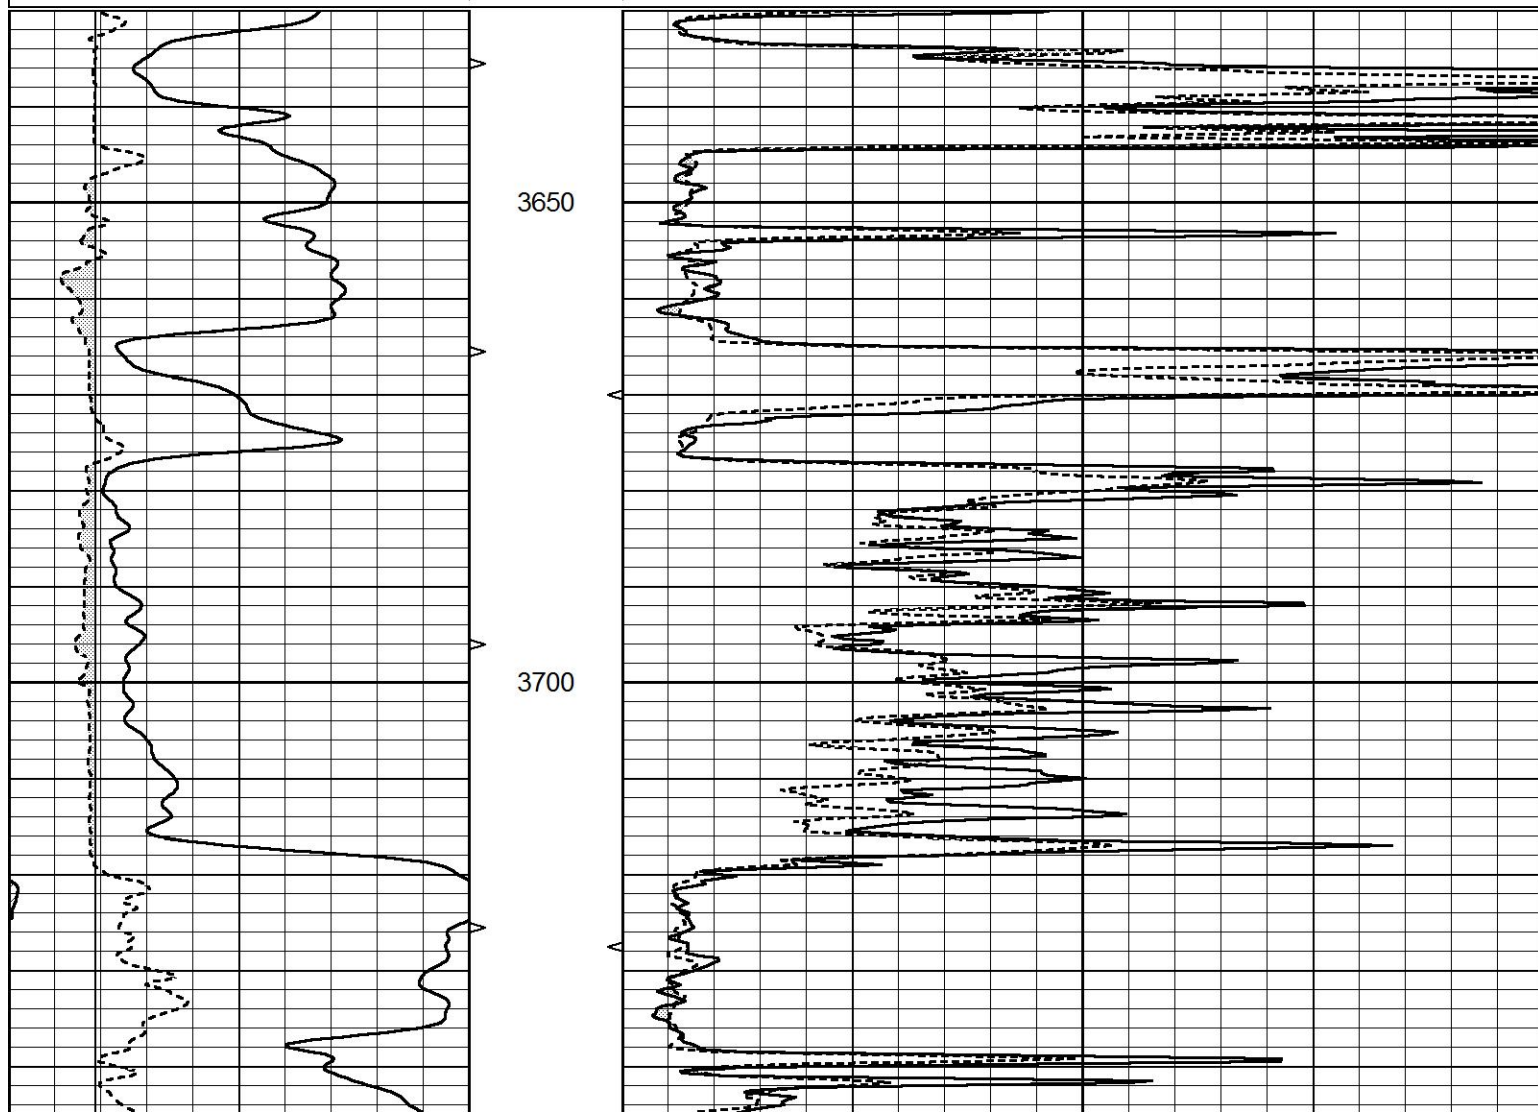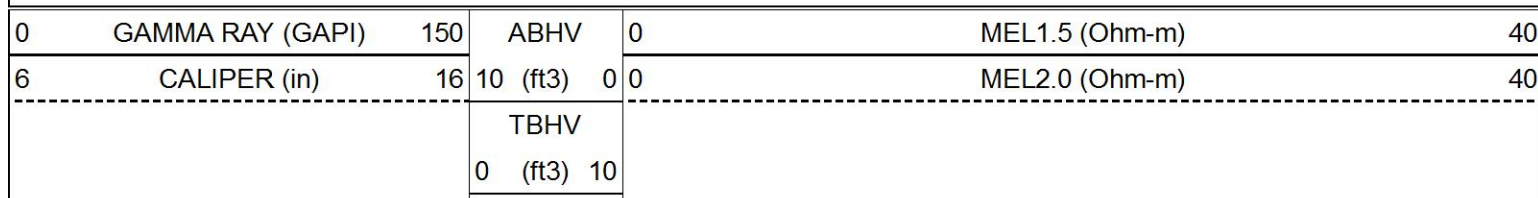

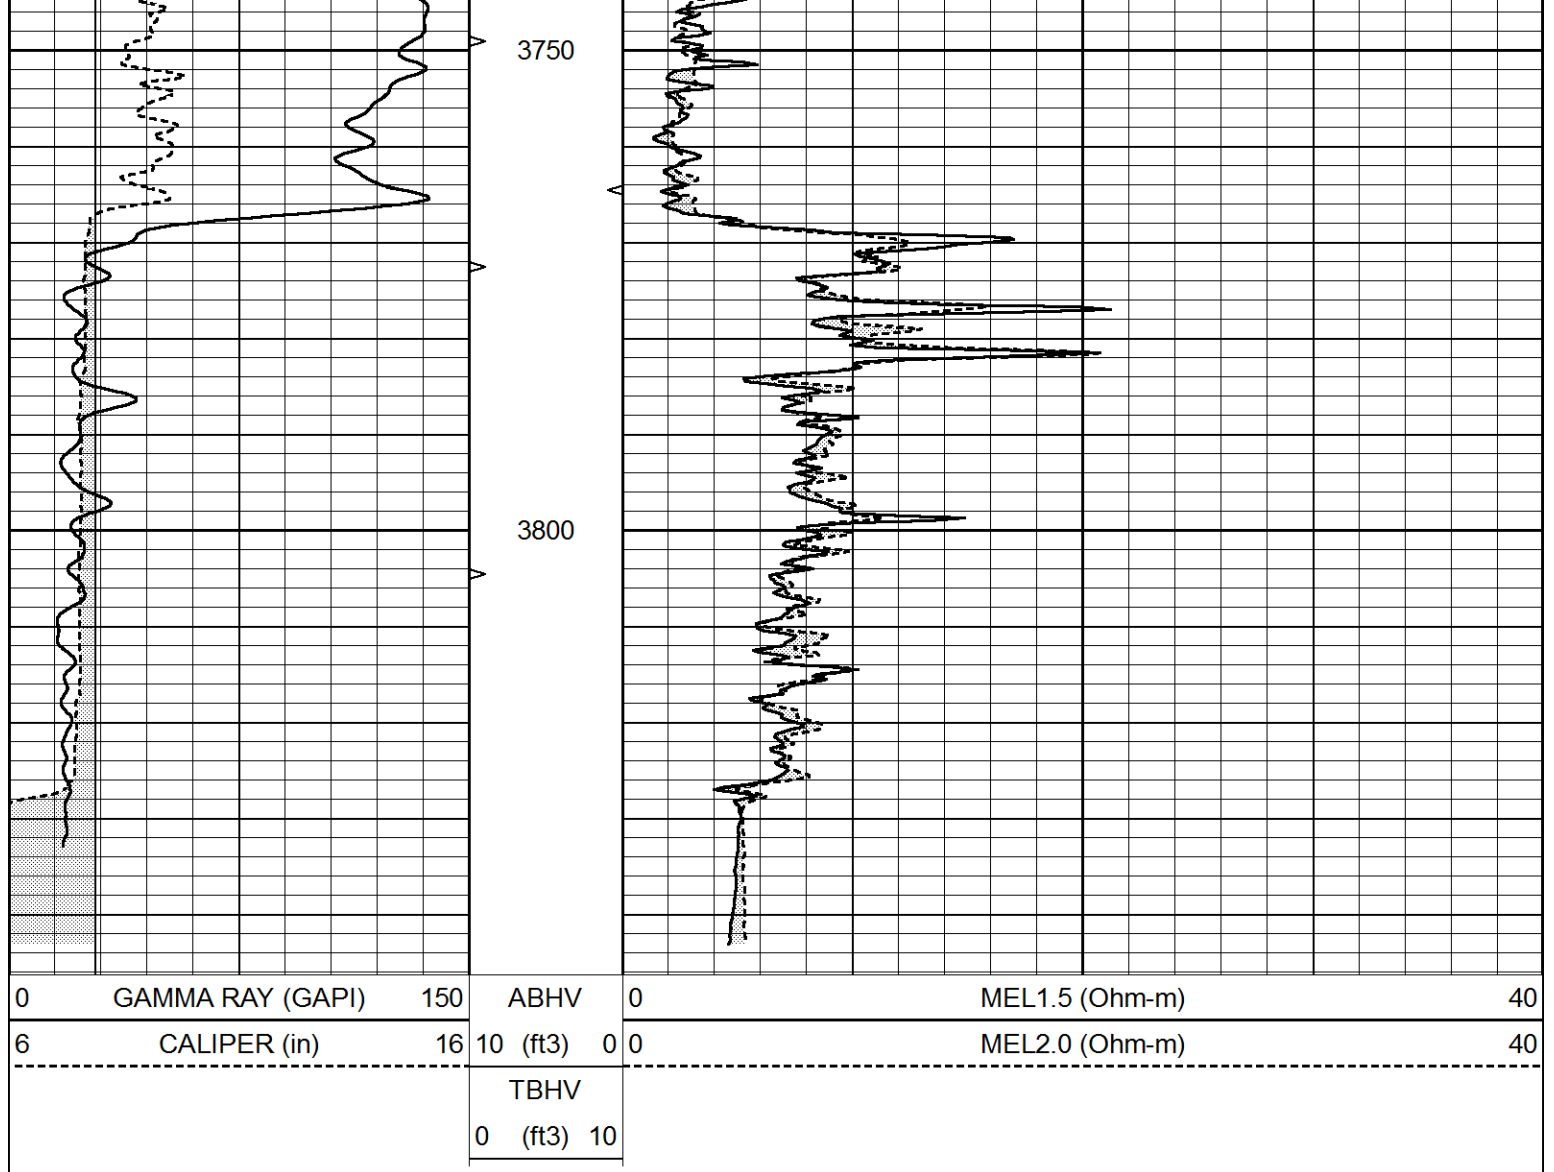

Calibration Report			
Database File	5230ddn.db		
Dataset Pathname	pass6.1		
Dataset Creation	Sun Oct 11 23:23:11 2020		
MICRO_USR Calibration Report			
Serial Number:	070910		
Tool Model:	ProbeL		
Performed:	Mon Feb 24 07:51:20 2020		
Caliper Calibration:	Gain=7.282	Offset=3.087	
References	Low Cal	High Cal	
Readings	8.000	14.000	
	0.647	1.471	
1.5" Calibration:	Gain=50.000	Offset=-0.567	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.004	1.335	
2" Calibration:	Gain=45.000	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.004	1.029	

Microlog Calibration Report								
Serial-Model: Performed:			070910-ProbeL (Not Performed)					
Readings			References				Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000
Gamma Ray Calibration Report								
Serial Number:			070558					
Tool Model:			Probe1					
Performed:			Mon Jan 21 19:38:56 2019					
Calibrator Value:			1.0	GAPI				
Background Reading:			0.0	cps				
Calibrator Reading:			1.0	cps				
Sensitivity:			0.2500	GAPI/cps				