



MICRO LOG

Company	VINCENT OIL CORPORATION	Company	VINCENT OIL CORPORATION
Well	CLOSE#2-2	Well	CLOSE#2-2
Field	SODVILLE	Field	SODVILLE
County	FORD	County	FORD
State	KANSAS	State	KANSAS
Location:	AP1 # : 15-057-21001-00-00	Location:	2230' FSL & 2055' FWL
Permanent Datum	GROUND LEVEL	Elevation	2530
Log Measured From	KELLY BUSHING 12' A.G.L.	Elevation	K.B. 2542
Drilling Measured From	KELLY BUSHING	Elevation	D.F. 2540
		Elevation	G.L. 2530
Date	07/20/18		
Run Number	TWO		
Depth Driller	5350		
Depth Logger	5350		
Bottom Logged Interval	5330		
Top Log Interval	4200		
Casing Driller	8 5/8" @ 845		
Casing Logger	645		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.3/56		
pH / Fluid Loss	9.5/10.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.50@82		
Rmt @ Meas. Temp	.36@82		
Rmc @ Meas. Temp	.60@82		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.32@128		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	128F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	Ken LeBlanc		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS
KINGSDOWN BLACKTOP NORTH TO WILBURN RD.
WEST TO 122 RD.
1/2 SOUTH, EAST INTO.




MAIN PASS

Database File: 2695pe.db
Dataset Pathname: pass5MIC
Presentation Format: _micro
Dataset Creation: Fri Jul 20 06:25:56 2018
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

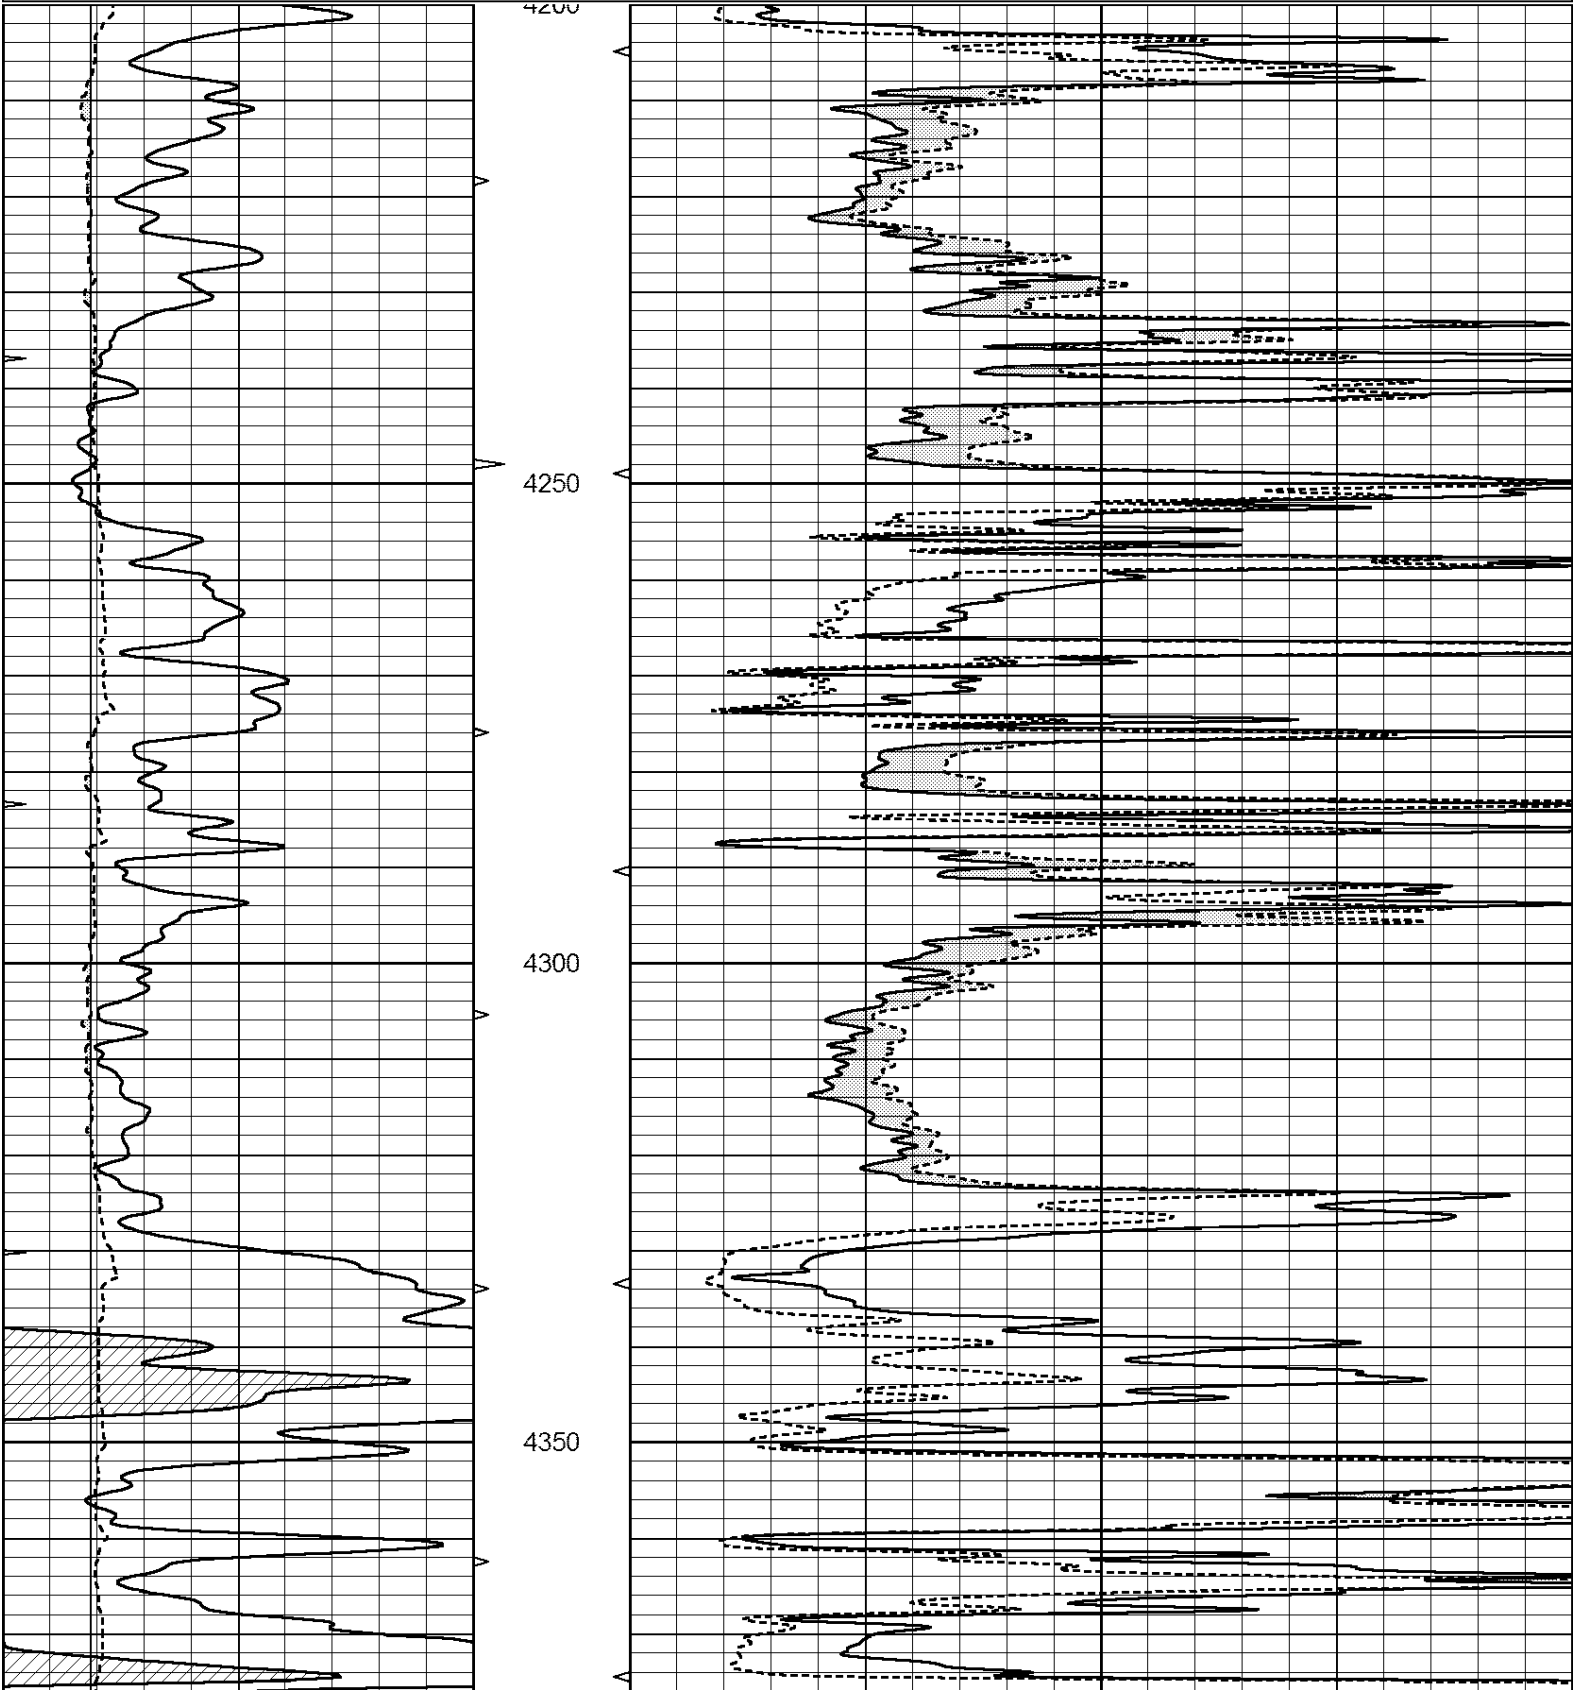

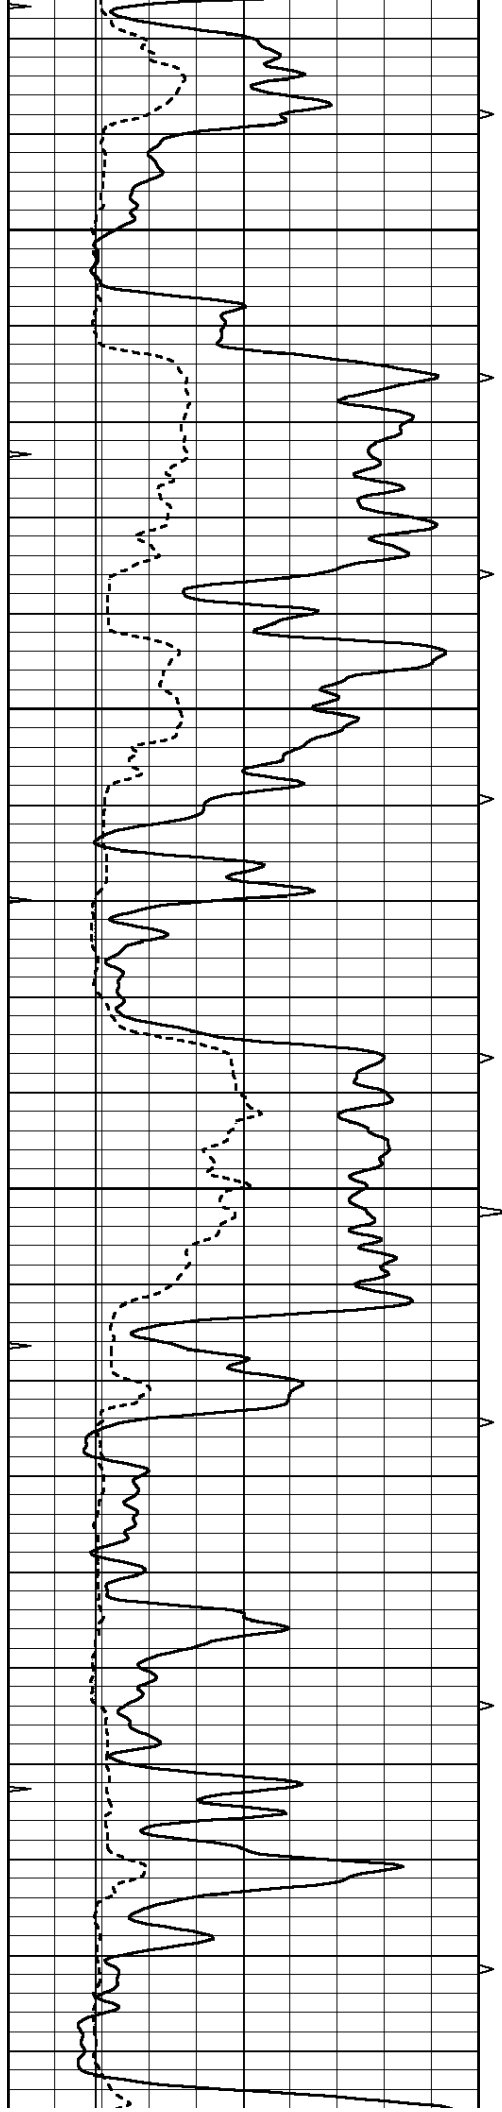



4400

4450

4500

4550

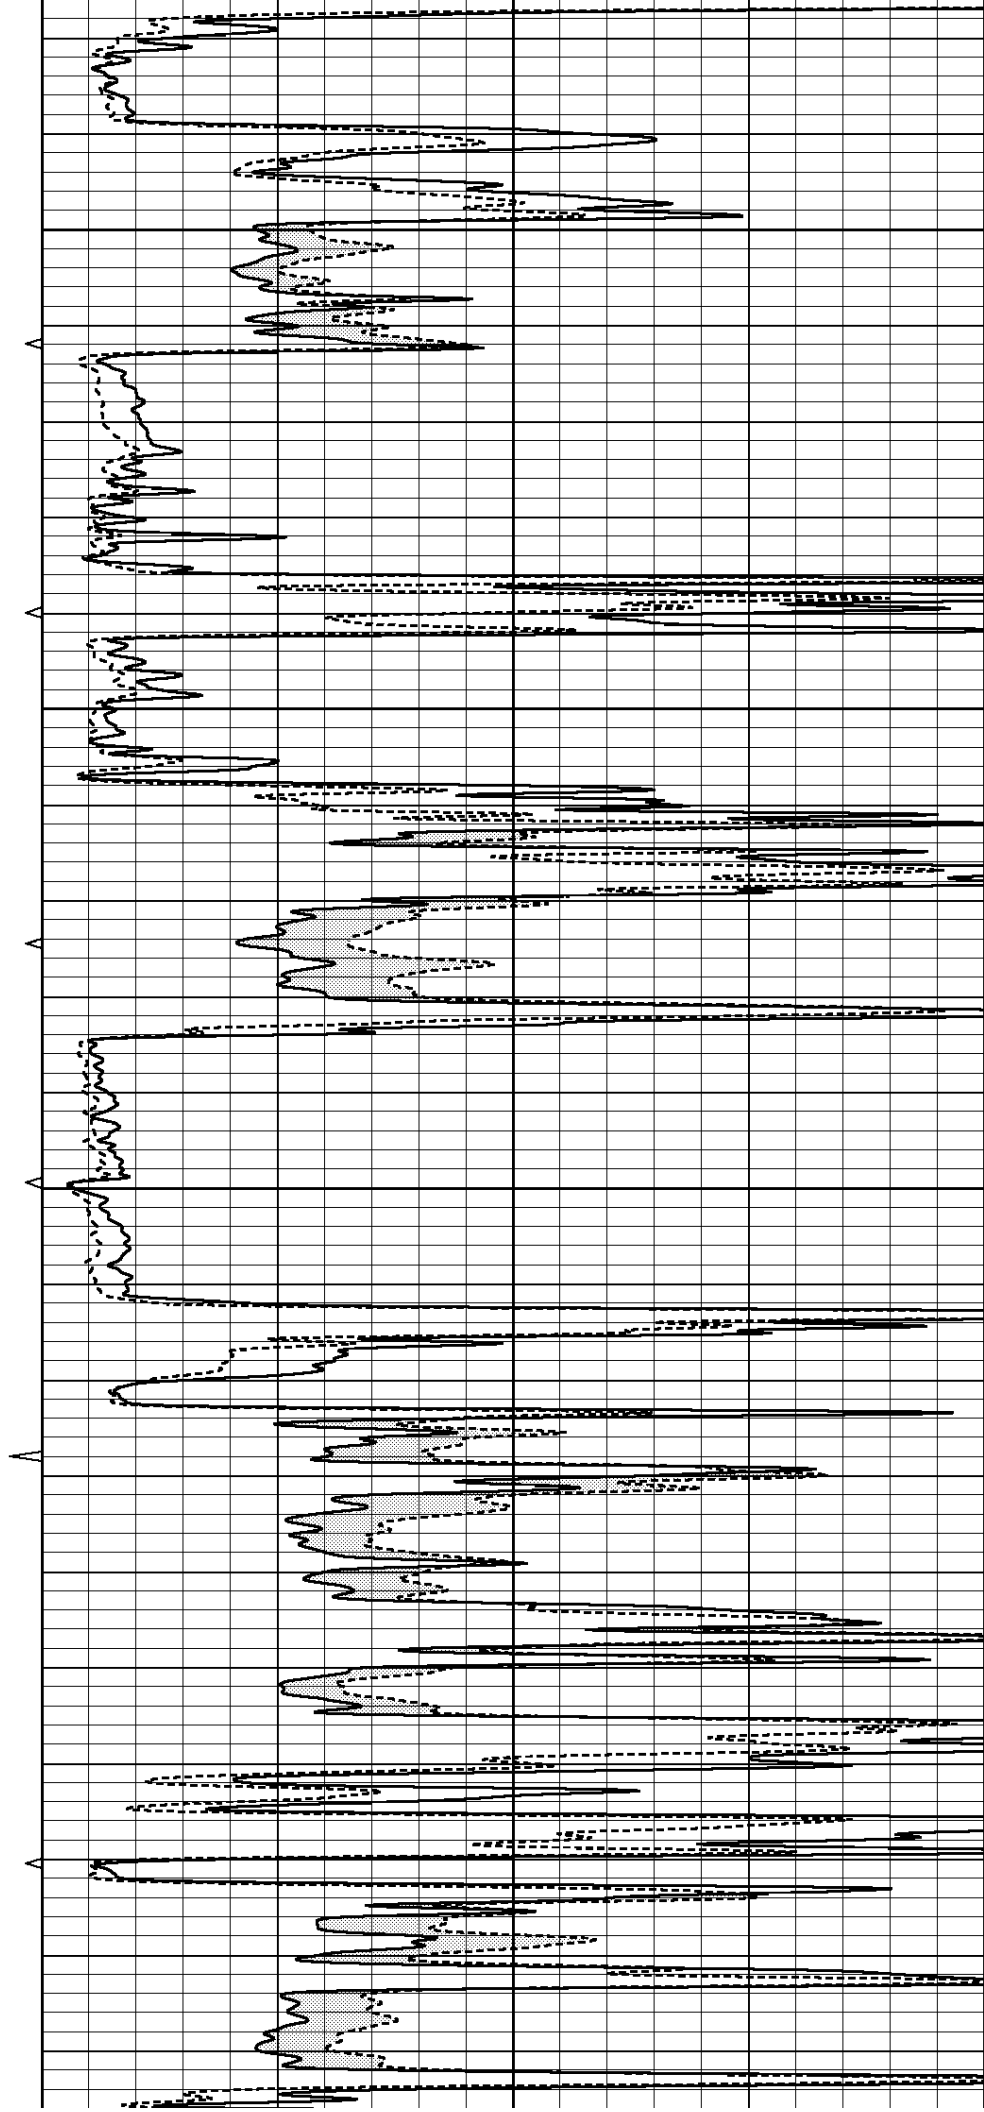

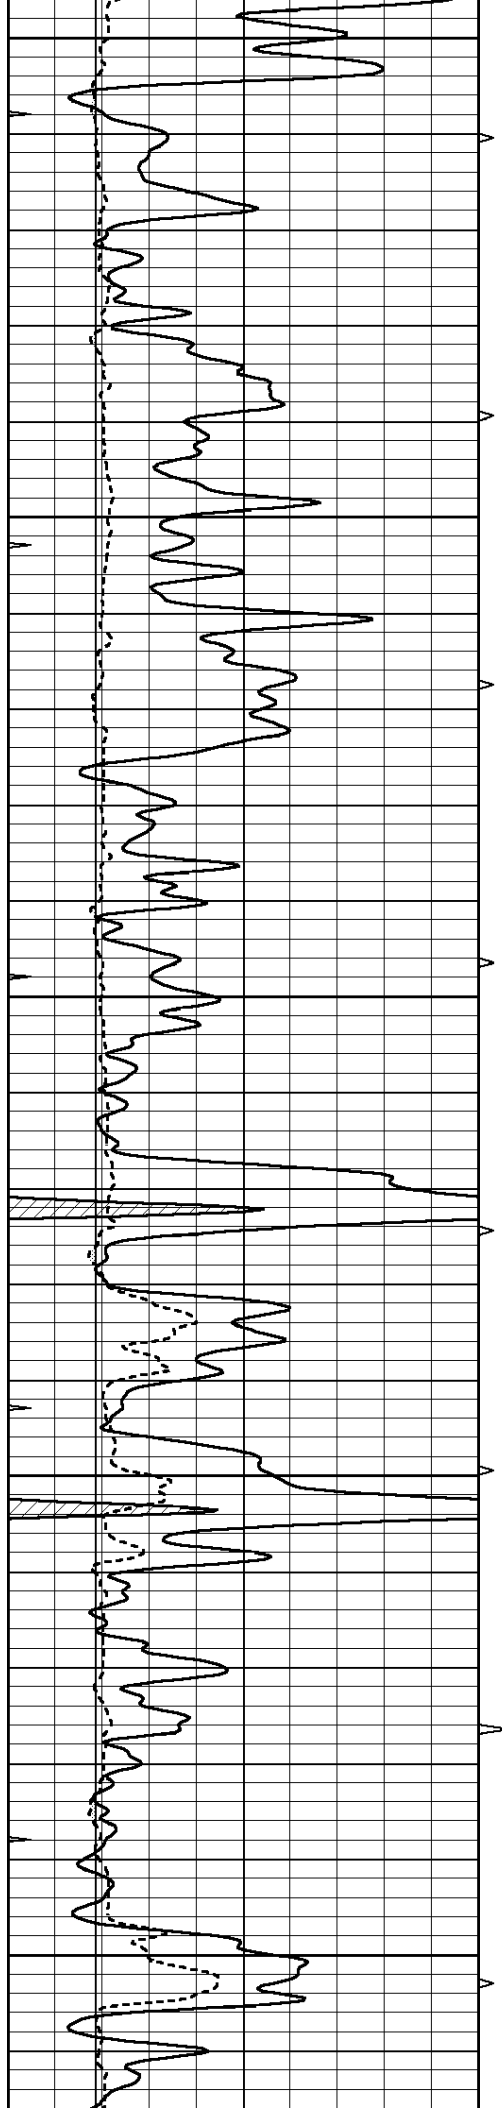


4600


4650

4700

4750

4800

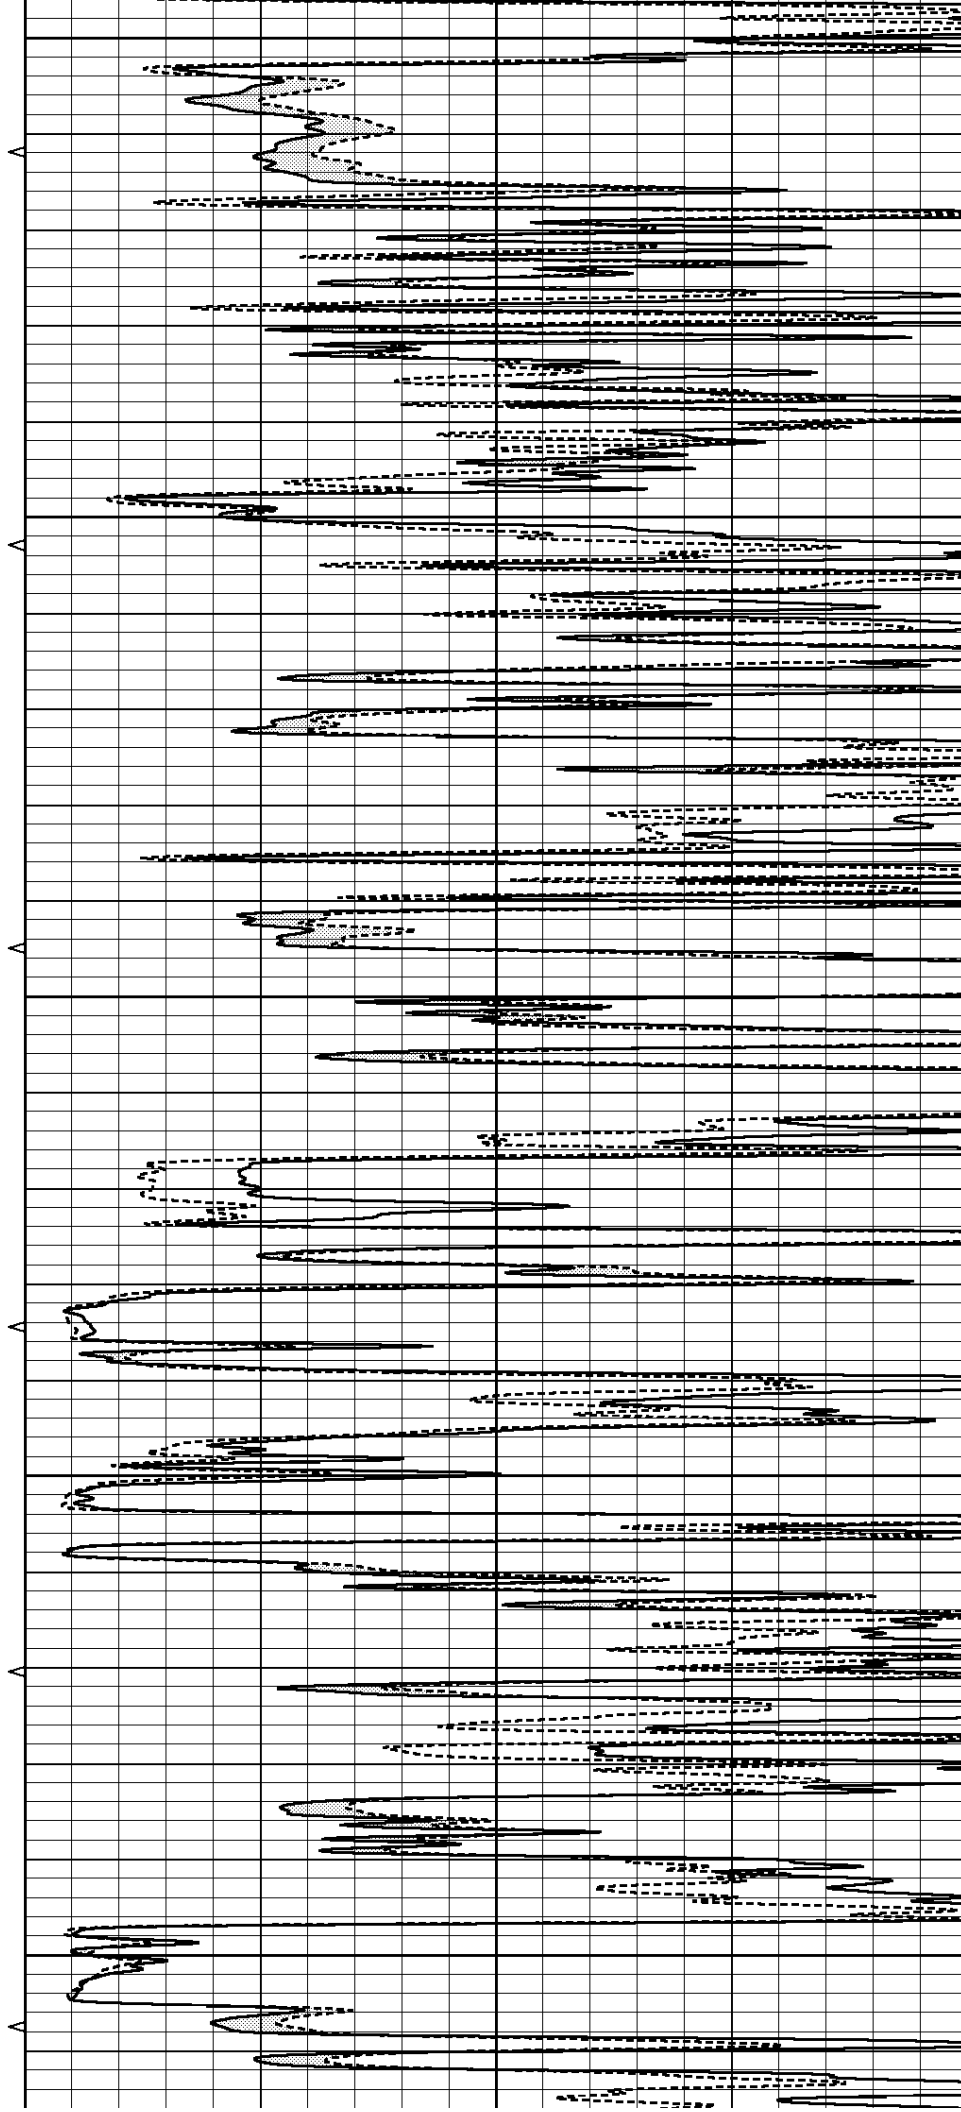

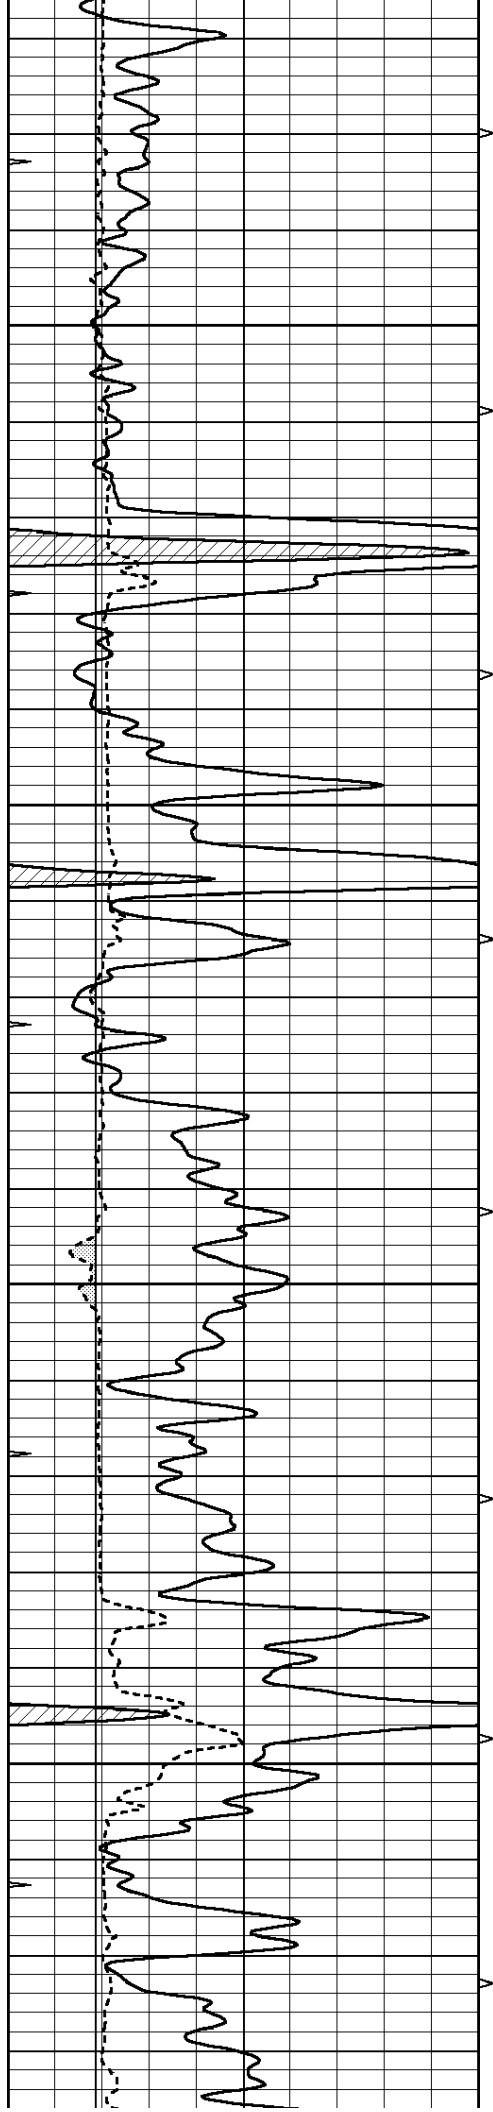



4850

4900

4950

5000

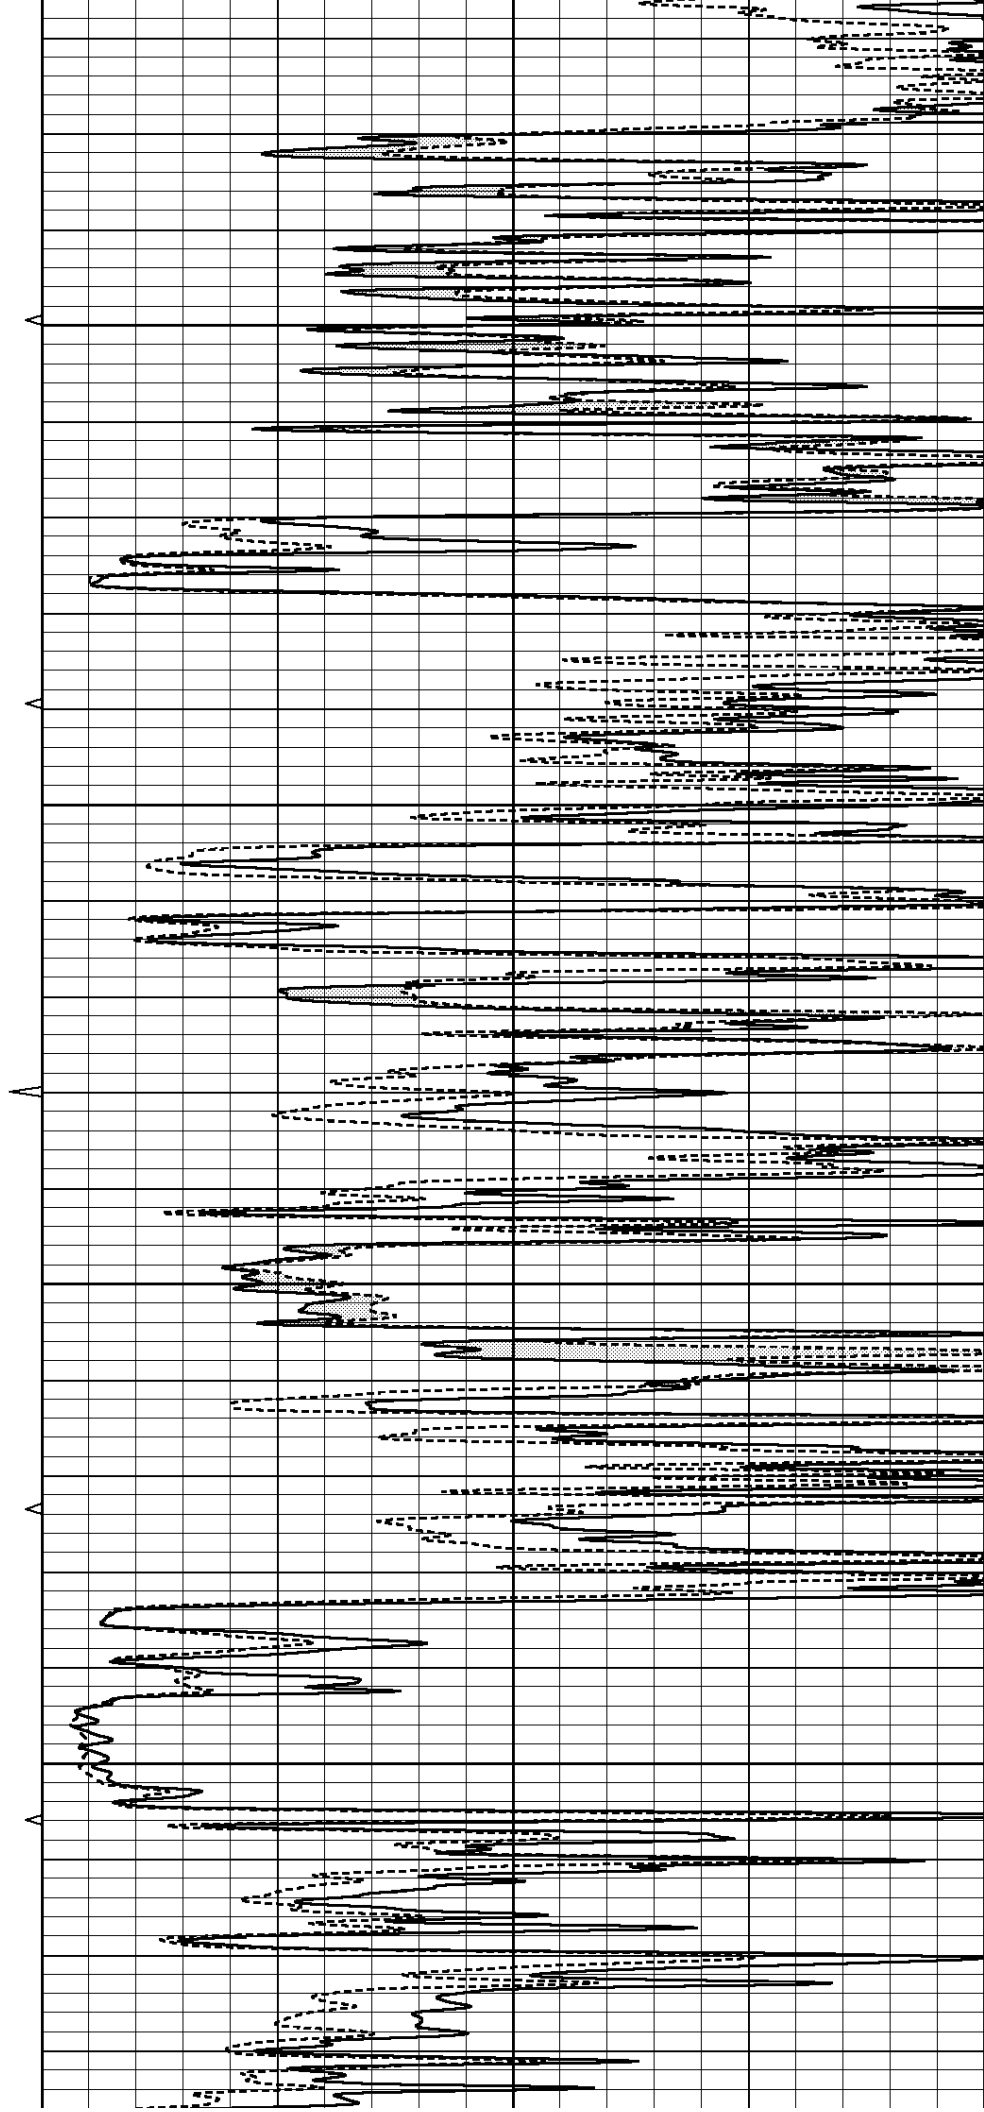

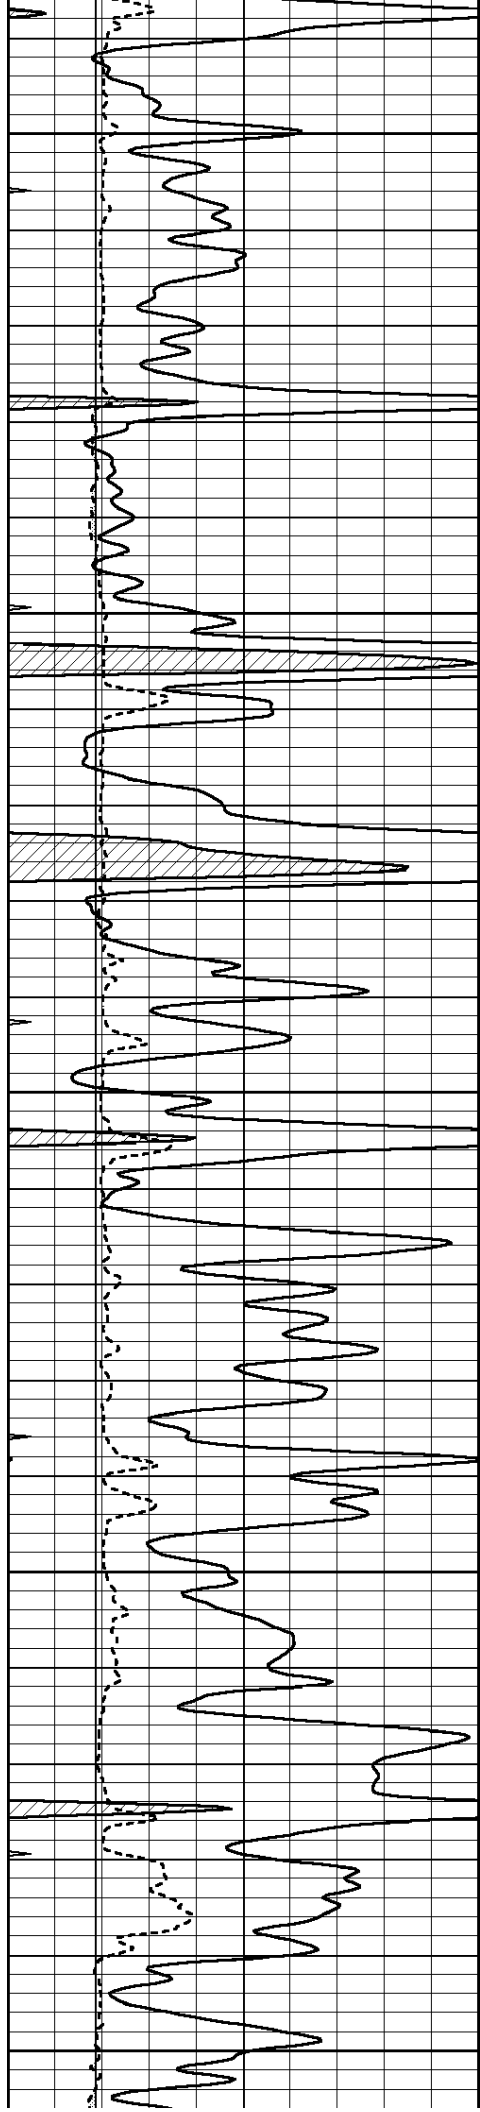


5050



5100

5150

5200




5250

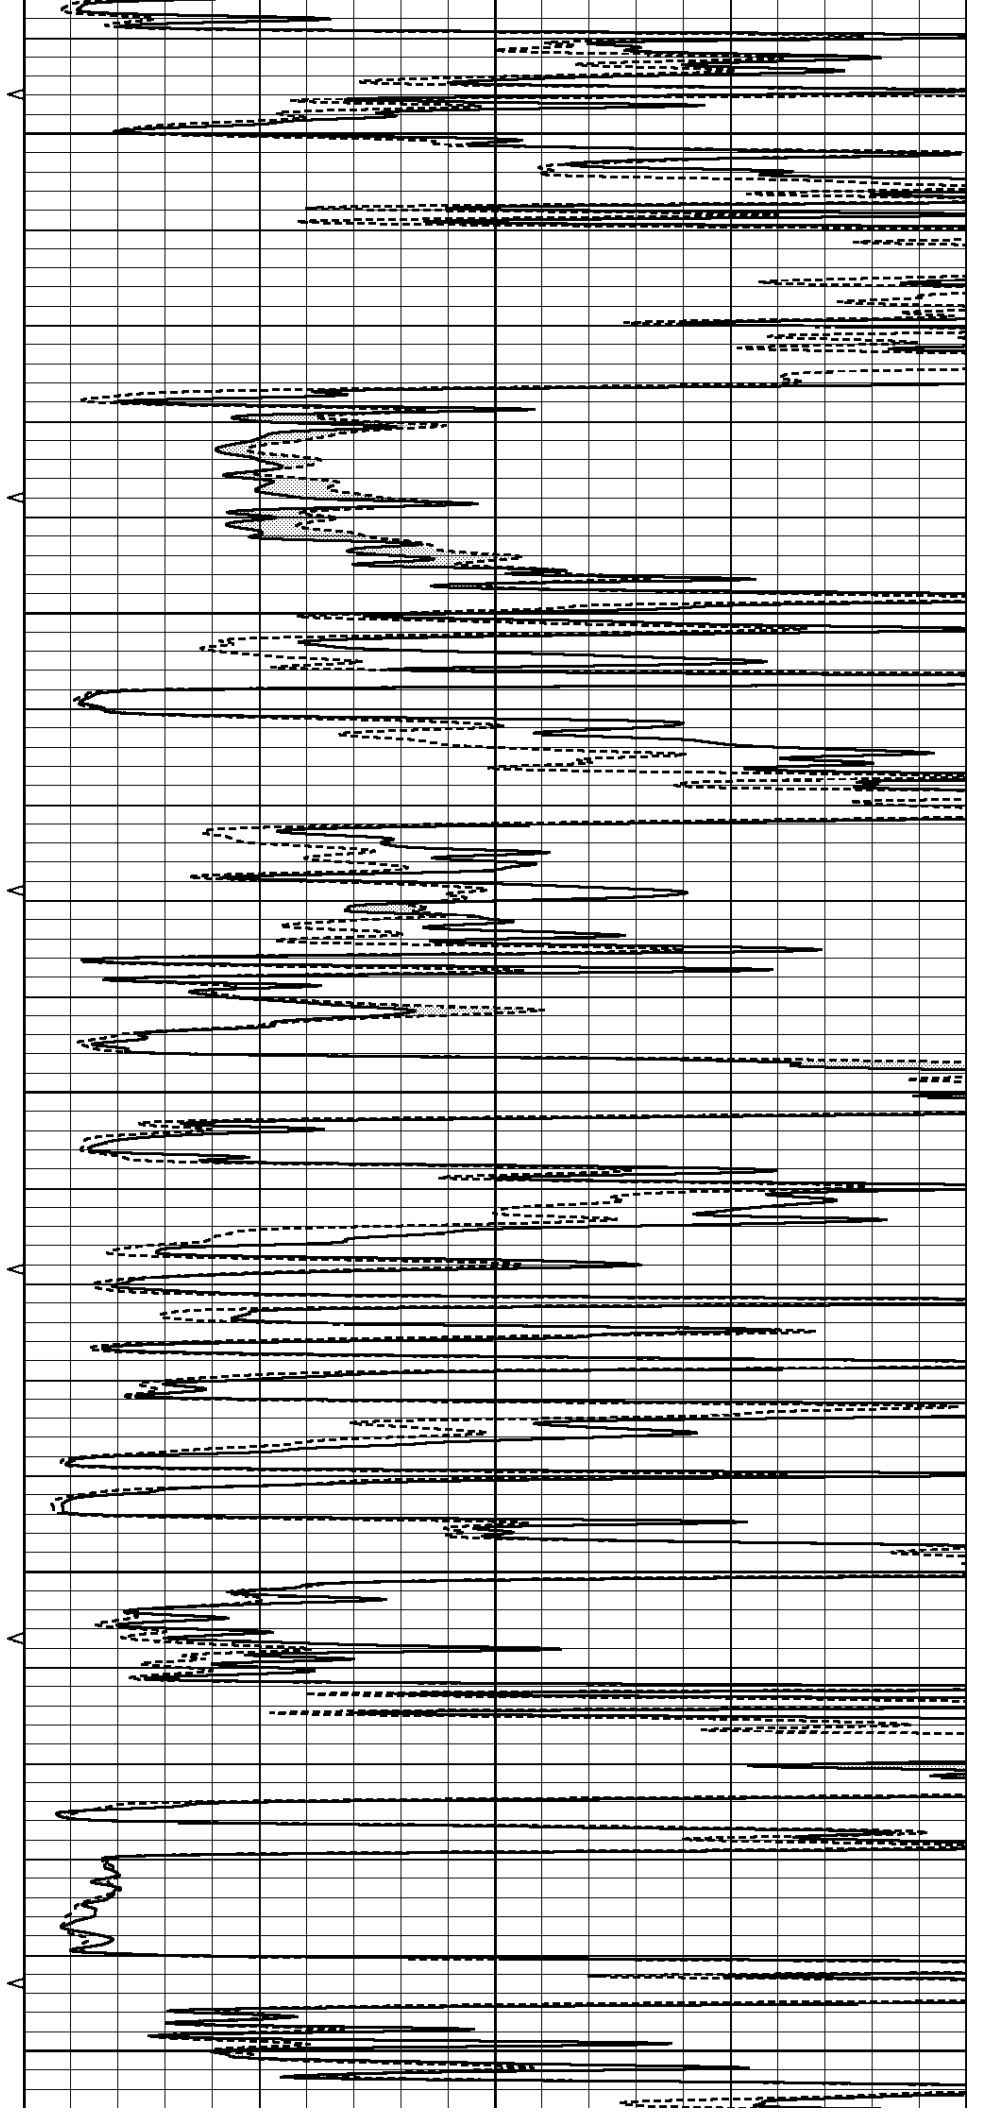


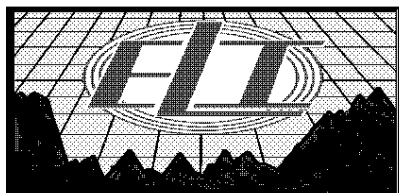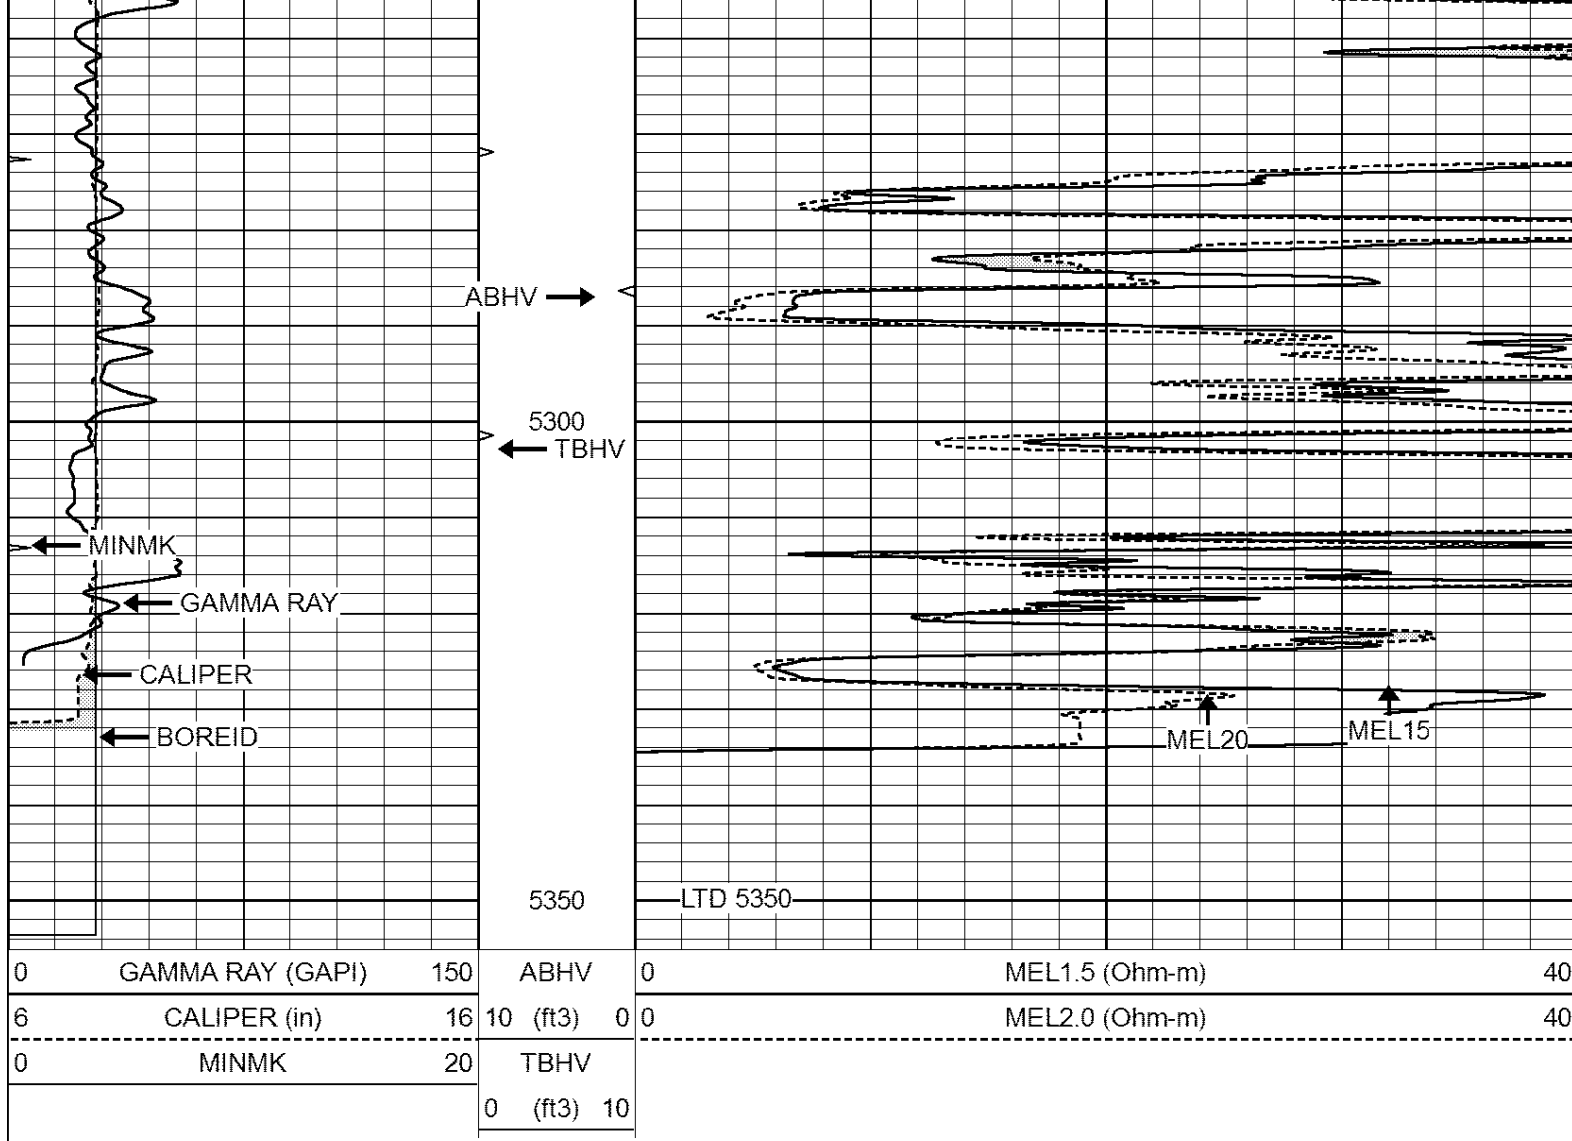

REPEAT SECTION

Database File: 2695pe.db
 Dataset Pathname: pass4.1
 Presentation Format: _micro
 Dataset Creation: Fri Jul 20 06:21:06 2018
 Charted by: Depth in Feet scaled 1:240

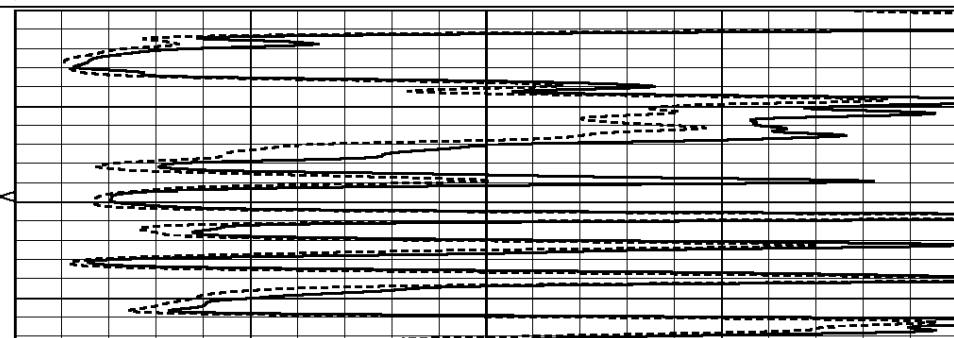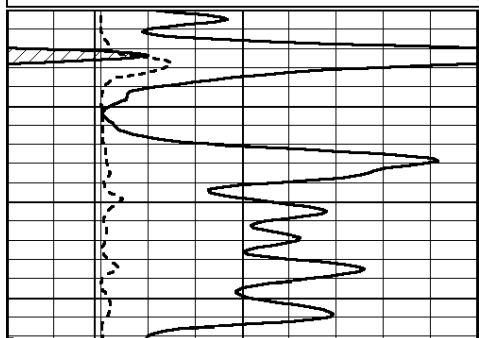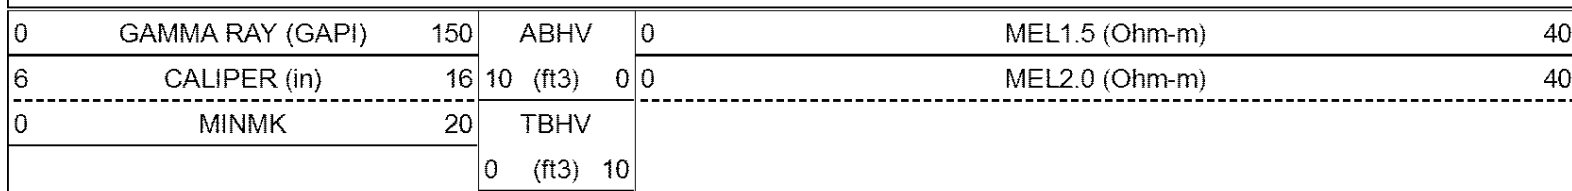

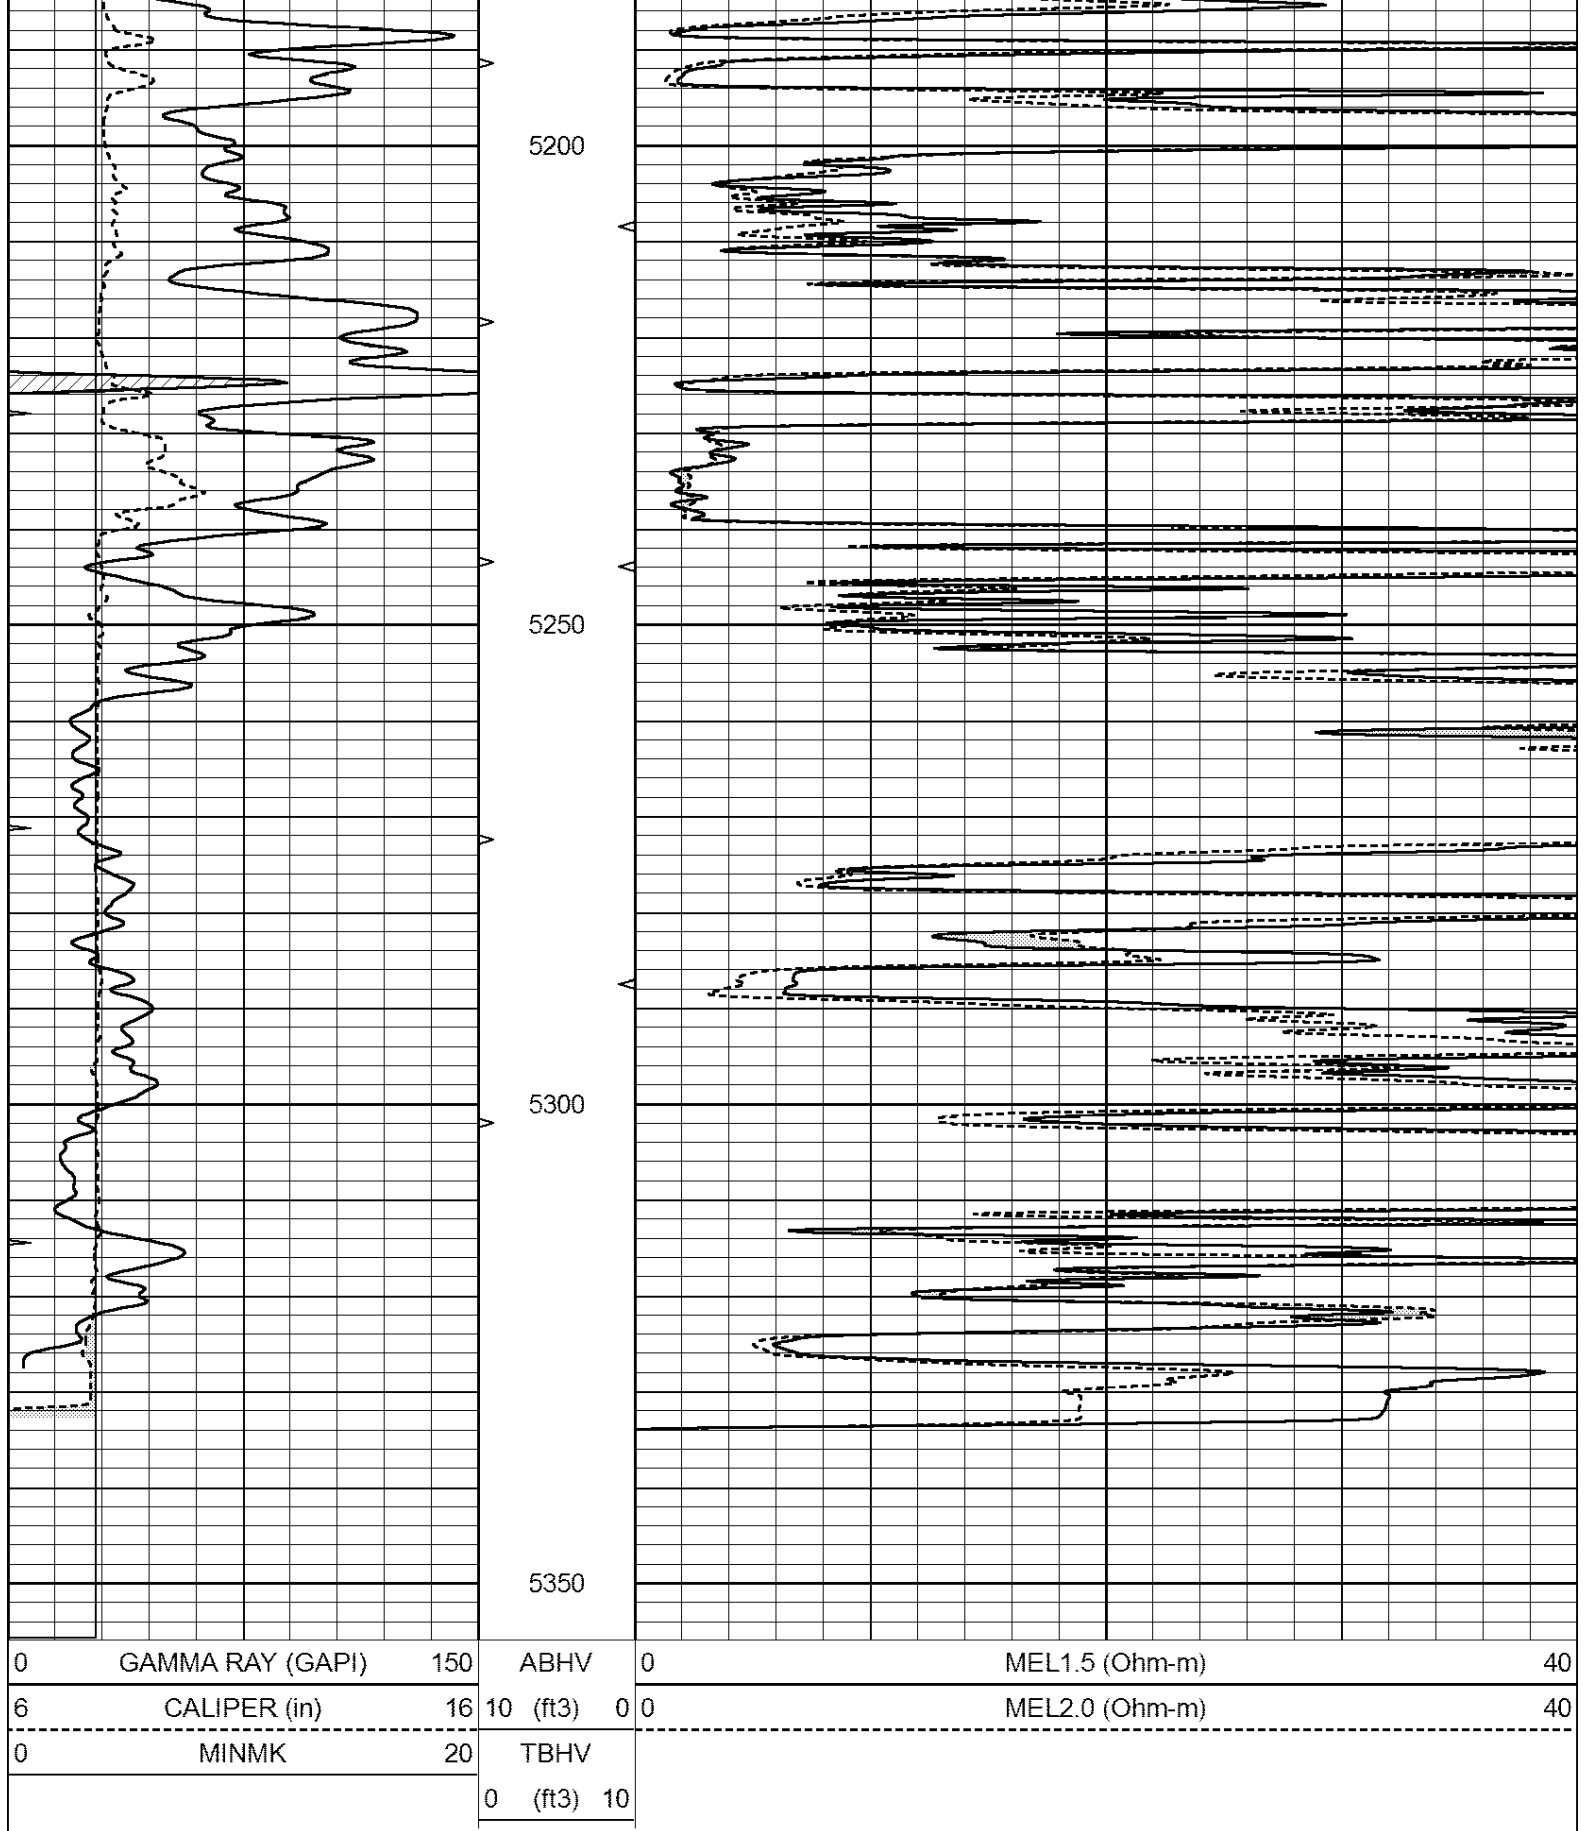

Calibration Report

Database File: 2695pe.db
Dataset Pathname: pass4.1
Dataset Creation: Fri Jul 20 06:21:06 2018

Serial Number:	MICRO4	
Tool Model:	PROBE	
Performed:	Thu Jul 05 09:30:00 2018	
Caliper Calibration:	Gain=3.729	Offset=-17.125
References	Low Cal	High Cal
Readings	7.000	14.000
	6.470	8.348
1.5" Calibration:	Gain=39.297	Offset=-1.175
References	Low Cal	High Cal
Readings	0.000	20.000
	0.013	1.517
2" Calibration:	Gain=51.168	Offset=-1.264
References	Low Cal	High Cal
Readings	0.000	20.000
	0.015	1.180
Gamma Ray Calibration Report		
Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Mon Jul 02 20:05:37 2018	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.9400	GAPI/cps