




Company		TRANS-PACIFIC OIL CORPORATION							
Well		DUMLER #4-14 SWDW							
Field		KANSADA							
County		NESS							
State		KANSAS				Country U.S.A.			
Country U.S.A.									
		Location:				API #: 15-135-26018-0000		Other Services	
						1140' FNL & 2266' FWL			
		SEC 14 TWP 17S RGE 26W							
Permanent Datum		GROUND LEVEL				Elevation 2561		Elevation	
Log Measured From		KELLY BUSHING 7' A.G.L.						K.B. 2568	
Drilling Measured From		KELLY BUSHING						D.F. 2566	
								G.L. 2561	
Date		10-2-18							
Run Number		ONE							
Depth Driller		1825							
Depth Logger		1775							
Bottom Logged Interval		1773							
Top Log Interval		0							
Open Hole Size									
Type Fluid		WATER							
Density / Viscosity									
Max. Recorded Temp.									
Estimated Cement Top		2760							
Time Well Ready									
Time Logger on Bottom									
Equipment Number		3362							
Location		HAYS, KANSAS							
Recorded By		JEREMY SEIB							
Tested By		MOE SMITH							




All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general conditions set out in our current Price Schedule.




Comments




THANK YOU FOR USING E.L.I. WIRELINE SERVICES HAYS, KANSAS (785)628-6395
DIRECTIONS: UTICA, KS - 1 MILE EAST TO VET CLINIC - 4 1/2 MILES SOUTH - WEST INTO




```
Database File: 2971.db
Dataset Pathname: pass3.1
Presentation Format: dcb102
Dataset Creation: Tue Oct 02 09:28:54 2018
Charted by: Depth in Feet scaled 1:2400
```


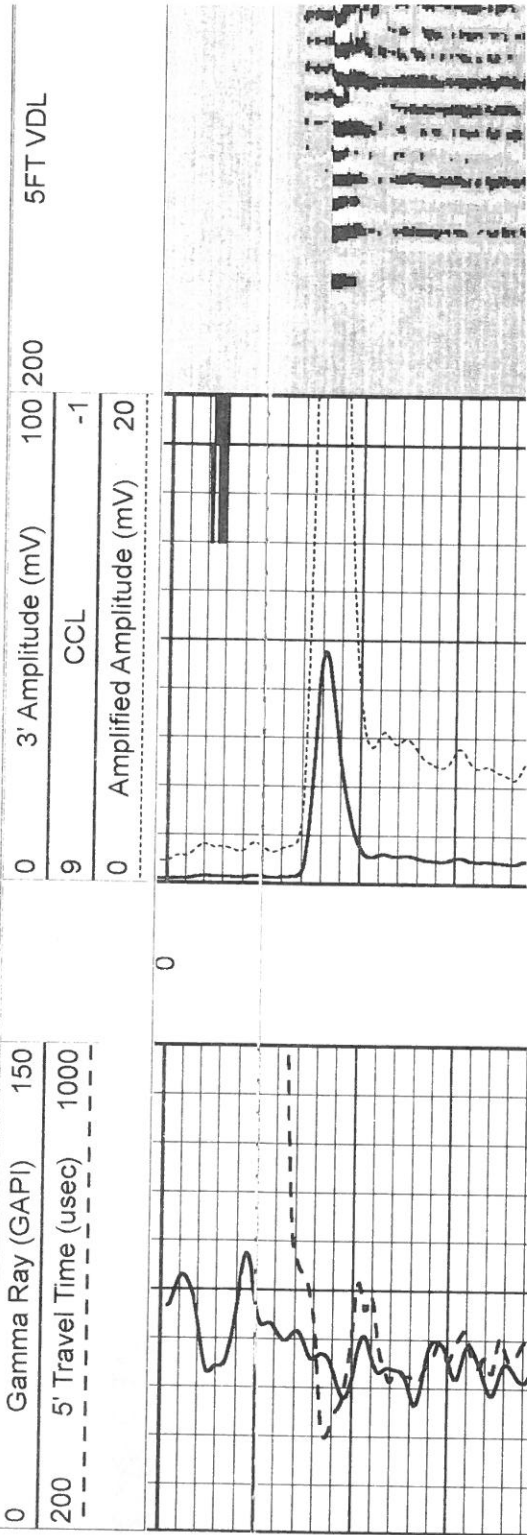


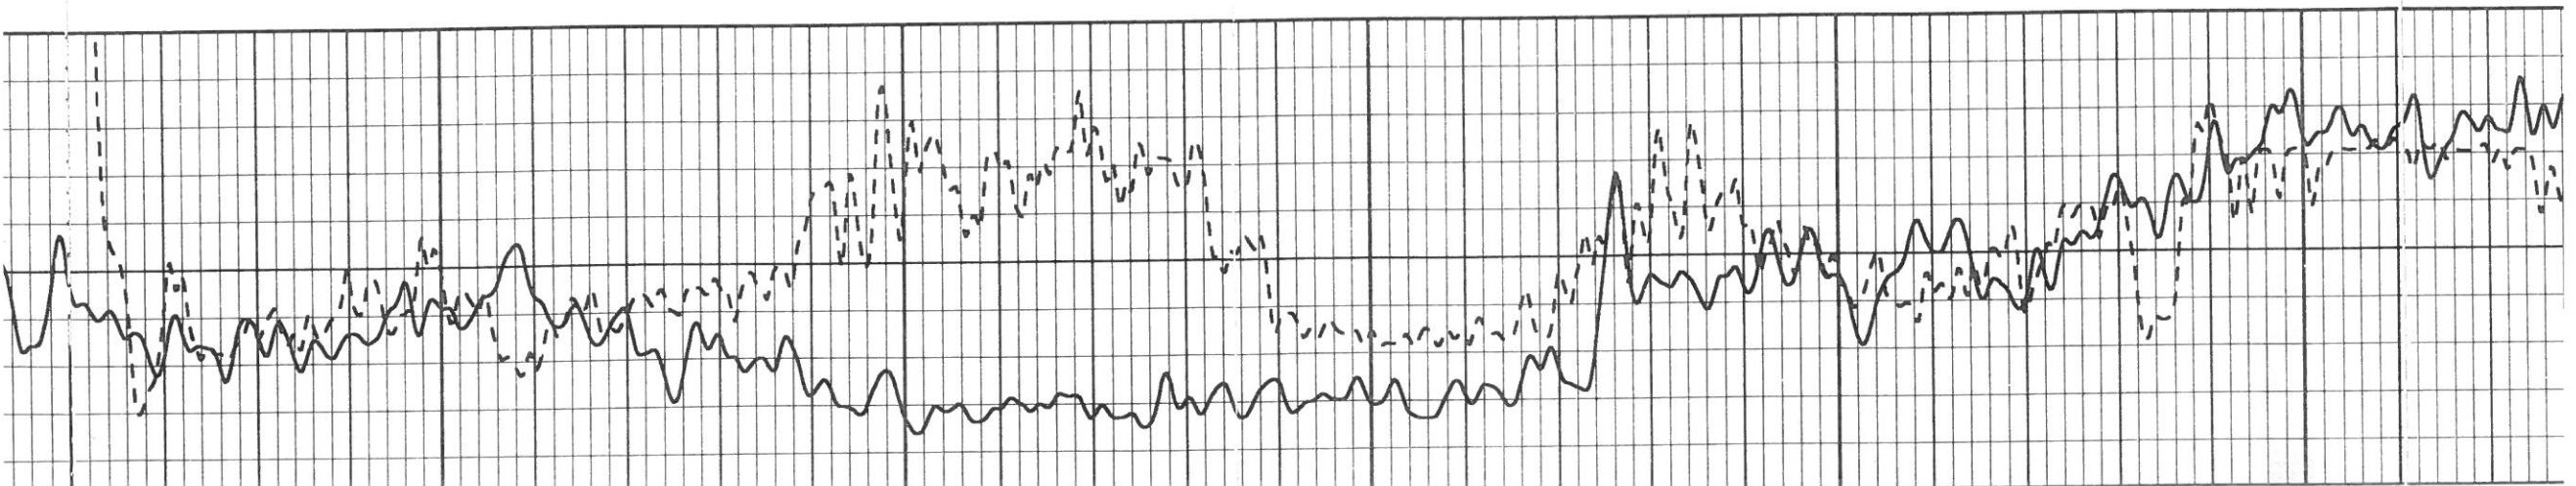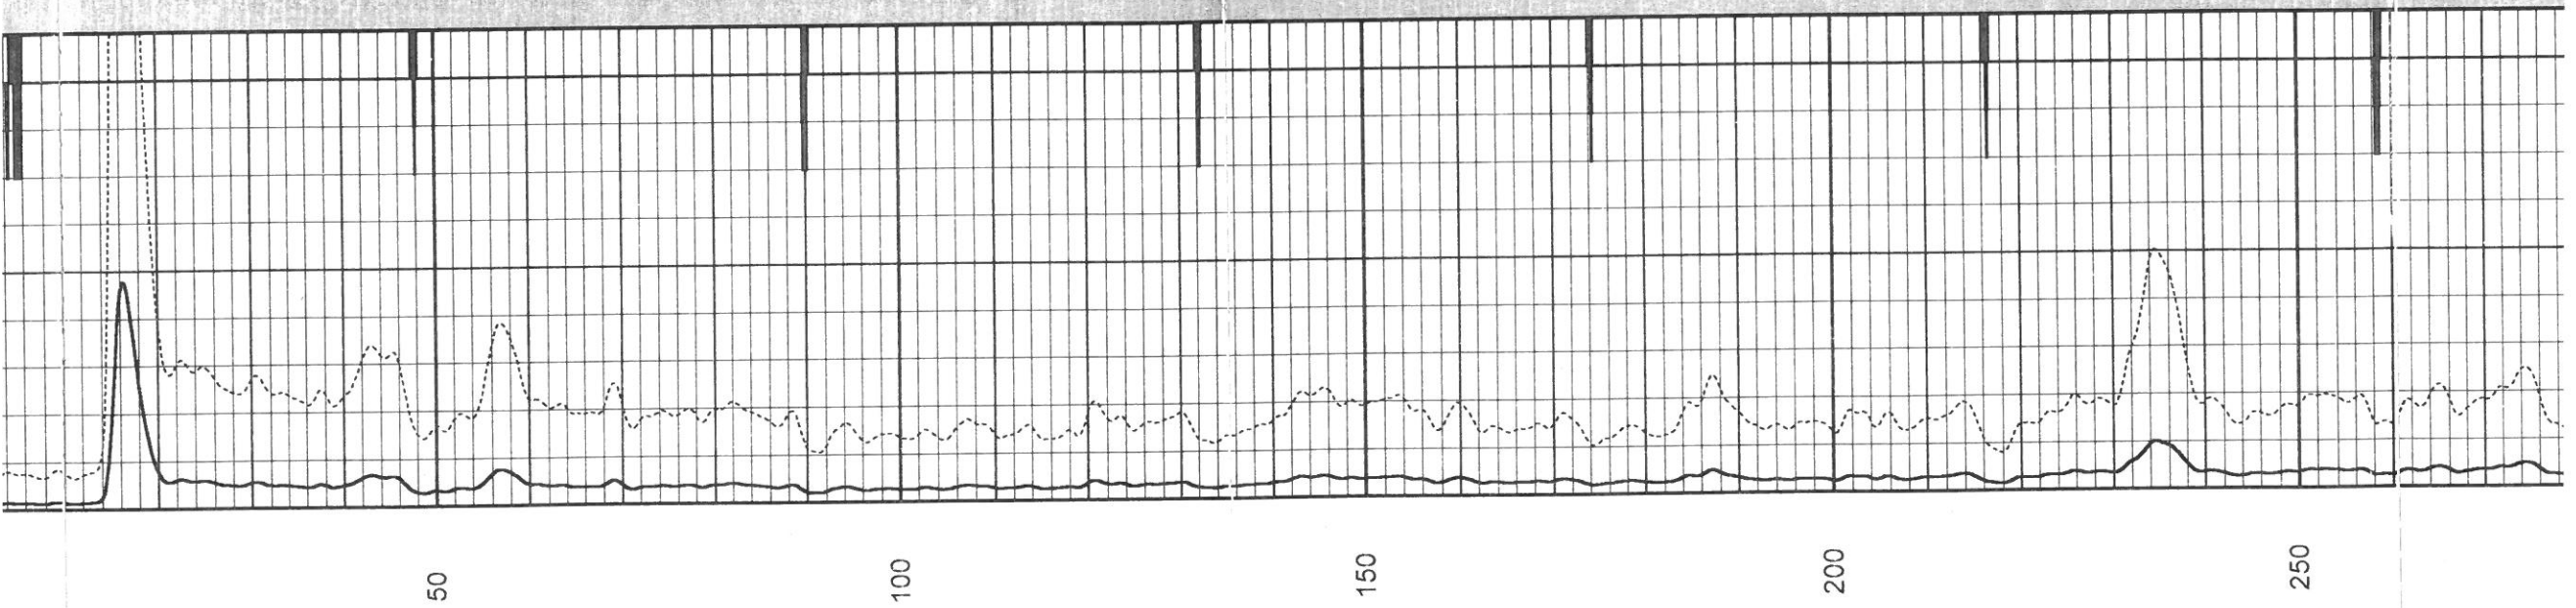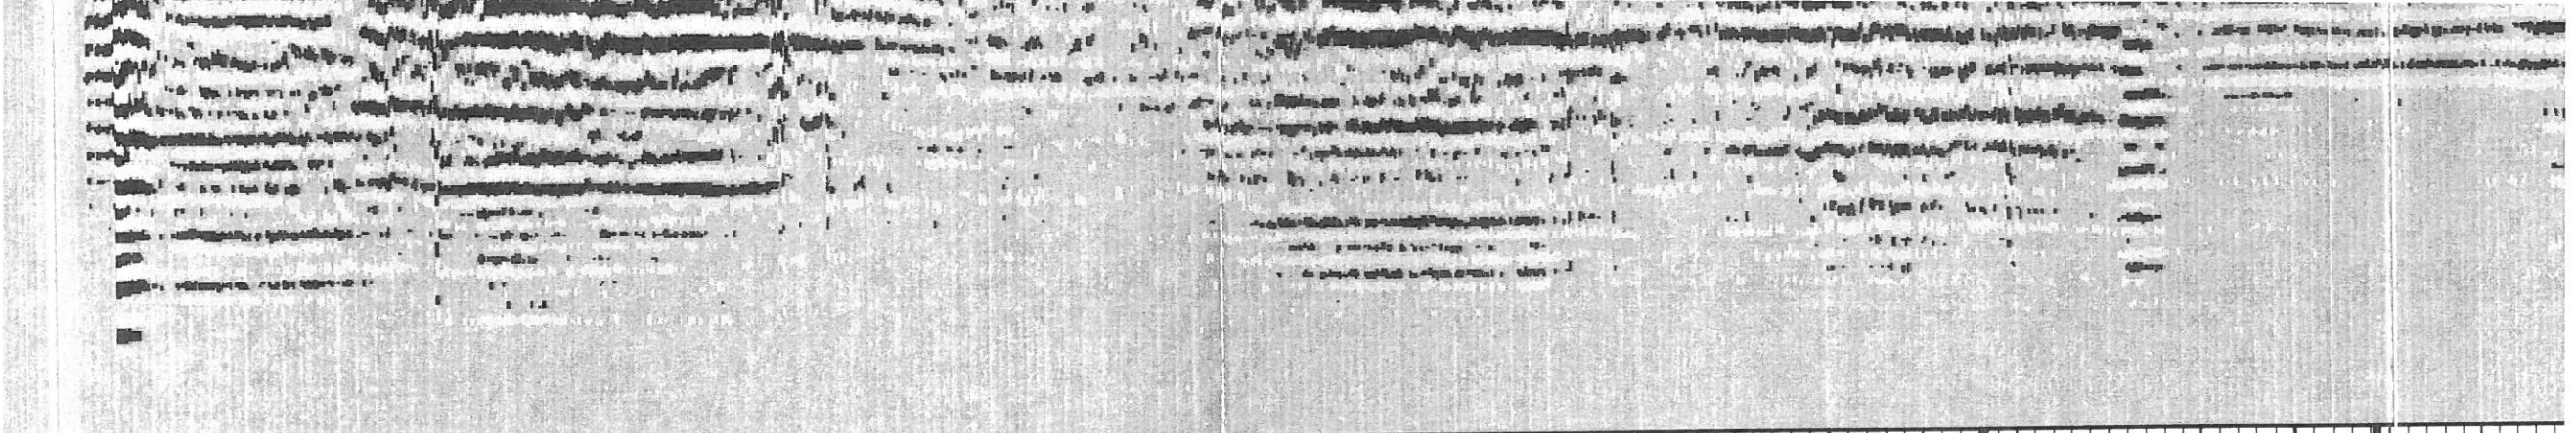

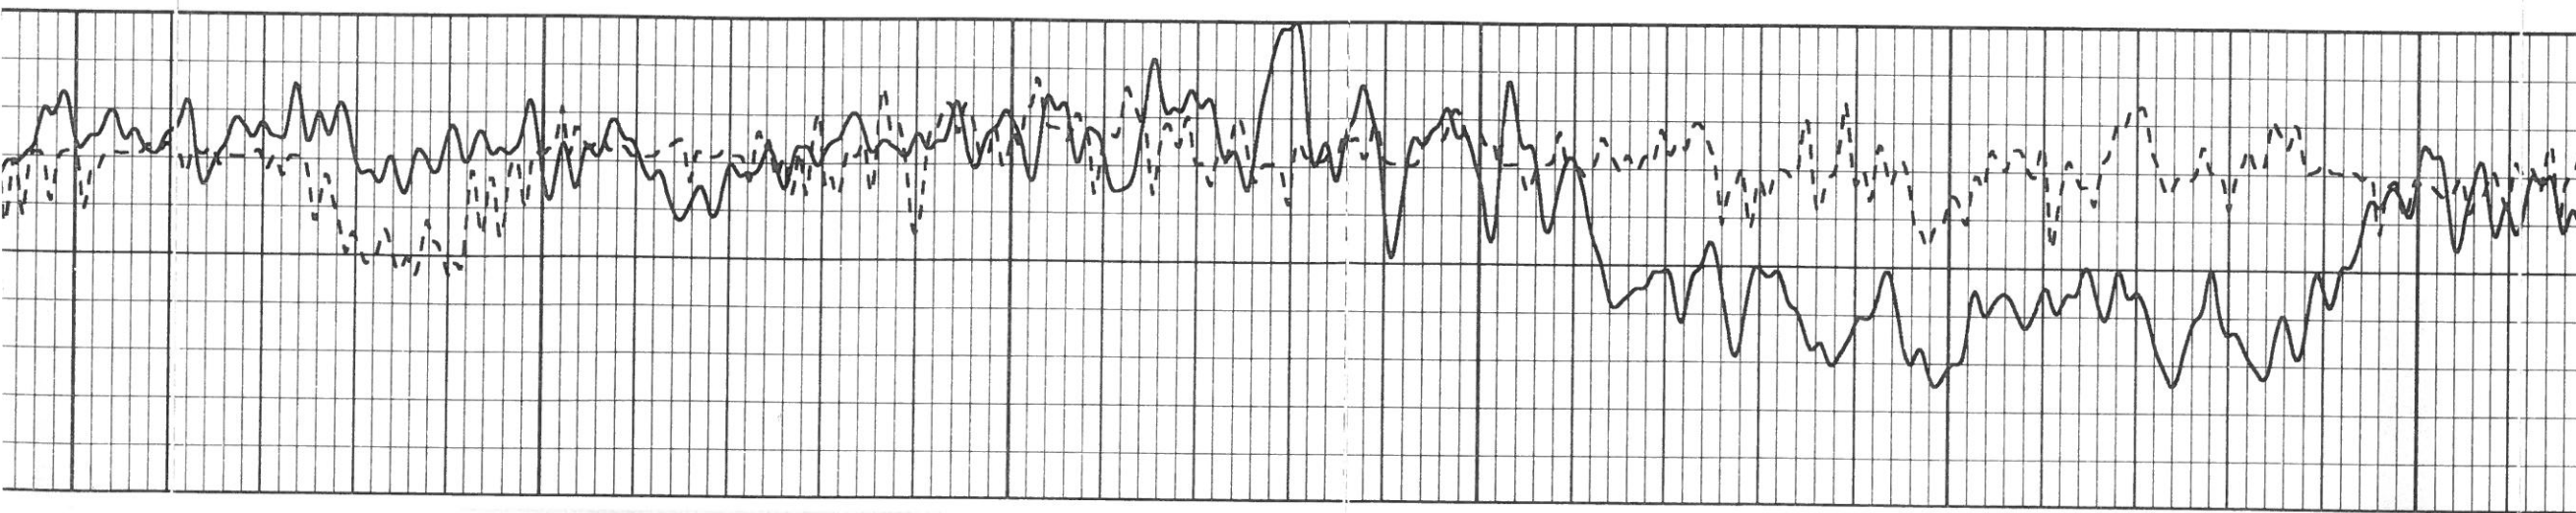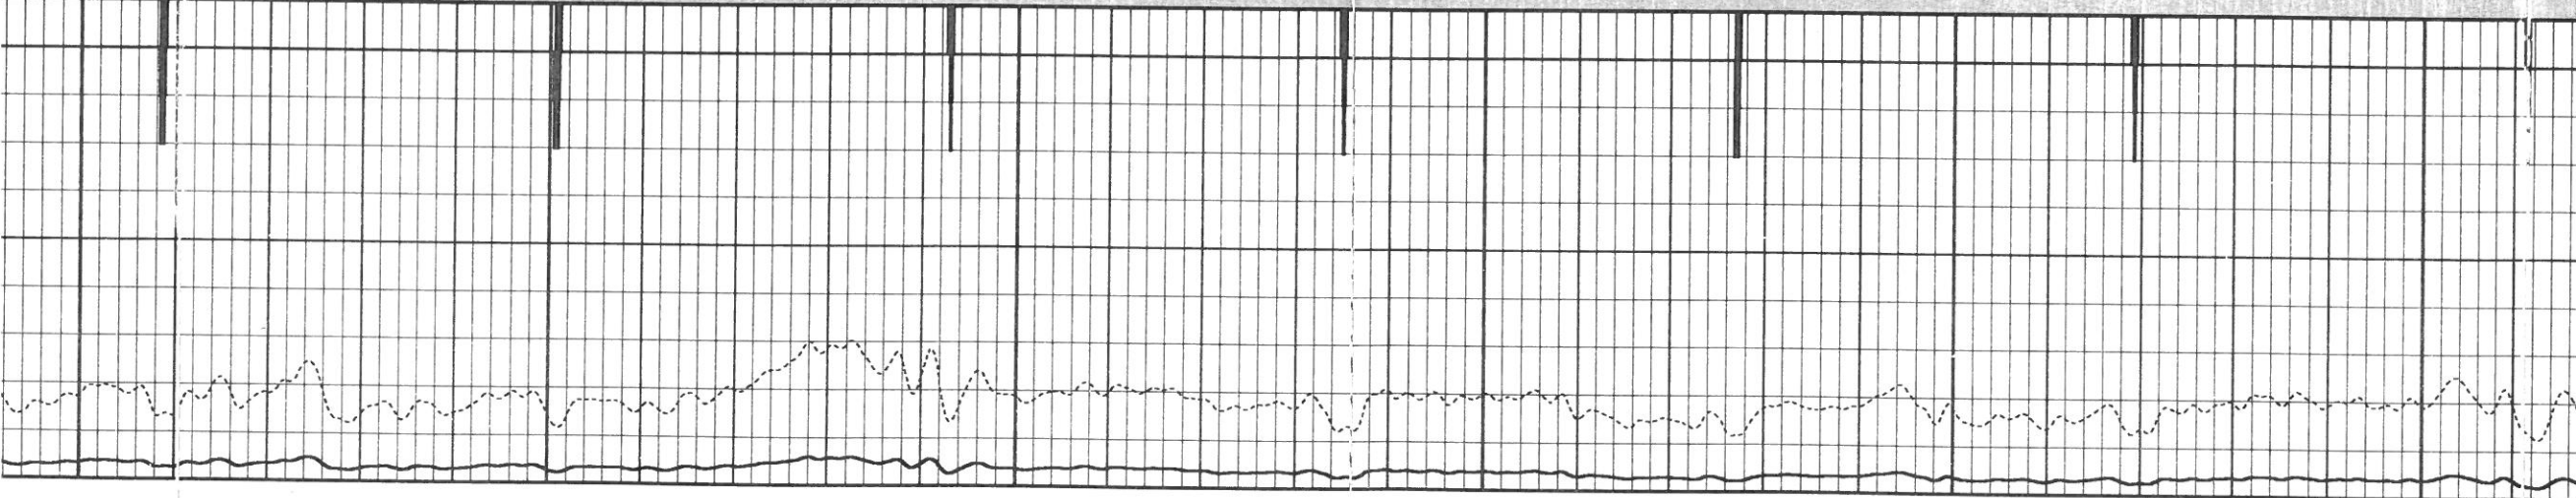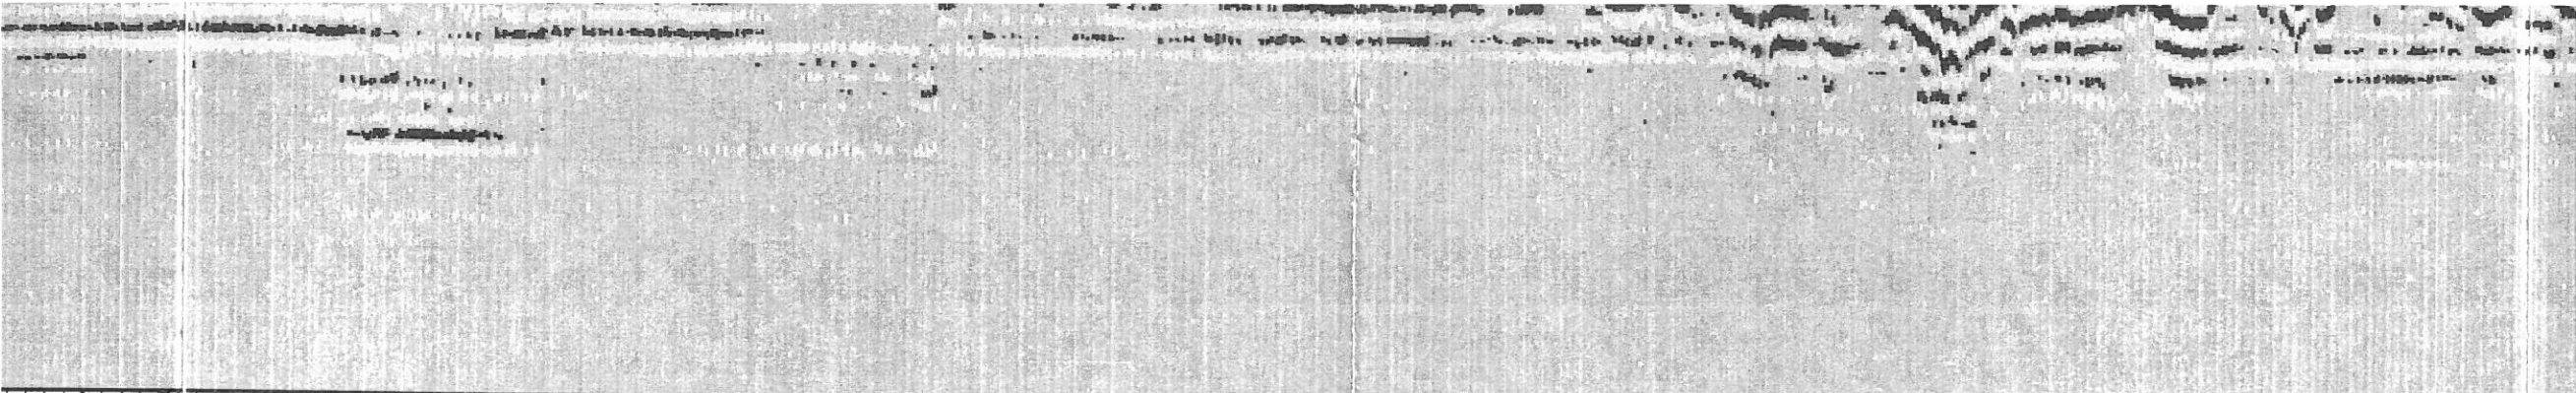


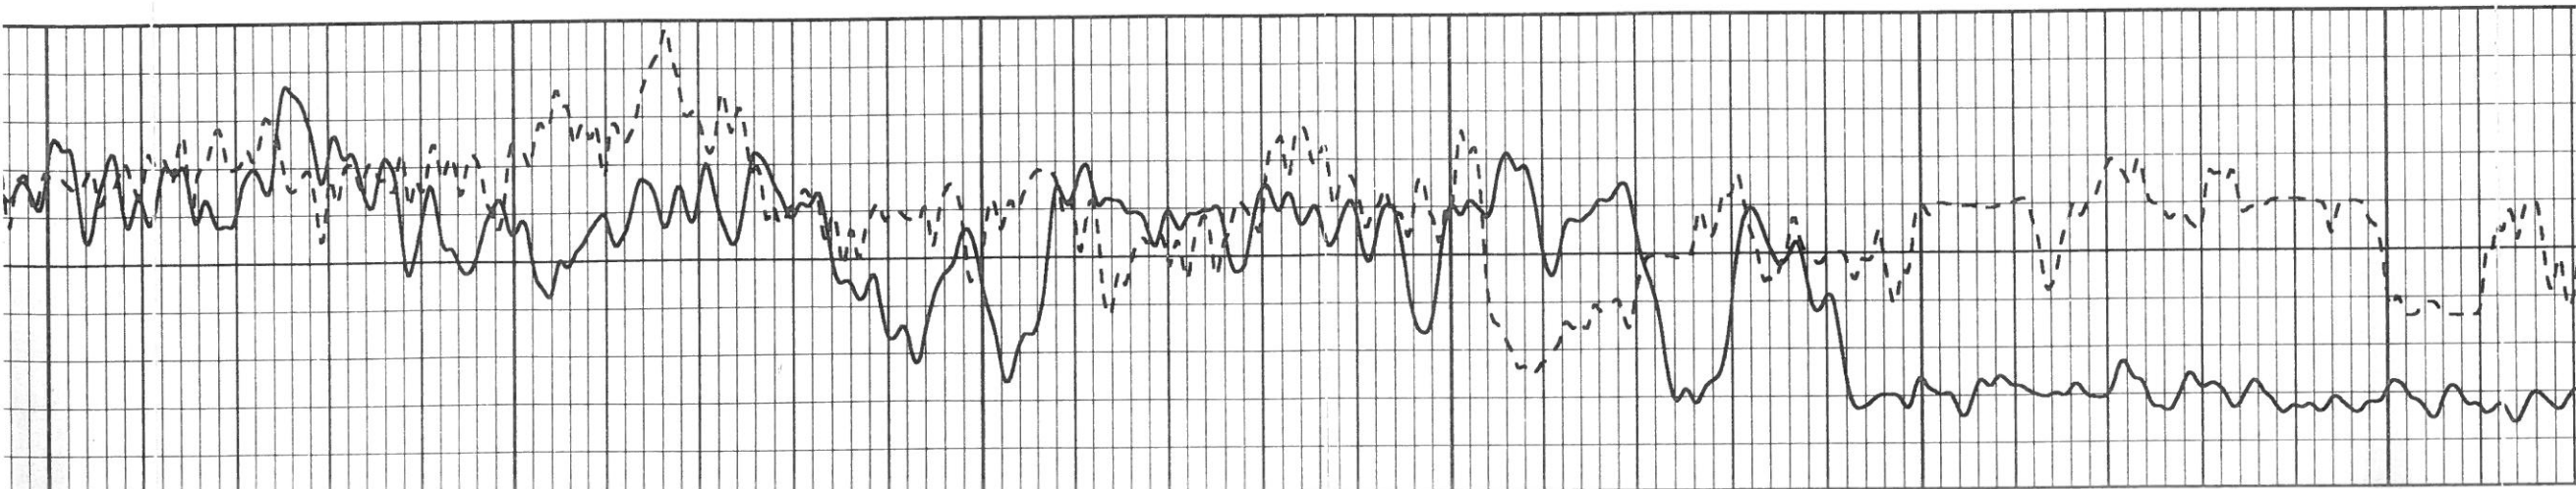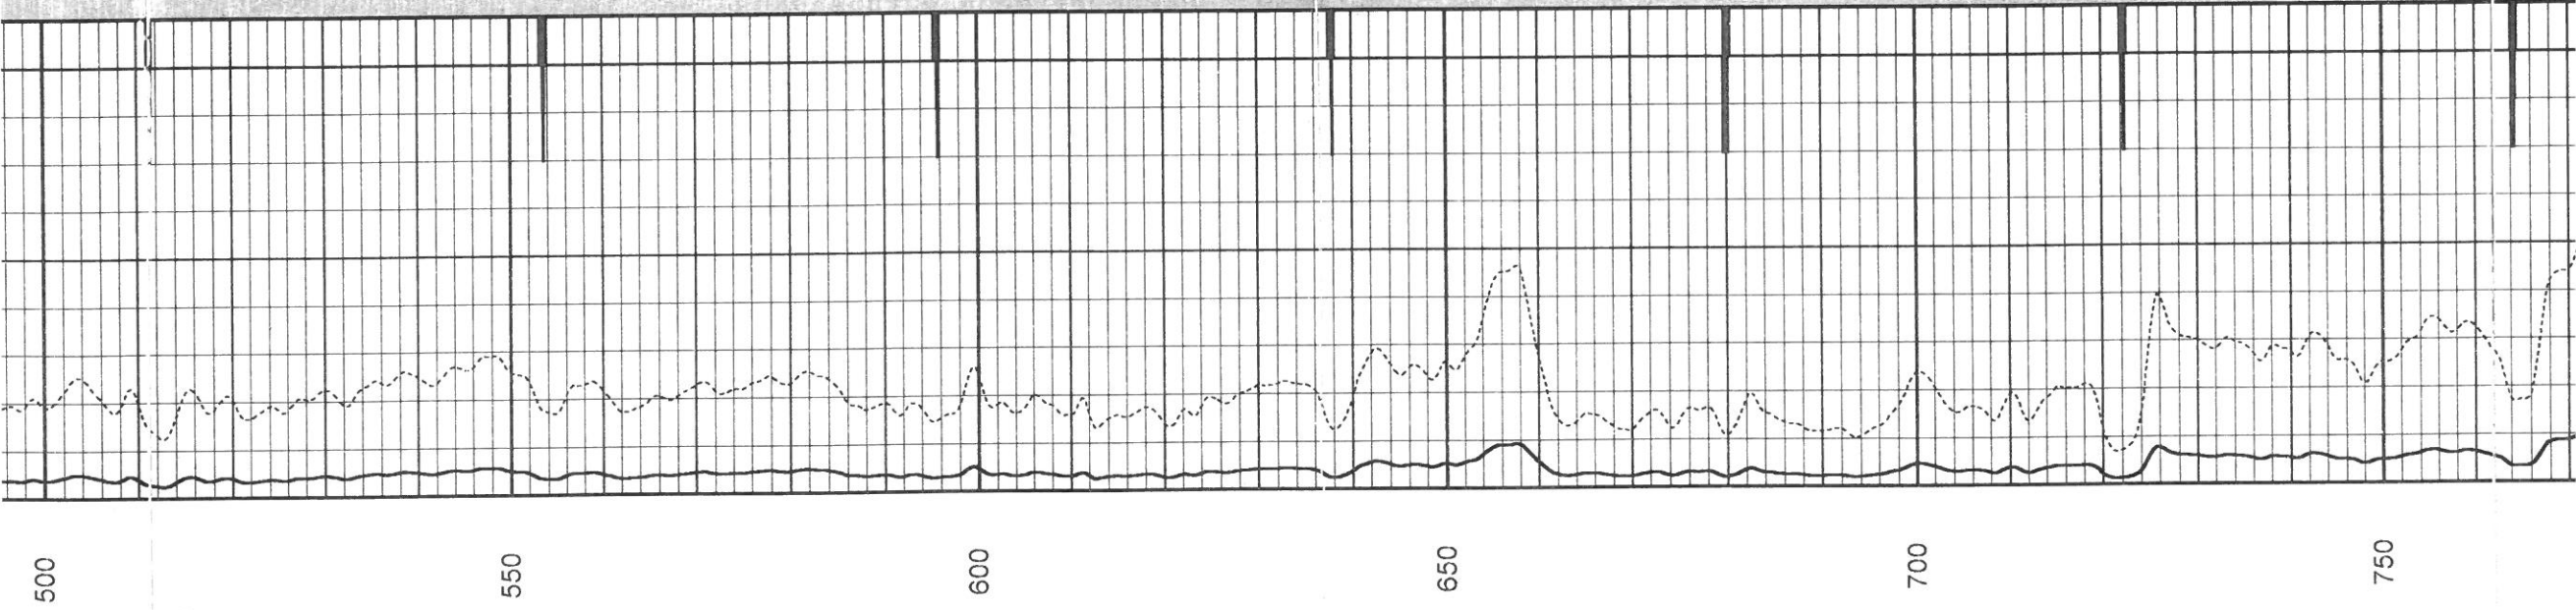
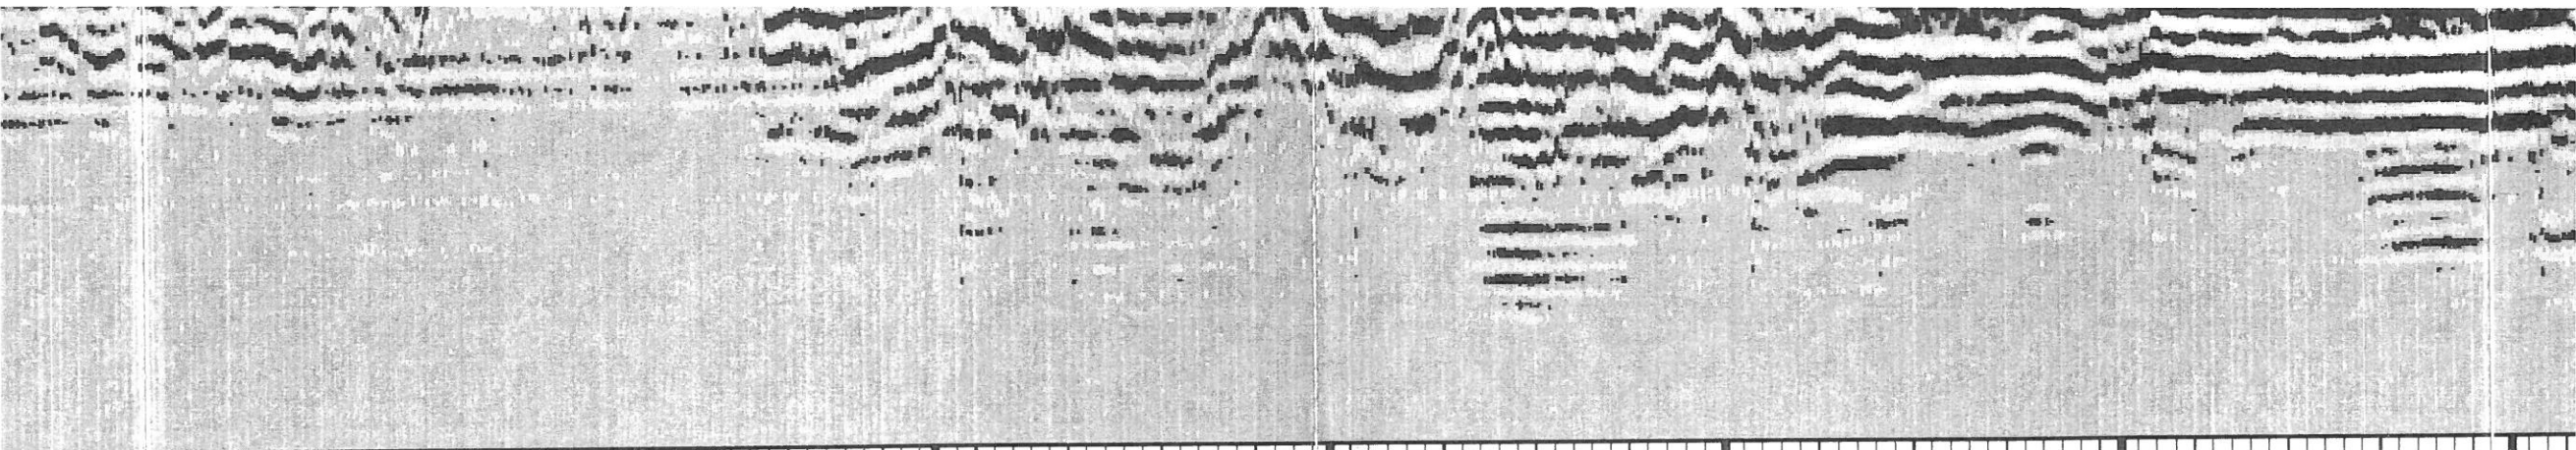


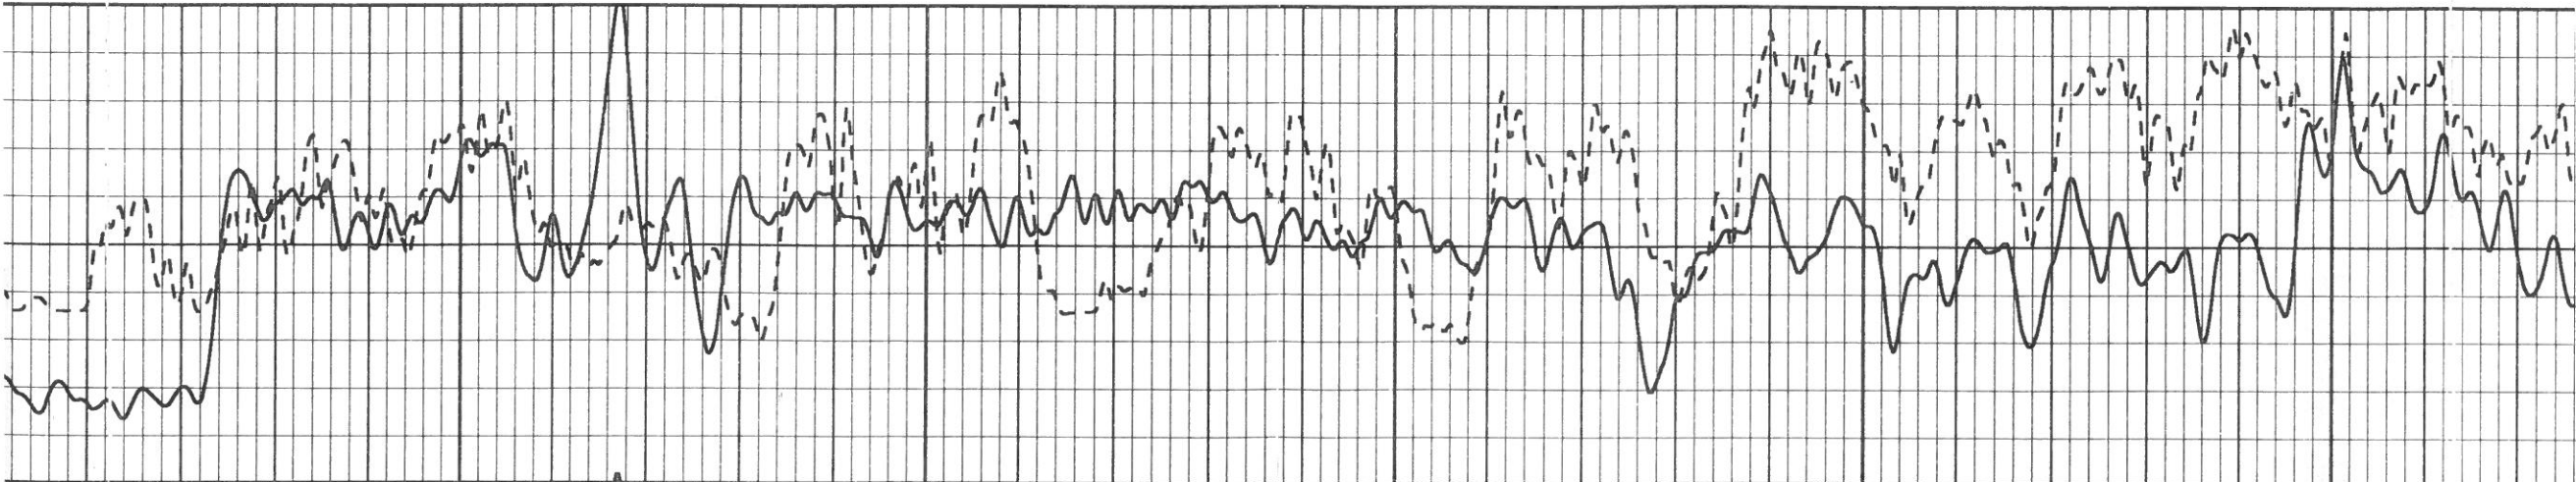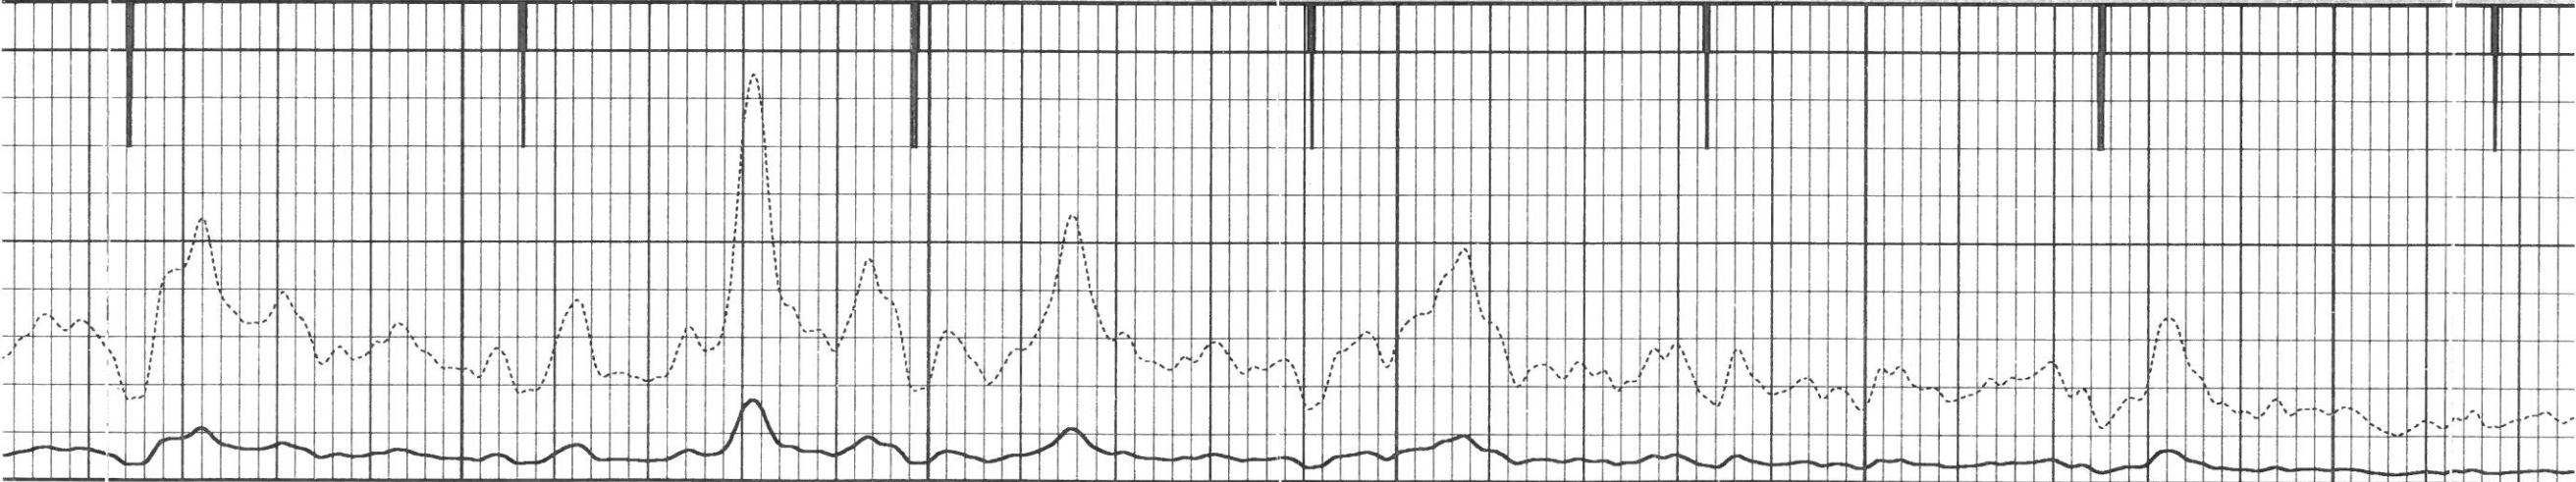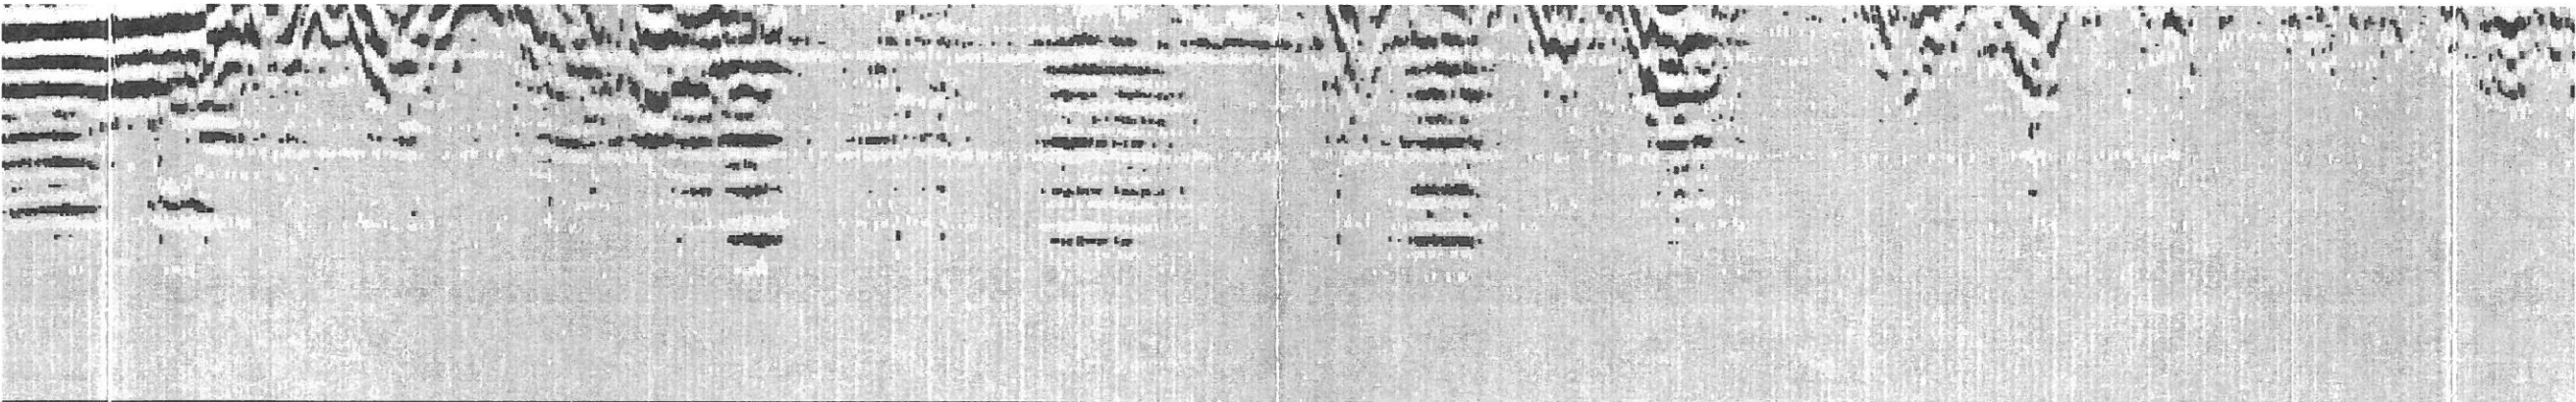

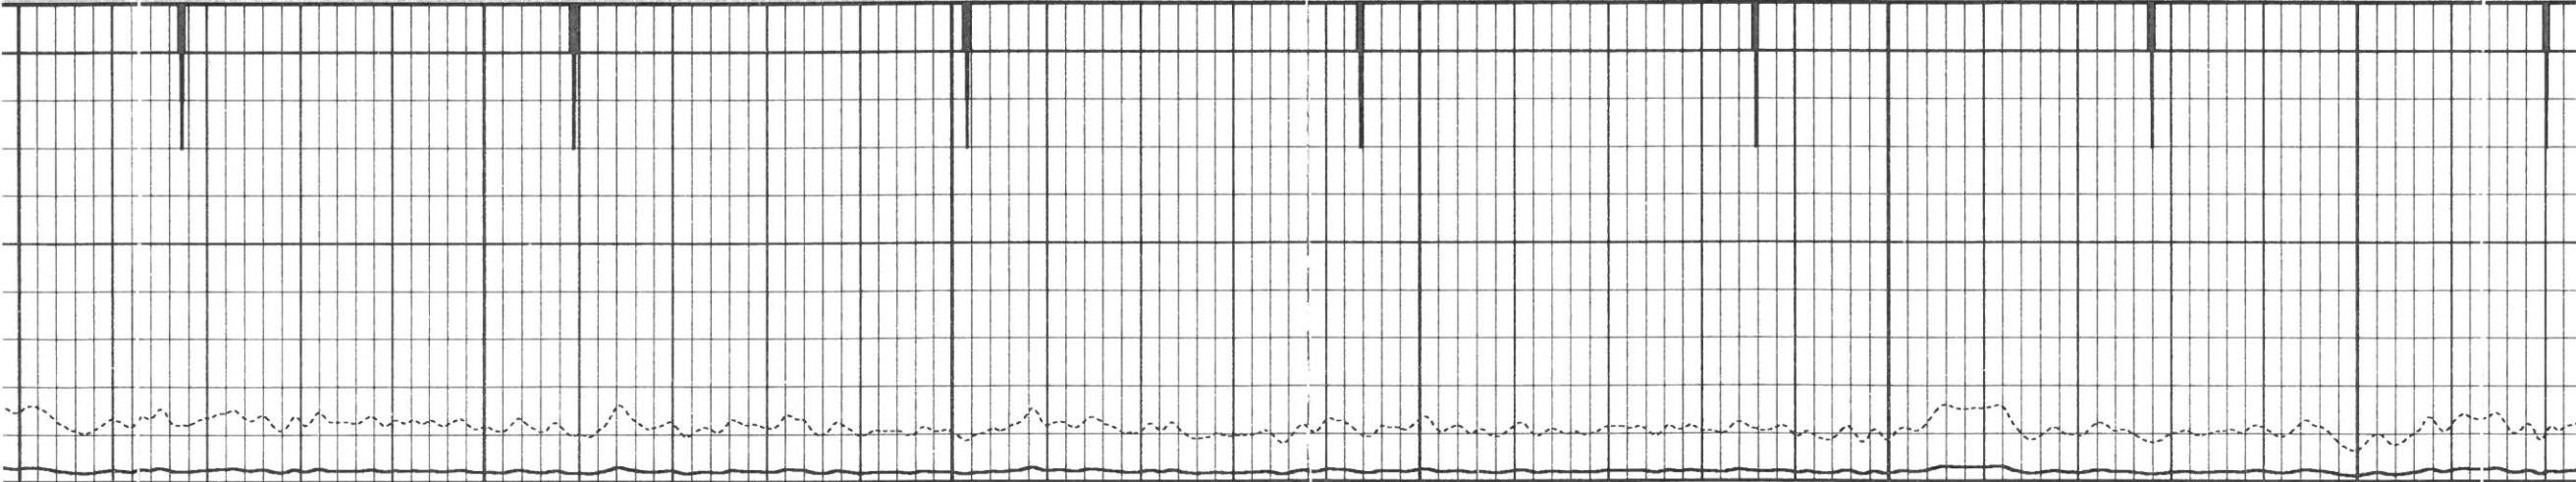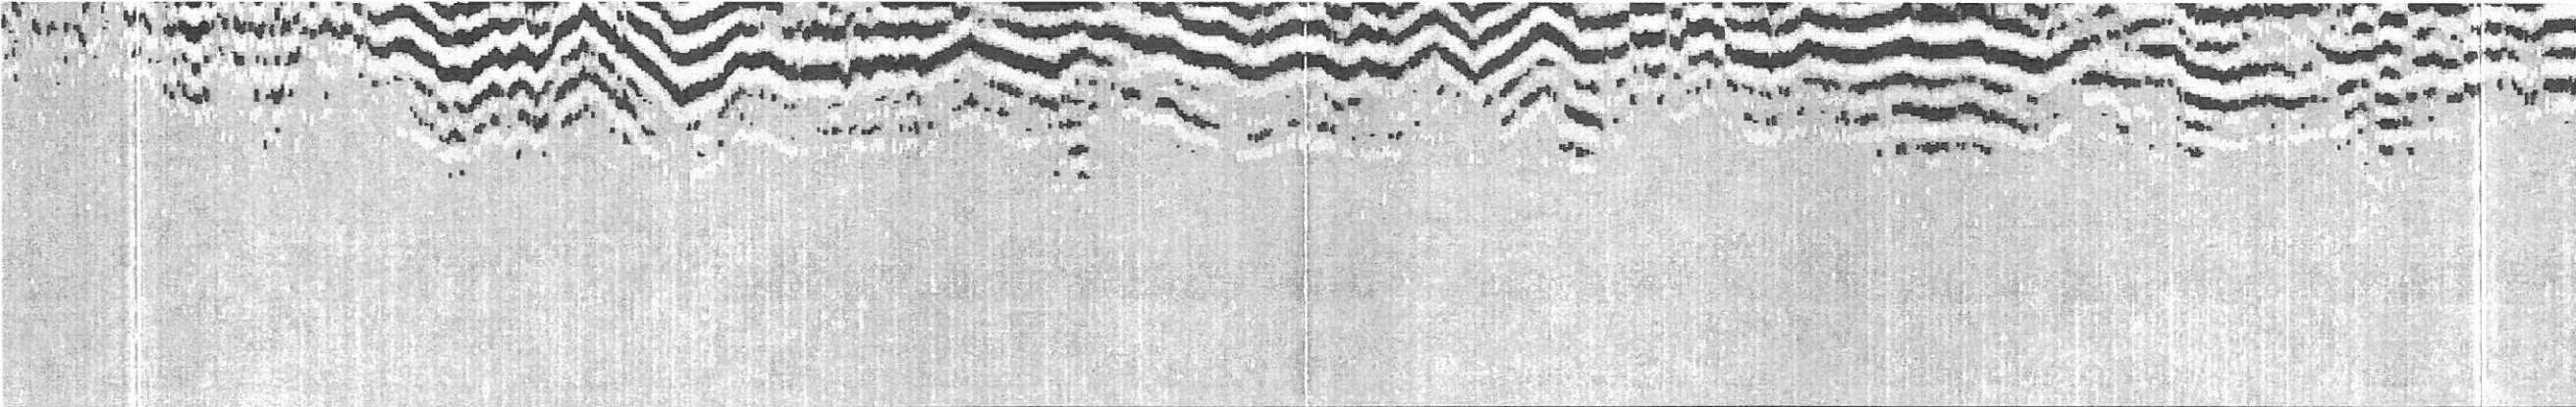

1000 1050 1100 1150 1200 1250

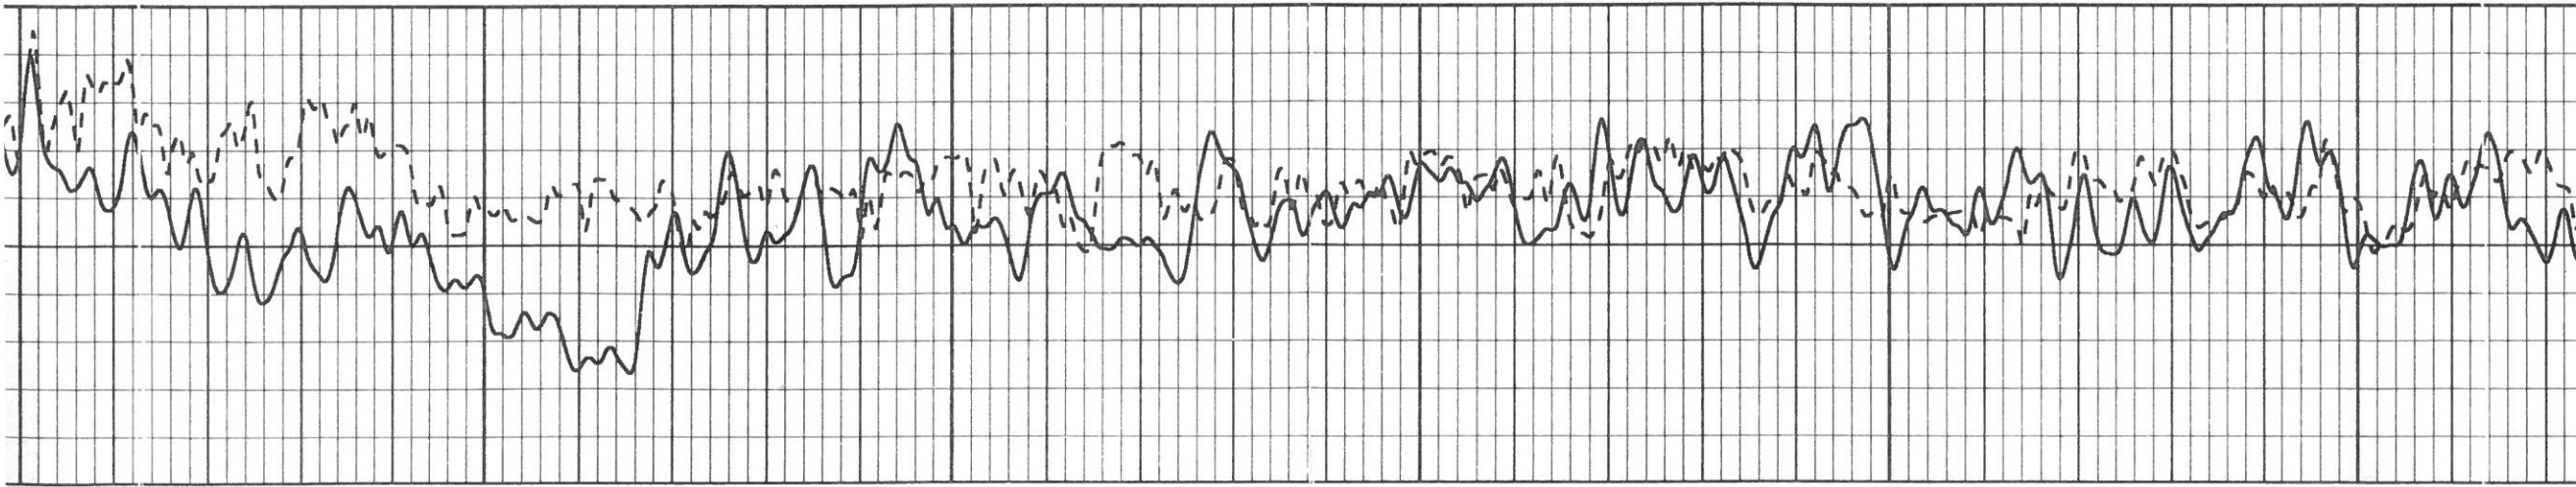

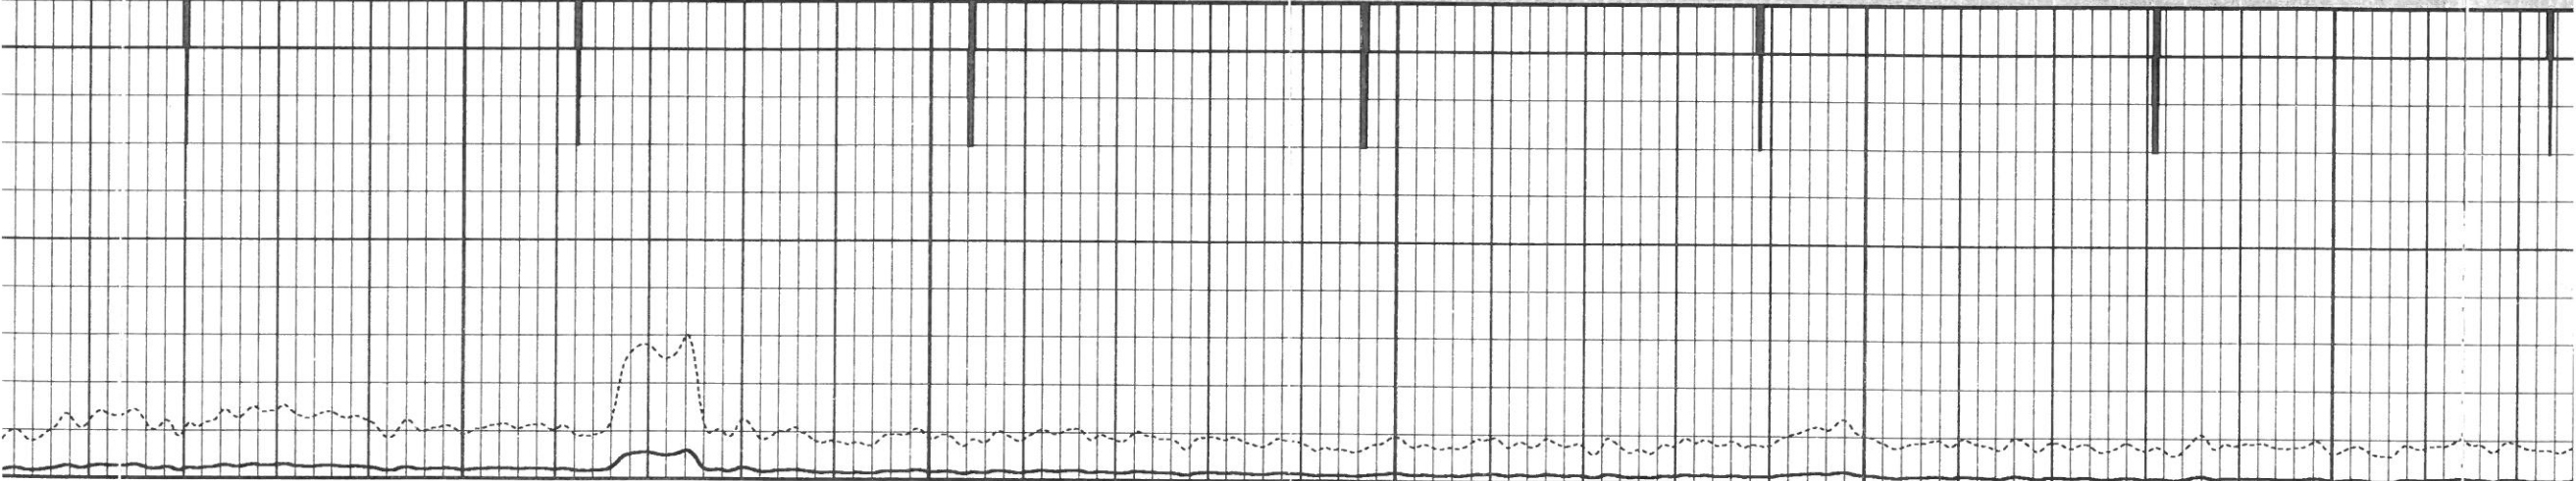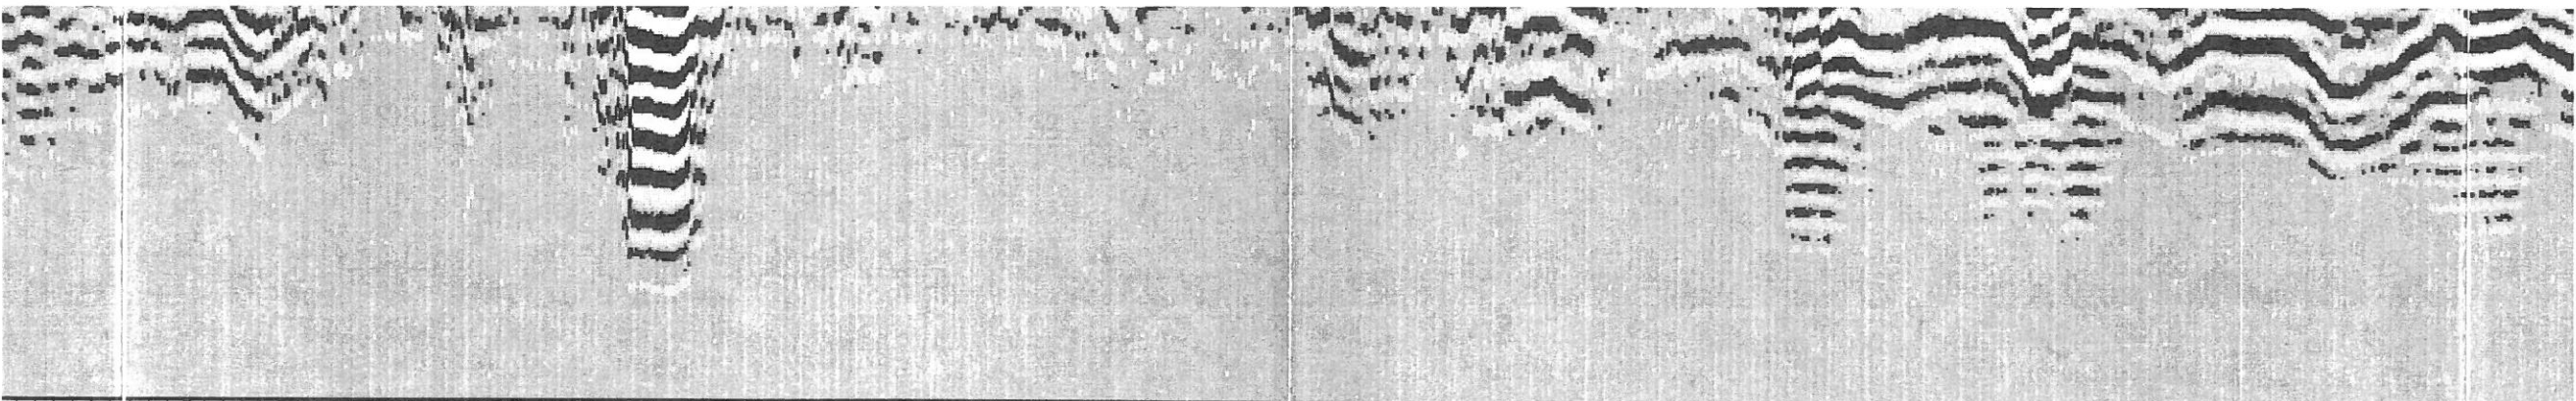


1300




1350



1400

1450

1500

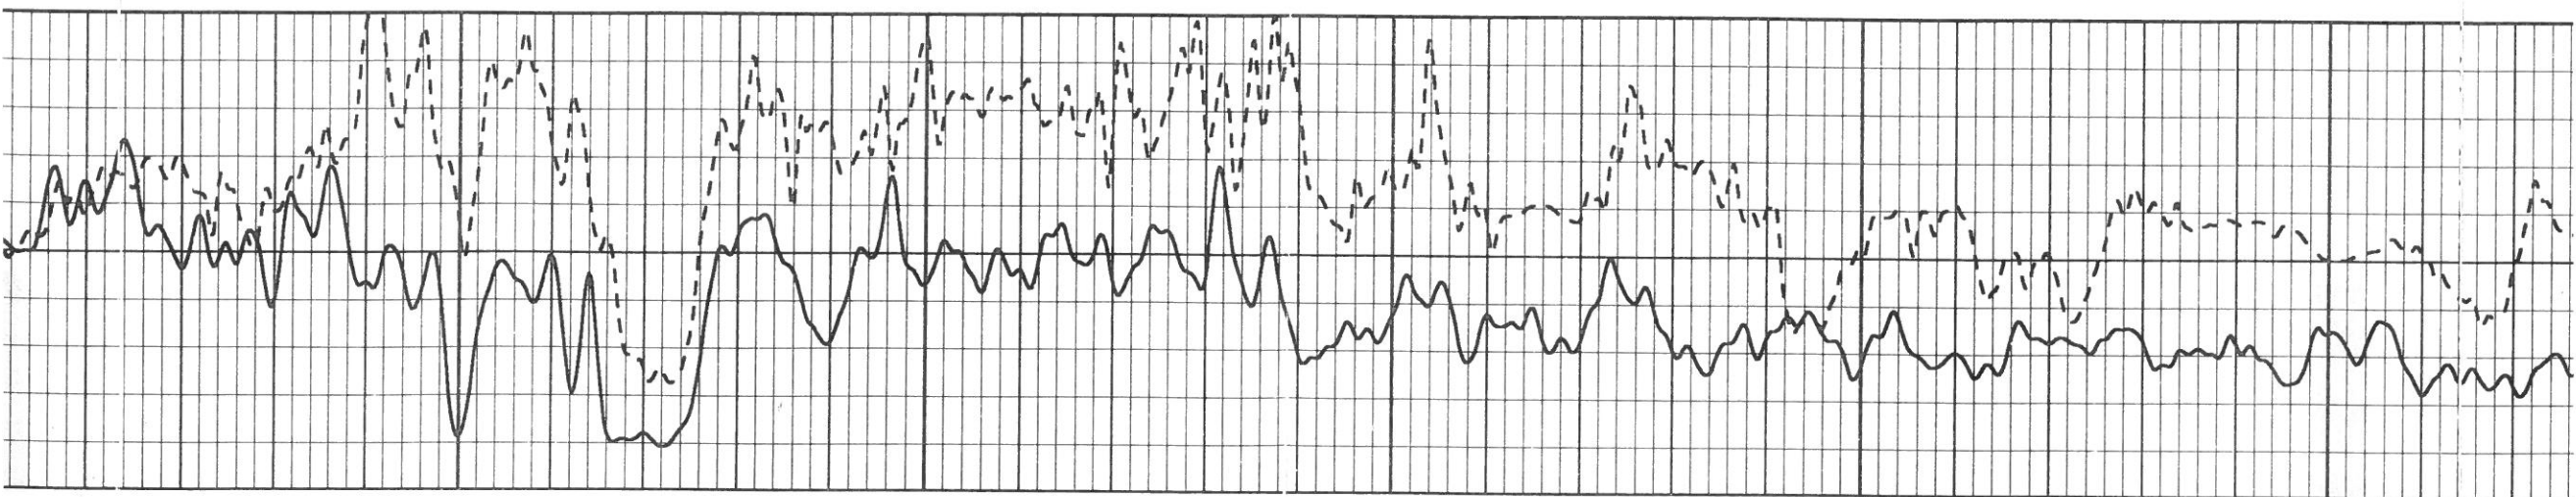


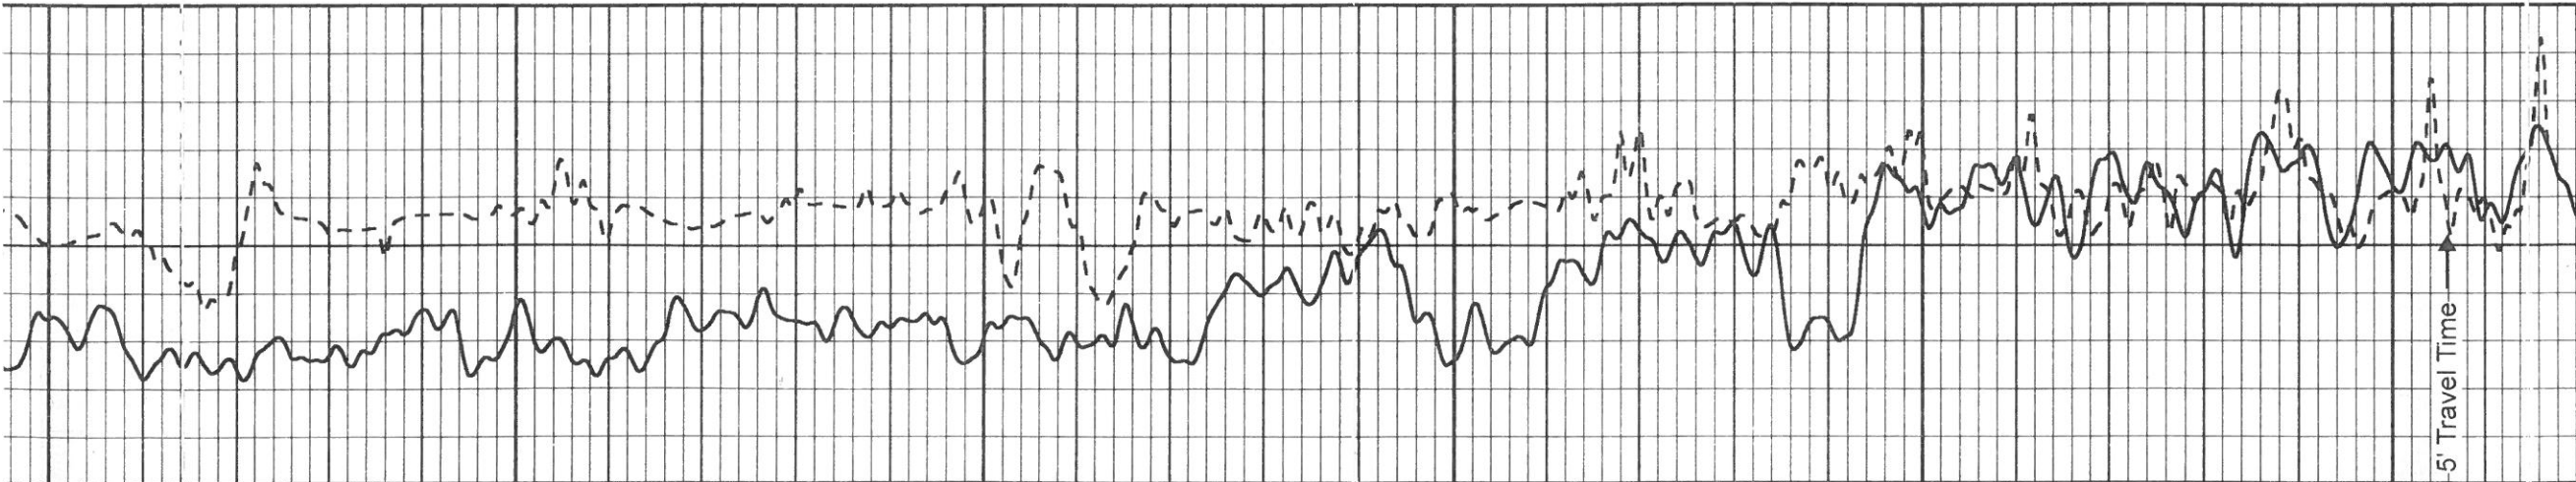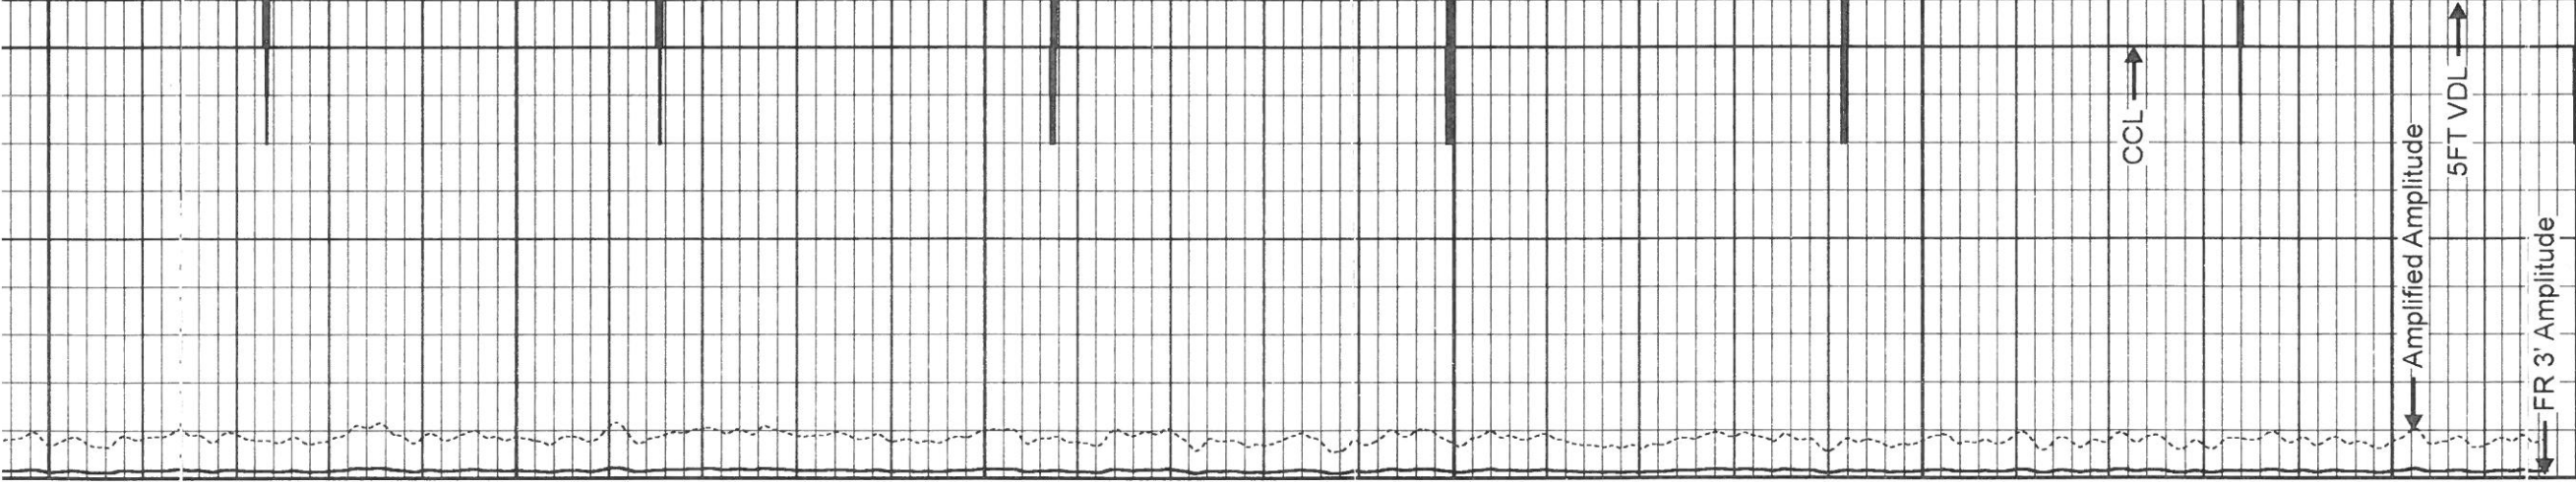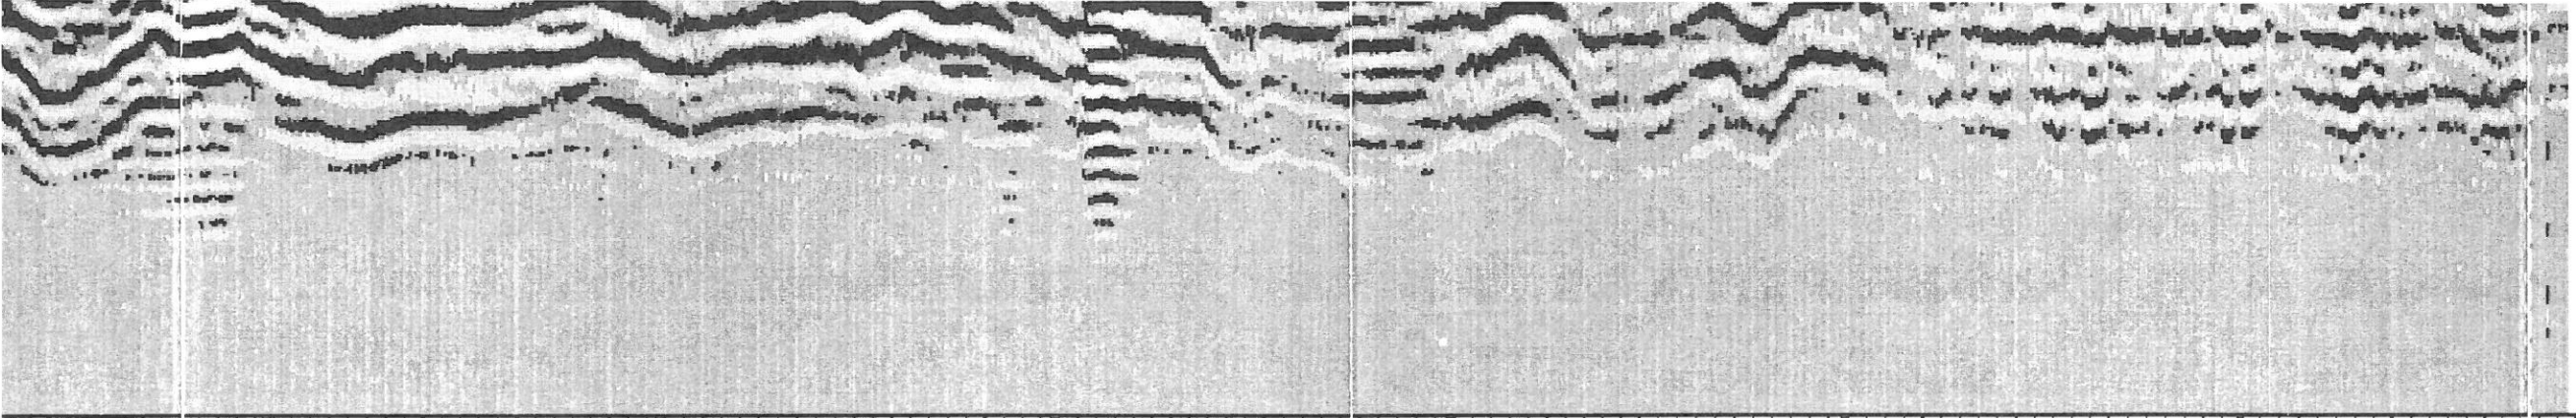

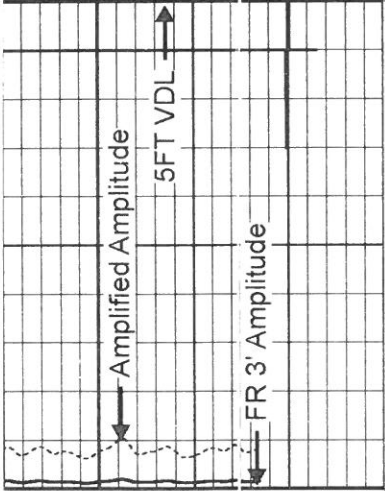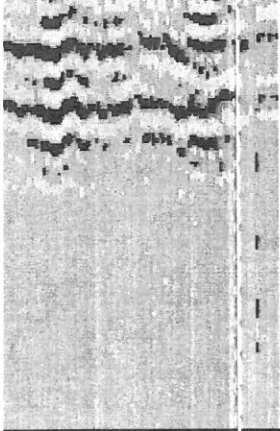

1750

TD 1775

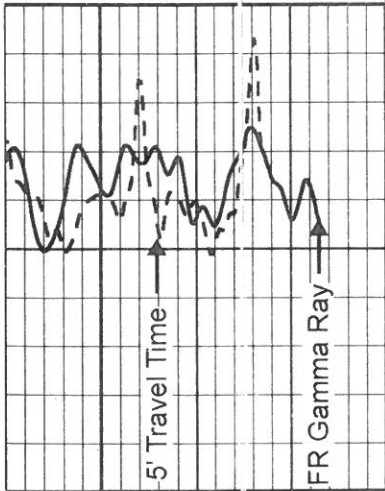

0	Gamma Ray (GAPI)	150	0	3' Amplitude (mV)	100	200	5FT VDL	1
200	5' Travel Time (usec)	1000	9	CCL	-1			
			0	Amplified Amplitude (mV)	20			