



ONE	TD	CSG	REC	0	150	30	-10	47.0 us/r	30	-10	2.77 g/cc	30	-10	LIME
-----	----	-----	-----	---	-----	----	-----	-----------	----	-----	-----------	----	-----	------

DIRECTIONAL INFORMATION

Maximum Deviation @ KOP @

Remarks:  
 GTET-DSNT-SDLT-BSAT-ACRT RUN IN COMBINATION  
 ANNULAR HOLE VOLUME CALCULATED FOR 5.5 INCH CASING  
 CHLORIDES REPORTED AT 1600 PPM

HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.

HALLIBURTON

**HALLIBURTON**


Plot Time: 12-Aug-18 01:05:48  
 Plot Range: 1775 ft to 4953.58 ft  
 Data: MERIT\_RIVERBND4\Well Based\MAIN\_TD-CSG\  
 Plot File: \\LOCAL\MERIT\_RIVERBND4\Well Based\ACRT5\ACRT\_5inch\_MAIN



## 5 INCH MAIN LOG


# MAIN LOG 5" PER 100'


	0.2	10in Resistivity 2ft Res	2000
		ohm-metre	
	0.2	20in Resistivity 2ft Res	2000
		ohm-metre	
	0.2	30in Resistivity 2ft Res	2000
		ohm-metre	
	0.2	60in Resistivity 2ft Res	2000
		ohm-metre	
SP - 20 +	0.2	90in Resistivity 2ft Res	2000
		ohm-metre	

0	Gamma API	150	1 : 240 ft	15K	Tension	0
	api				pounds	

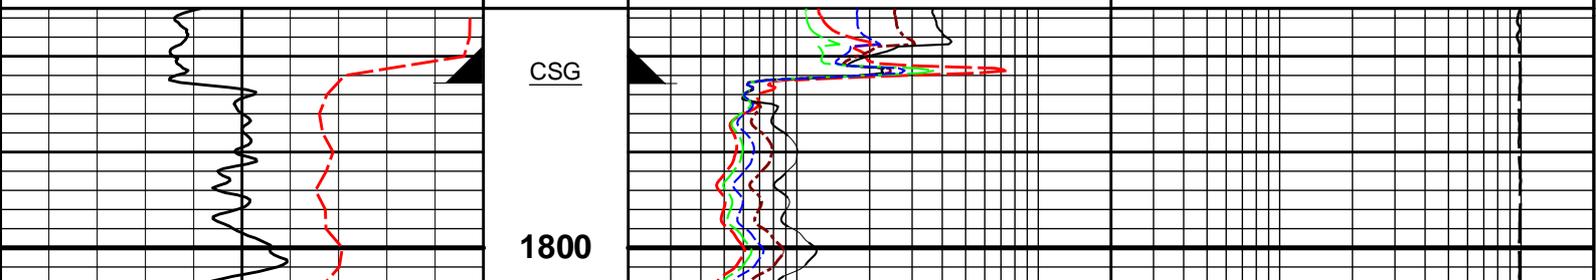

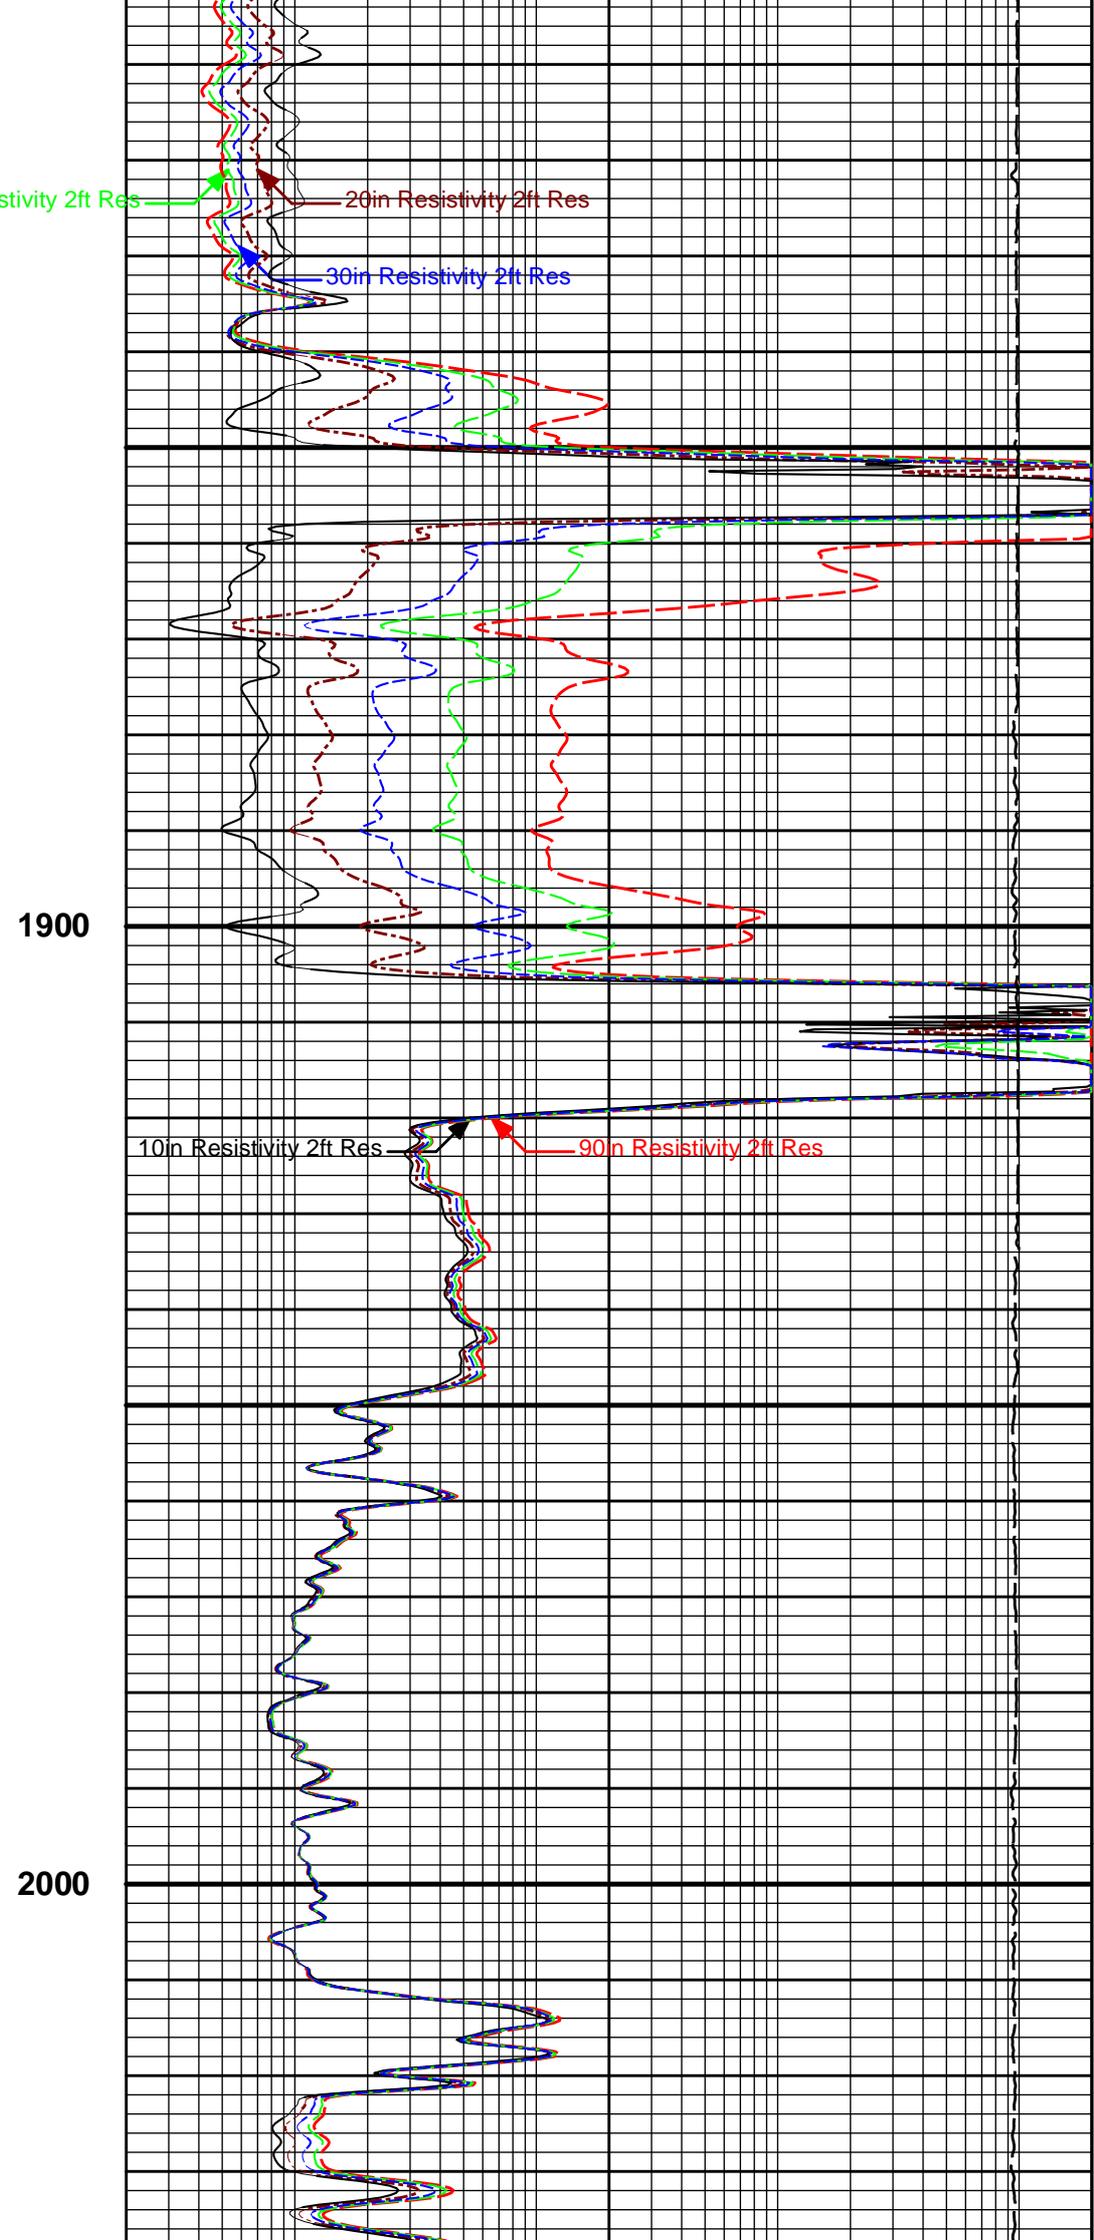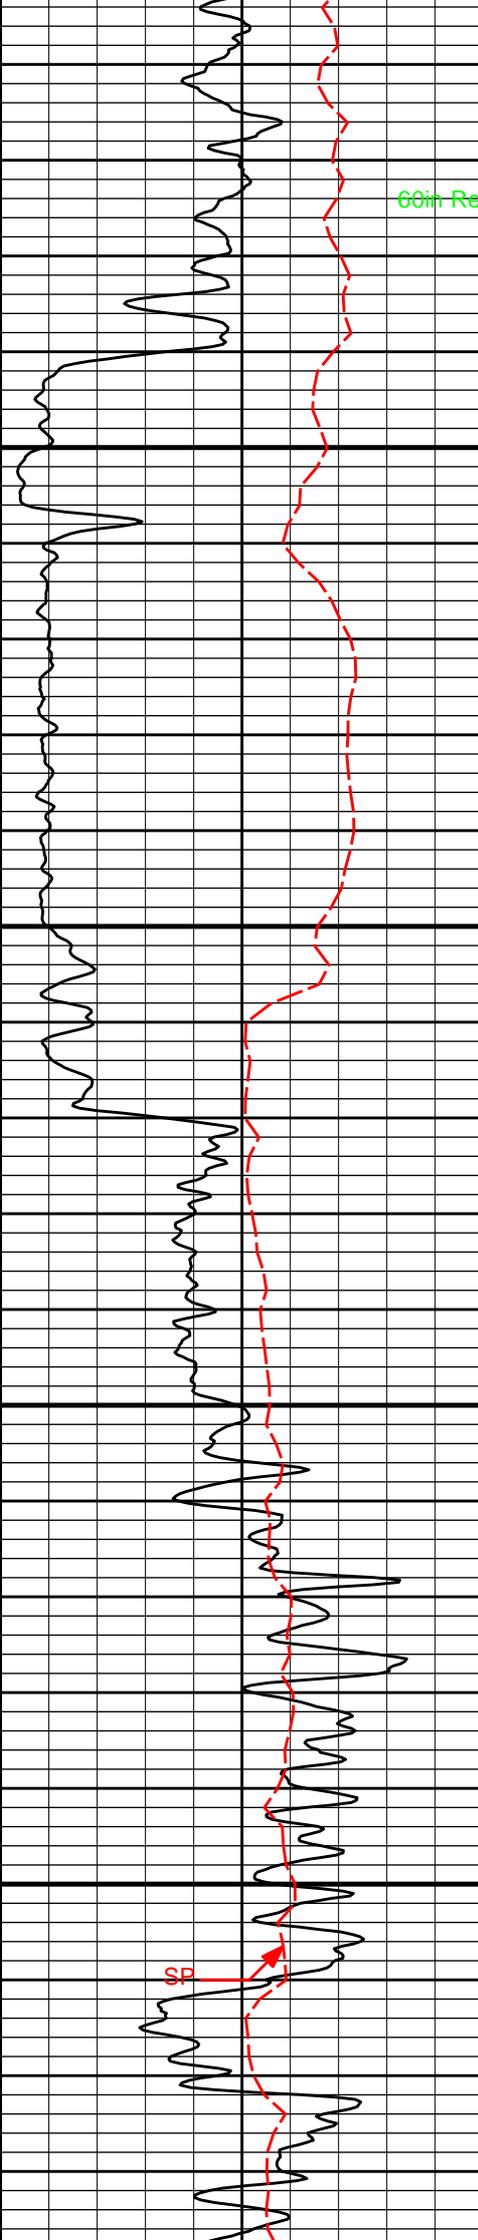

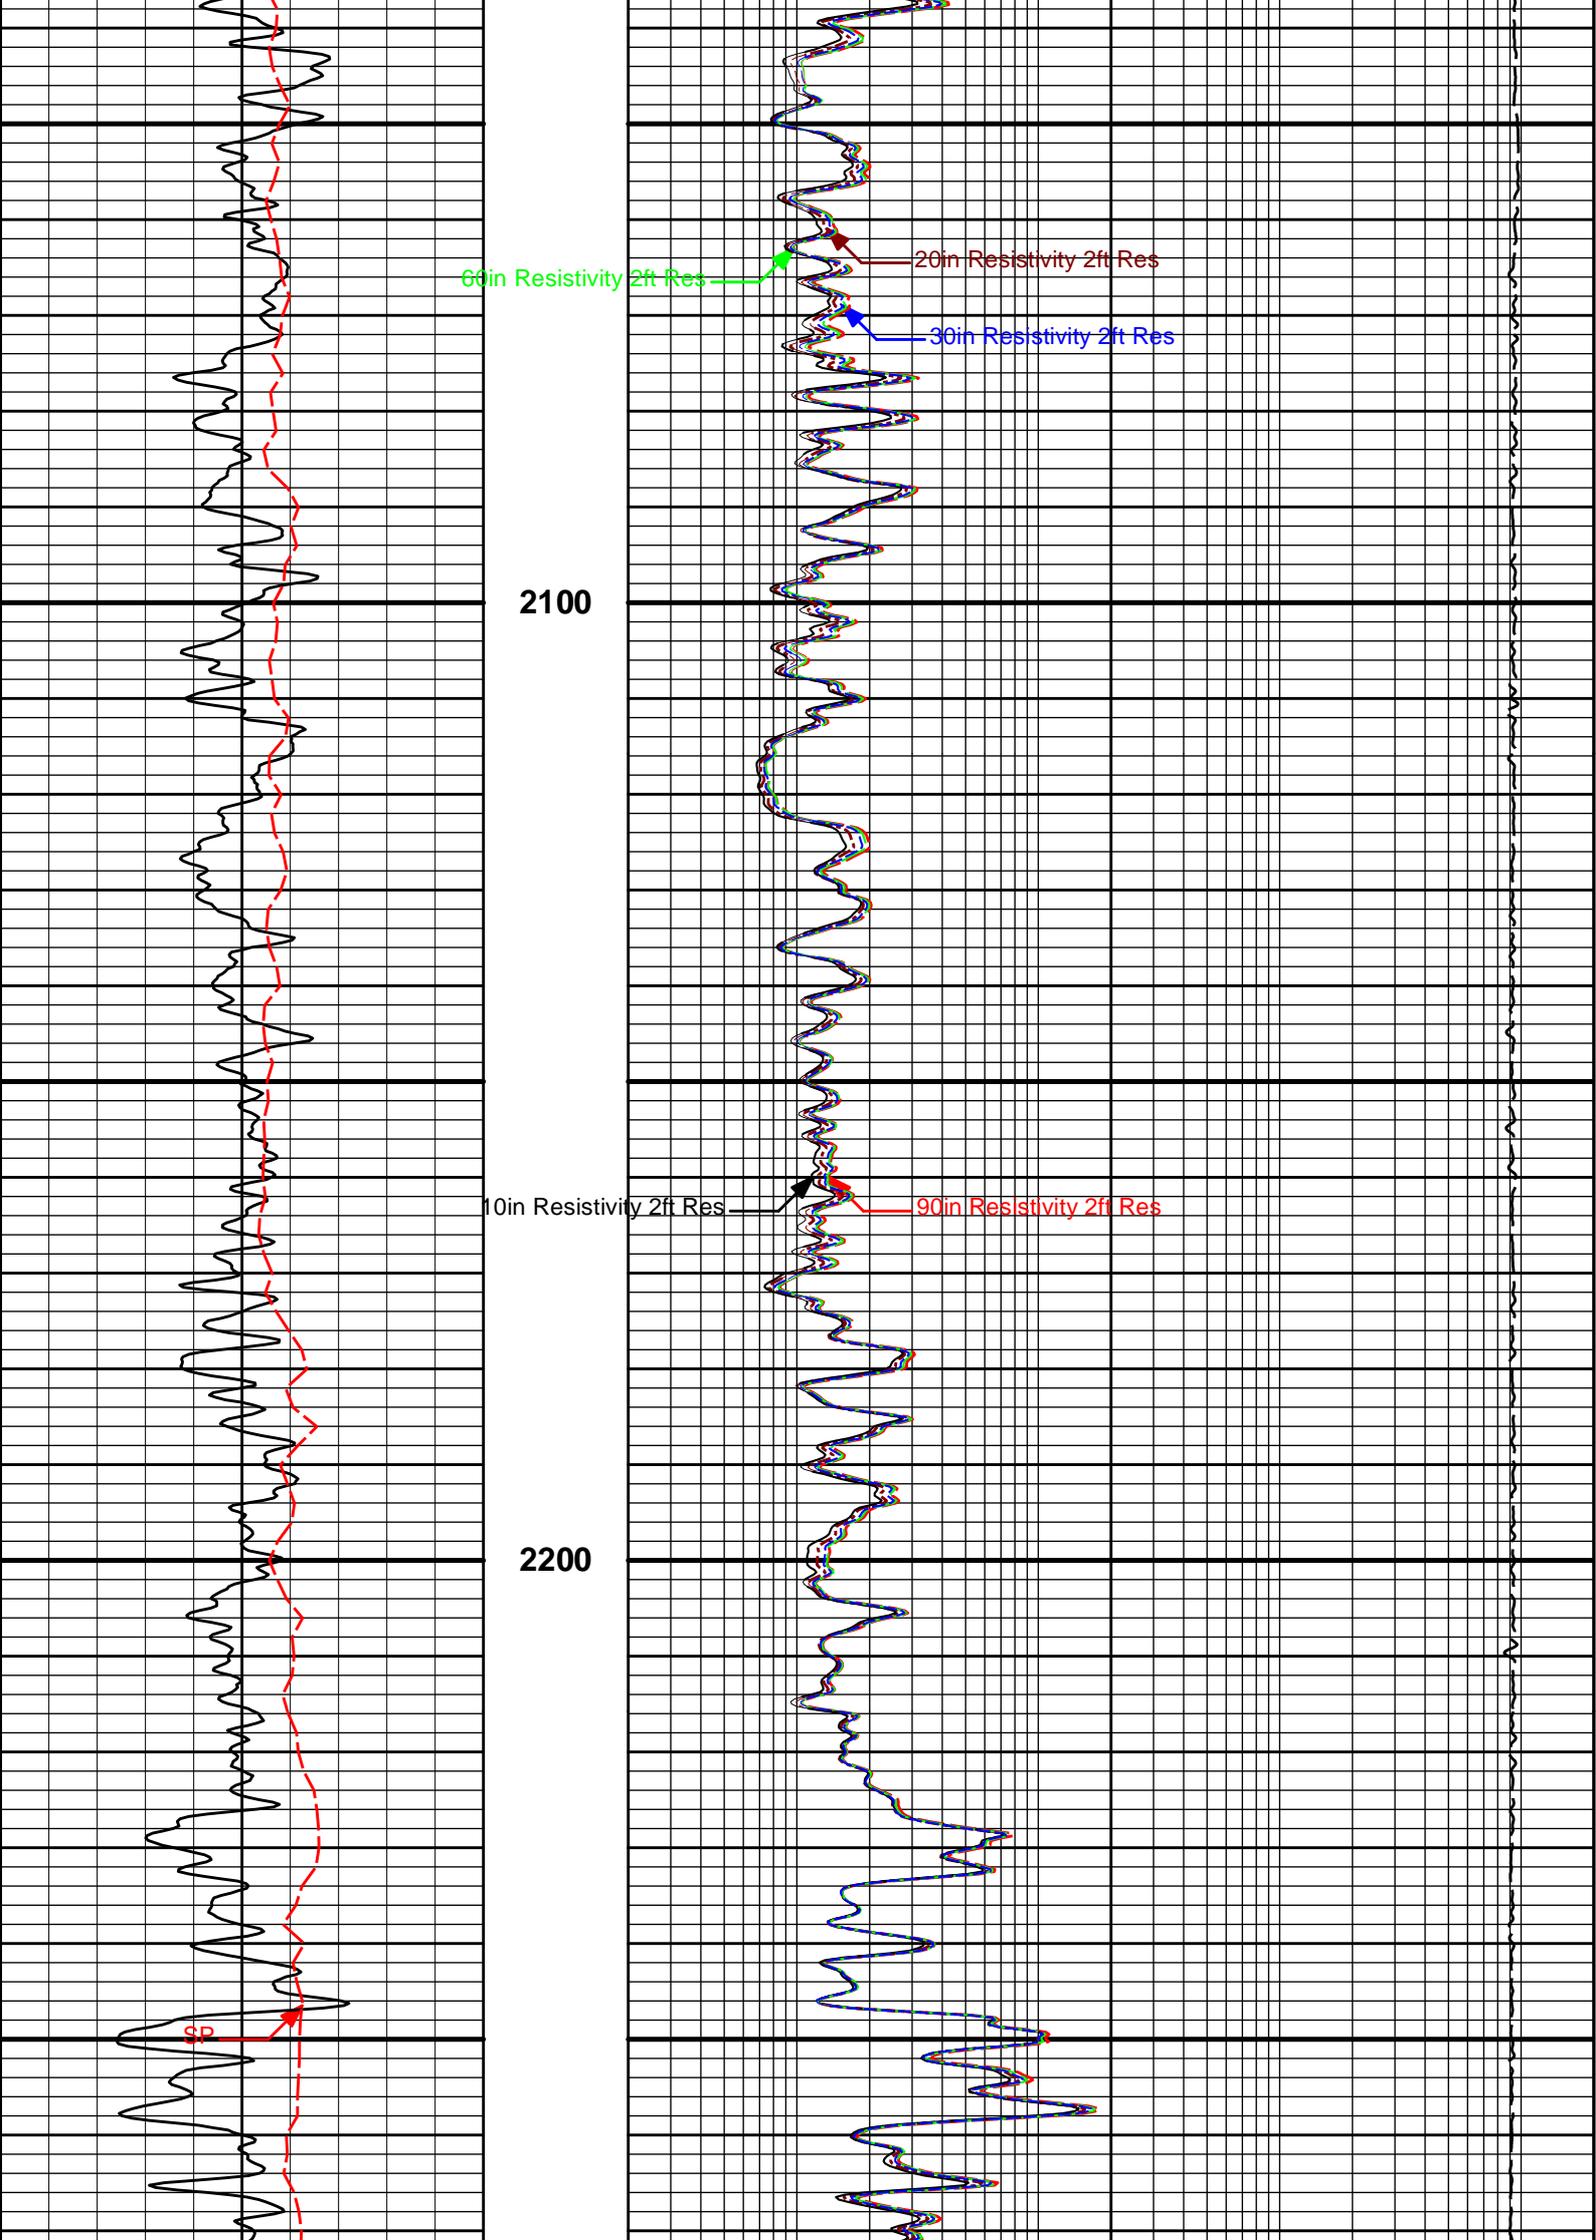

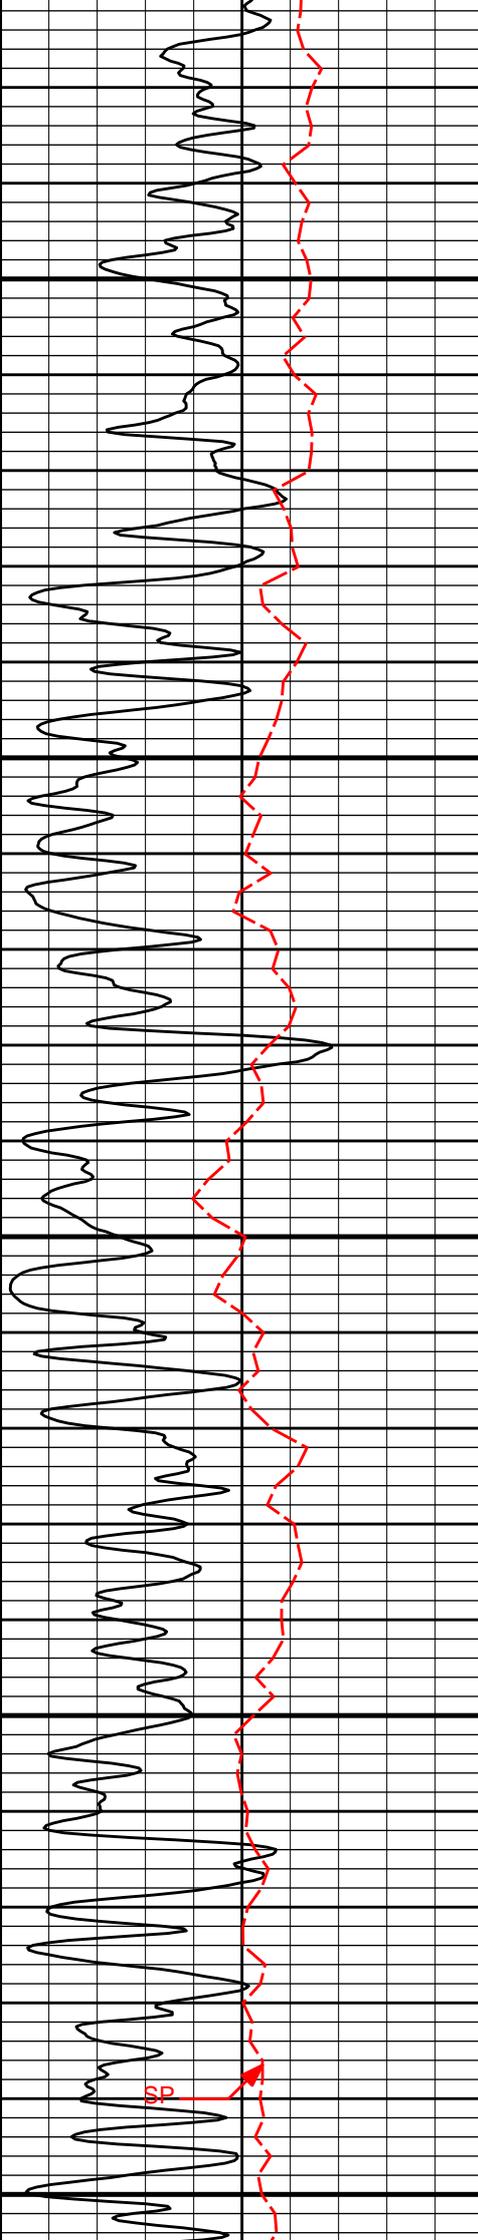


2300

2400

2500

60in Resistivity 2ft Res

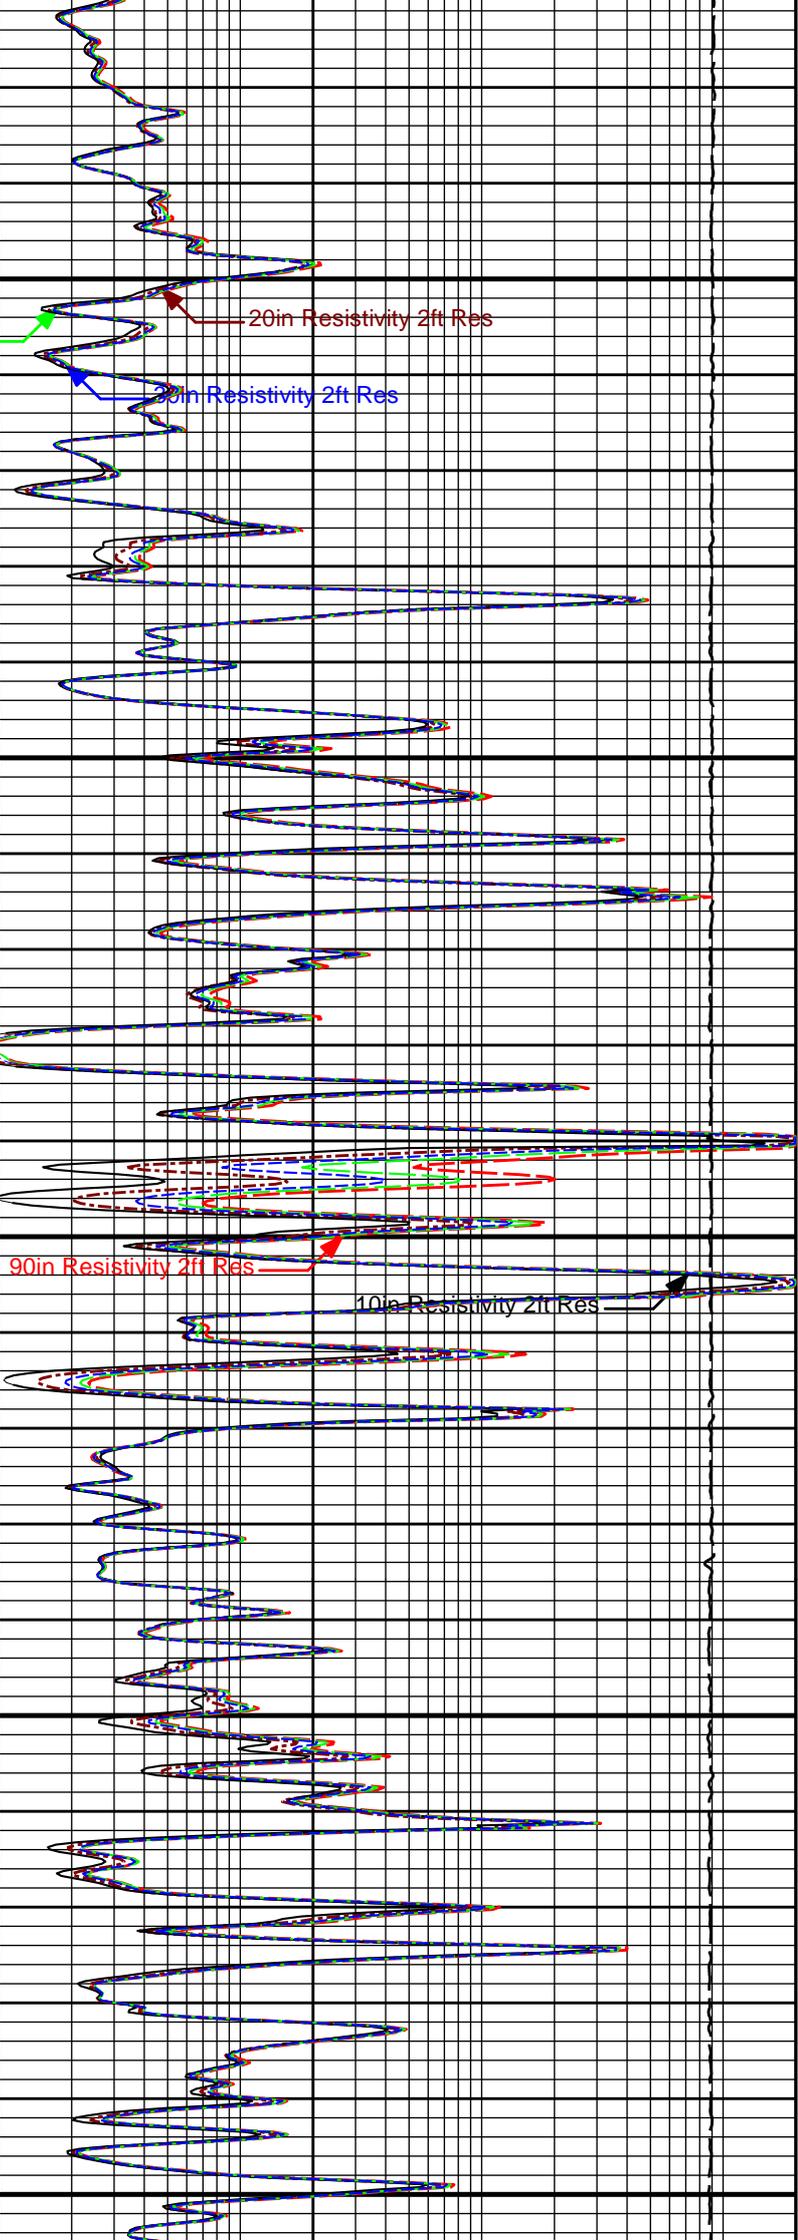


20in Resistivity 2ft Res

30in Resistivity 2ft Res

90in Resistivity 2ft Res

10in Resistivity 2ft Res

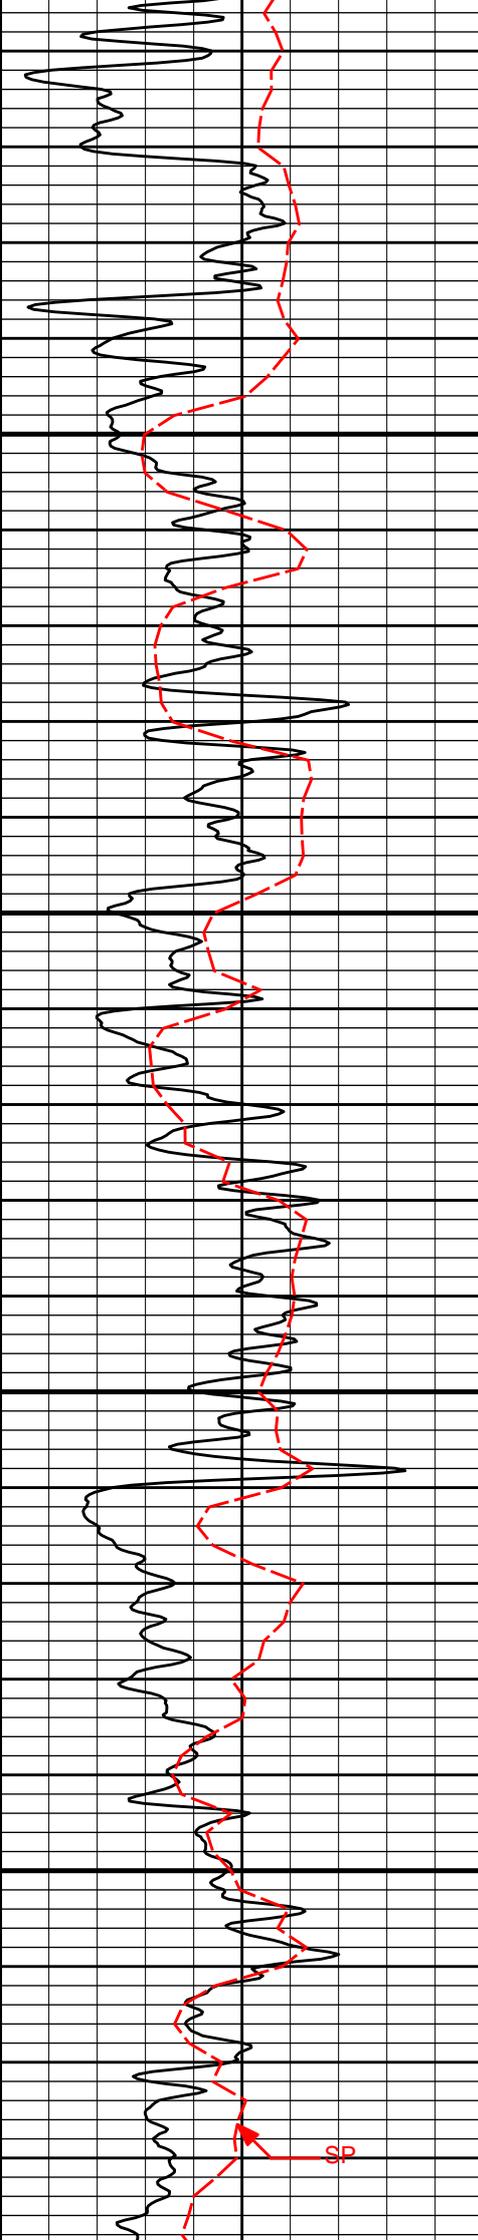

2600

2700


60in Resistivity 2ft Res


20in Resistivity 2ft Res

30in Resistivity 2ft Res

90in Resistivity 2ft Res


10in Resistivity 2ft Res

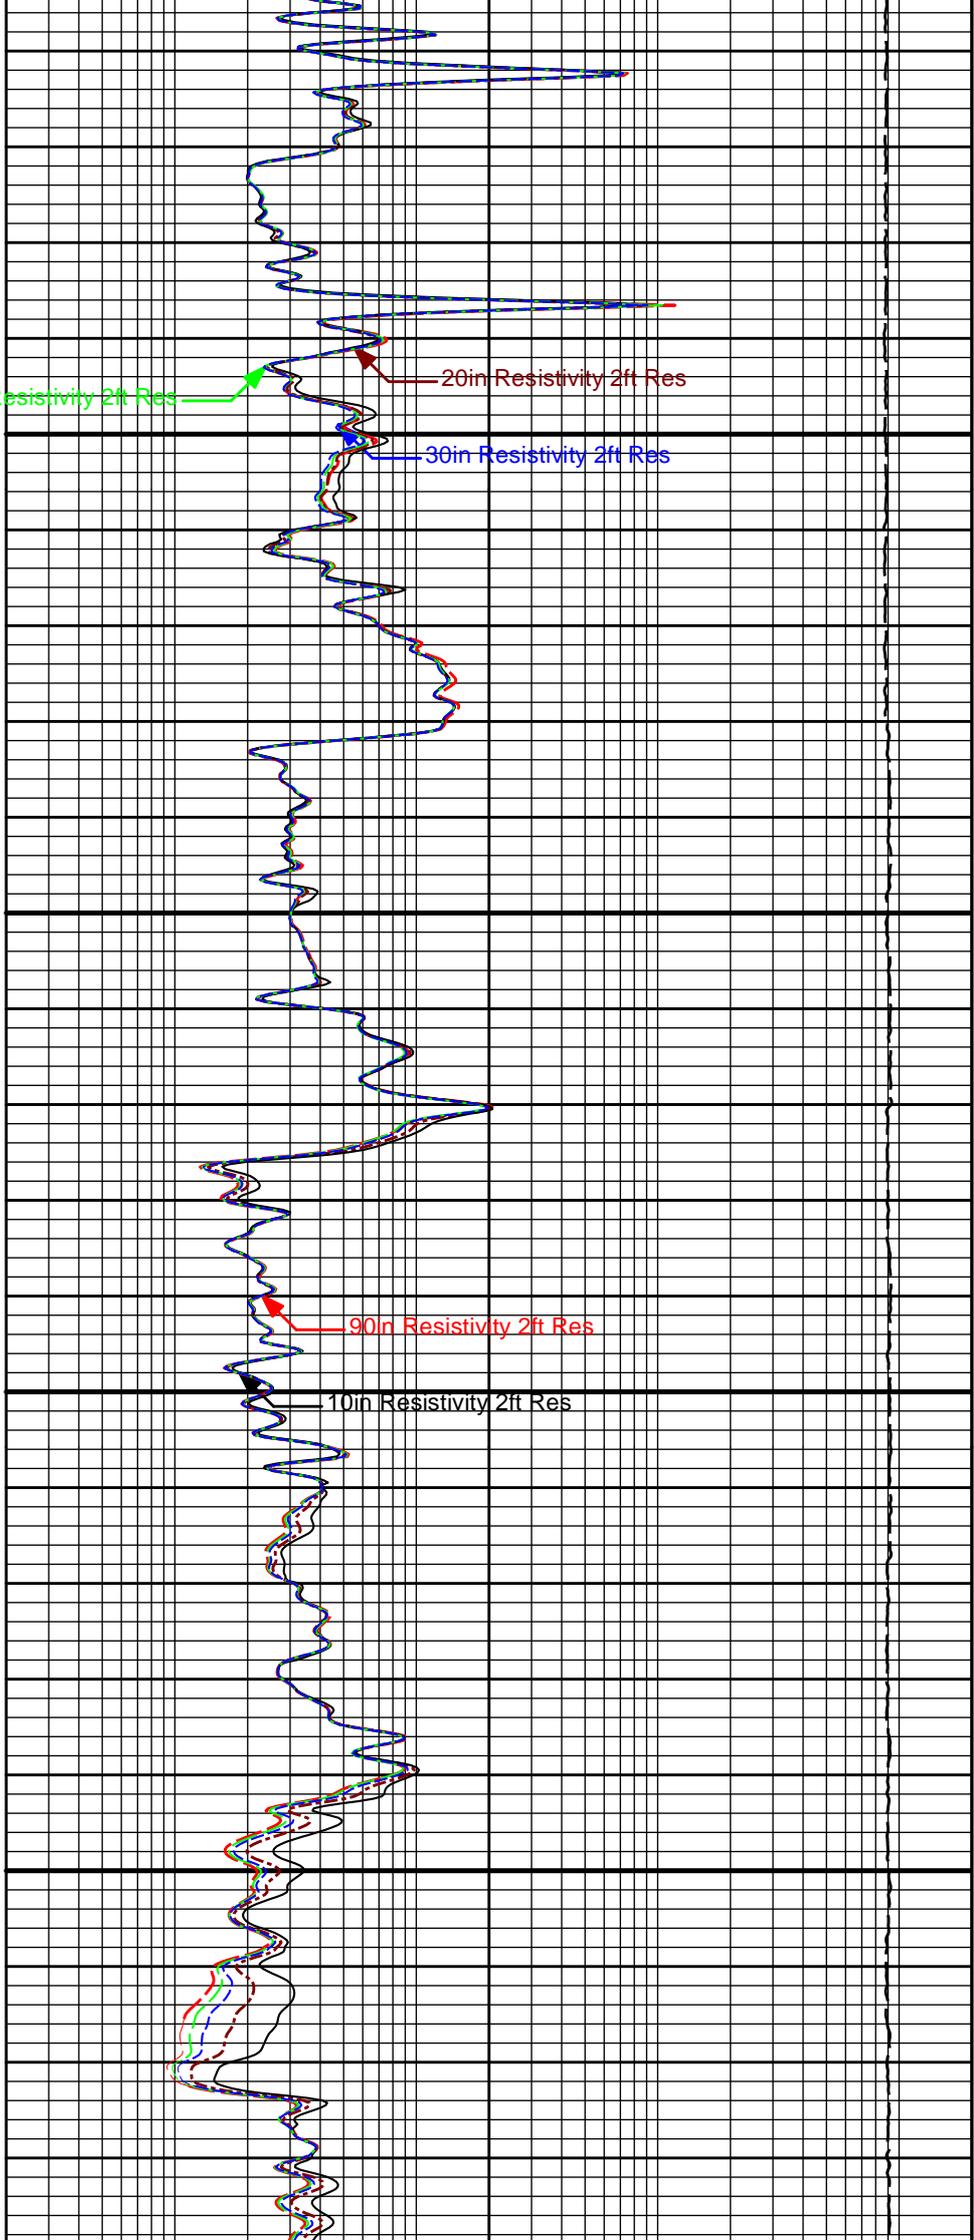

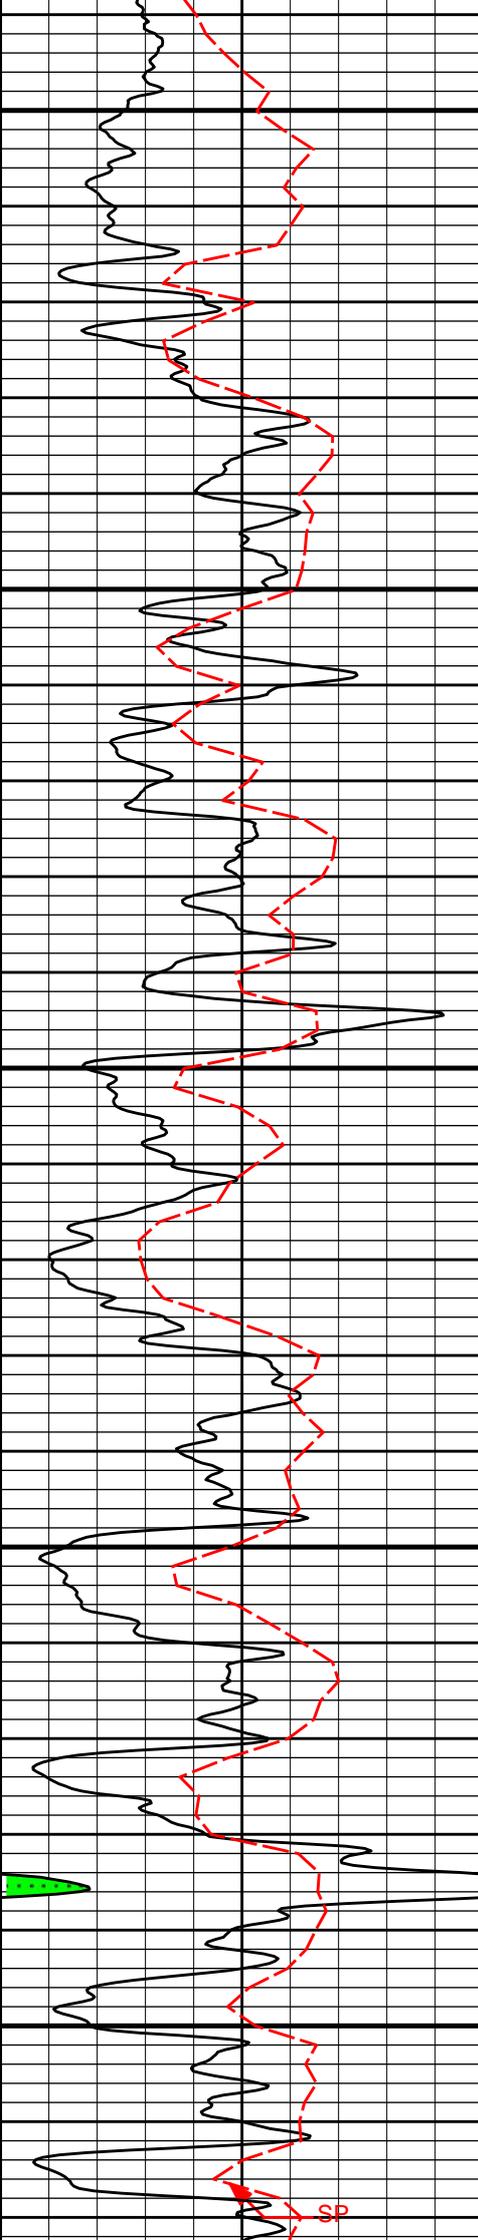

2800

2900

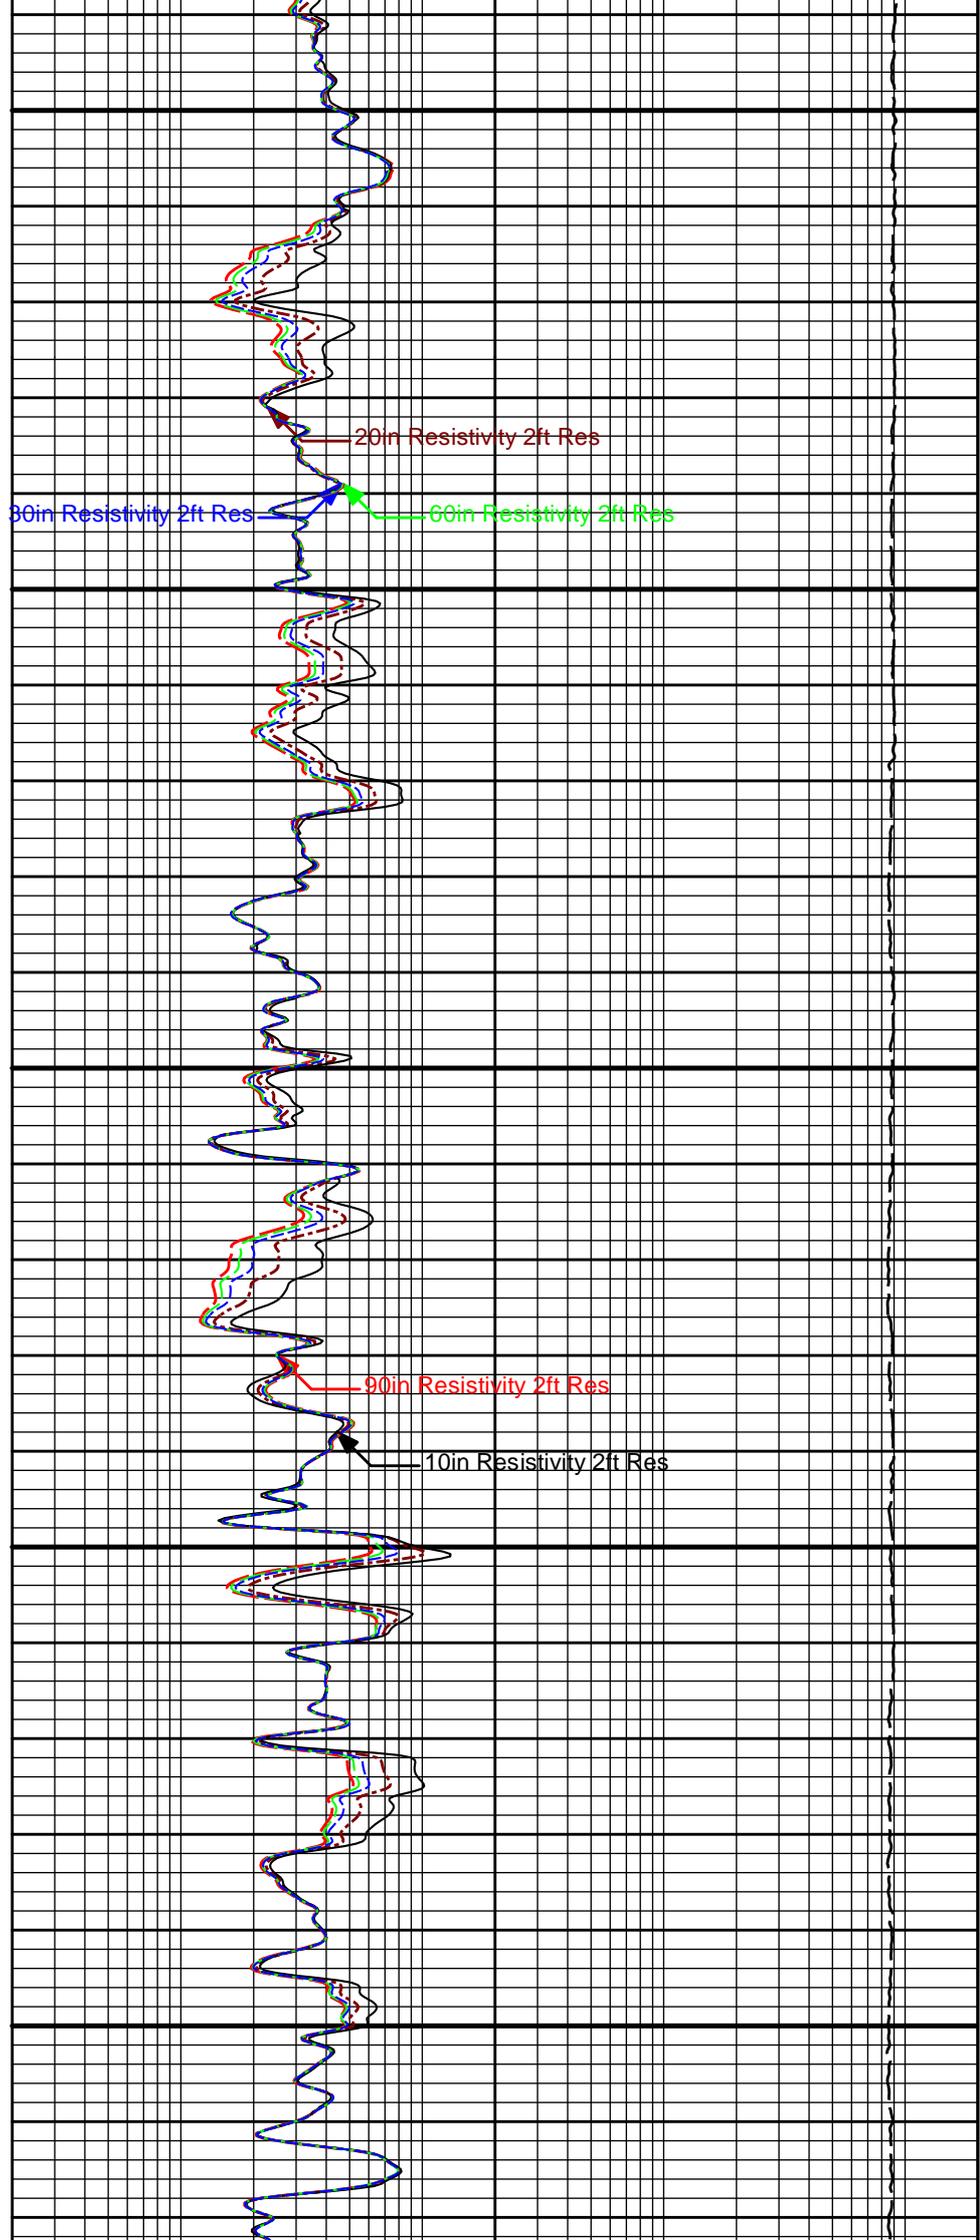


20in Resistivity 2ft Res

30in Resistivity 2ft Res

60in Resistivity 2ft Res

90in Resistivity 2ft Res


10in Resistivity 2ft Res

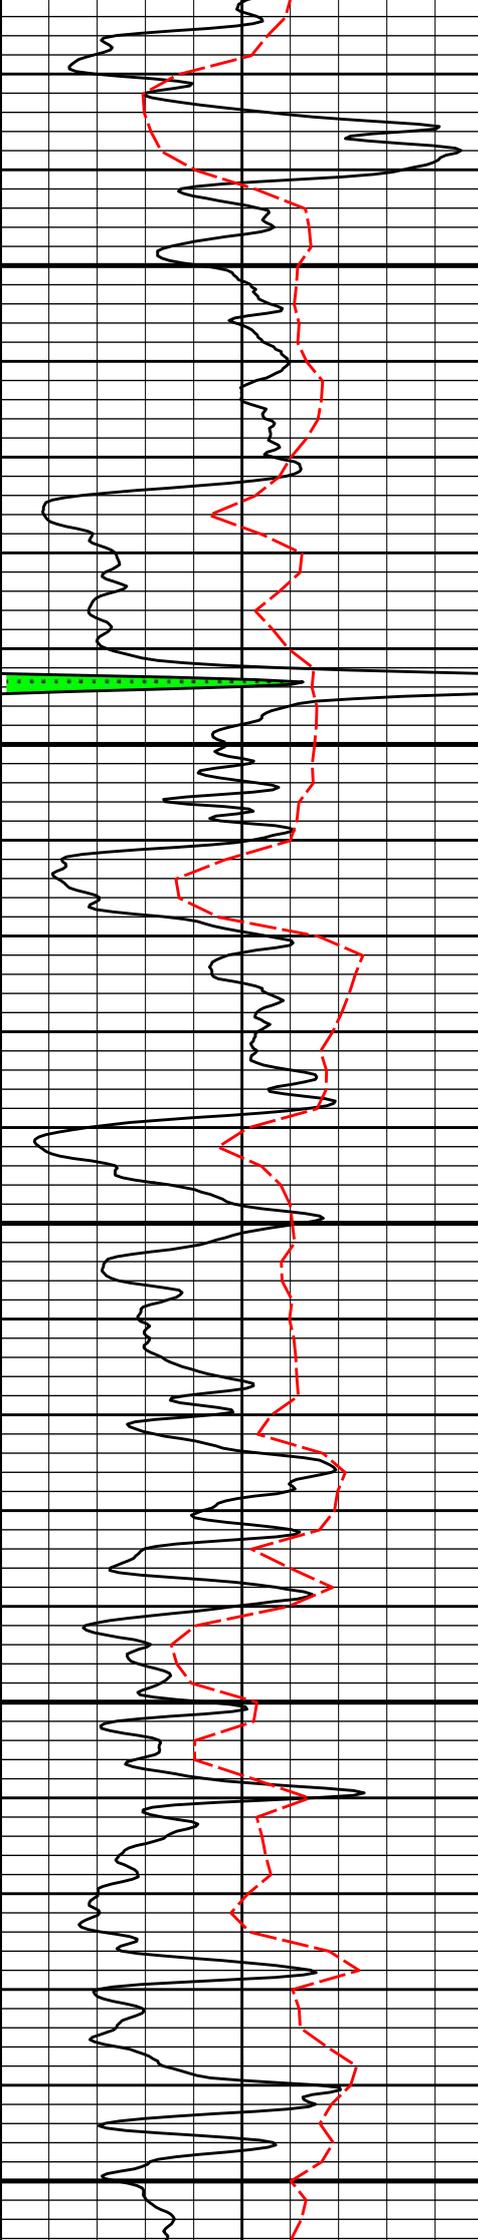

3000

3100

3200

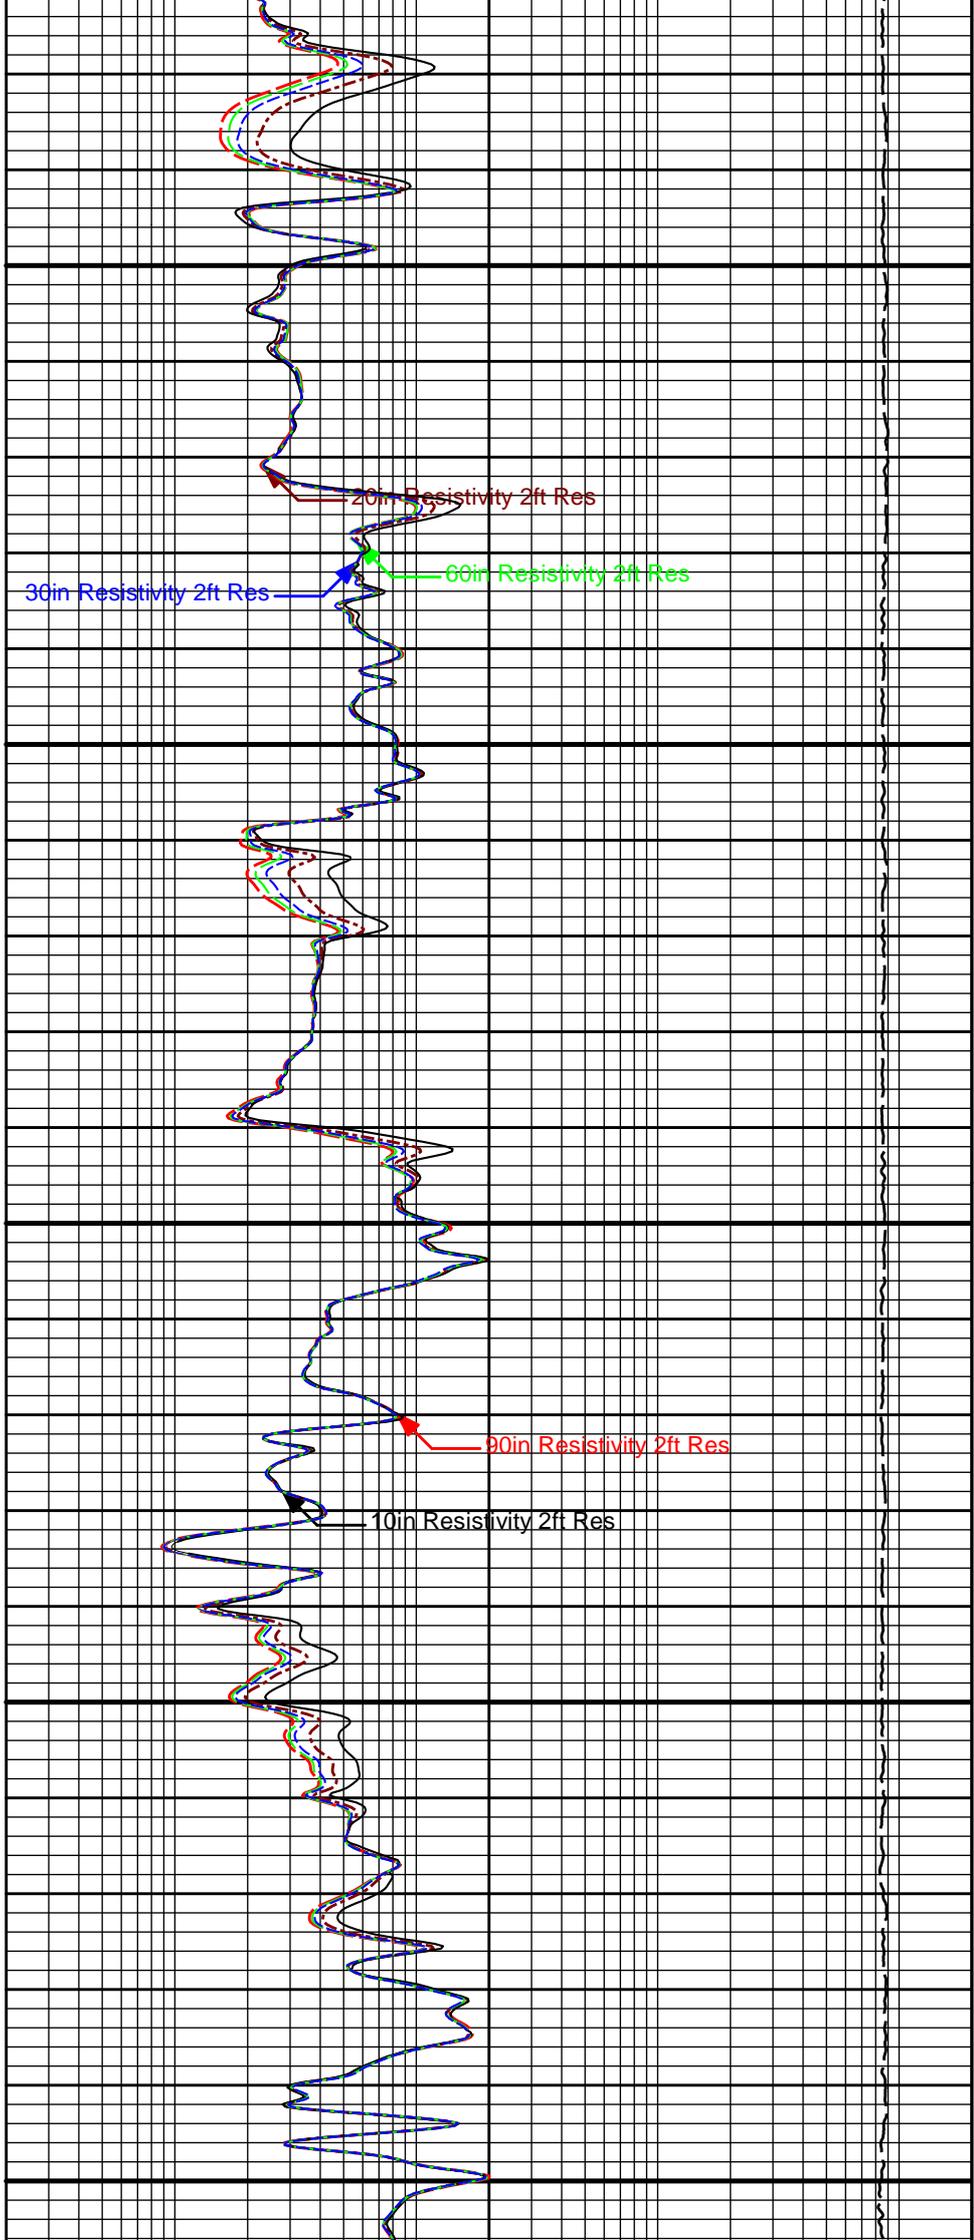



20in Resistivity 2ft Res


30in Resistivity 2ft Res

60in Resistivity 2ft Res

90in Resistivity 2ft Res


10in Resistivity 2ft Res

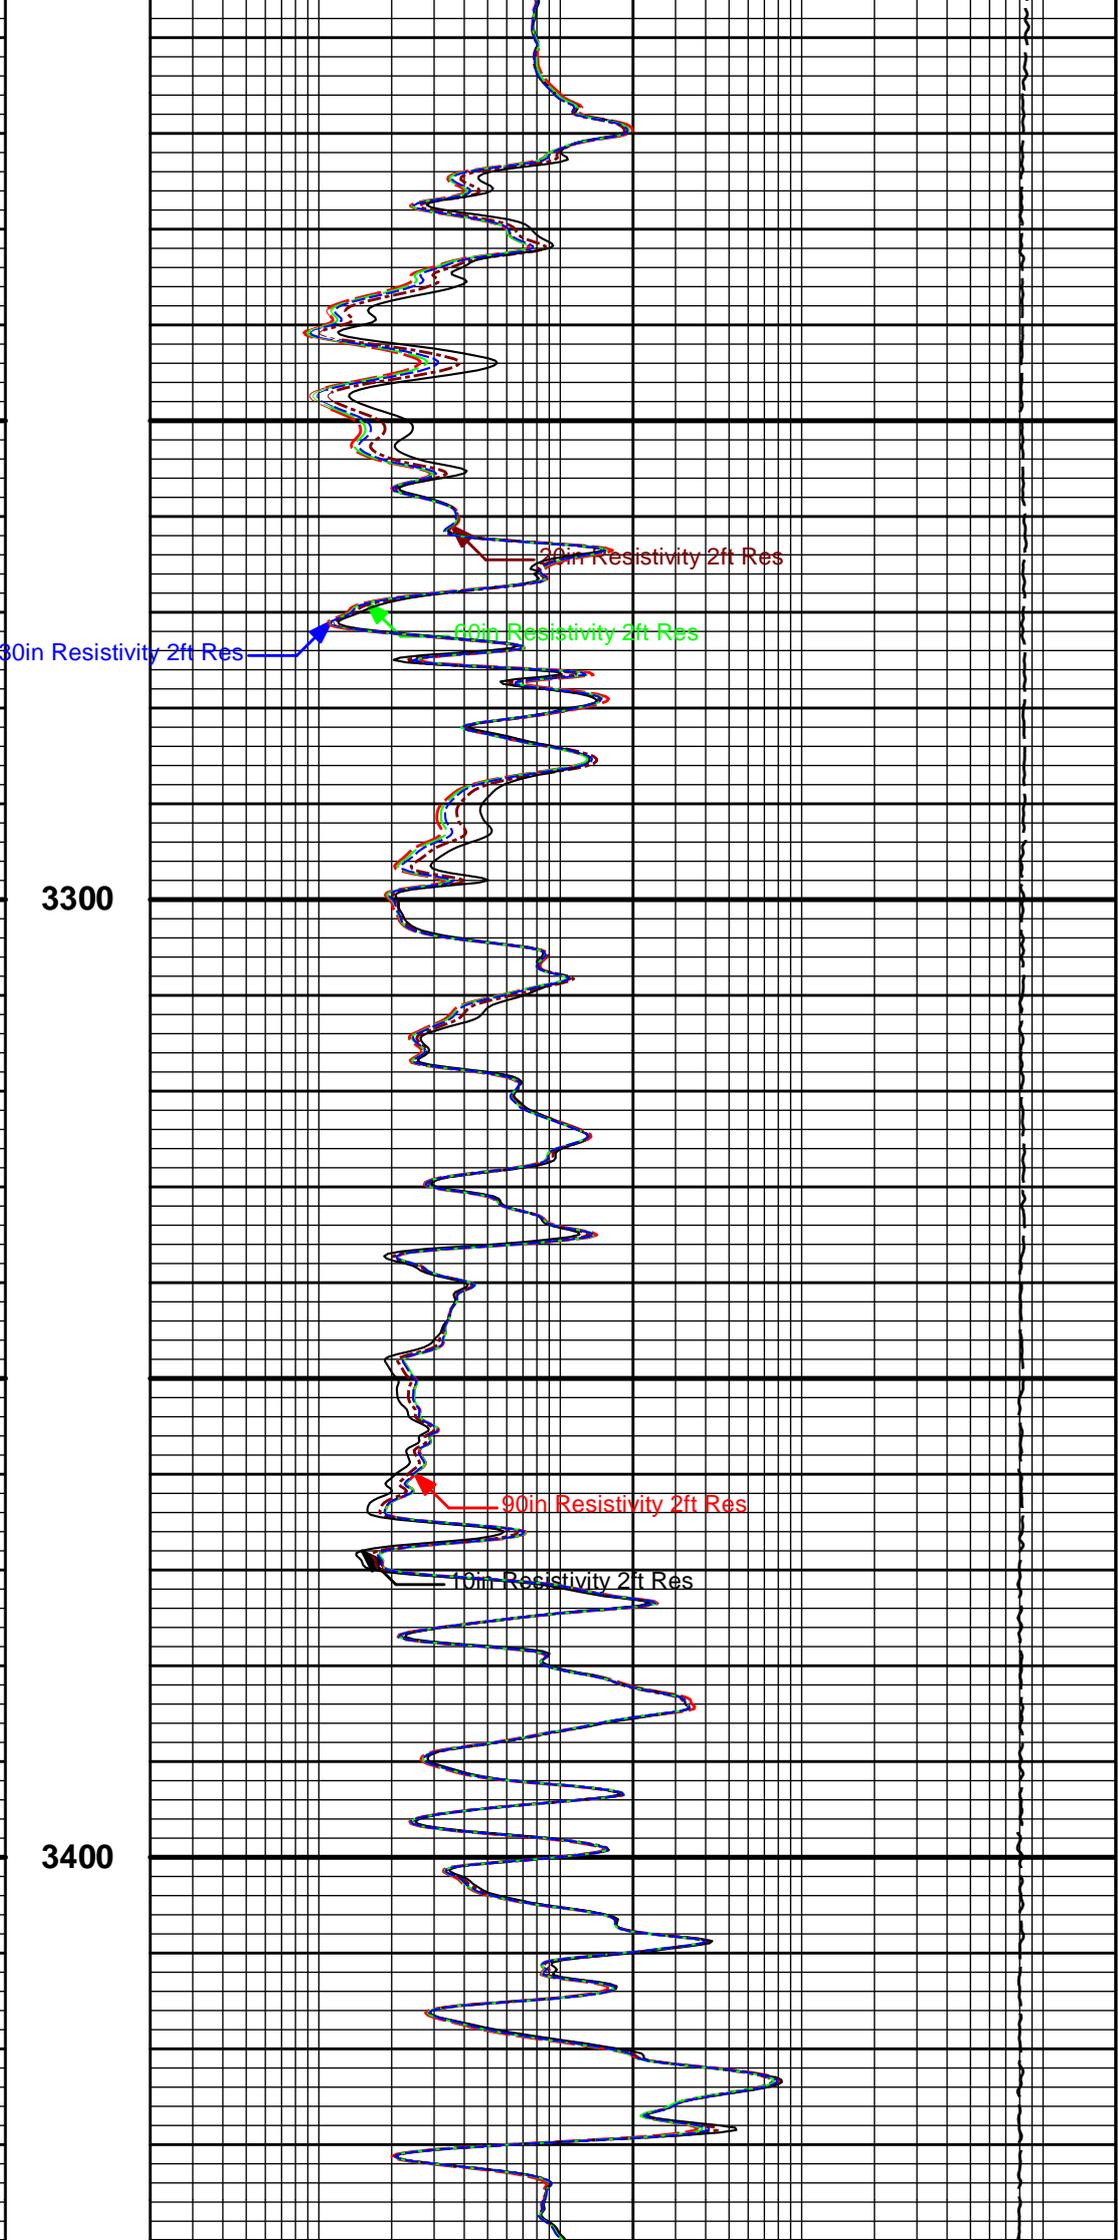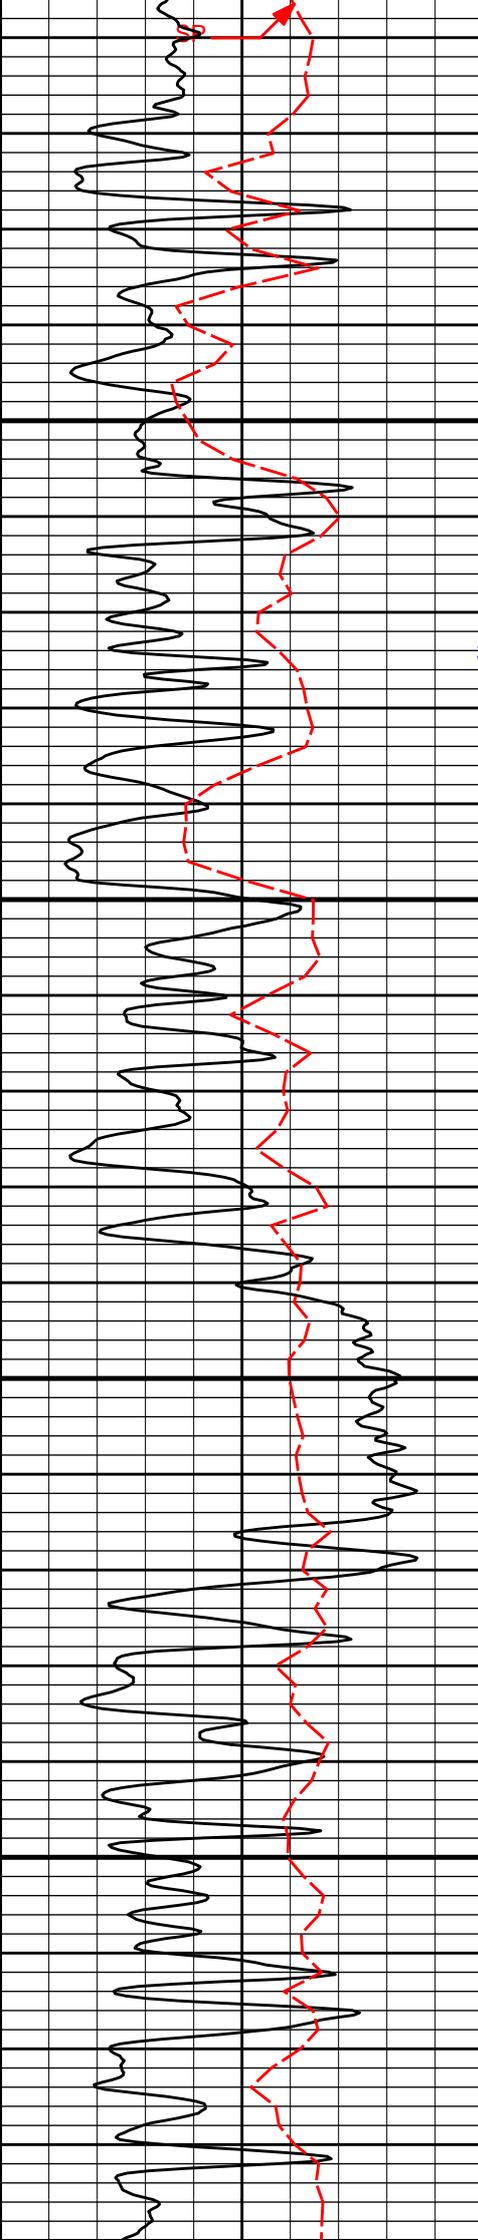

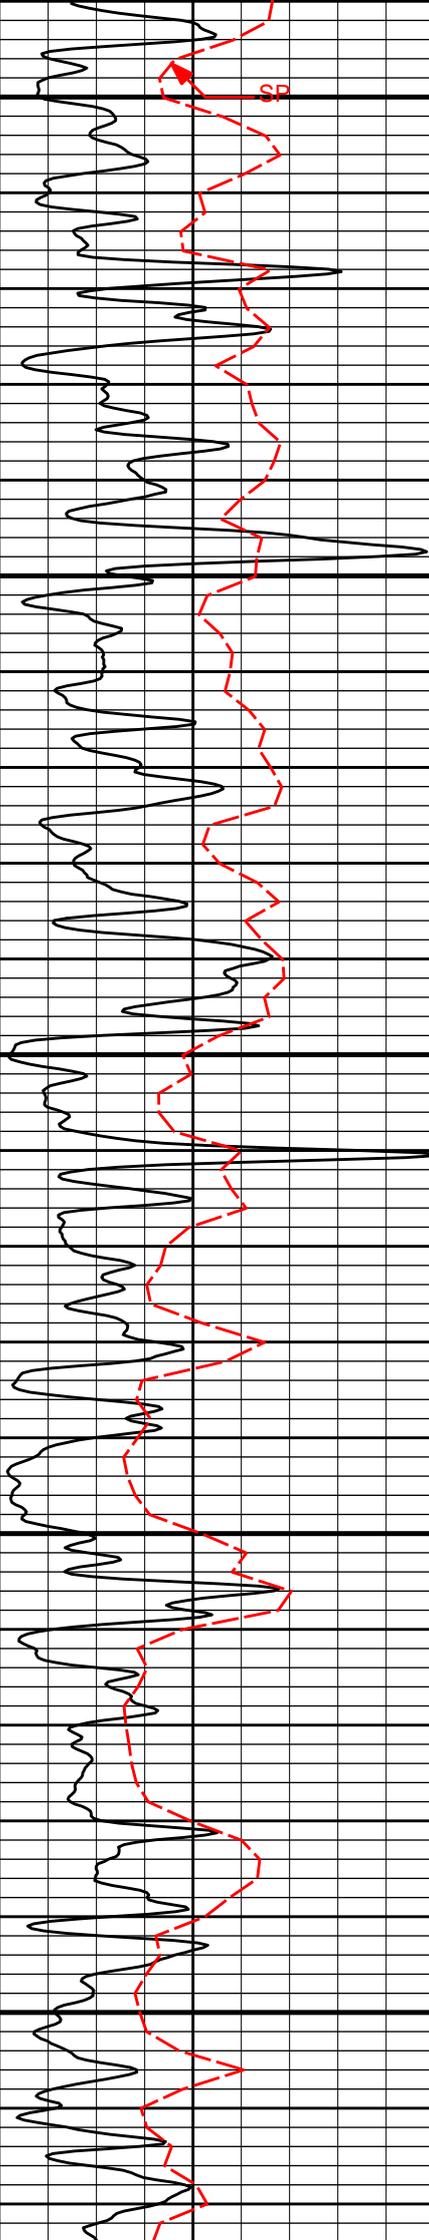

3500

3600

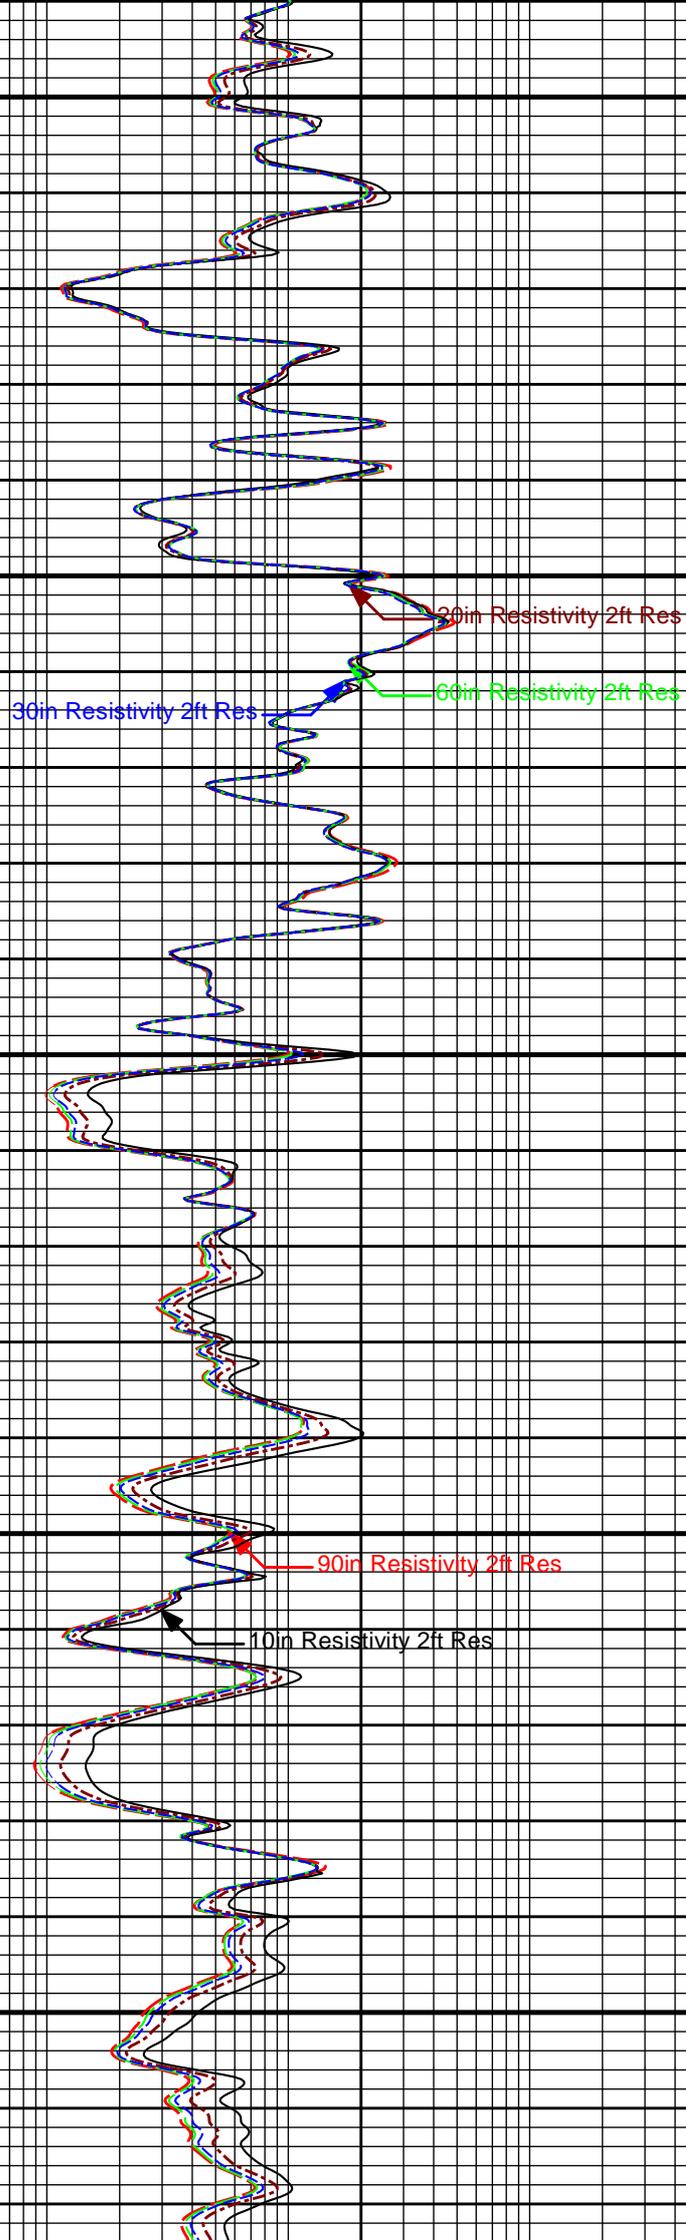


30in Resistivity 2ft Res

30in Resistivity 2ft Res

60in Resistivity 2ft Res

90in Resistivity 2ft Res


10in Resistivity 2ft Res

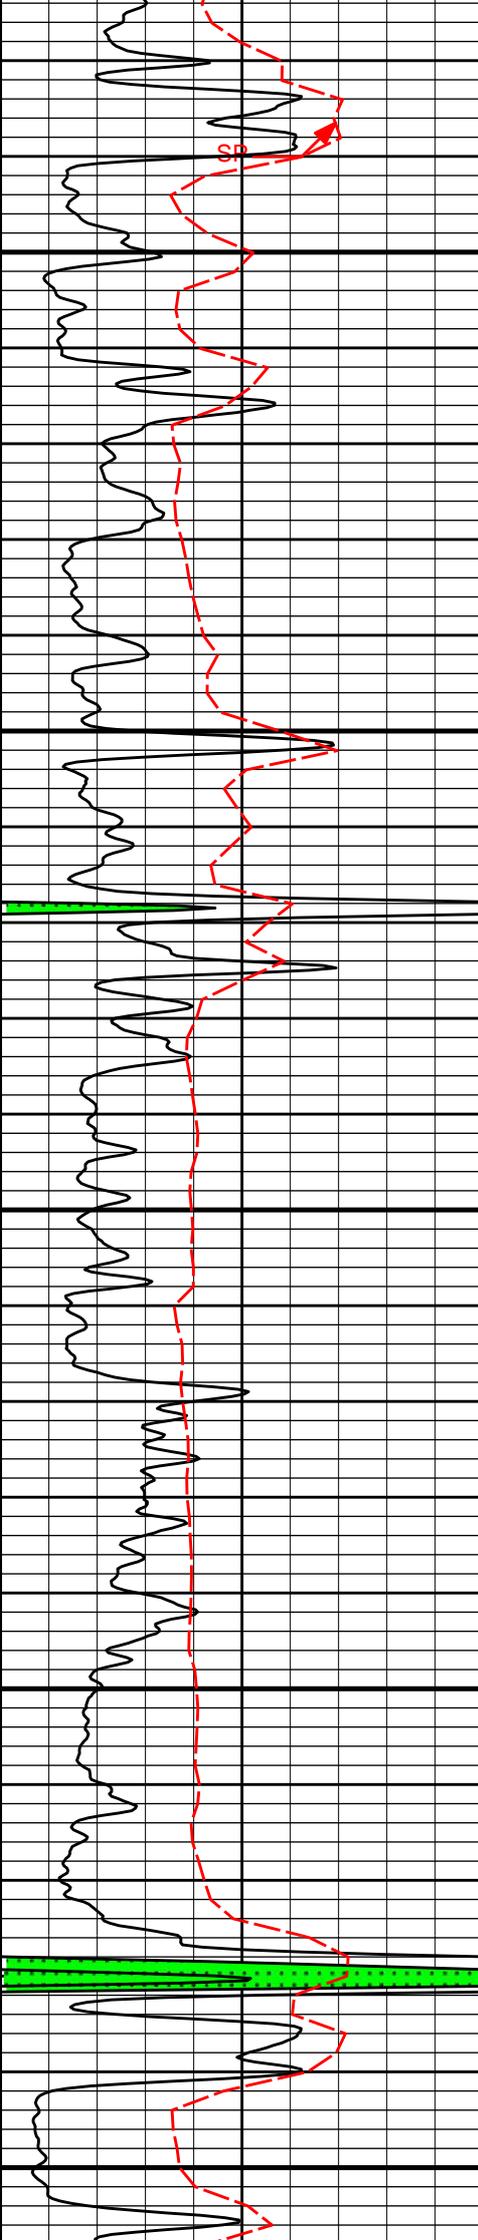

3700

3800

3900

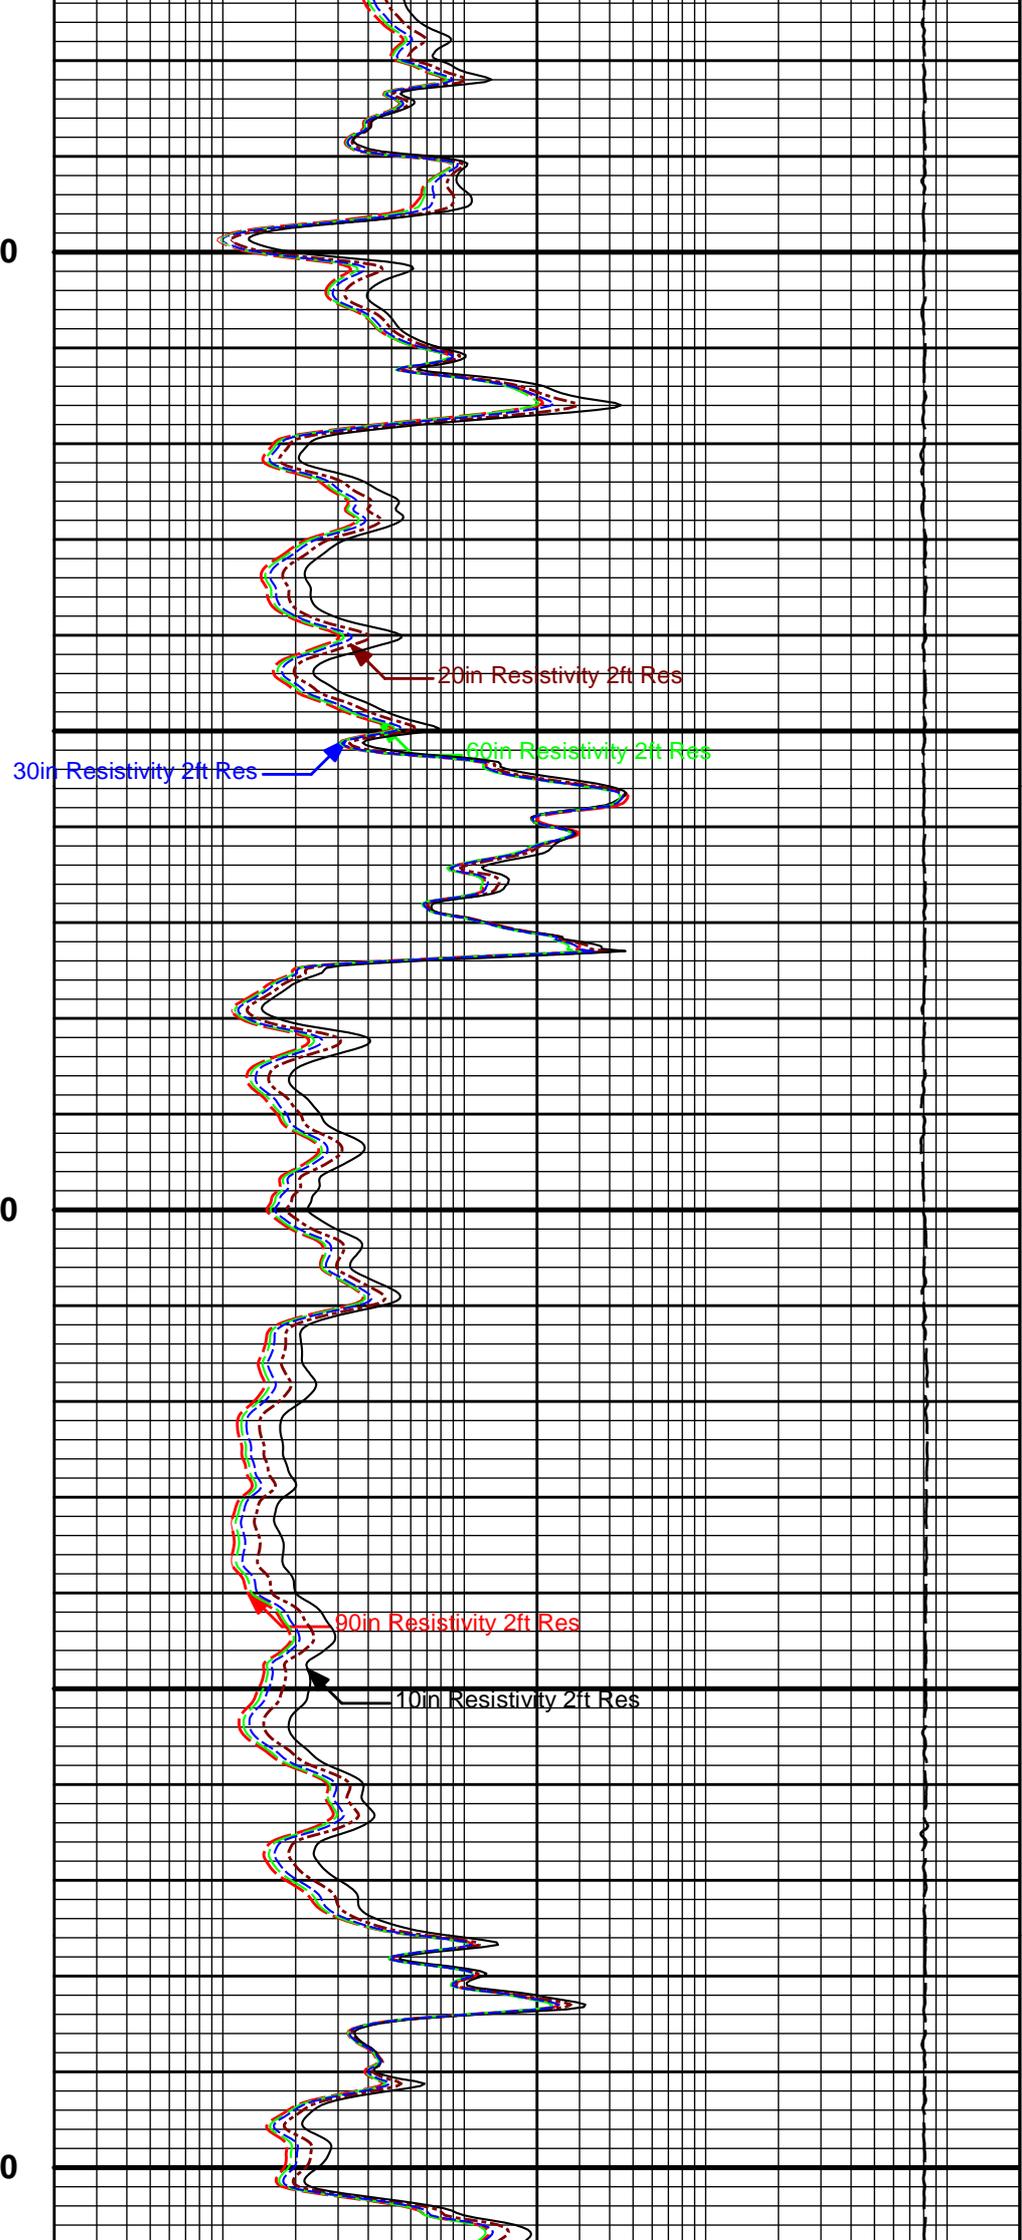


20in Resistivity 2ft Res

30in Resistivity 2ft Res

60in Resistivity 2ft Res


90in Resistivity 2ft Res


10in Resistivity 2ft Res

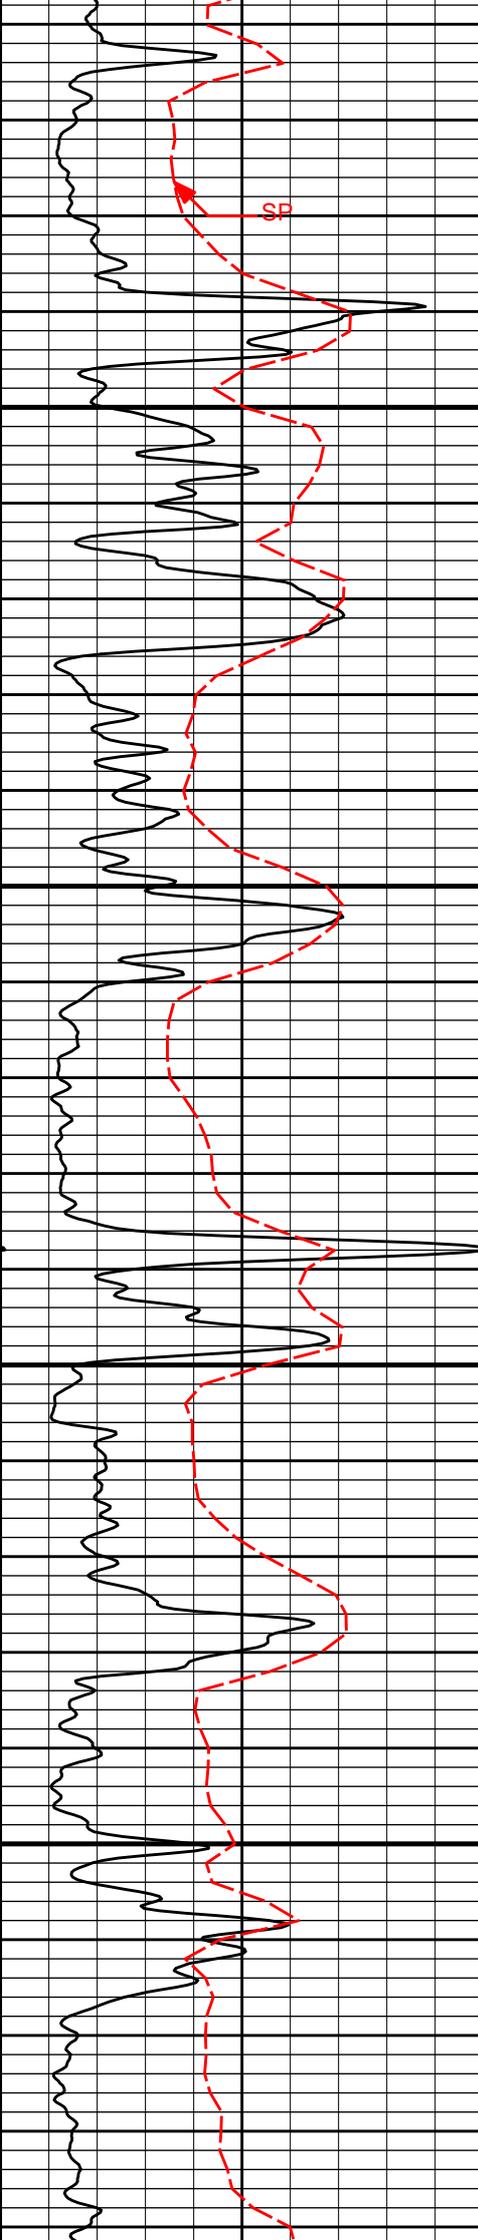

4000


4100

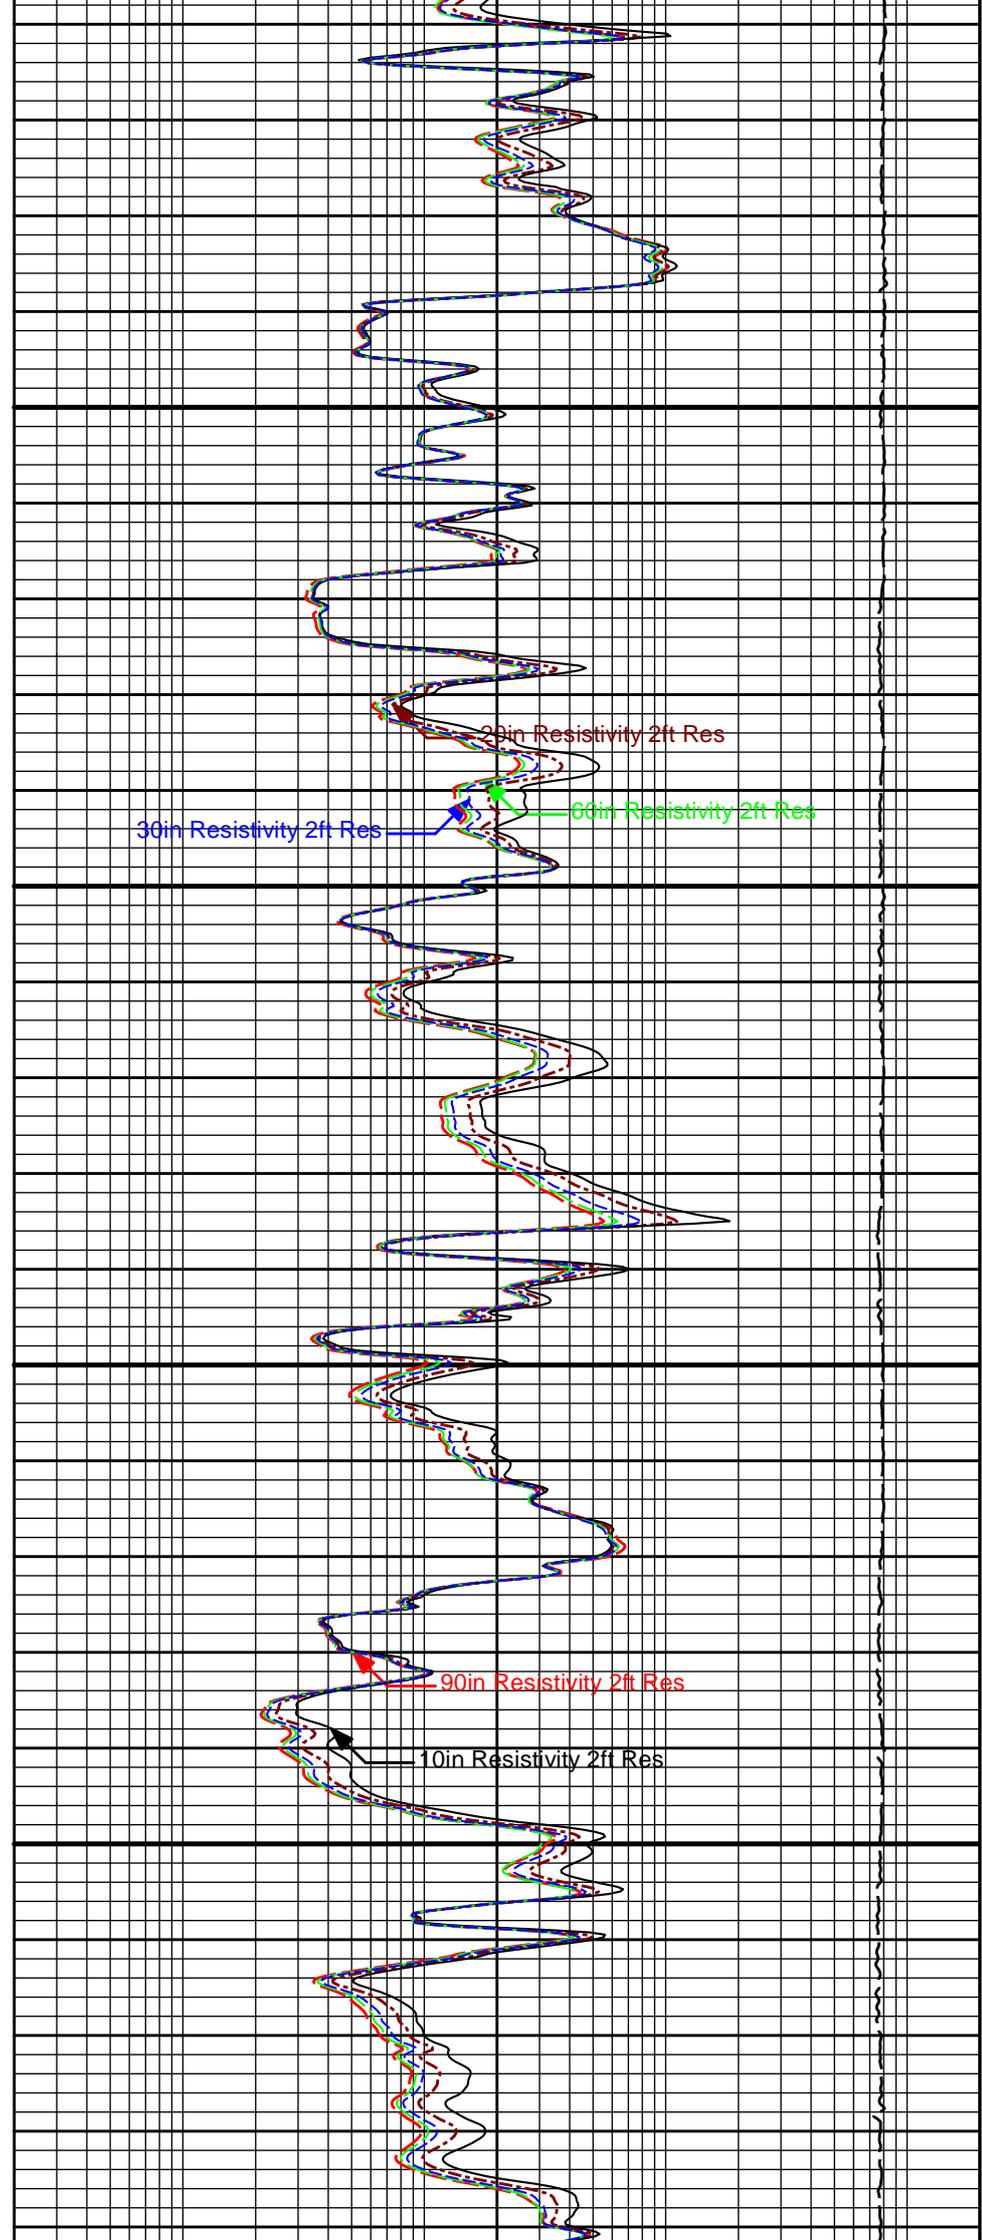


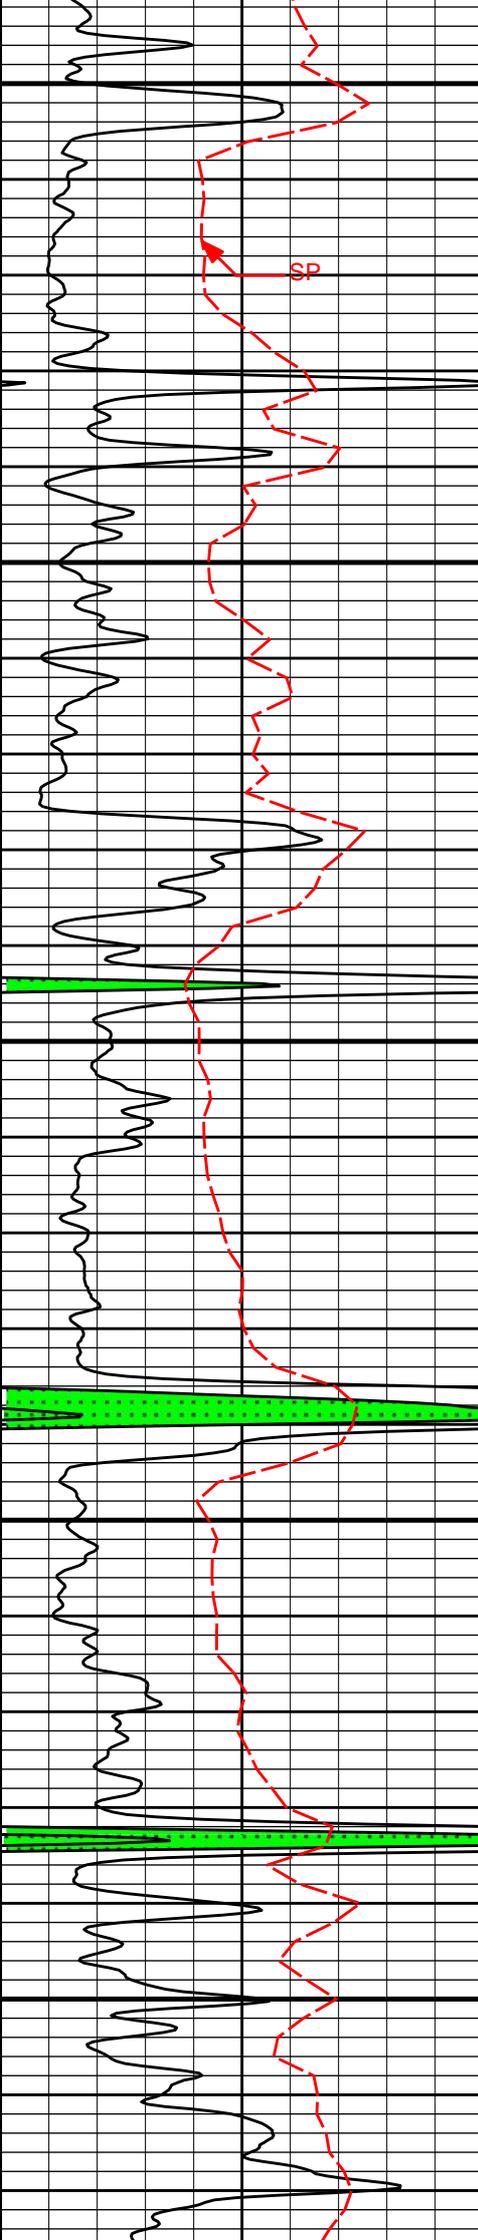

4200

4300

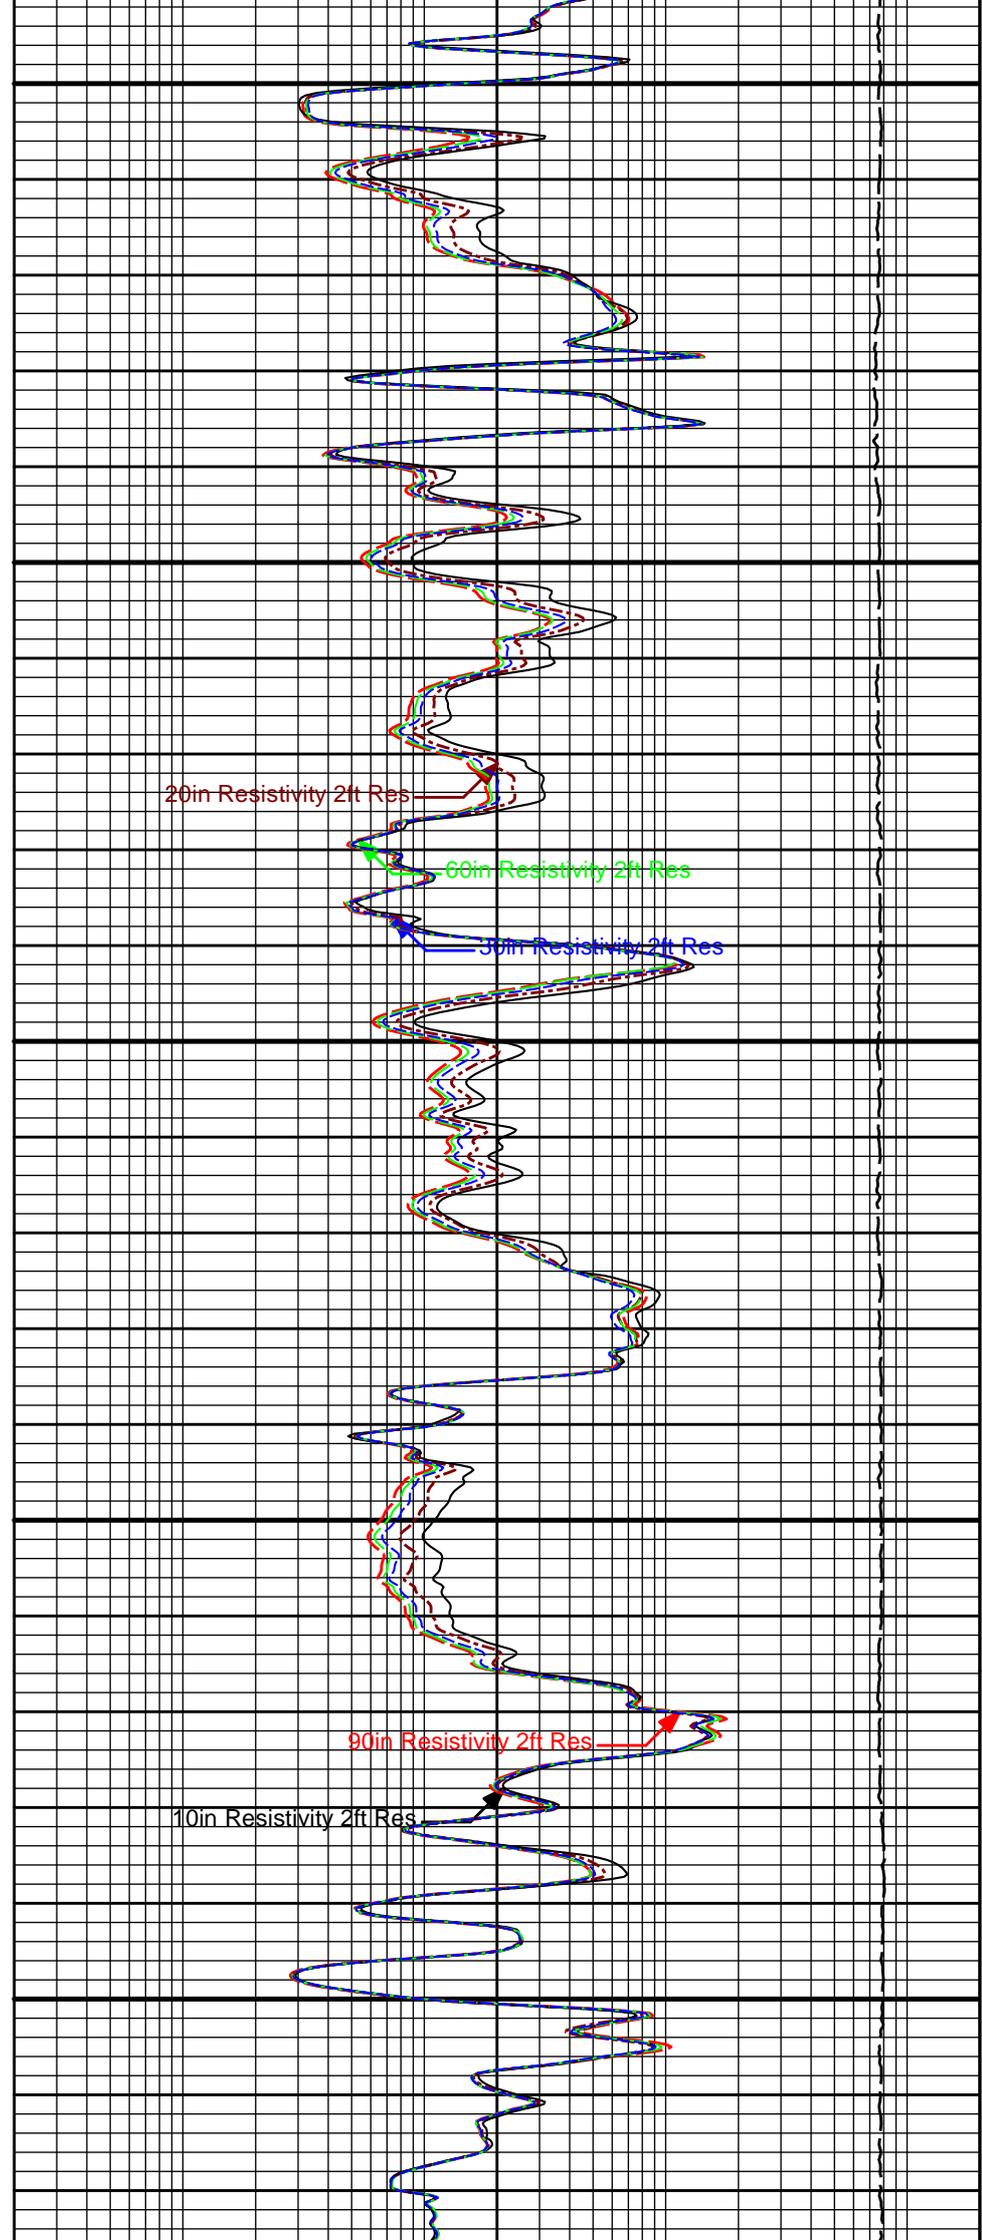

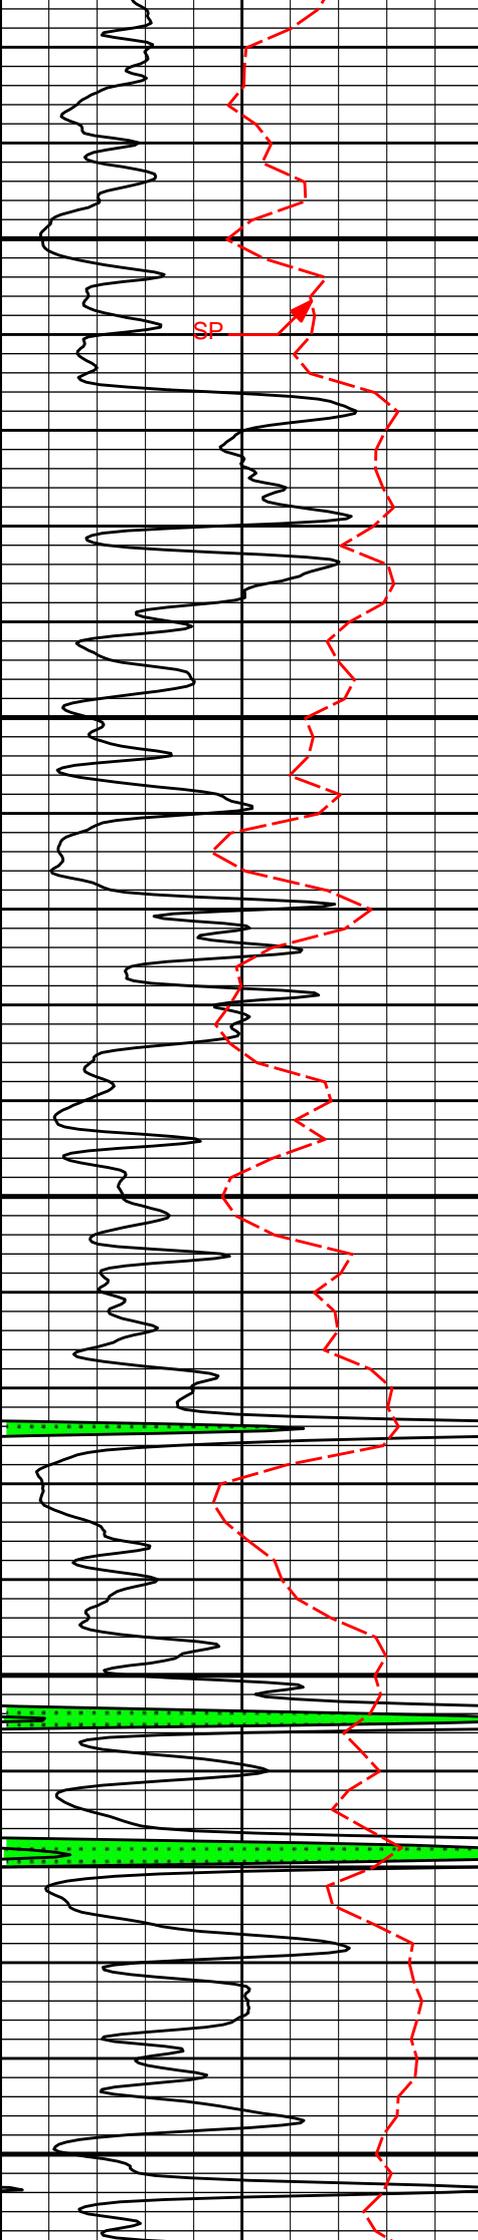


4400

sp

4500

4600

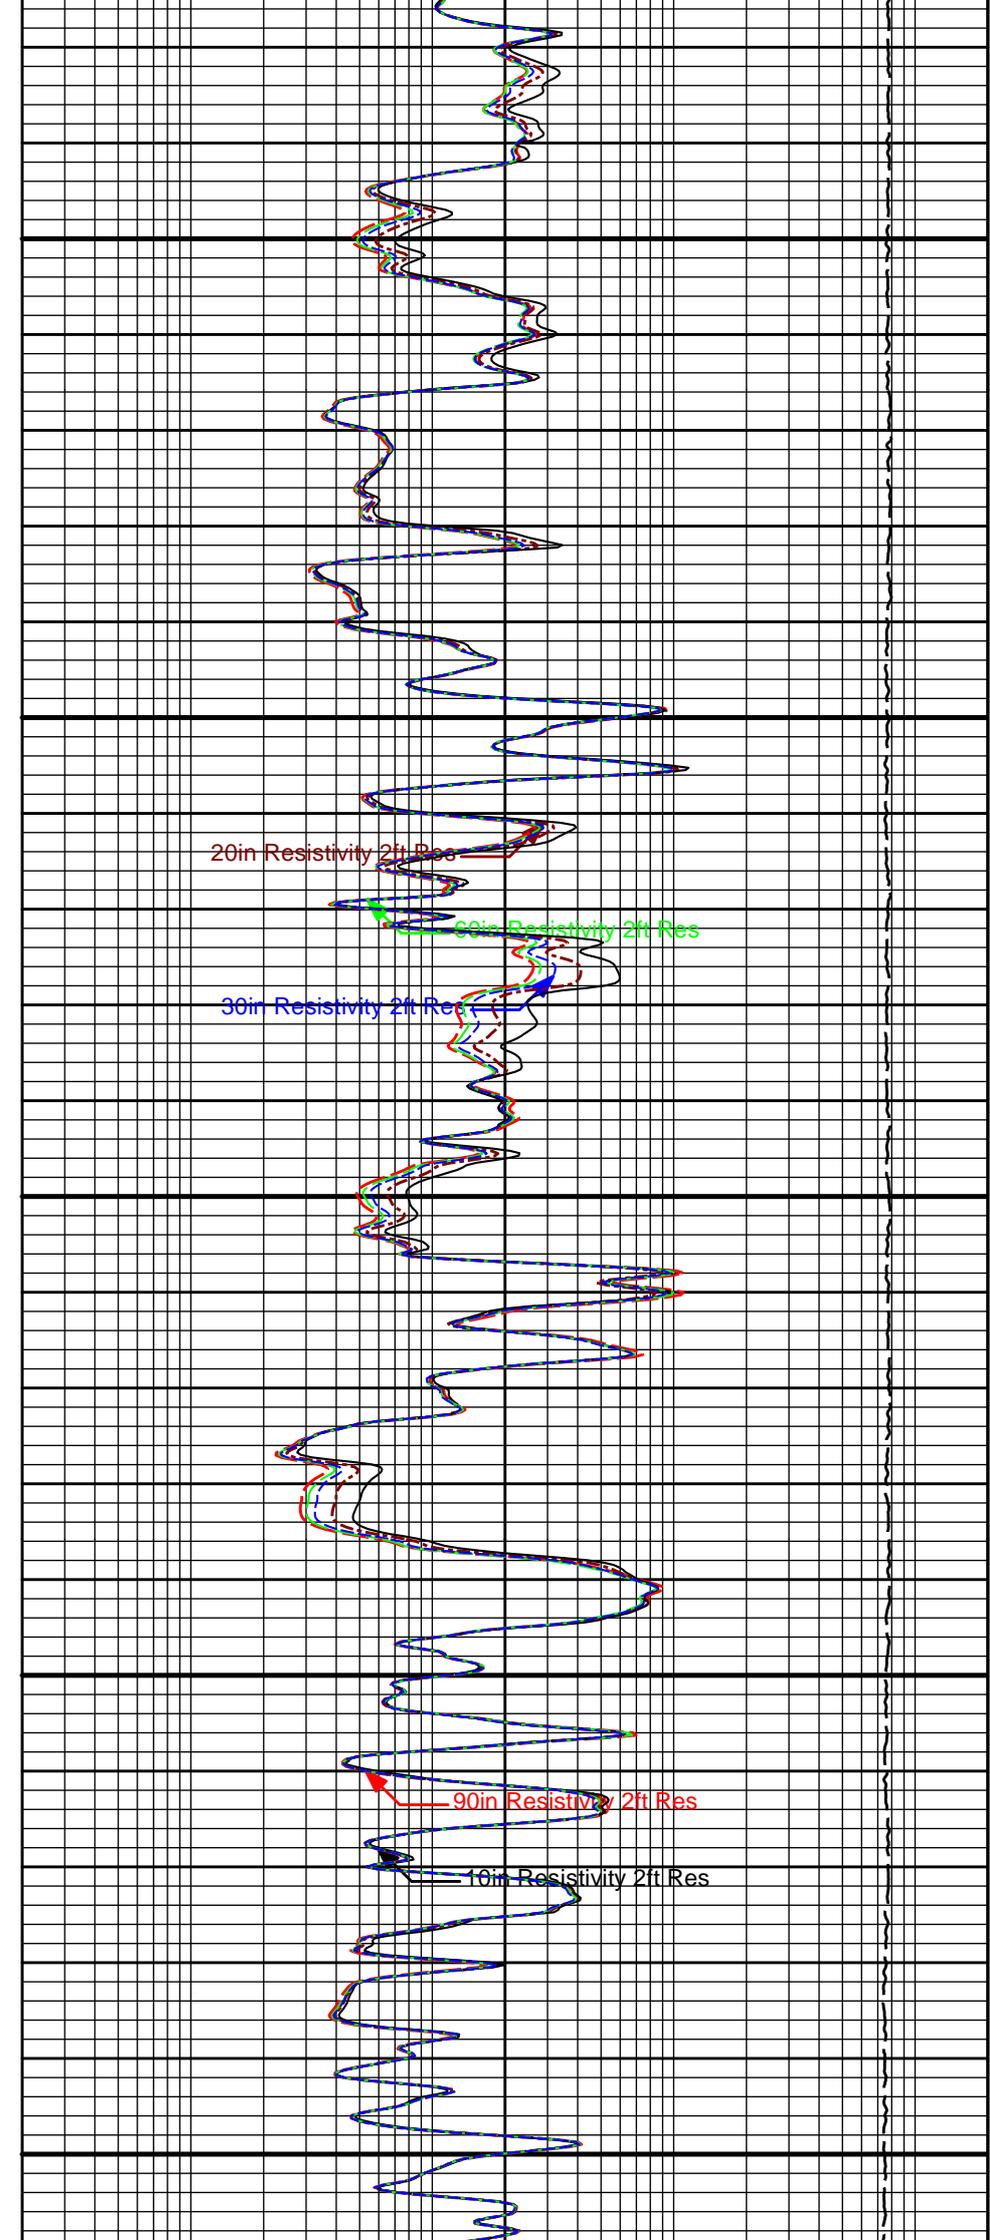


20in Resistivity 2ft Res

60in Resistivity 2ft Res

30in Resistivity 2ft Res


90in Resistivity 2ft Res

10in Resistivity 2ft Res

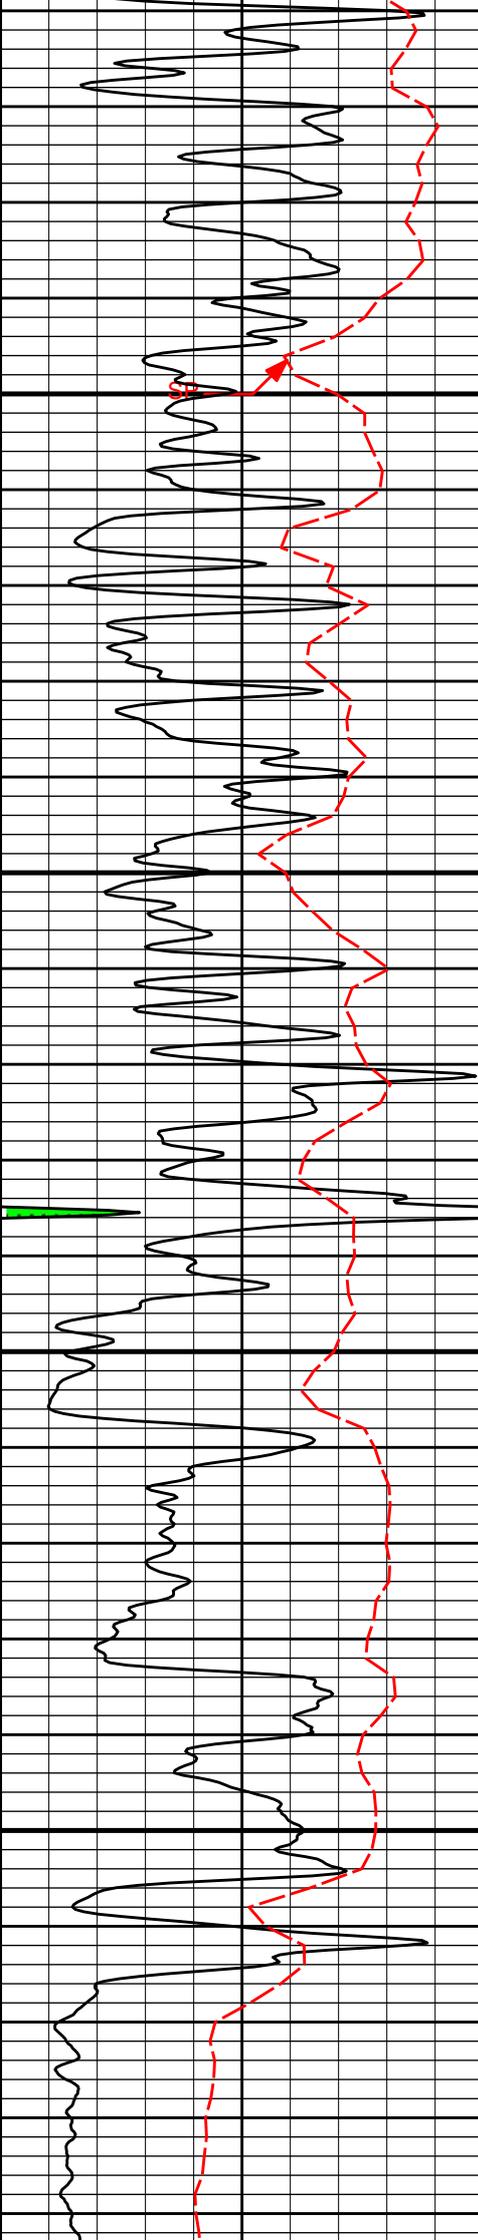

4700

4800

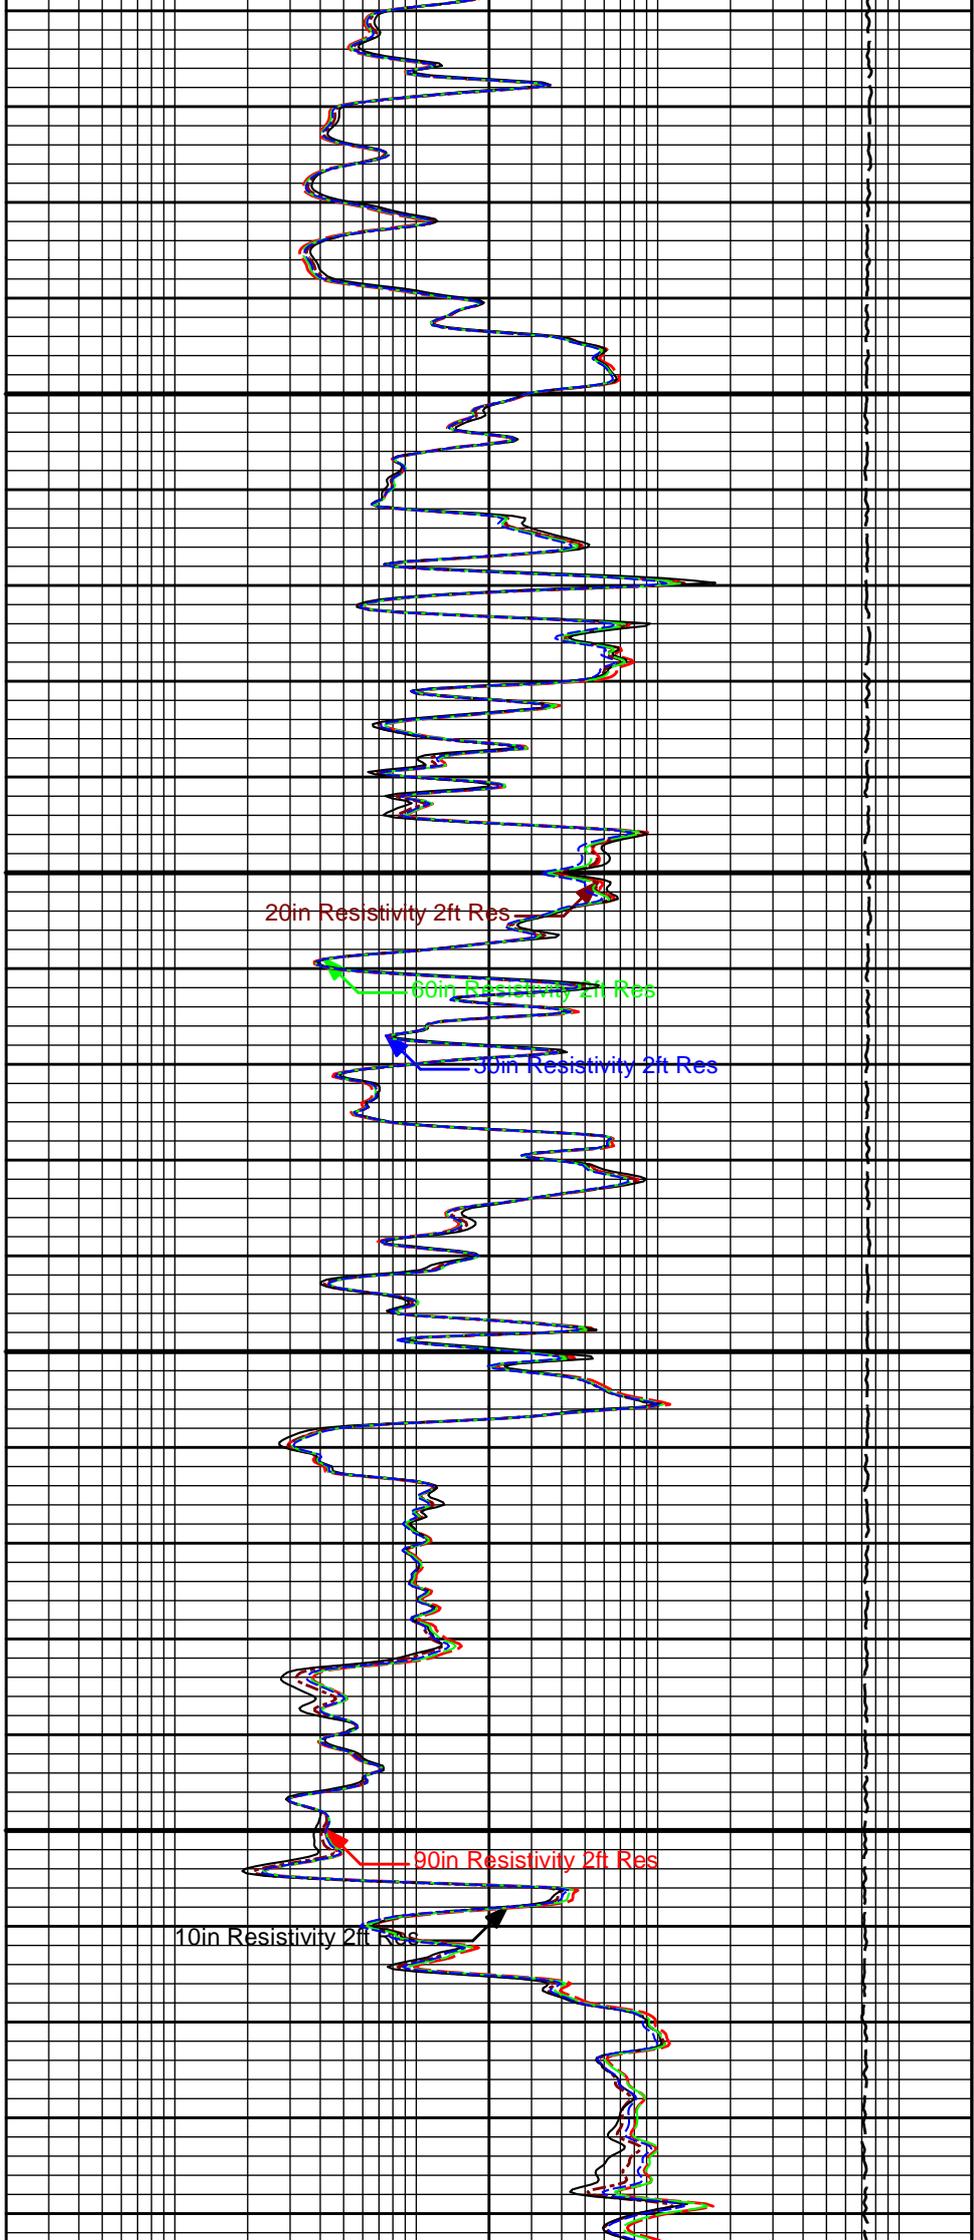


20in Resistivity 2ft Res

60in Resistivity 2ft Res

30in Resistivity 2ft Res

90in Resistivity 2ft Res

10in Resistivity 2ft Res

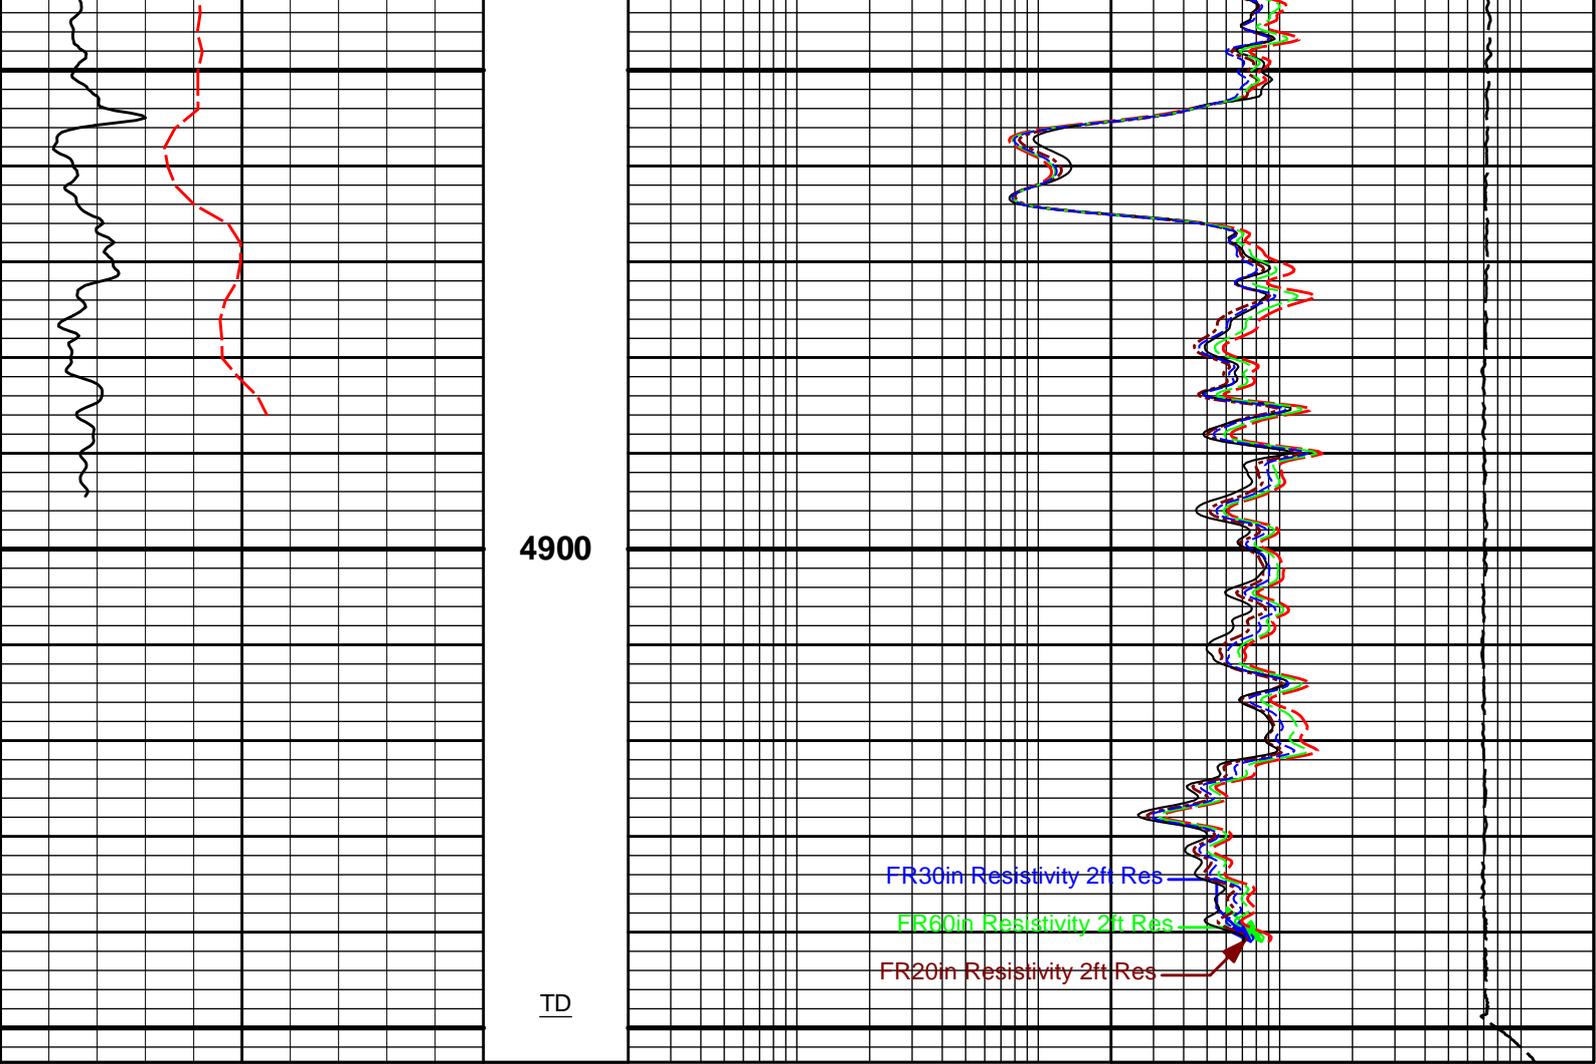

0	Gamma API	150	1 : 240 ft	15K	Tension	0
	api				pounds	
	SP			0.2	90in Resistivity 2ft Res	2000
	-]20[+				ohm-metre	
				0.2	60in Resistivity 2ft Res	2000
					ohm-metre	
				0.2	30in Resistivity 2ft Res	2000
					ohm-metre	
				0.2	20in Resistivity 2ft Res	2000
					ohm-metre	
				0.2	10in Resistivity 2ft Res	2000
					ohm-metre	

**HALLIBURTON**

Plot Time: 12-Aug-18 01:05:51  
 Plot Range: 1775 ft to 4953.58 ft  
 Data: MERIT\_RIVERBND4\Well Based\MAIN\_TD-CSG\  
 Plot File: \\LOCAL-MERIT\_RIVERBND4\Well Based\ACRT5\ACRT\_5inch\_MAIN

### 5 INCH MAIN LOG


**MAIN LOG 5" PER 100'**


**HALLIBURTON**

Plot Time: 12-Aug-18 01:05:52

# 5 INCH REPEAT SECTION

## REPEAT SECTION 5" PER 100'

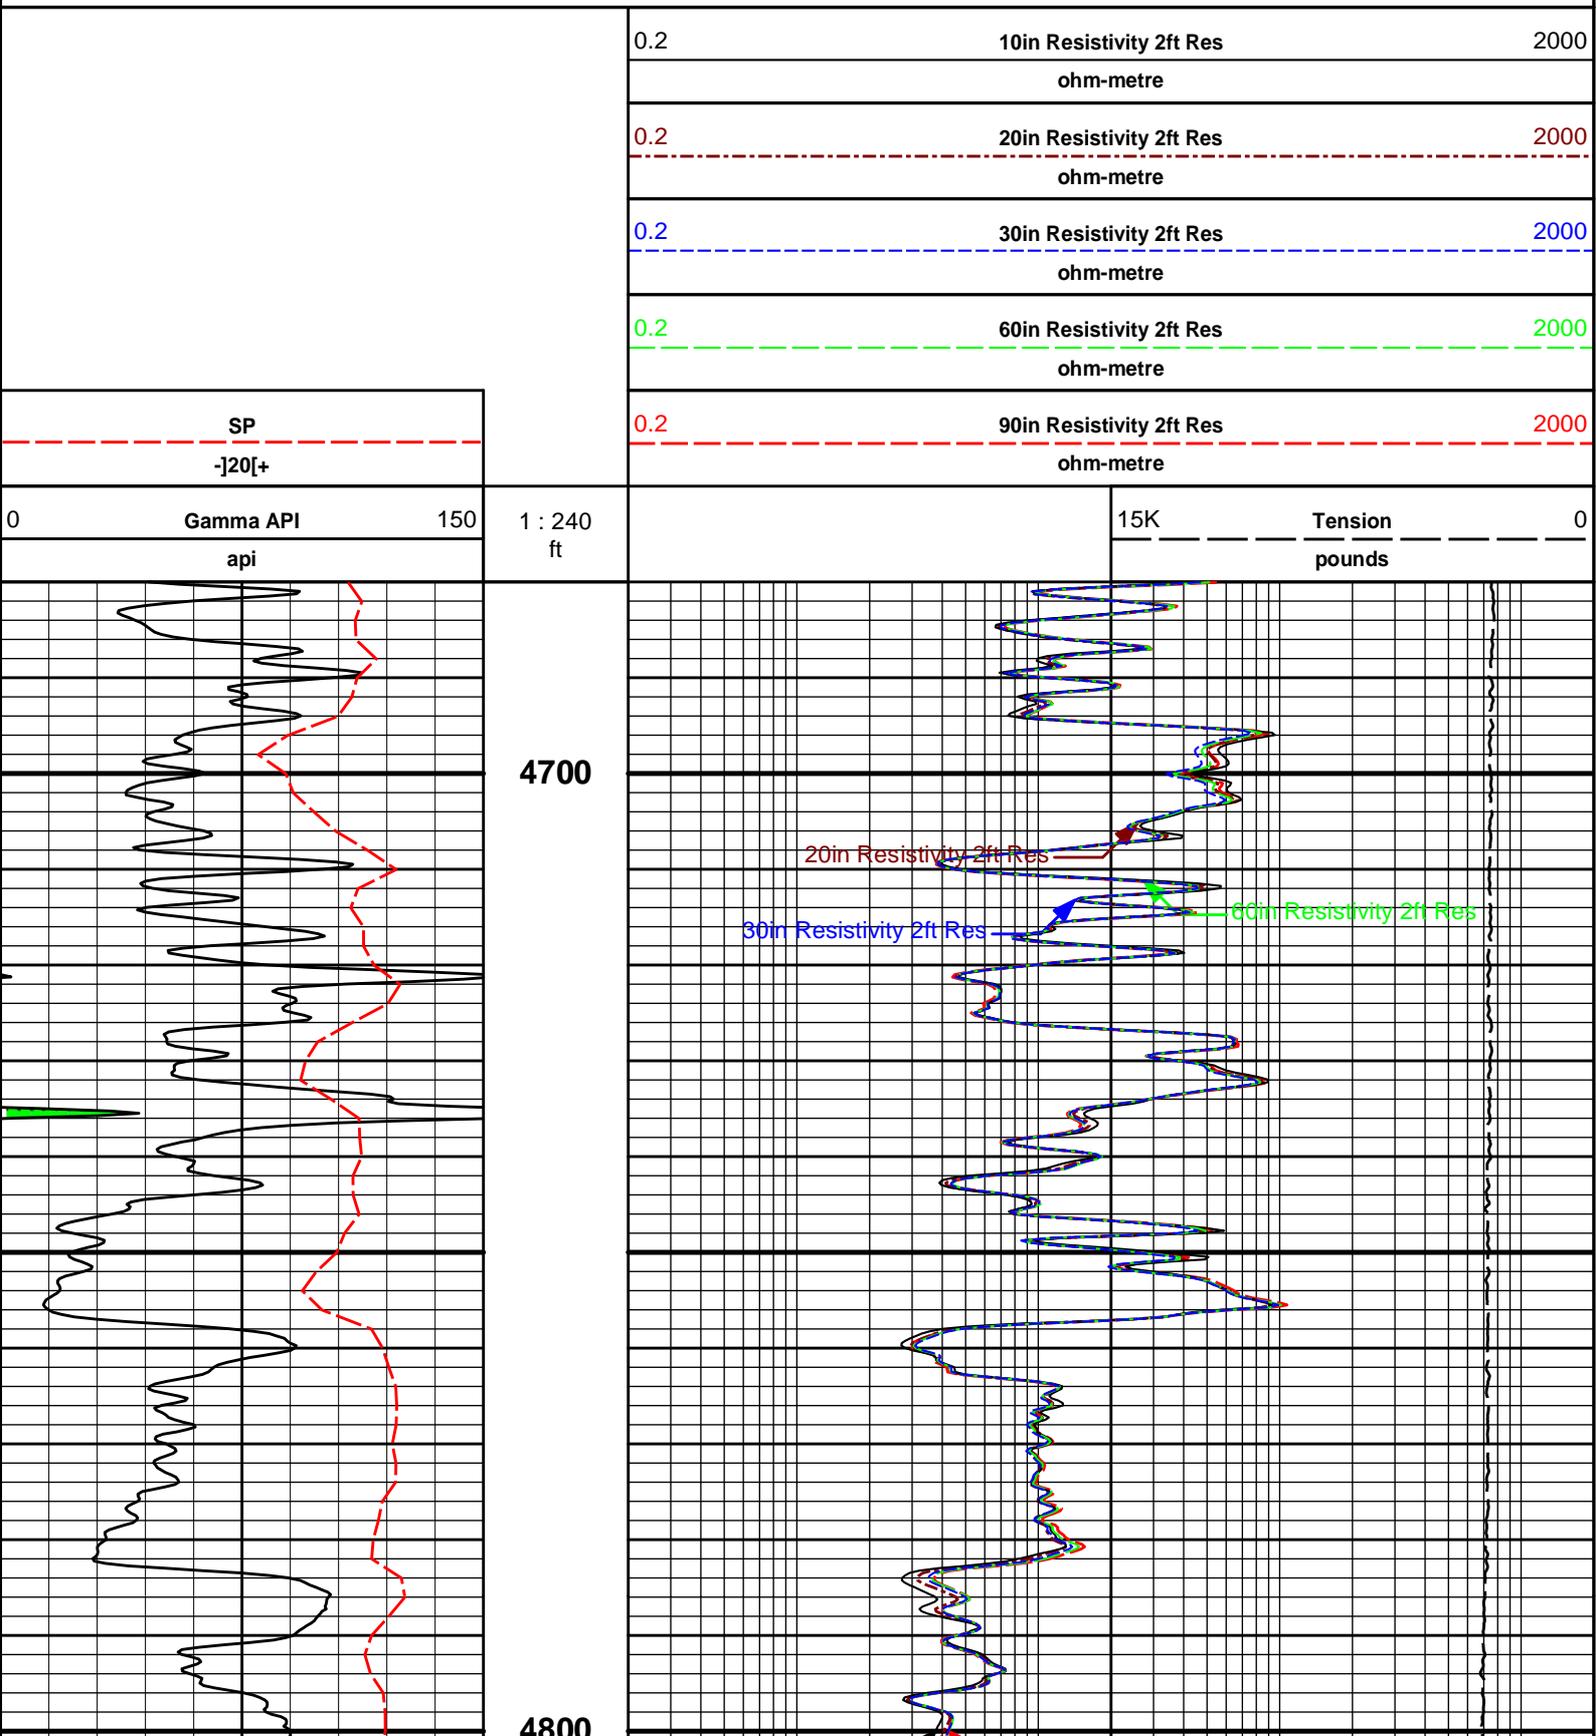

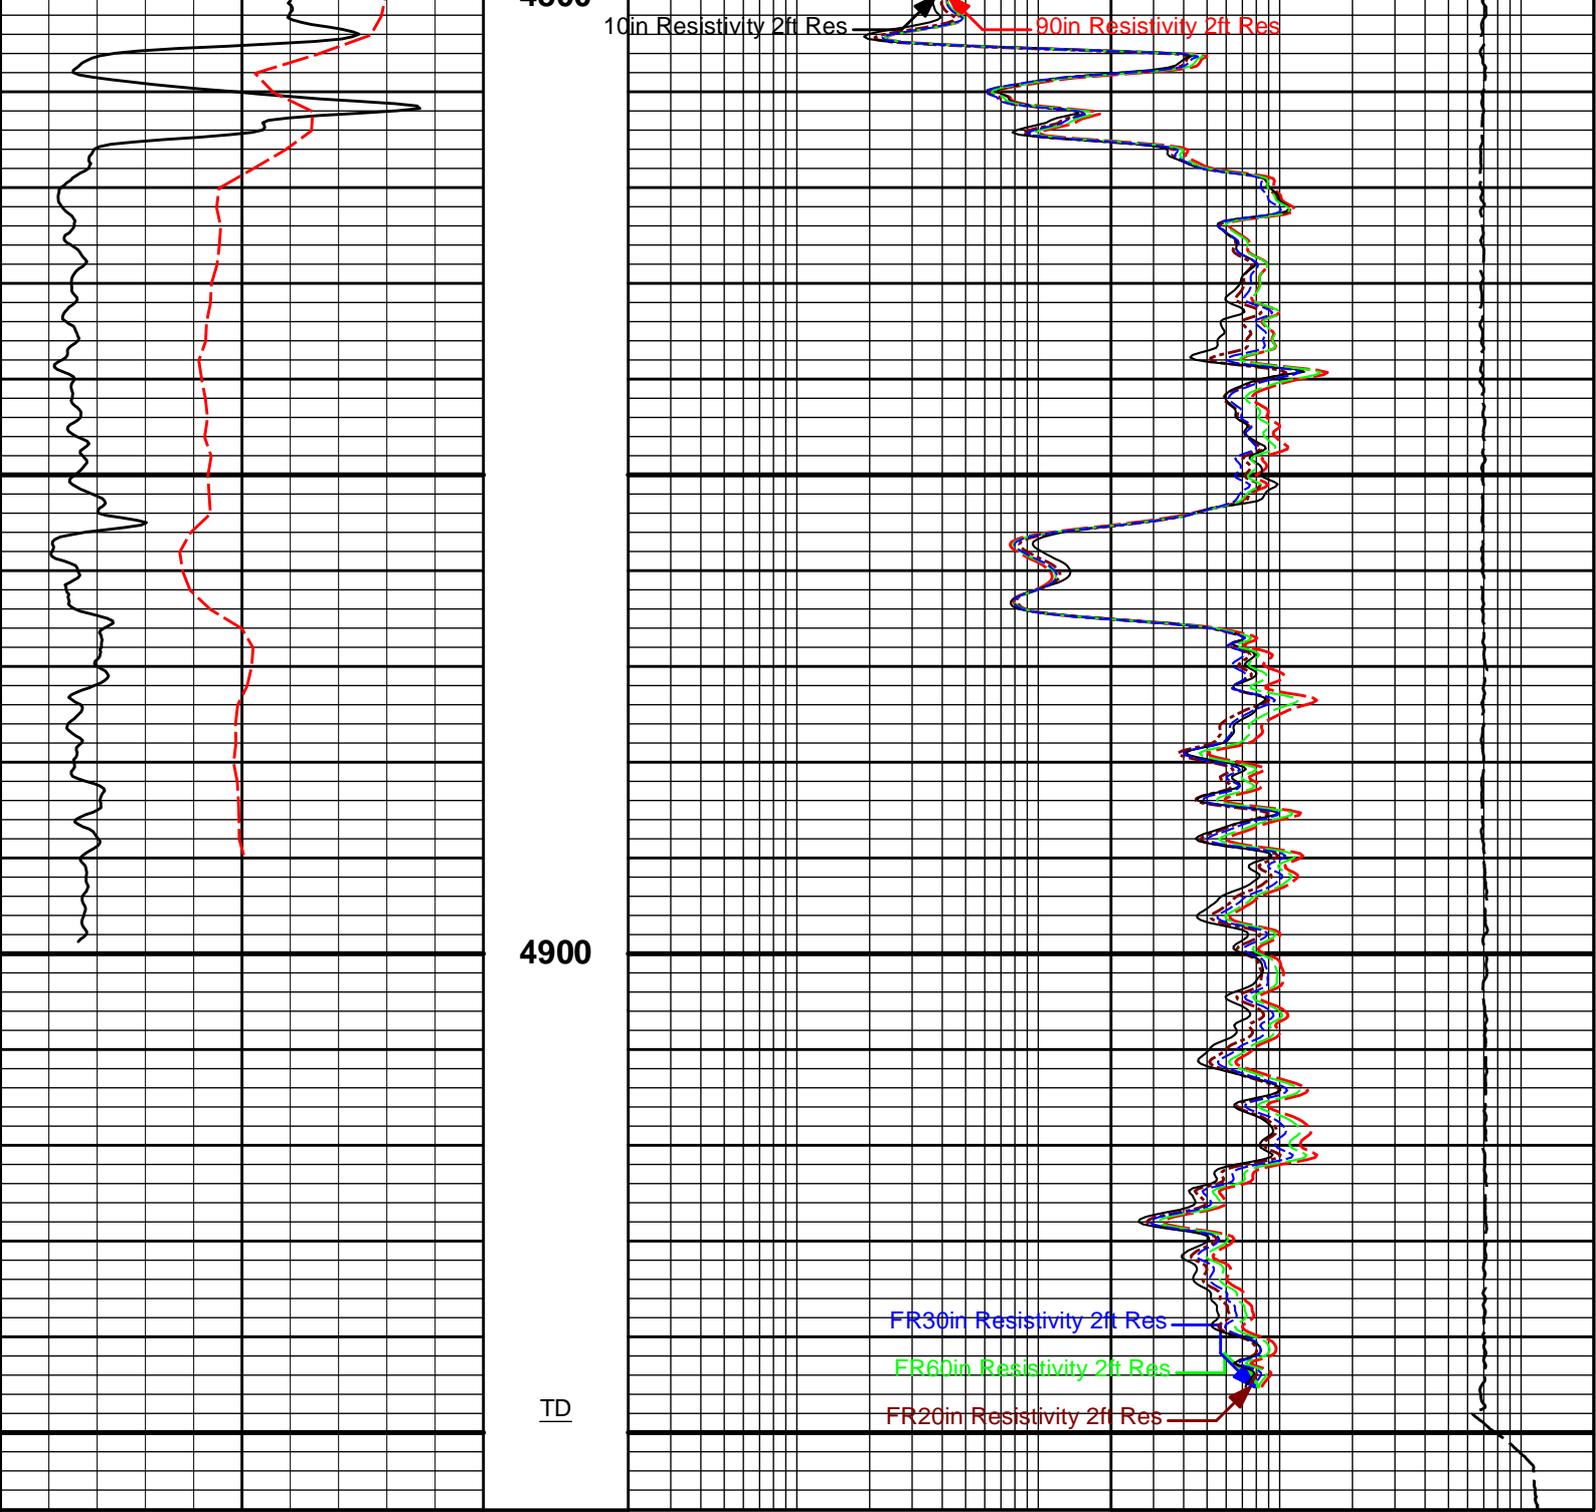

0	Gamma API	150	1 : 240 ft	15K	Tension	0
	api				pounds	
	SP			0.2	90in Resistivity 2ft Res	2000
	- 20 +				ohm-metre	
				0.2	60in Resistivity 2ft Res	2000
					ohm-metre	
				0.2	30in Resistivity 2ft Res	2000
					ohm-metre	
				0.2	20in Resistivity 2ft Res	2000
					ohm-metre	
				0.2	10in Resistivity 2ft Res	2000
					ohm-metre	

**HALLIBURTON**

Plot Time: 12-Aug-18 01:05:53  
 Plot Range: 4680 ft to 4958.08 ft  
 Data: MERIT\_RIVERBND4\Well Based\REPEAT\  
 Plot File: \\LOCAL-MERIT\_RIVERBND4\Well Based\ACRT5\ACRT\_5inch\_REPEAT

# 5 INCH REPEAT SECTION

## REPEAT SECTION 5" PER 100'

**HALLIBURTON**

### PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.200	ppg
	SHARED	WAGT	Weighting Agent	Natural	
	SHARED	BSAL	Borehole salinity	0.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	2.000	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	CSTR	Compressive Strength	1000.00	psia
	SHARED	ST	Surface Temperature	75.0	degF
	SHARED	TD	Total Well Depth	4950.00	ft
	SHARED	BHT	Bottom Hole Temperature	135.0	degF
	SHARED	SVTM	Navigation and Survey Master Tool	NONE	
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
	SHARED	TEMM	CBM Temperature Master Tool	GTET	
	SHARED	SOCI	Source of Casing Information	Parameters	
	SHARED	MSAL	Water-base mud filtrate salinity	0.00	ppm
	Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	
	Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
	Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
	Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
	Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
	Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
	Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
	Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
	Rwa / CrossPlot	BHSM	Borehole Size Source Tool	SDLT	
	Rwa / CrossPlot	ROIN	Input for RO Calculation	Rwa	
	GTET	GROK	Process Gamma Ray?	Yes	
	GTET	GEOK	Process Gamma Ray EVR?	No	
	GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
	GTET	BHSM	Borehole Size Source Tool	SDLT	
	DSNT	DNOK	Process DSN?	Yes	

DSNT	DEOK	Process DSN EVR?	No	
DSNT	NLIT	Neutron Lithology	Limestone	
DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
DSNT	DNTT	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
DSNT	UCLA	Classic Neutron Parameter utilized?	No	
DSNT	BHSM	Borehole Size Source Tool	SDLT	
SDLT	CLOK	Process Caliper Outputs?	Yes	
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
SDLT Pad	BHSM	Borehole Size Source Tool	SDLT	
BSAT	MBOK	Compute BCAS Results?	Yes	
BSAT	FLLO	Frequency Filter Low Pass Value?	5000	Hz
BSAT	FLHI	Frequency Filter High Pass Value?	27000	Hz
BSAT	DTFL	Delta -T Pore Fluid	189.00	uspf
BSAT	DTMT	Delta -T Matrix Type	Limestone 47.6	
BSAT	DTSH	Delta -T Shale	100.00	uspf
BSAT	SPEQ	Acoustic Porosity Equation	Wylie	
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Upr	
ACRt Sonde	TPOS	Tool Position	Eccentered	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMAX	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm
ACRt Sonde	BHSM	Borehole Size Source Tool	SDLT	
ACRt Sonde	MBFL	Apply Corkscrew Effect?	No	

BOTTOM

Data: MERIT\_RIVERBND4\0001 GTET-DSNT-SDLT-BSAT-ACRT004 11-Aug-18 23:24 Up @4954.0f

Date: 11-Aug-18 23:45:32

**HALLIBURTON**

## CALIBRATION REPORT

### NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name: GTET - 11013113

Reference Calibration Date: 02-May-18 11:20:36

Engineer: WHITLOCK

Calibration Date: 05-Aug-18 09:58:00

Software Version: WL INSITE R5.6.3 (Build 4)

Calibration Version: 1

Calibrator Source S/N: TB-79

Calibrator API Reference:222.00 api

Equivalent Calibrator API Reference:225.9 api

Measurement	Measured	Calibrated	Units
Background	26.4	26.2	api
Background + Calibrator	253.6	252.1	api

### NATURAL GAMMA RAY TOOL FIELD CALIBRATION

**Tool Name:** GTET - 11013113

**Reference Calibration Date:** 05-Aug-18 09:58:00

**Engineer:** WHITLOCK

**Calibration Date:** 05-Aug-18 10:00:58

**Software Version:** WL INSITE R5.6.3 (Build 4)

**Calibration Version:** 1

Calibrator Source S/N: TB-79

Calibrator API Reference:222.00 api

Equivalent Calibrator API Reference:225.9 api

Field Verification	Shop	Field	Units
Background	26.2	26.1	api
Background + Calibrator	252.1	251.2	api
Calibrator	225.9	225.0	api

Shop	Field	Difference	Tolerance
225.9	225.0	0.9	+/- 9.00

### DUAL SPACED NEUTRON SHOP CALIBRATION

**Tool Name:** DSNT - 11019641

**Reference Calibration Date:** 04-Aug-18 12:03:14

**Engineer:** SCHLIEM

**Calibration Date:** 04-Aug-18 12:26:27

**Software Version:** WL INSITE R5.6.3 (Build 4)

**Calibration Version:** 1

Logging Source S/N: DSN-436

Tank Serial Number: EL RENO HWT

Reference value assigned to Tank: 56.100

Snow Block S/N: 12156883

Calibration Tank Water Temperature: 89 degF

Min. Tool Housing Outside Diameter: 3.625 in

CALIBRATION CONSTANTS			
Measurement	Prev. Value	New Value	Control Limit On New Value
Gain:	0.97922	0.97742	0.900 - 1.100

WATER TANK SUMMARY (Horizontal Water Tank)				
Measurement	Current Reading (Previous Coef.)	Calibrated (New Coef.)	Change	Control Limit On Change
Porosity (decp):	0.2364	0.2358	0.0006	+/- 0.0020
Calibrated Ratio:	10.5794	10.5599	0.019	+/- 0.050

VERIFIER		
Measurement	Value	Control Limit
Snow-Block Porosity (decp):	0.0667	0.02000 - 0.09000

PASS/FAIL SUMMARY	
Background Check:	Passed
Gain-Range Check:	Passed
Snow-Block Check:	Passed

### DUAL SPACED NEUTRON FIELD CALIBRATION

**Tool Name:** DSNT - 11019641

**Reference Calibration Date:** 04-Aug-18 12:26:27

**Engineer:** WHITLOCK

**Calibration Date:** 05-Aug-18 09:45:13

**Software Version:** WL INSITE R5.6.3 (Build 4)

**Calibration Version:** 1

Logging Source S/N: DSN-436

Snow Block S/N: 12156883

NEUTRON FIELD-CHECK SUMMARY				
Shop	Field	Difference	Control Limit	

Shop	Field	Difference	On Change
Snow-Block Porosity (dec):	0.0667	0.0665	-0.0002 +/- 0.0150

**PASS/FAIL SUMMARY**

Block Change Check:	Passed
Snow Block Stat Check:	Passed
Temperature Check:	Passed

**DENSITY CALIPER SHOP CALIBRATION**

<b>Tool Name:</b> SDLT - 10960494	<b>Reference Calibration Date:</b> 01-Jan-70 00:00:00
<b>Engineer:</b> WHITLOCK	<b>Calibration Date:</b> 08-Jun-18 16:19:27
<b>Software Version:</b> WL INSITE R5.6.3 (Build 4)	<b>Calibration Version:</b> 1
<b>Host Tool Name:</b> DSNT - 11019641	

**CALIBRATION COEFFICIENTS**

Measurement	Previous Value	New Value	Control Limit On New Value
Pad Offset	-3977.11	-3977.11	-7000.00 - -1000.00
Pad Gain	0.0003897	0.0003897	0.0002000 - 0.0006000
Arm Offset	-3073.13	-3073.13	-5000.00 - 3000.00
Arm Gain	0.0005210	0.0005210	0.000300 - 0.000700
Arm Power	-0.000005094	-0.000005094	-0.000010000 - 0.000010000

The ring diameter is computed from:  $DIAMETER = PAD\ EXTENSION + ARM\ EXTENSION + TOOL\ DIAMETER$

Tool Diameter: 4.50 in

**CALIBRATION RINGS**

Measurement	Current Reading (Previous Coeff.)	Calibrated (New Coeff.)	Change	Control Limit On New Value
<b>PAD EXTENSION:</b>				
Small Ring (in)	2.00	2.00	0.00	+/- 0.20
Medium Ring (in)	3.75	3.75	0.00	+/- 0.20
<b>RING DIAMETER:</b>				
Small Ring (in)	6.50	6.50	0.00	+/- 0.20
Medium Ring (in)	8.25	8.25	0.00	+/- 0.20
Large Ring (in)	15.00	15.00	0.00	+/- 0.20

**PASS/FAIL SUMMARY**

Calibration-Coefficients Range Check:	Passed
Ring-Measurement Check:	Passed

**PASS/FAIL SUMMARY**

Calibration-Coefficients Range Check:	Passed
---------------------------------------	--------

**SDLT CALIPER FIELD CALIBRATION**

<b>Tool Name:</b> SDLT - 10960494	<b>Reference Calibration Date:</b> 08-Jun-18 16:19:27
<b>Engineer:</b> WHITLOCK	<b>Calibration Date:</b> 05-Aug-18 09:46:30
<b>Software Version:</b> WL INSITE R5.6.3 (Build 4)	<b>Calibration Version:</b> 1

**MEASURED CALIPER VALUES**

Measurement	Shop	Field	Change	Control Limit On New Value
Pad Extension	3.75	3.79	0.04	+/- 0.10
Ring Diameter	8.25	8.25	-0.00	+/- 0.15

**PASS/FAIL SUMMARY**

Pad Extension Check:	Passed
Diameter Check:	Passed

**MICRO LOG SHOP CALIBRATION**

<b>Tool Name:</b> Microlog Pad - 10960494	<b>Reference Calibration Date:</b> 01-Jan-70 00:00:00
---	---

Engineer: WHITLOCK

Calibration Date: 08-Jun-18 16:08:54

Software Version: WL INSITE R5.6.3 (Build 4)

Calibration Version: 1

Host Tool Name: DSNT - 11019641

**CALIBRATION COEFFICIENT SUMMARY**

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Measured	Calibrated	Measured	Calibrated	
Tool Zero	-0.07	-0.07	-0.01	-0.01	ohmm
Calibration Point #1	0.00	0.00	0.00	0.00	ohmm
Calibration Point #2	20.00	20.00	20.00	20.00	ohmm
Internal Reference	19.92	19.92	19.98	19.98	ohmm

Measurement	Micro Log Normal	Micro Log Lateral	Units
	Tool Value	Tool Value	
Tool Zero	-0.11	0.18	V
Calibration Point #1	18.42	2.03	V
Calibration Point #2	5354.08	6974.83	V
Internal Reference	5331.77	6967.38	V

**MICRO LOG FIELD CHECK**

Tool Name: Microlog Pad - 10960494

Reference Calibration Date: 08-Jun-18 16:08:54

Engineer: WHITLOCK

Calibration Date: 05-Aug-18 09:54:07

Software Version: WL INSITE R5.6.3 (Build 4)

Calibration Version: 1

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Shop	Field	Shop	Field	
Tool Zero	-0.07	-0.07	-0.01	-0.00	ohmm
Internal Reference	19.92	19.89	19.98	19.95	ohmm

Summary				
Signal	Shop	Field	Difference	Tolerance
Microlog Normal	19.92	19.89	0.03	+/- 0.80
Microlog Lateral	19.98	19.95	0.03	+/- 0.80

**SPECTRAL DENSITY SHOP CALIBRATION**

Tool Name: SDLT Pad - 11213308

Reference Calibration Date: 08-Jun-18 10:39:59

Engineer: WHITLOCK

Calibration Date: 08-Jun-18 11:01:29

Software Version: WL INSITE R5.6.3 (Build 4)

Calibration Version: 1

Logging Source S/N: 5475GW

Aluminum Block S/N: EL RENO

Density: 2.581g/cc

Pe: 3.170

Magnesium Block S/N: EL RENO

Density: 1.687g/cc

Pe: 2.594

**DENSITY CALIBRATION SUMMARY**

Measurement	Previous Value	New Value	Control Limit
Near Bar Gain	1.0041	1.0112	0.90 - 1.10
Near Dens Gain	0.9869	0.9898	0.90 - 1.10
Near Peak Gain	0.9943	0.9998	0.90 - 1.10
Near Lith Gain	1.0181	1.0093	0.90 - 1.10
Far Bar Gain	1.0040	1.0066	0.90 - 1.10
Far Dens Gain	0.9932	0.9944	0.90 - 1.10
Far Peak Gain	0.9916	0.9923	0.90 - 1.10
Far Lith Gain	0.9744	0.9710	0.90 - 1.10

Near Bar Offset	0.0934	0.0300	NONE
Near Dens Offset	0.2485	0.2218	NONE
Near Peak Offset	0.1593	0.1112	NONE
Near Lith Offset	-0.0690	0.0007	NONE
Far Bar Offset	0.0165	-0.0022	NONE

Far Dens Offset	0.1281	0.1192	NONE
Far Peak Offset	0.1238	0.1182	NONE
Far Lith Offset	0.2190	0.2467	NONE
<hr/>			
Near Bar Background	955.07	955.02	700 - 1450
Near Dens Background	316.53	316.75	230 - 480
Near Peak Background	138.87	138.74	100 - 210
Near Lith Background	168.67	169.41	125 - 260
Far Bar Background	482.41	482.24	450 - 900
Far Dens Background	194.46	191.91	175 - 345
Far Peak Background	77.48	77.25	70 - 140
Far Lith Background	79.35	80.04	75 - 145

CALIBRATION BLOCK SUMMARY				
Measurement	Current Reading (Previous Coef)	Calibrated (New Coef)	Change	Control Limit On Change
MAGNESIUM				
Density (g/cc)	1.688	1.687	-0.001	+/- 0.015
Pe	2.517	2.559	0.042	+/- 0.150
ALUMINUM				
Density (g/cc)	2.582	2.581	-0.001	+/- 0.01500
Pe	3.106	3.132	0.026	+/- 0.150

TOOL SUMMARY				
Measurement	Near Detector		Far Detector	
	Value	Control Limits	Value	Control Limits
QUALITY				
Background	0.0017	+/- 0.0110	0.0006	+/- 0.0140
Magnesium Block	-0.0008	+/- 0.0110	-0.0008	+/- 0.0140
Aluminum Block	-0.0005	+/- 0.0110	-0.0001	+/- 0.0140
Resolution	9.21	6.00 - 11.50	9.21	6.00 - 11.50
Internal Verifier(B+D+P+L)	1580	1200 - 2700	831	800 - 1700

PASS/FAIL SUMMARY	
Background Quality Check:	Passed
Background Range Check:	Passed
Background Resolution Check:	Passed
Background Verification Check:	Passed
Magnesium Quality Check:	Passed
Aluminum Quality Check:	Passed
Gains Check:	Passed
Changes in Calibration Blocks:	Passed

**SPECTRAL DENSITY FIELD CHECK**

<b>Tool Name:</b> SDLT Pad - 11213308	<b>Reference Calibration Date:</b> 08-Jun-18 11:01:29
<b>Engineer:</b> WHITLOCK	<b>Calibration Date:</b> 05-Aug-18 09:57:45
<b>Software Version:</b> WL INSITE R5.6.3 (Build 4)	<b>Calibration Version:</b> 1

Pad Temperature: 89.3 degF

DENSITY FIELD CALIBRATION SUMMARY				
Measurement	Shop	Field	Change	Control Limit +/-
Near (B+D+P+L) cps	1579.927	1575.636	-4.291	15.990
Far (B+D+P+L) cps	831.441	827.695	-3.746	15.874
Near Resolution	9.21	9.13	-0.080	0.50
Far Resolution	9.21	9.31	0.100	1.00

**PASS/FAIL SUMMARY**

Bkg Quality Check:	Passed
Bkg Resolution Check:	Passed
Bkg Verification Check:	Passed

**ARRAY COMPENSATED TRUE RESISTIVITY SHOP CALIBRATION**

<b>Tool Name:</b> ACRt Sonde - 11830728	<b>Reference Calibration Date:</b> 23-Feb-18 10:15:37
<b>Engineer:</b> WHITLOCK	<b>Calibration Date:</b> 06-Jun-18 13:24:46
<b>Software Version:</b> WL INSITE R5.6.3 (Build 4)	<b>Calibration Version:</b> 1
<b>Host Tool Name:</b> ACRt Instrument - 11830684	

**TYPICAL GAIN RANGE**

Subarray	R12KHz			R36KHz			R72KHz		
	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper
A1 (80")	0.95	1.0279	1.05	0.95	1.0076	1.05	0.95	0.9997	1.05
A2 (50")	0.95	1.0334	1.05	0.95	1.0139	1.05	0.95	1.0097	1.05
A3 (29")	0.95	1.0346	1.05	0.95	1.0146	1.05	0.95	1.0081	1.05
A4 (17")	0.95	1.0279	1.05	0.95	1.0063	1.05	0.95	1.0018	1.05
A5 (10")	N/A	N/A	N/A	0.95	1.0001	1.05	0.95	0.9950	1.05
A6 (6")	N/A	N/A	N/A	0.95	0.9869	1.05	0.95	0.9818	1.05

**SONDE OFFSET**

Subarray	R12KHz		R36KHz		R72KHz	
	(mmho/m)		(mmho/m)		(mmho/m)	
A1 (80")	0.315		-4.964		-5.711	
A2 (50")	0.409		-3.450		-5.485	
A3 (29")	-11.648		-3.720		-3.783	
A4 (17")	-90.980		-28.724		-23.707	
A5 (10")	N/A		-76.200		-37.537	
A6 (6")	N/A		280.488		149.005	

**TRANSMITTER CURRENT GAIN**

Signal	Lower	R	Upper
12K	0.6	0.82	1.3
36K	1.0	1.80	2.0
72K	1.0	1.05	2.0

**R-MUD VERIFICATION**

Signal	Lower (ohm-m)	Measured (ohm-m)	Upper (ohm-m)
Mud Cell	0.95	0.99	1.05

**PASS/FAIL SUMMARY**

GAIN RANGE CHK	PASS
SONDE OFFSET CHK	PASS

TOOL OK TO LOG

**CALIBRATION SUMMARY**

Sensor	Shop	Field	Post	Difference	Tolerance	Units
<b>GTET-11013113</b>						
Gamma Ray Calibrator	225.9	225.0	-----	0.9	+/- 9.00	api
<b>DSNT-11019641</b>						
Snow-Block Porosity	0.0667	0.0665	-----	0.0002	+/- 0.0150	decp
<b>SDLT-10960494</b>						
Pad Extension	3.75	3.79	-----	-0.04	+/-0.10	in
Ring Diameter	8.25	8.25	-----	0.00	+/-0.15	in
<b>Microlog Pad-10960494</b>						
MicroLog Normal	19.92	19.89	-----	0.03	+/-0.80	ohmm
MicroLog Lateral	19.98	19.95	-----	0.03	+/-0.80	ohmm

MicroLog Lateral	19.96	19.95	-----	0.05	+/-0.60	0mm
<b>SDLT Pad-11213308</b>						
Near(B+D+P+L)	1579.927	1575.636	-----	4.291	+/-15.990	cps
Far(B+D+P+L)	831.441	827.695	-----	3.746	+/-15.874	cps
<b>ACRt Sonde-11830728</b>						
Mud Cell	0.99	-----	-----	0	-----	ohm-m
Data: MERIT_RIVERBND4\0001 GTET-DSNT-SDLT-BSAT-ACRTIDLE				Date: 11-Aug-18 22:35:44		



## TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
CH_HOS_I 37.50 lbs	Weak Point 7000 lbs- CH_HOS_I 0.01 lbs	Ø 2.750 in Ø 0.010 in*		← Temperature @ 71.07 ft	3.03 ft	72.10 ft
XOHD-12345678 20.00 lbs		Ø 2.750 in Ø 3.625 in			0.95 ft	69.07 ft
SP Sub-11812437 60.00 lbs		Ø 3.625 in		← SP @ 66.34 ft	3.74 ft	68.12 ft
				← Z-Accelerometer @ 63.93 ft		64.38 ft
GTET-11013113 165.00 lbs		Ø 3.625 in			8.52 ft	
				← GammaRay @ 58.32 ft		55.86 ft
DSNT-11019641 174.00 lbs	DSN Decentralizer- 11019641 6.60 lbs	Ø 5.000 in* Ø 3.625 in			9.69 ft	
				← DSN Far @ 48.92 ft ← DSN Near @ 48.17 ft		46.17 ft
SDLT-10960494 360.00 lbs	SDLT Pad-11213308 65.00 lbs Microlog Pad-10960494 8.00 lbs  RAM-Cs137-00005475 1.00 lbs	Ø 4.500 in Ø 4.500 in* Ø 4.750 in* Ø 0.800 in*			10.81 ft	
				← Microlog @ 38.36 ft ← SDL Caliper @ 38.17 ft ← SDL @ 38.16 ft		35.36 ft

BSAT-12173982  
300.00 lbs

Ø 3.625 in →

Receiver Array @ 26.84 ft  
Sonic Receivers @ 26.84 ft

15.77 ft

ACRt Instrument-  
11830684  
50.00 lbs

Ø 3.625 in →

19.58 ft

5.03 ft

ACRt Sonde-  
11830728  
200.00 lbs

Ø 3.625 in →

← Mud Resistivity @ 13.19 ft

14.55 ft

← ACRt @ 9.21 ft

14.22 ft

Bull Nose-12345678  
5.00 lbs

Ø 2.750 in →

0.33 ft

0.33 ft

0.00 ft

Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max. Log. Speed (fpm)
CH_HOS	Hostile Cable Head with Load Cell	CH_HOS_I	37.50	3.03	69.07	300.00
WP7K	Weak Point 7000 lbs	CH_HOS_I	0.01	0.01	* 69.87	300.00
XOHD	Hostile to Dits Cross Over	12345678	20.00	0.95	68.12	300.00
SP	SP Sub	11812437	60.00	3.74	64.38	300.00
GTET	Gamma Telemetry Tool	11013113	165.00	8.52	55.86	60.00
DSNT	Dual Spaced Neutron	11019641	174.00	9.69	46.17	60.00
DCNT	DSN Decentralizer	11019641	6.60	5.13	* 49.50	300.00
SDLT	Spectral Density Tool	10960494	360.00	10.81	35.36	60.00
SDLP	Density Insite Pad	11213308	65.00	2.55	* 37.57	60.00
Cs137	Logging Source, SDLT-I, 1.78 Ci - Cs137	00005475	1.00	0.80	* 37.80	300.00
MICP	Microlog Pad	10960494	8.00	1.00	* 37.86	60.00
BSAT	Borehole Sonic Array Tool	12173982	300.00	15.77	19.58	60.00
ACRt	Array Compensated True Resistivity Instrument Section	11830684	50.00	5.03	14.55	120.00
ACRt	Array Compensated True Resistivity Sonde Section	11830728	200.00	14.22	0.33	120.00
BLNS	Bull Nose	12345678	5.00	0.33	0.00	300.00
<b>Total</b>			<b>1,452.11</b>	<b>72.10</b>		

\* Not included in Total Length and Length Accumulation.

Data: MERIT\_RIVERBND4\0001 GTET-DSNT-SDLT-BSAT-ACRT\004 11-Aug-18 23:24 Up @4954.0f Date: 11-Aug-18 23:44:38

COMPANY	MERIT ENERGY COMPANY
WELL	RIVER BEND 4
FIELD	ARKANSAS RIVER
COUNTY	FINNEY
STATE	KANSAS

COUNTY

TINNET

STATE

KANSAS

**HALLIBURTON**

ARRAY COMPENSATED  
TRUE RESISTIVITY  
5 INCH LOG