

ONE	TD	3480	REC	0	150	30	-10	47.0 us/ft	30	-10	2.77 g/cc	30	-10	LIME
-----	----	------	-----	---	-----	----	-----	------------	----	-----	-----------	----	-----	------

DIRECTIONAL INFORMATION

Maximum Deviation @ _____ KOP @ _____

Remarks:
 GTET-DSNT-SDLT-BSAT-ACRT RUN IN COMBINATION
 ANNULAR HOLE VOLUME CALCULATED FOR 5.5 INCH CASING
 CHLORIDES REPORTED AT 1600 PPM

HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.


HALLIBURTON





Plot Time: 12-Aug-18 00:16:12
 Plot Range: 3480 ft to 4953.58 ft
 Data: MERIT_RIVERBND4\Well Based\DETAILS\
 Plot File: \\PORO\Poro_IQ_5_MAIN


5 INCH MAIN LOG


MAIN SECTION 5" PER 100'

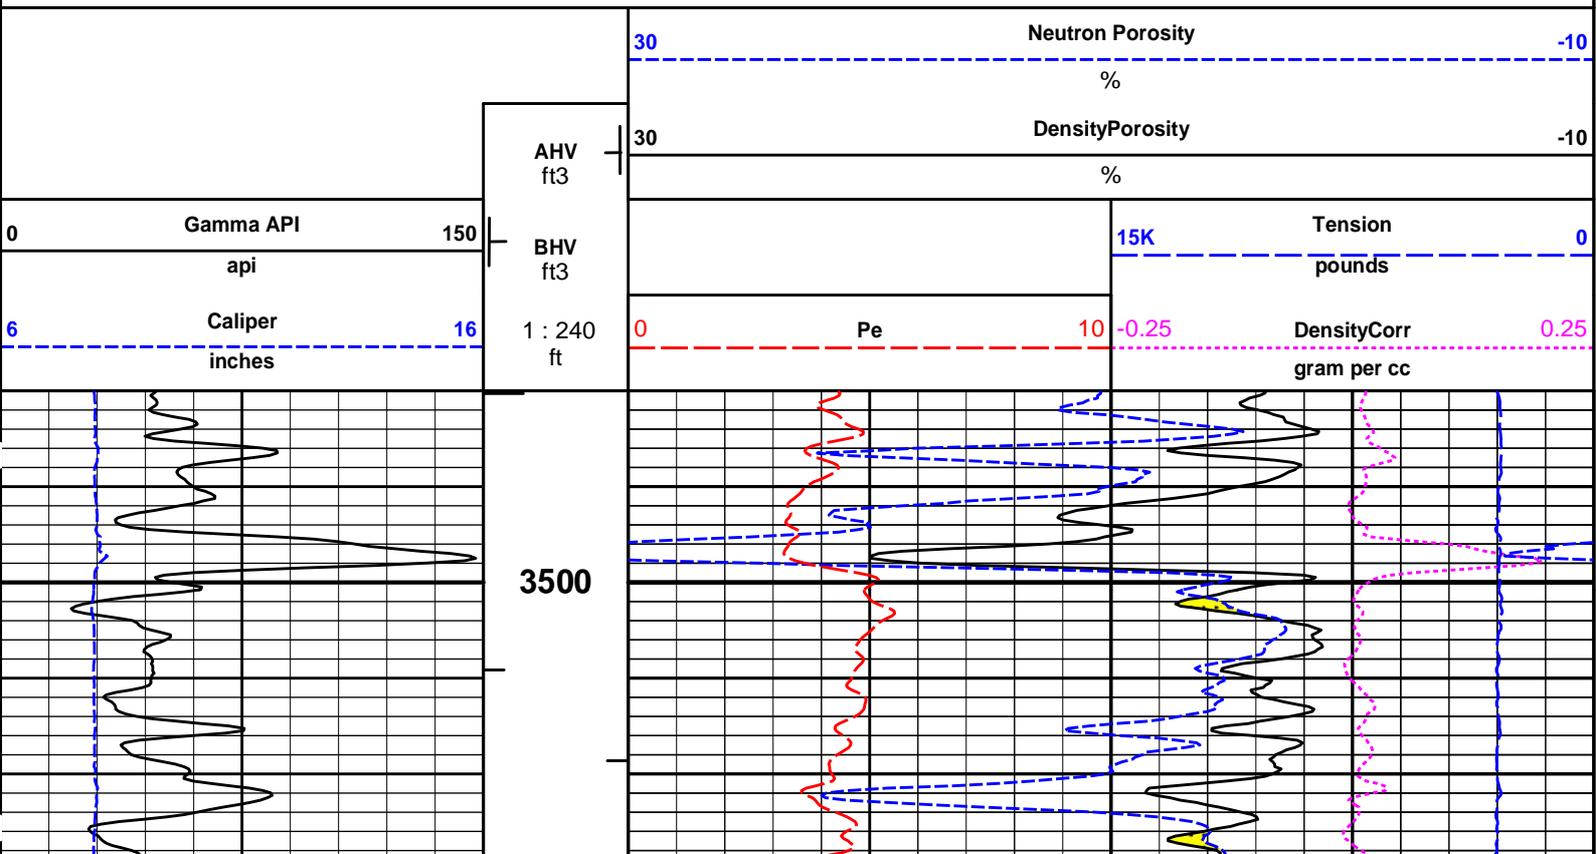


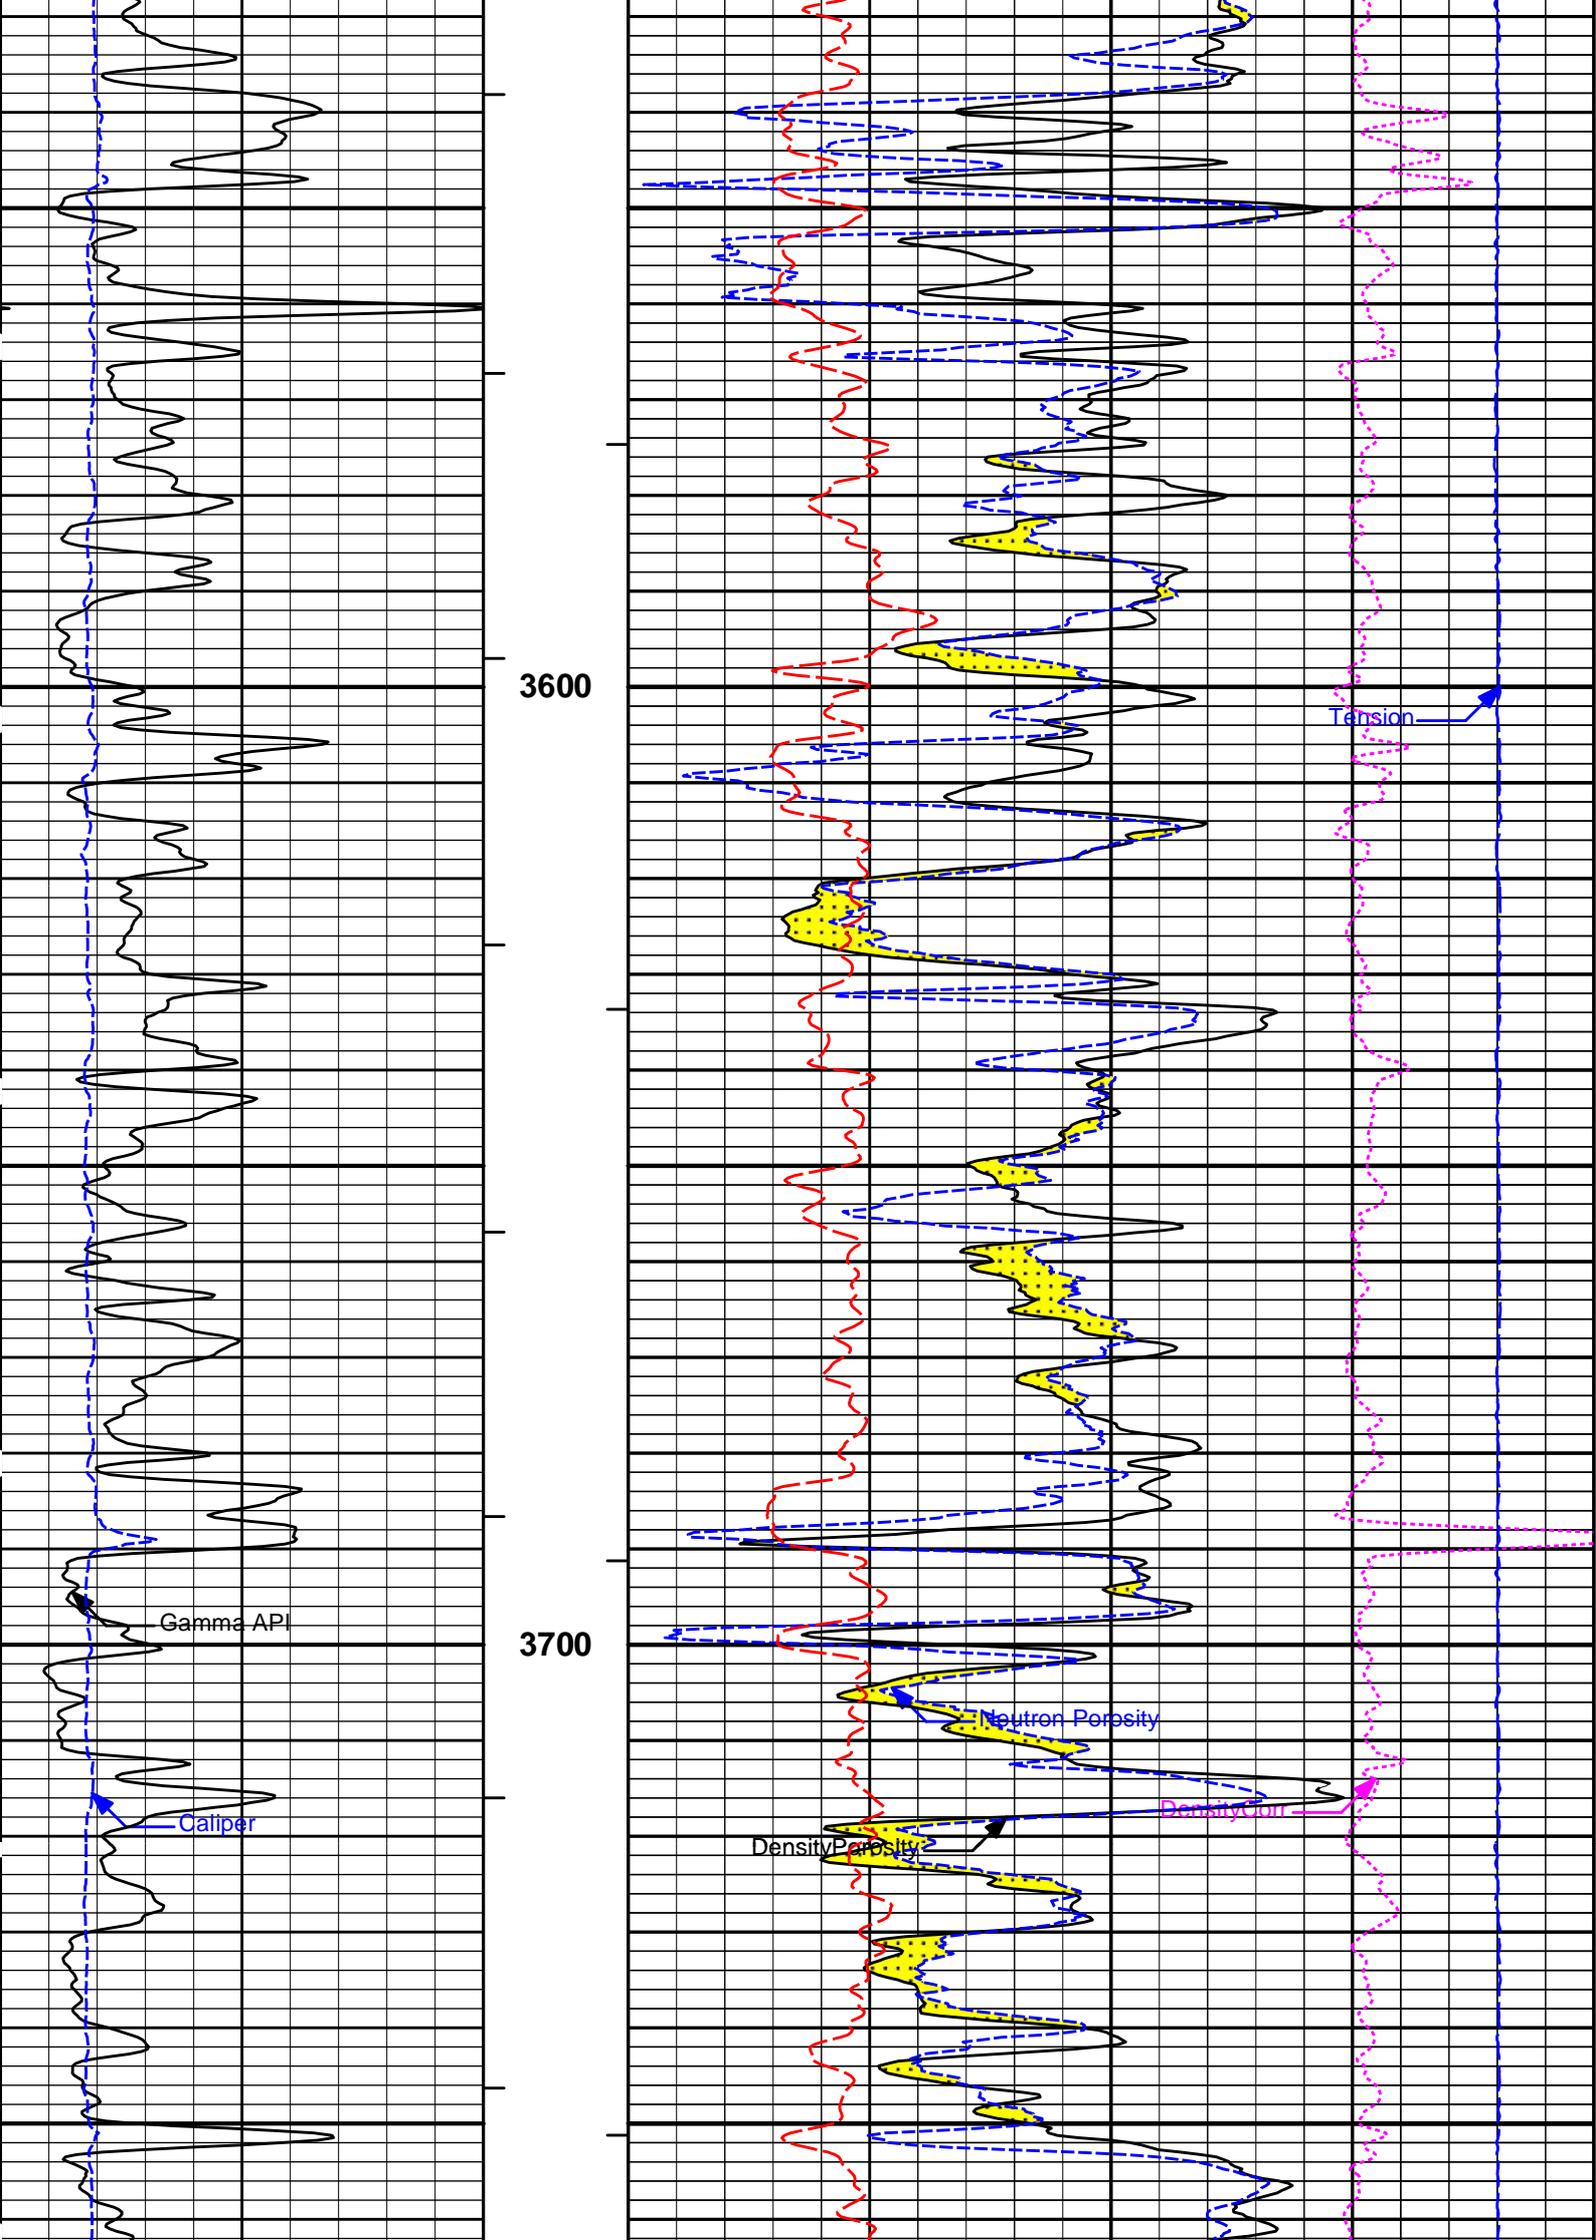


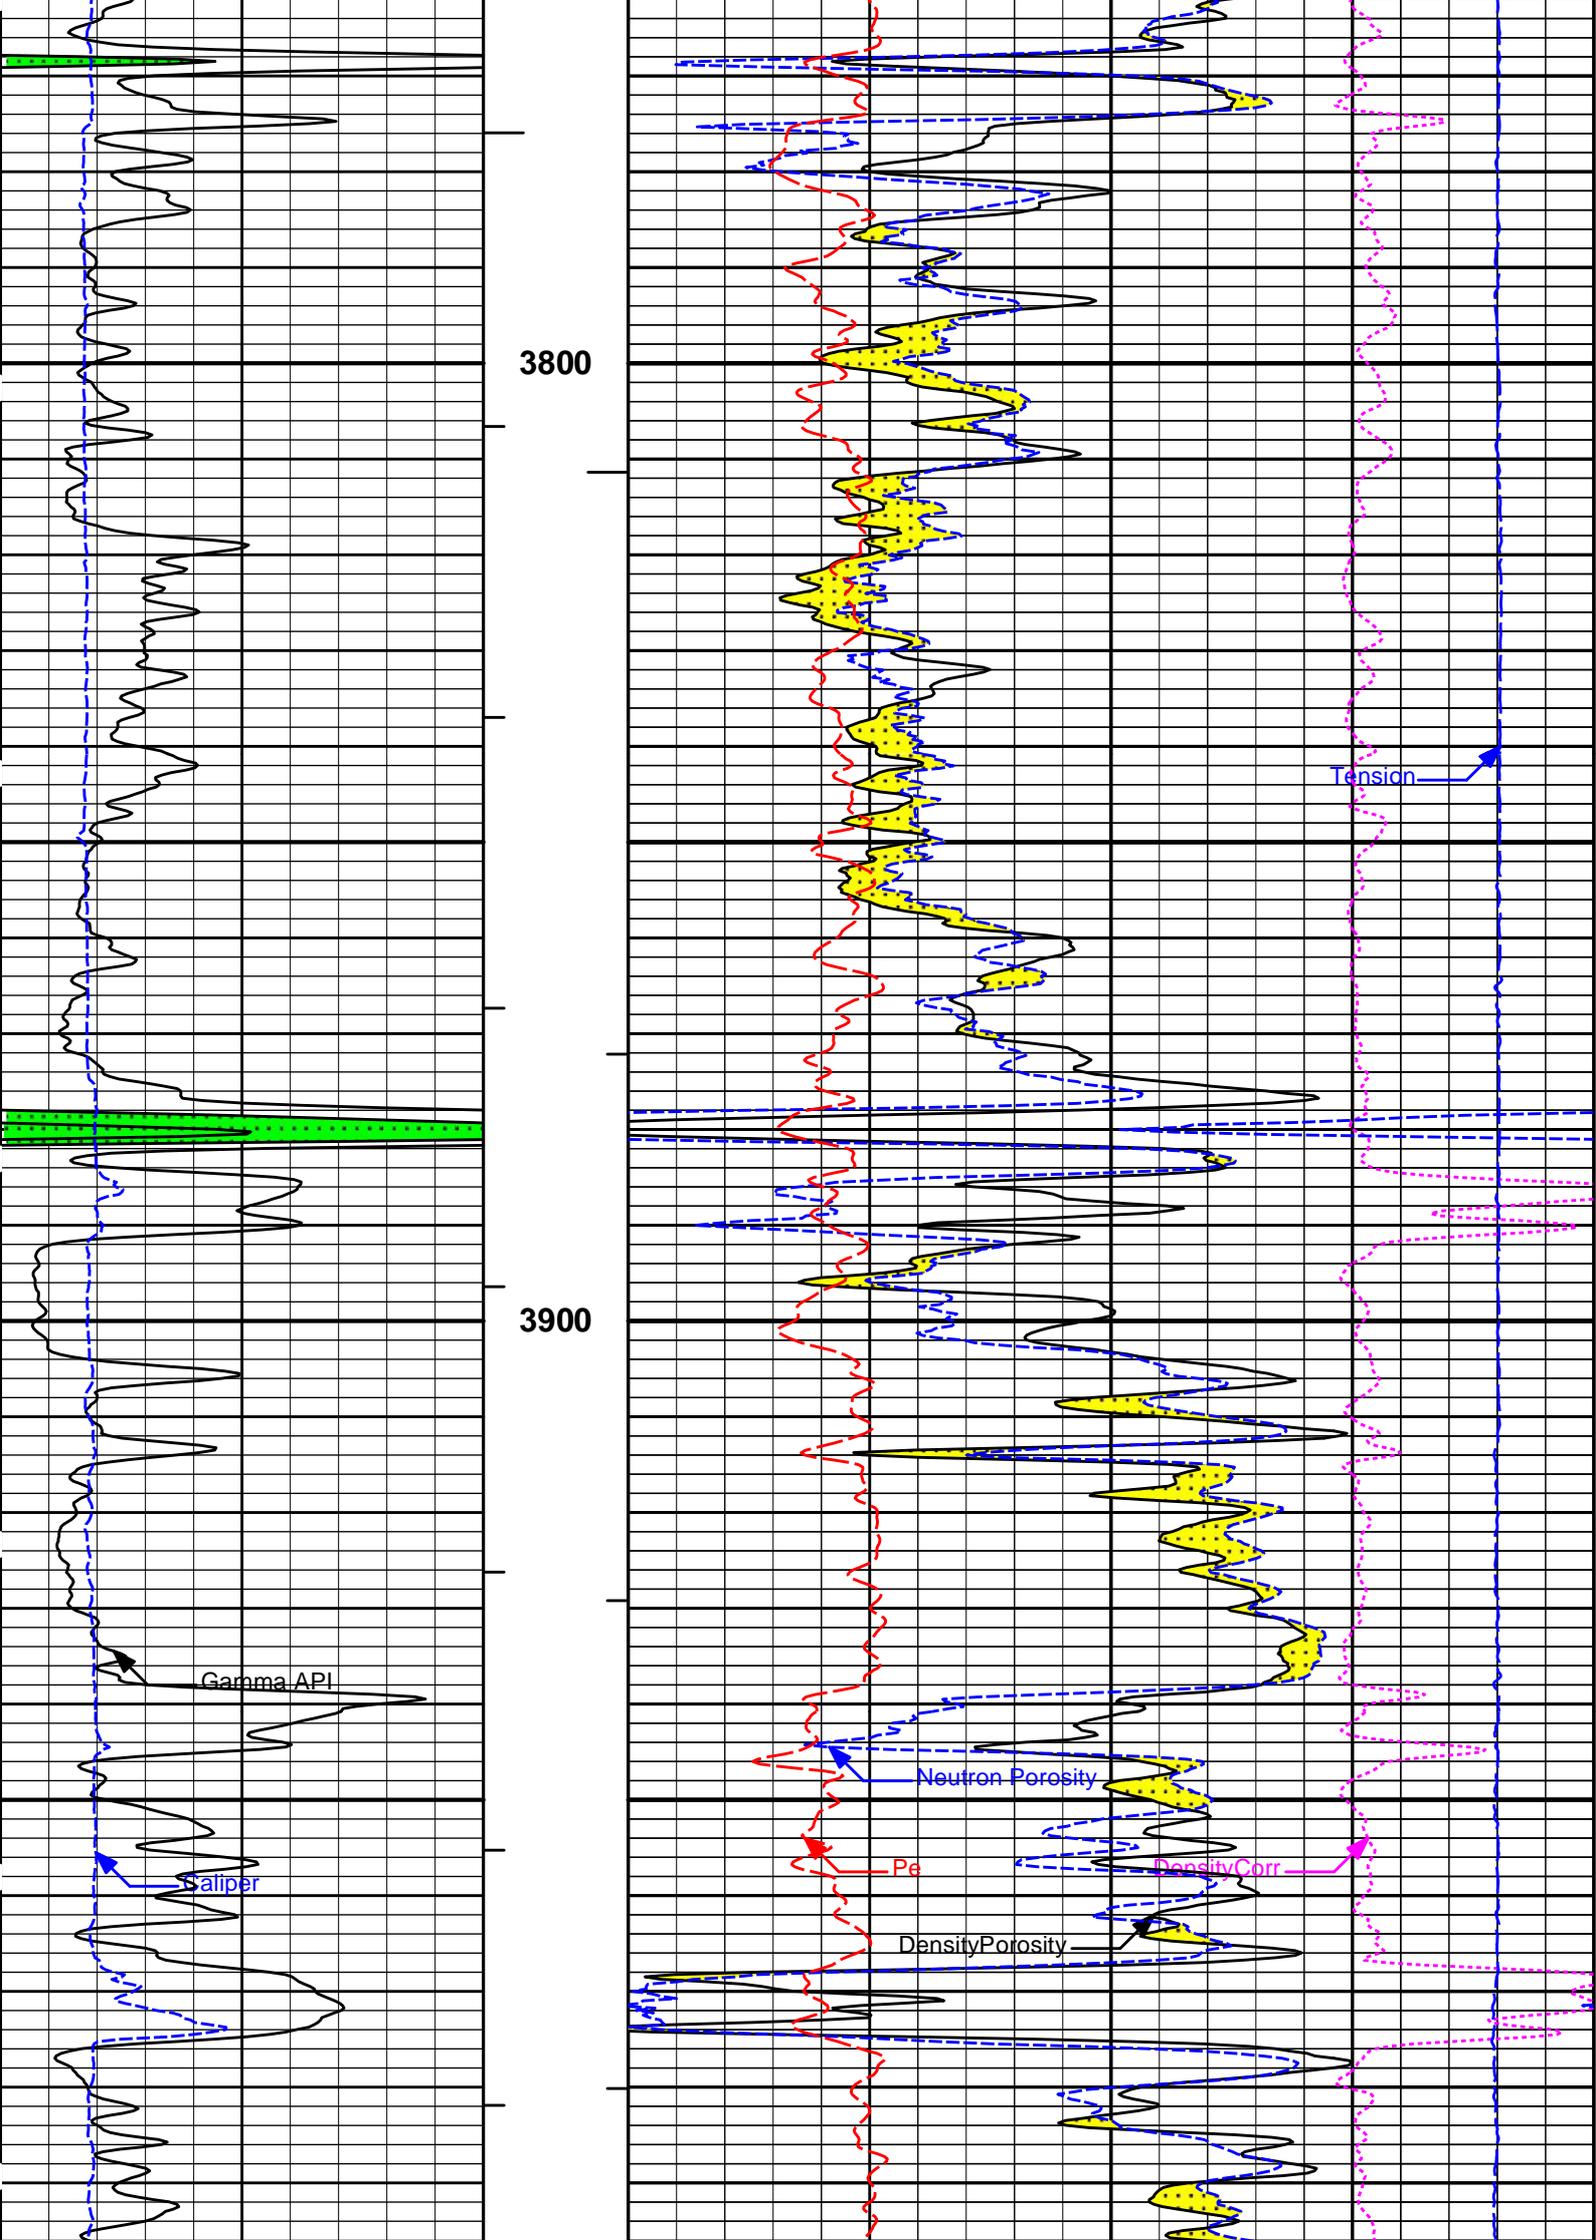


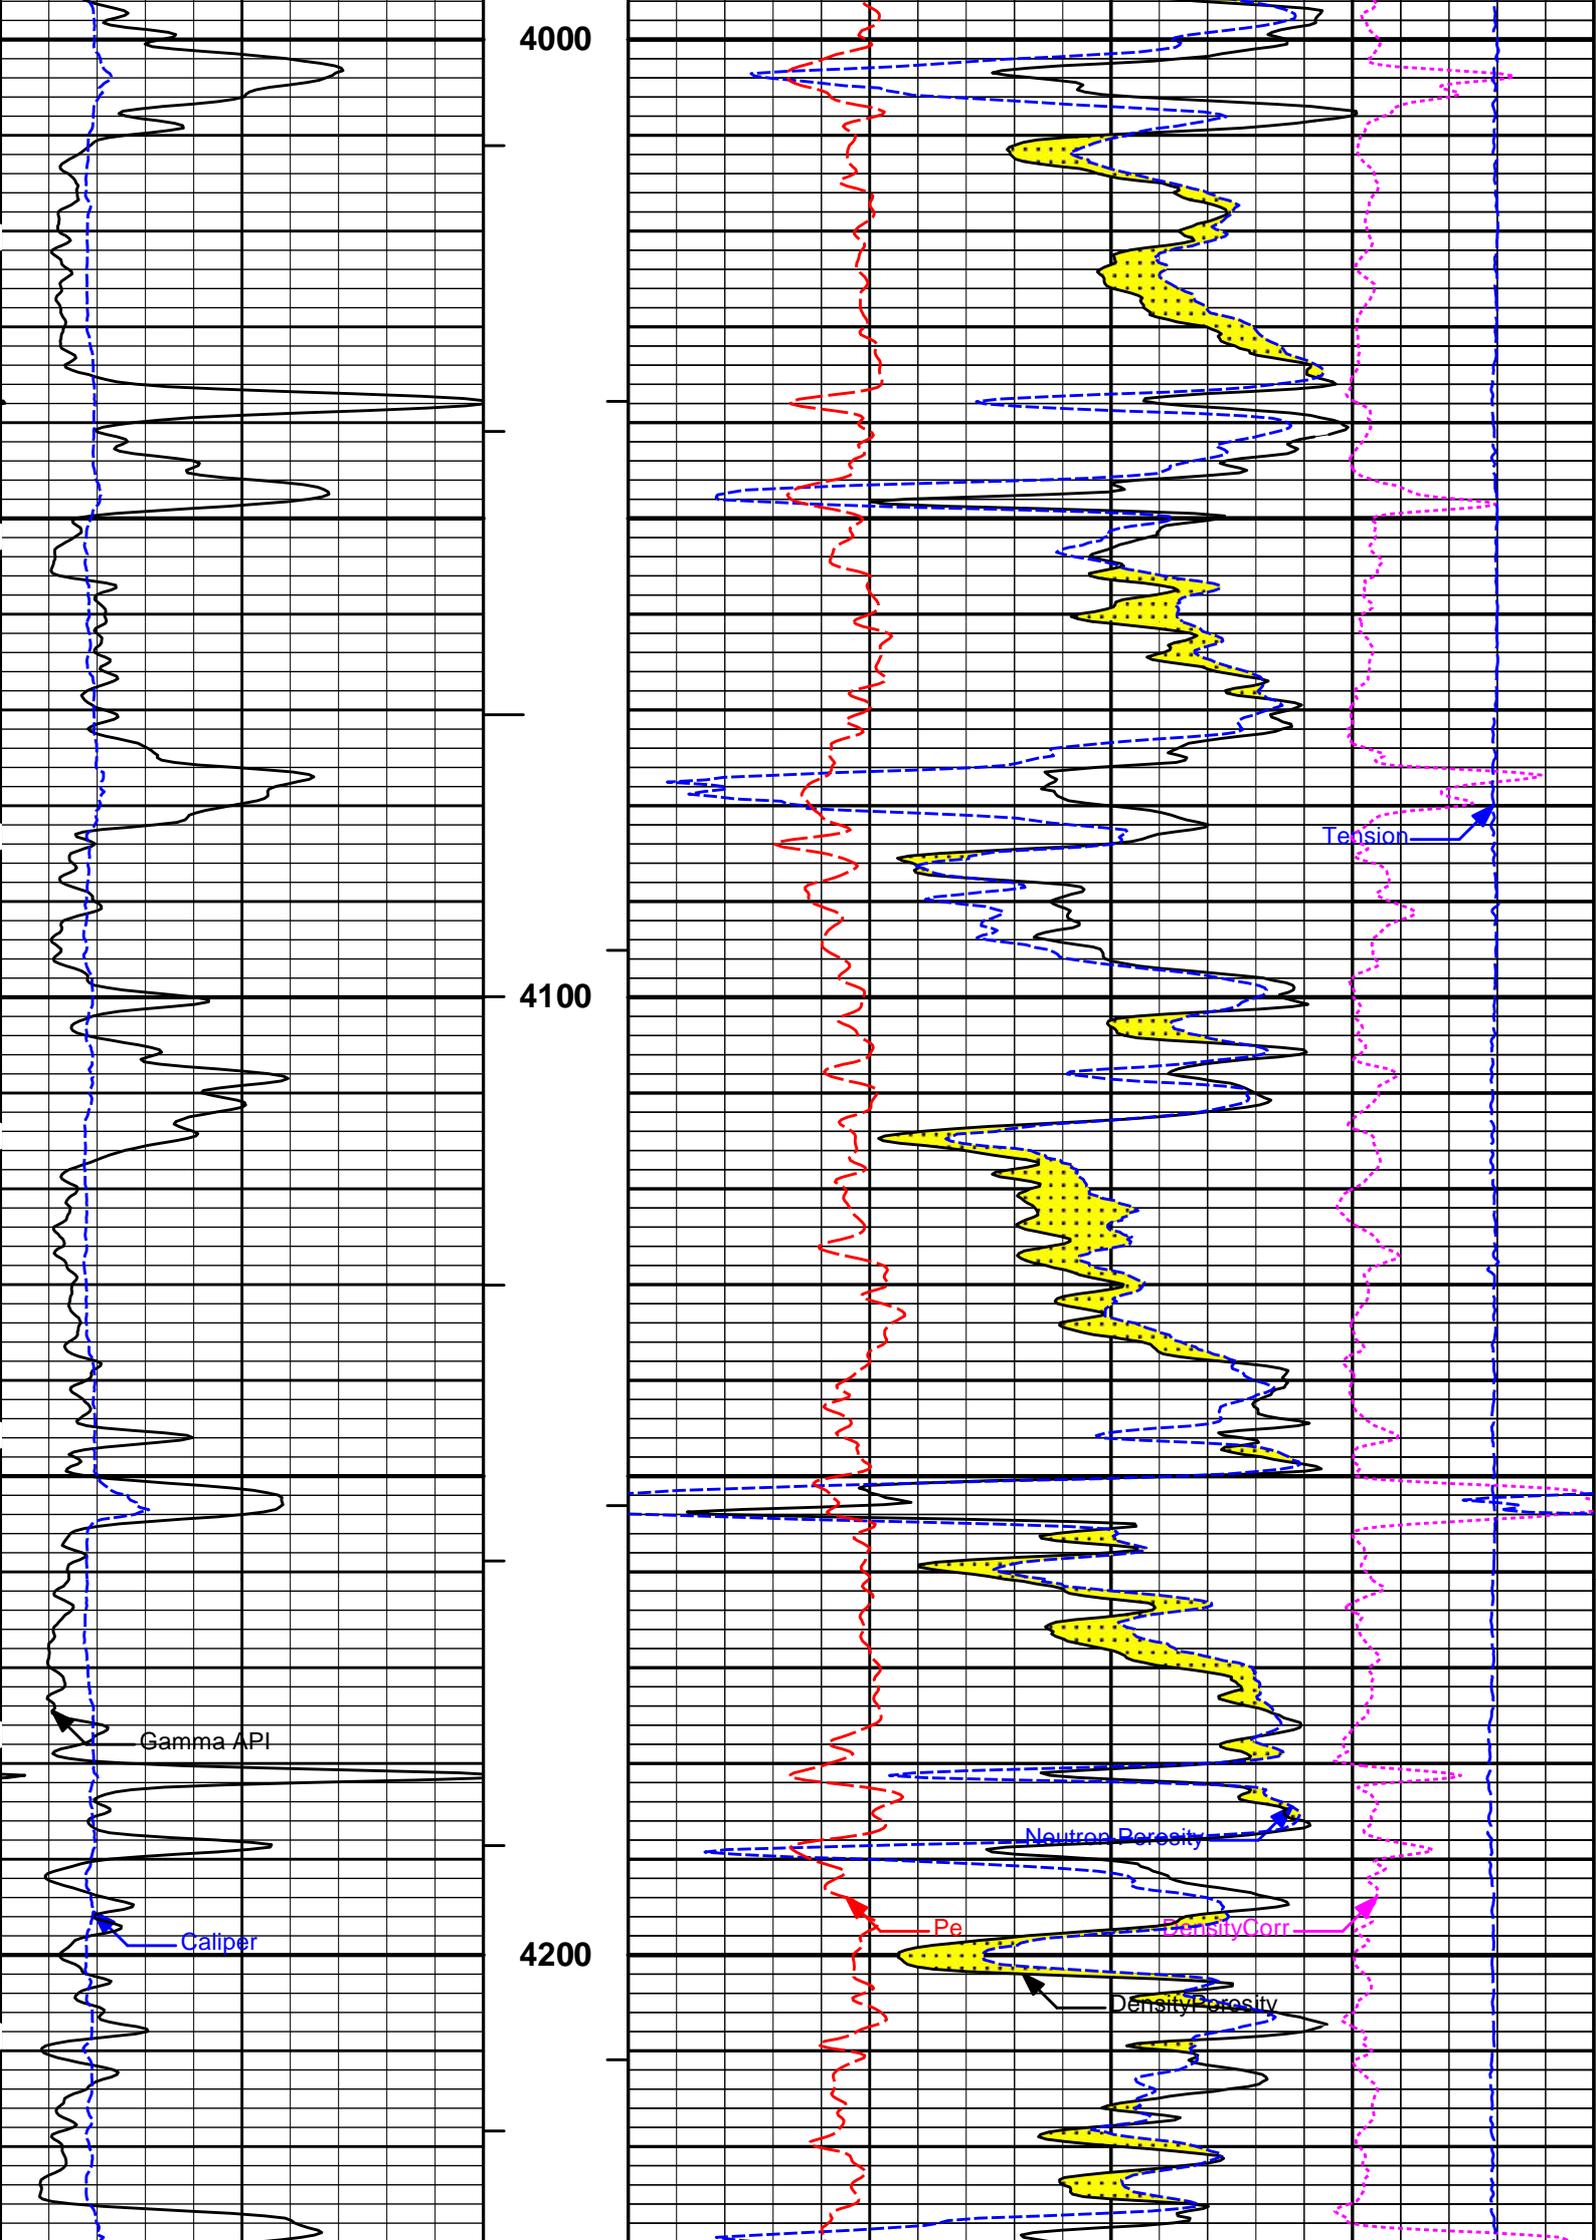

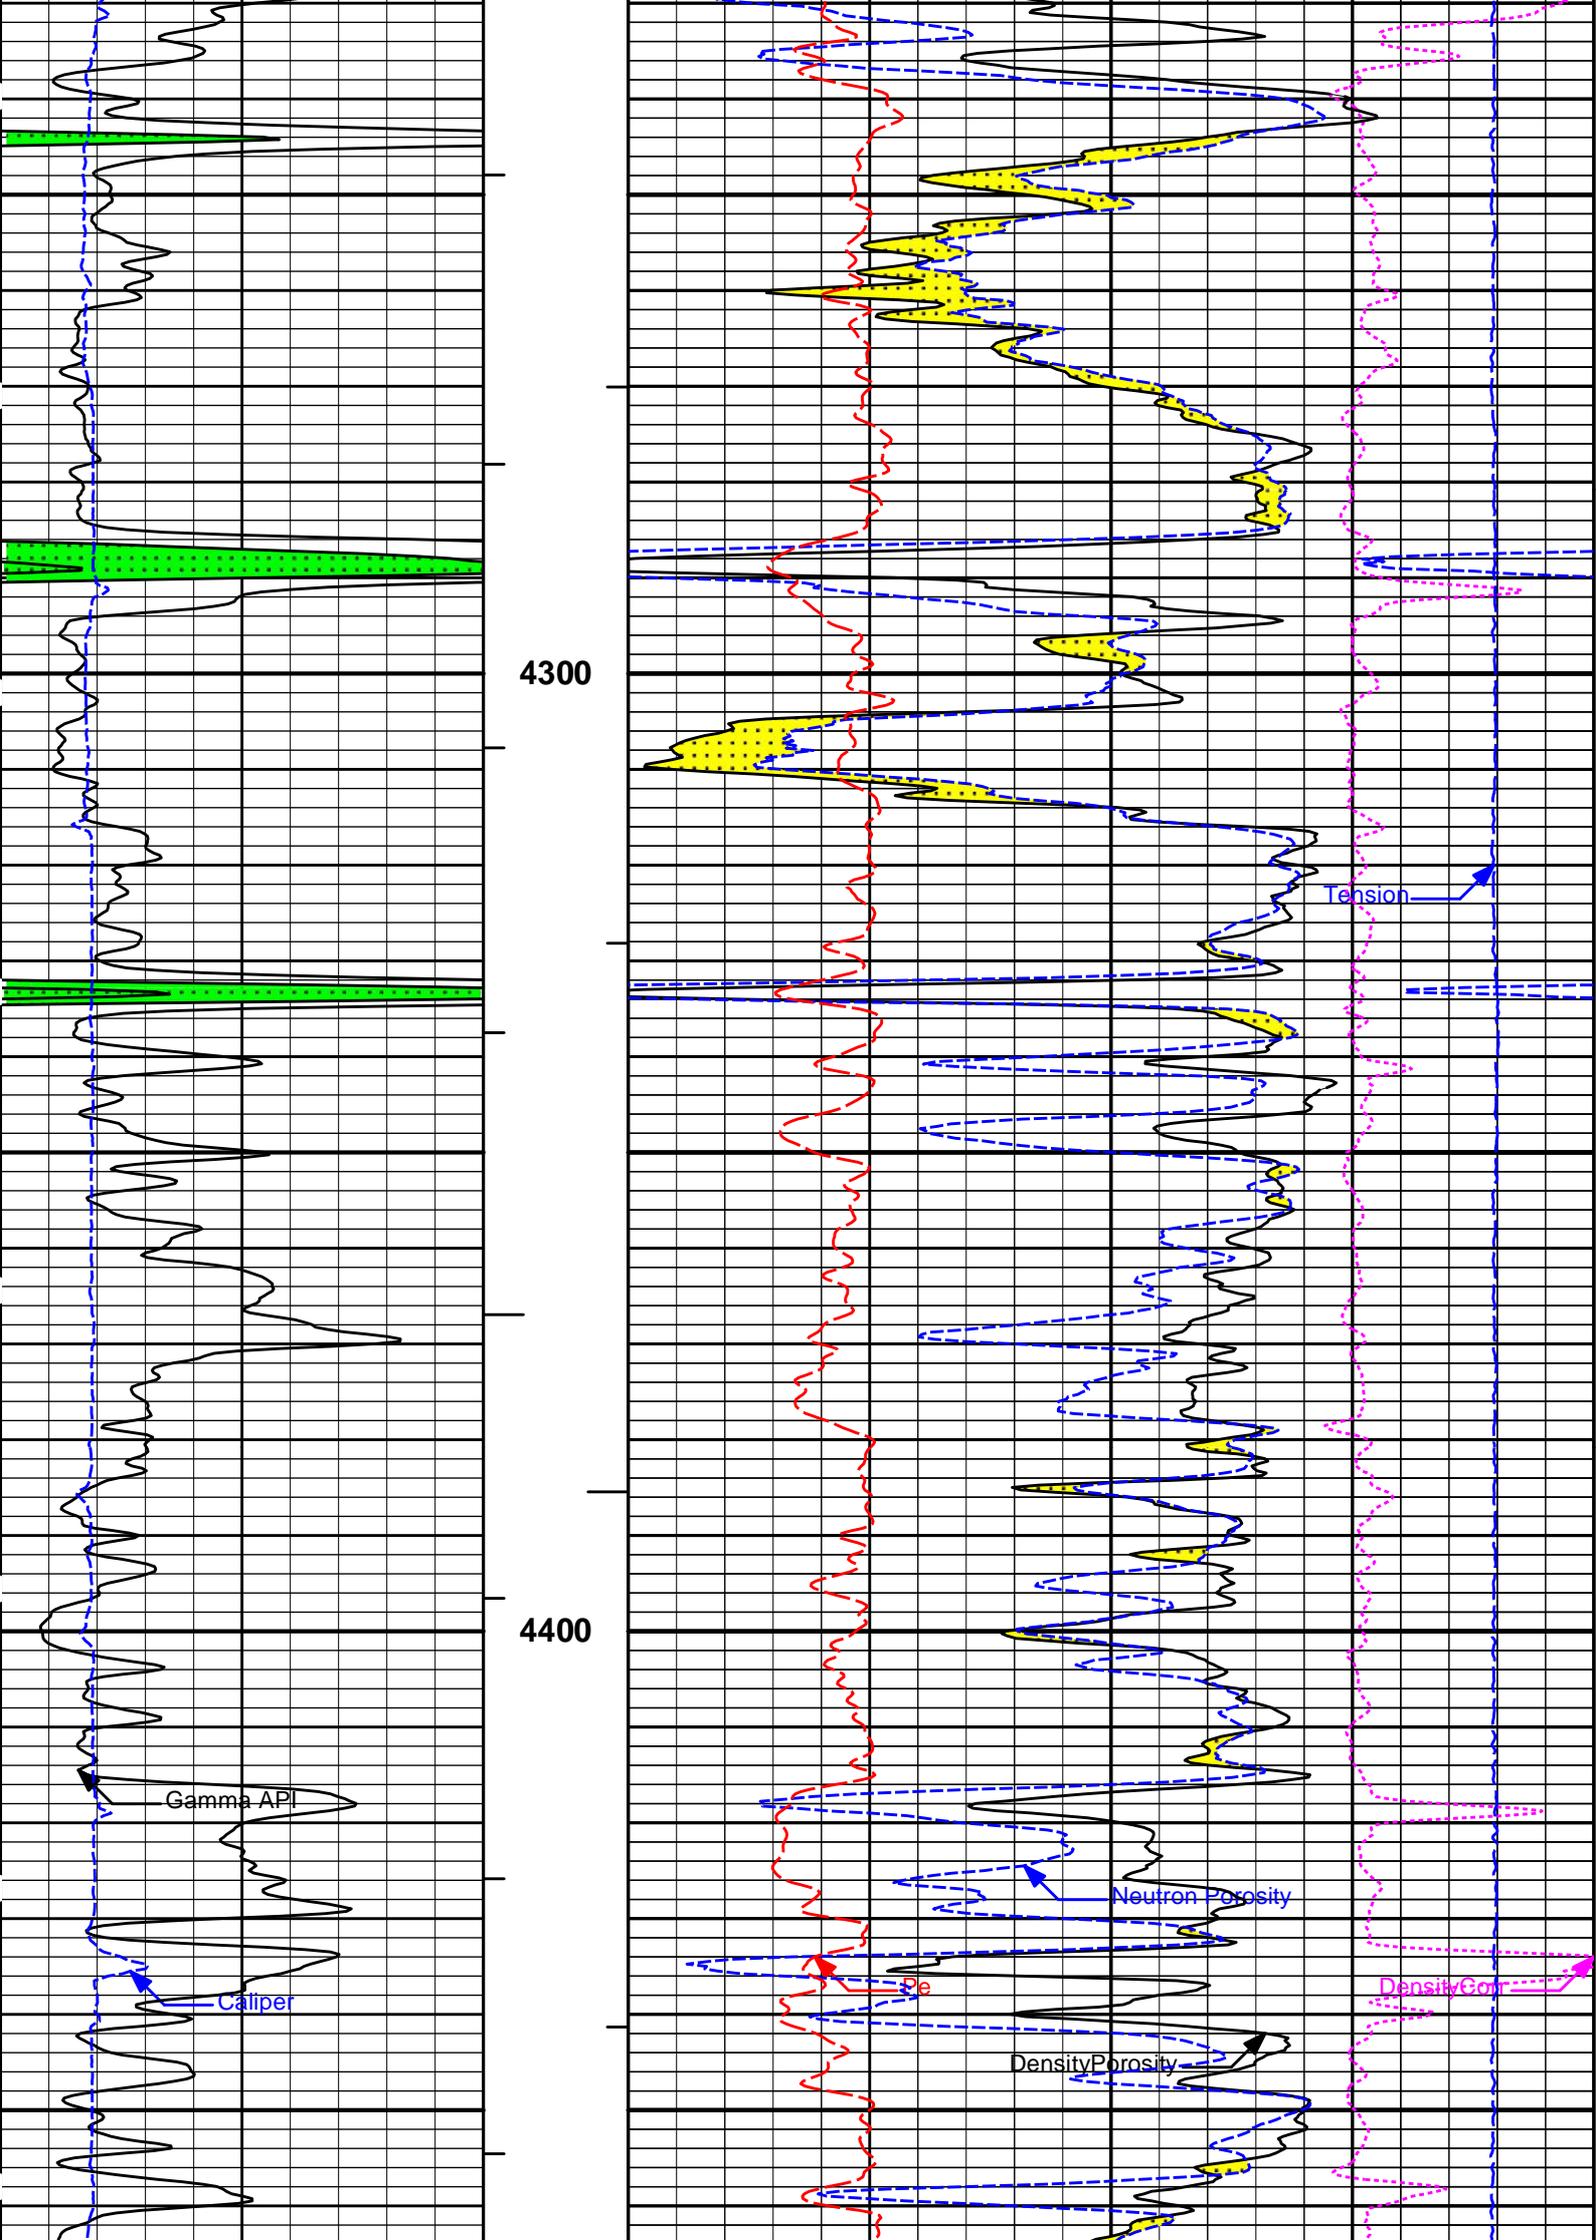

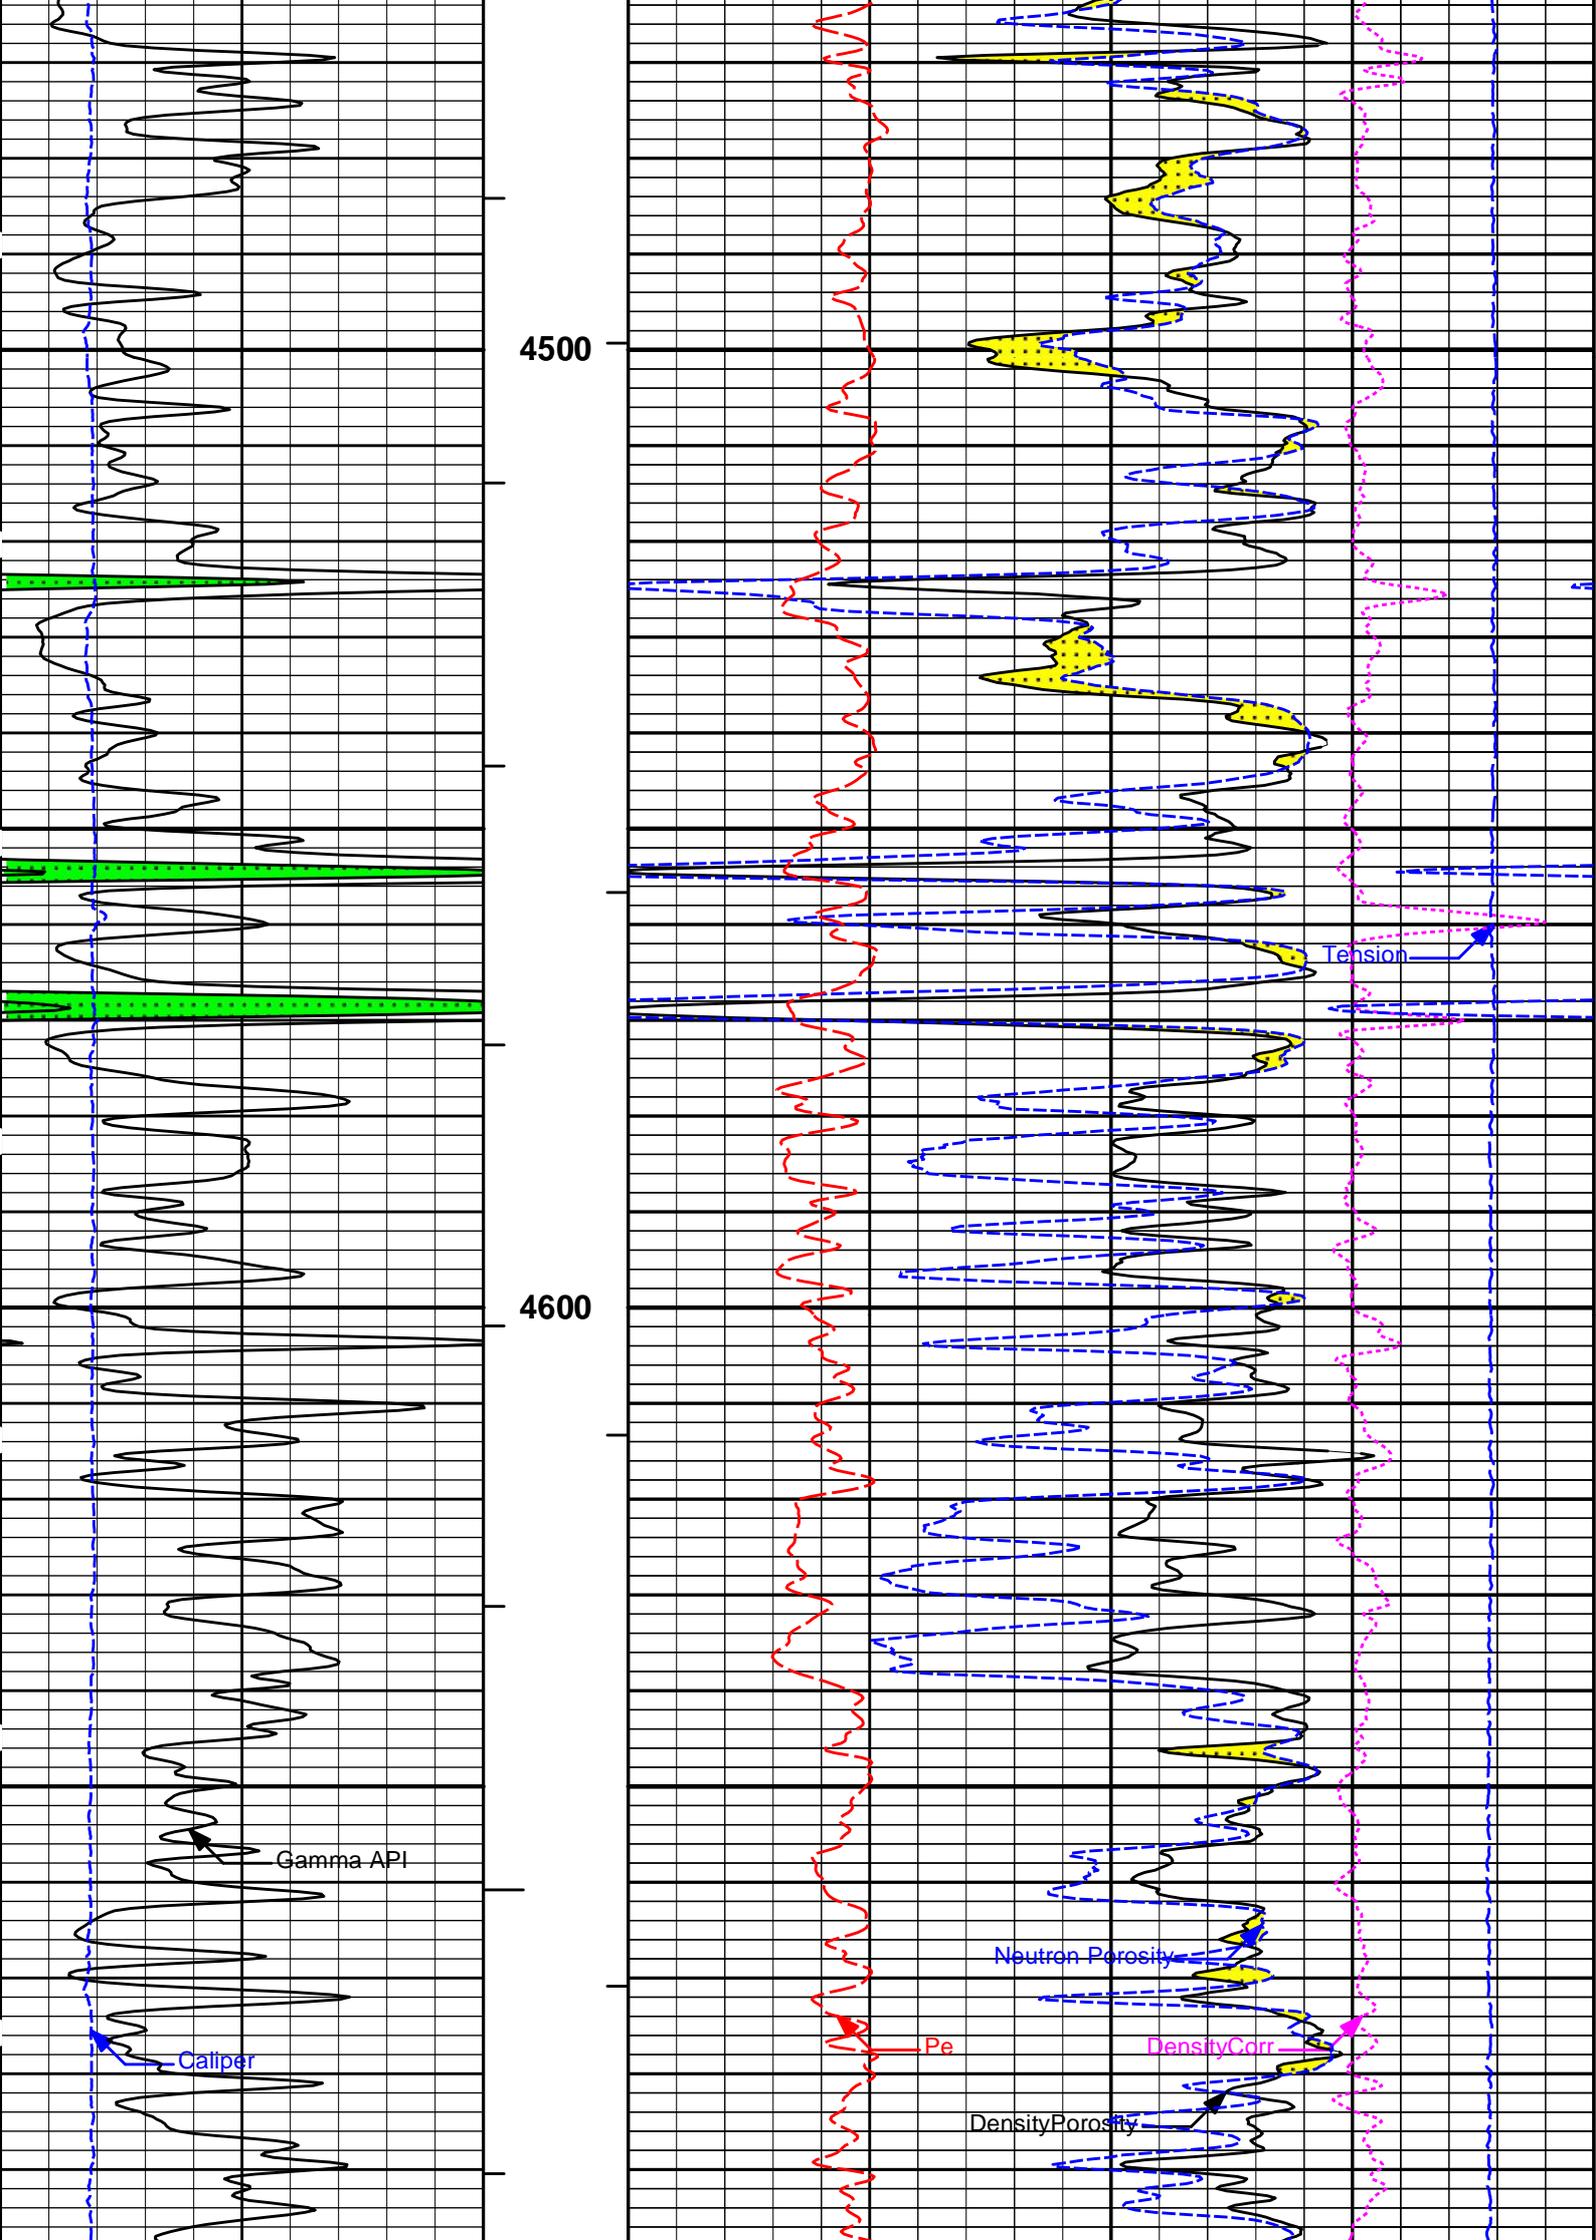

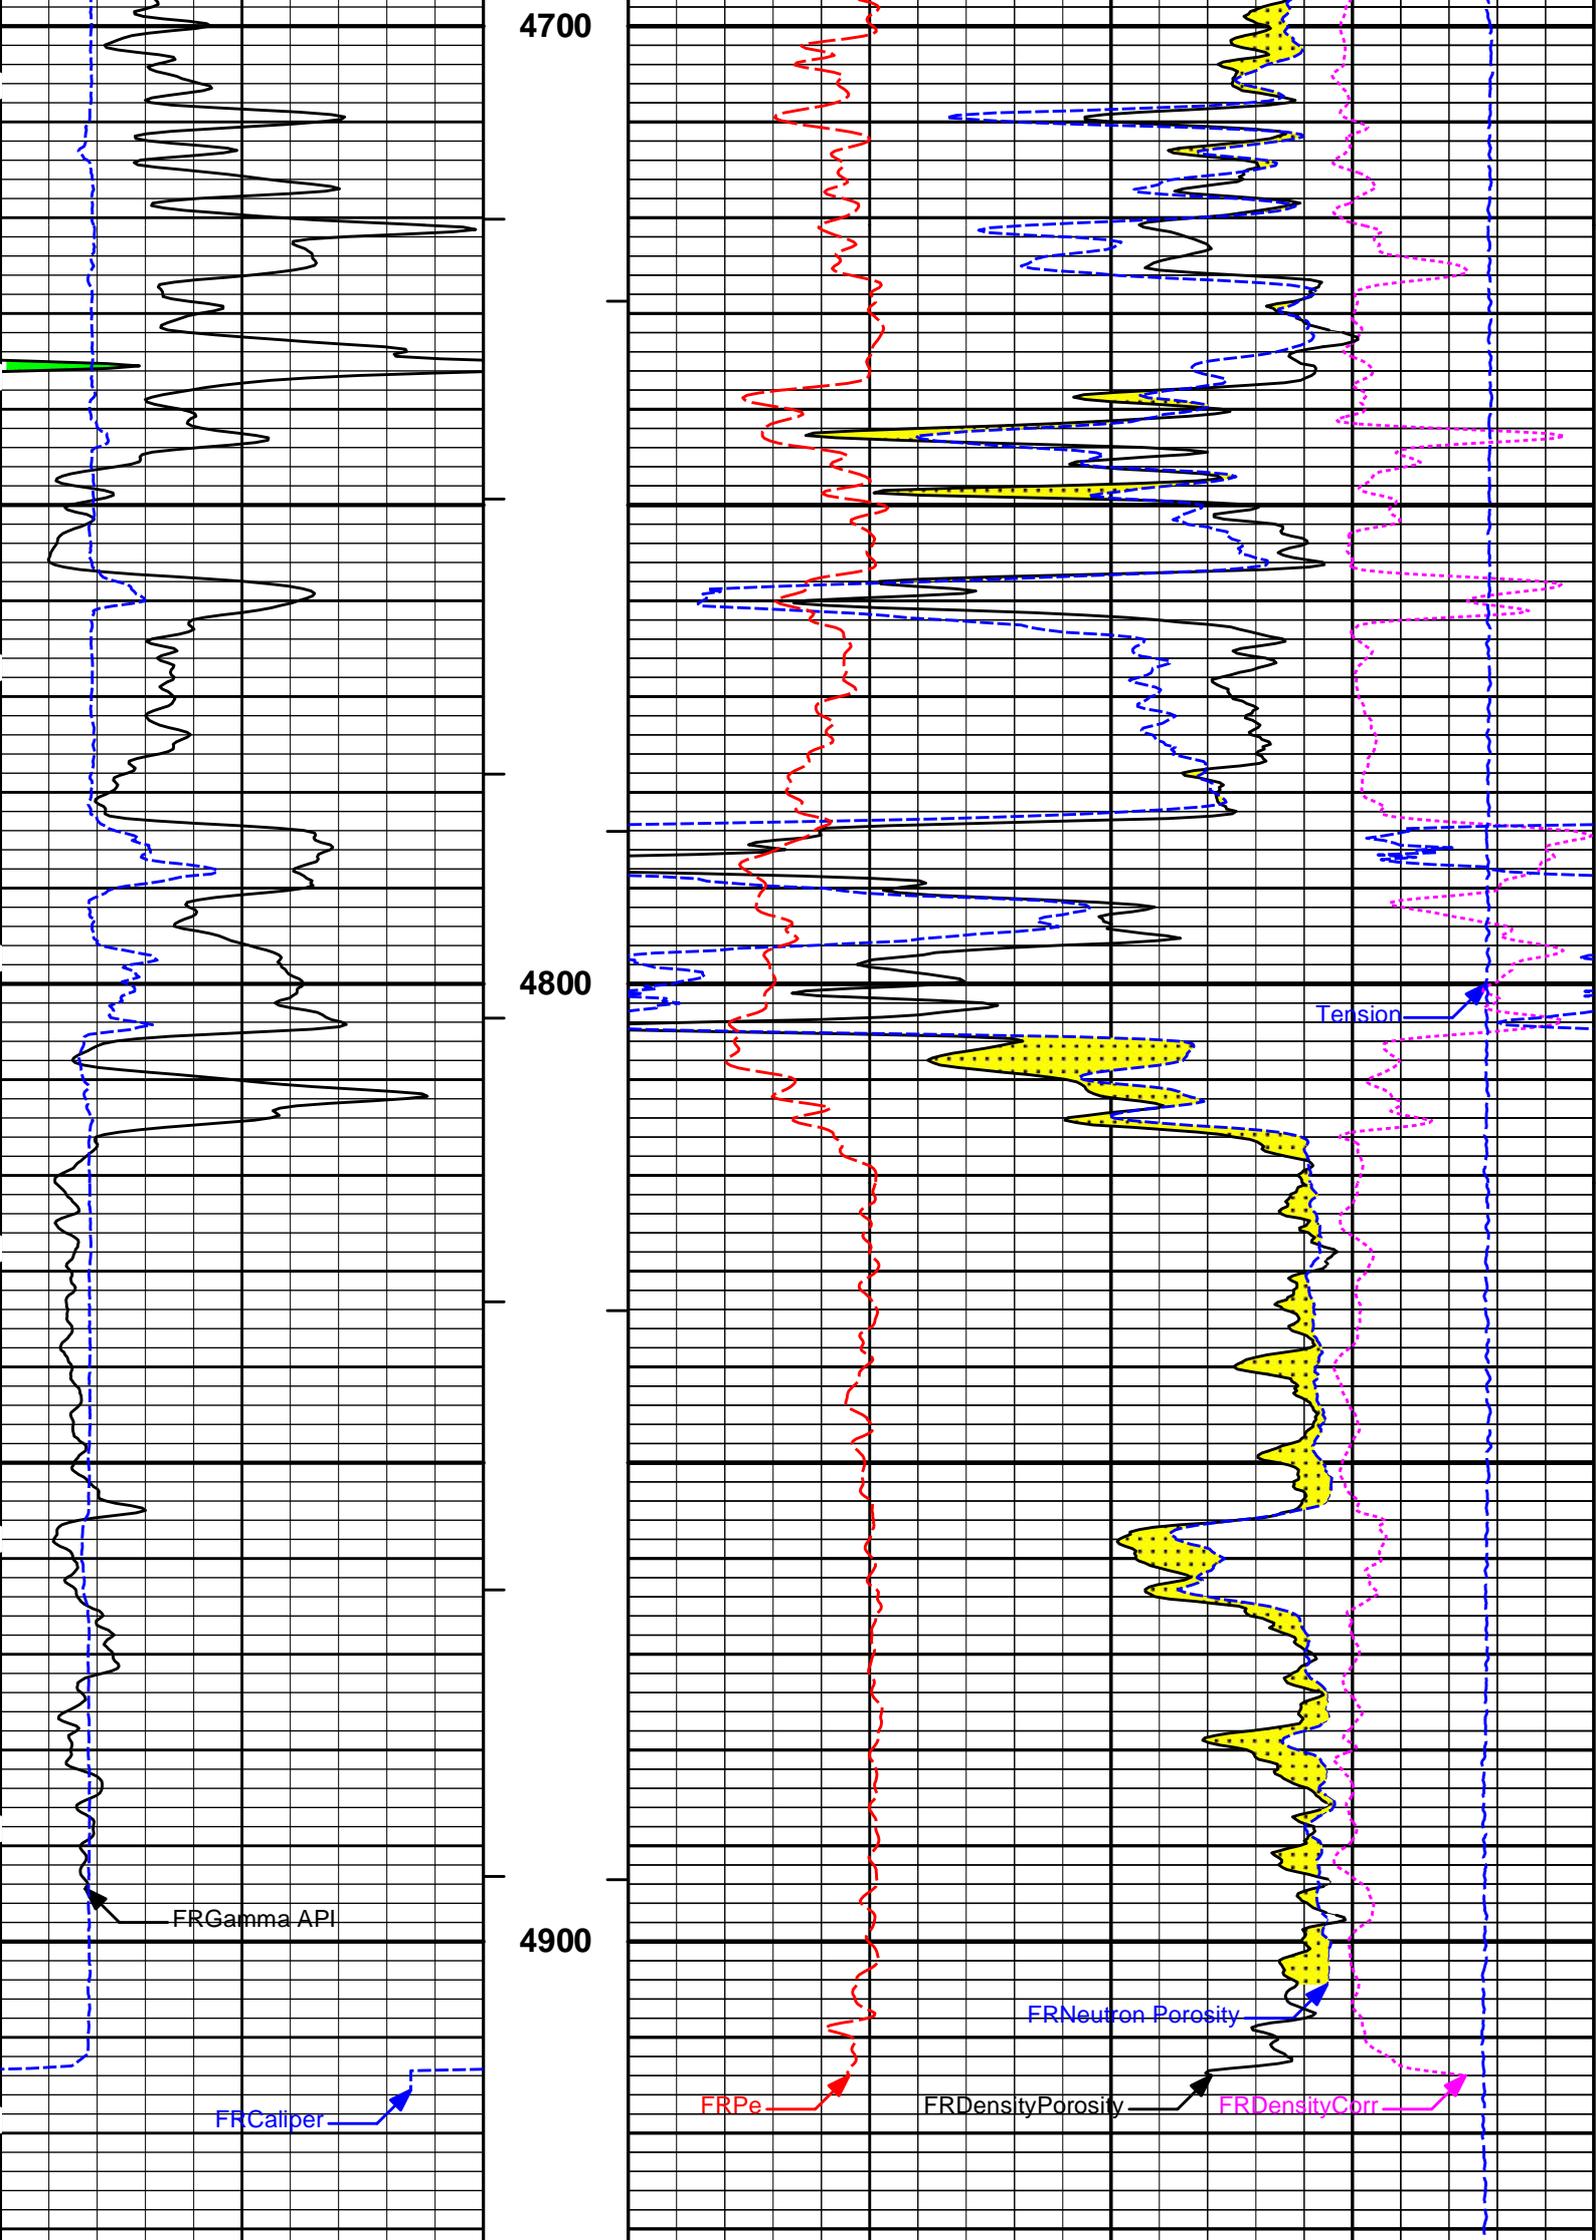

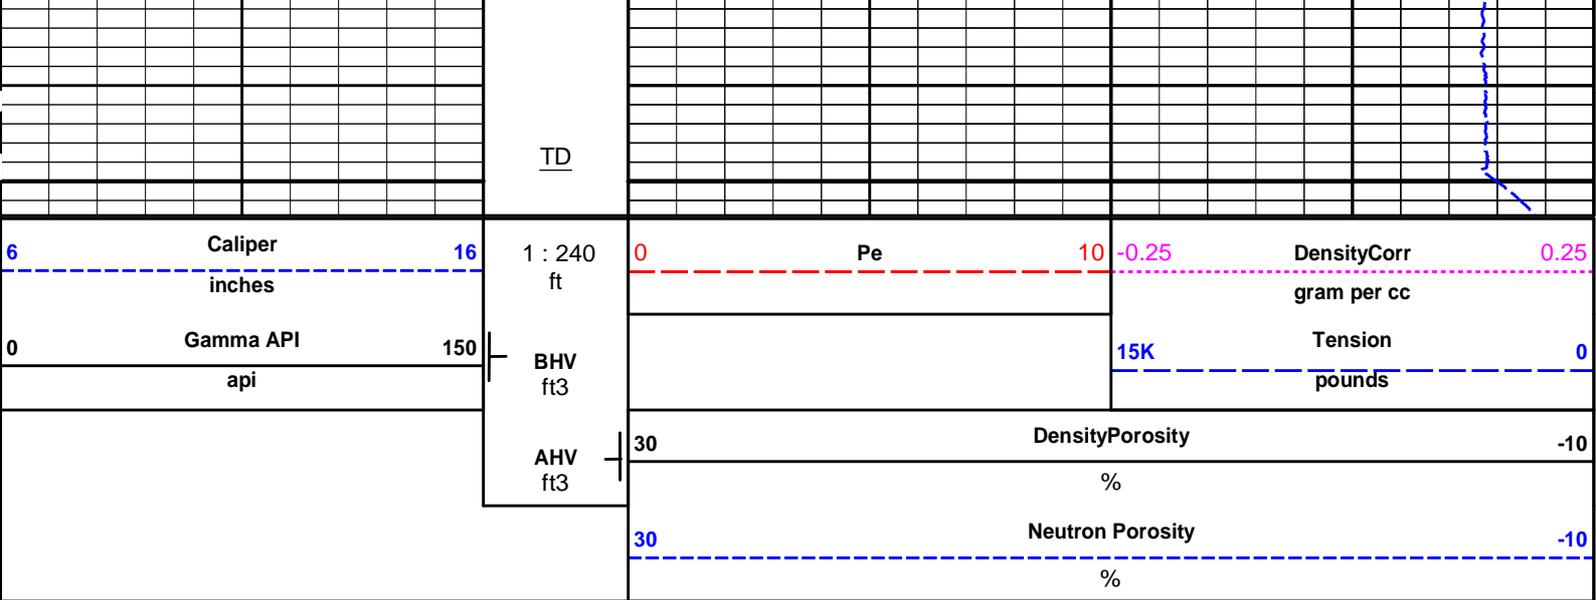

HALLIBURTON

Plot Time: 12-Aug-18 00:16:15
 Plot Range: 3480 ft to 4953.58 ft
 Data: MERIT_RIVERBND4\Well Based\DETAILS\
 Plot File: \\PORO\Poro_IQ_5_MAIN

5 INCH MAIN LOG


MAIN SECTION 5" PER 100'


HALLIBURTON


Plot Time: 12-Aug-18 00:16:15
 Plot Range: 4680 ft to 4958.08 ft
 Data: MERIT_RIVERBND4\Well Based\REPEAT\
 Plot File: \\PORO\Poro_IQ_5_REPEAT

5 INCH REPEAT LOG

REPEAT SECTION 5" PER 100'

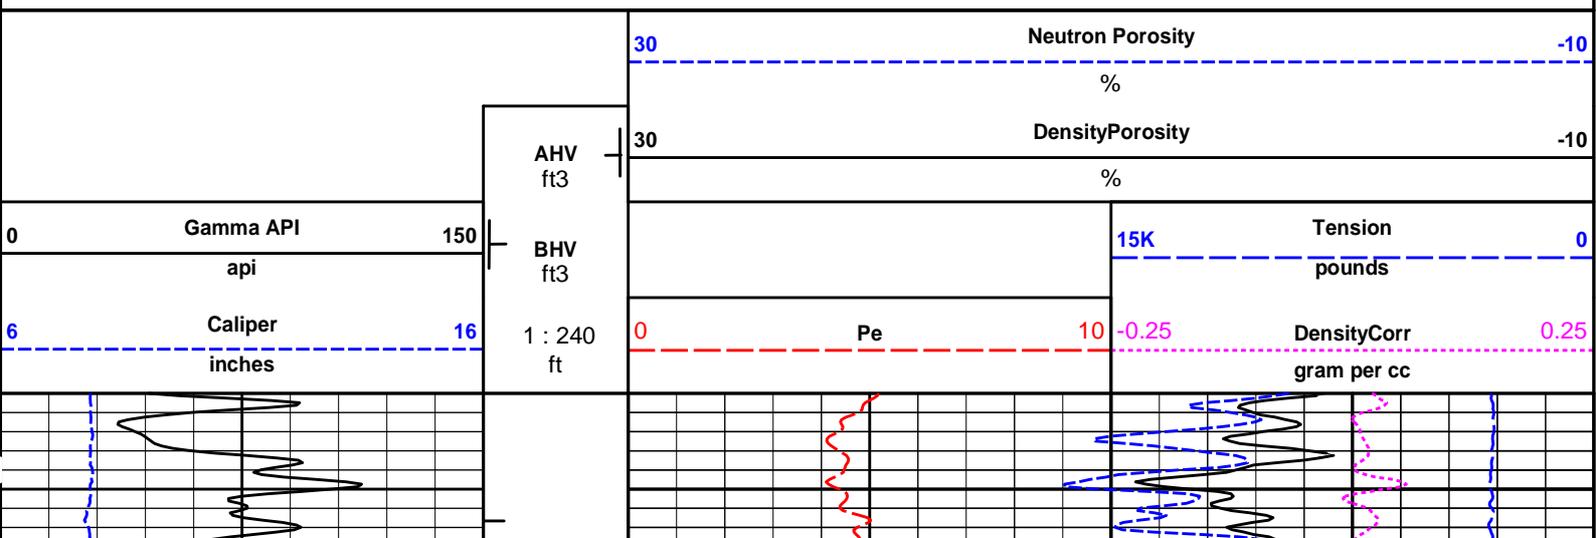

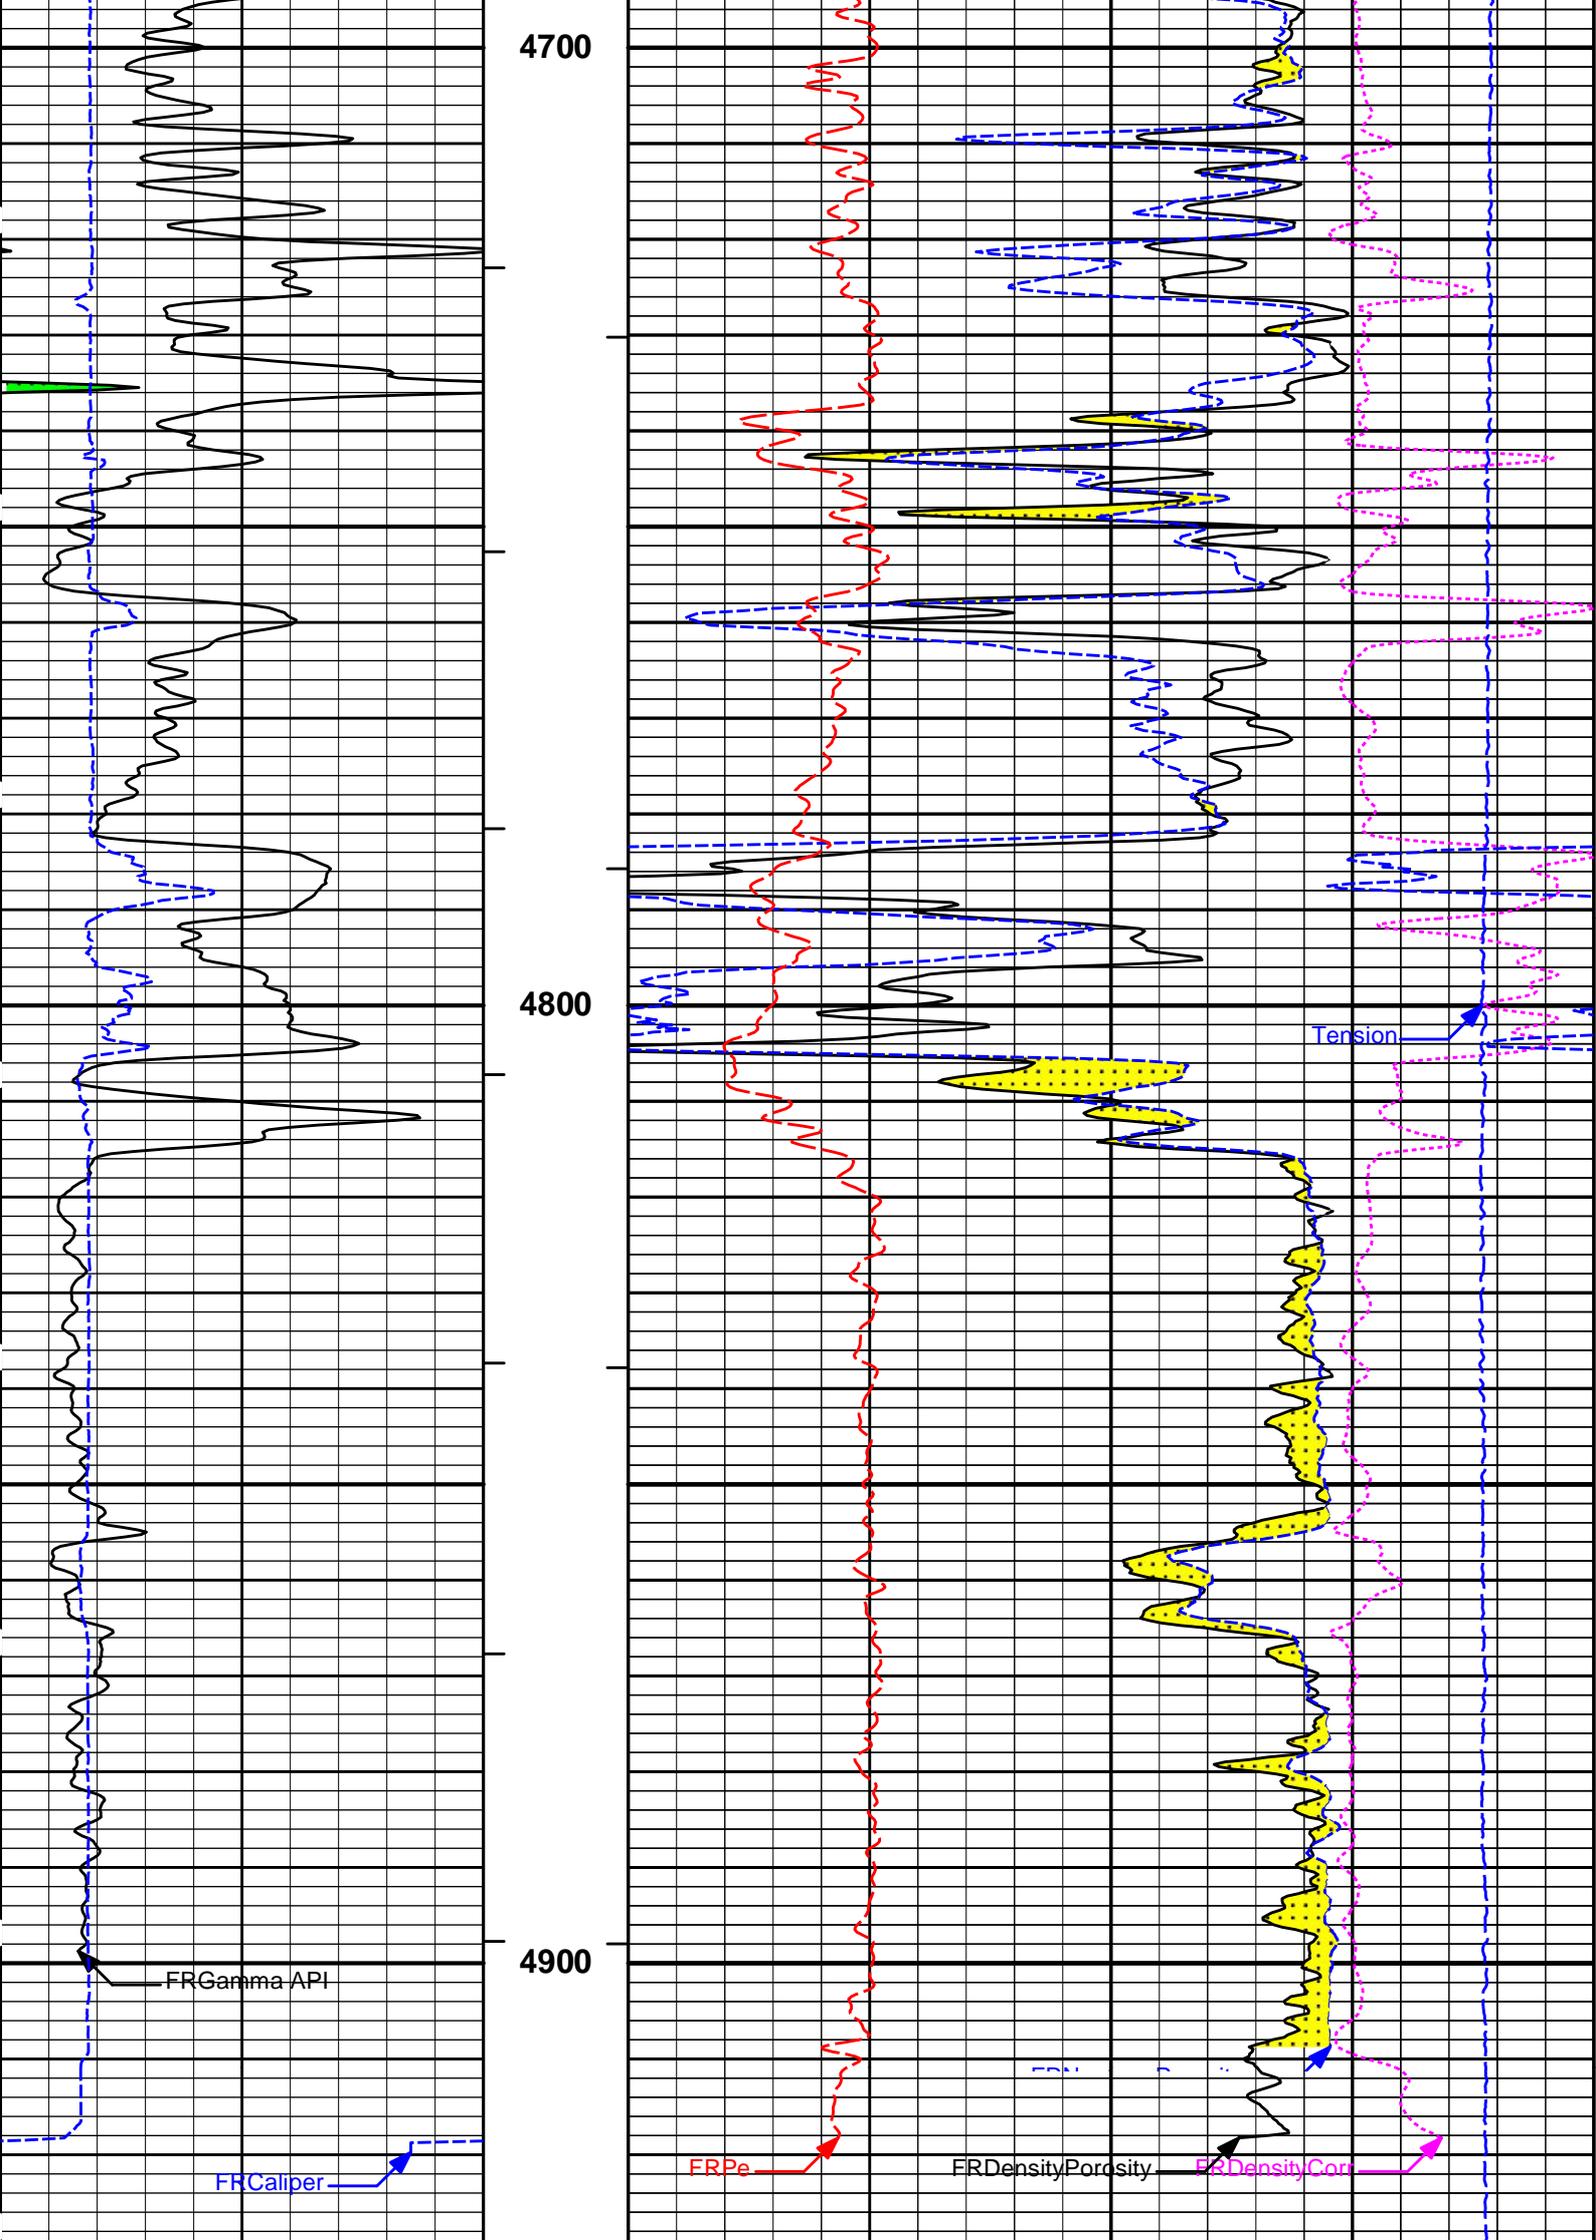

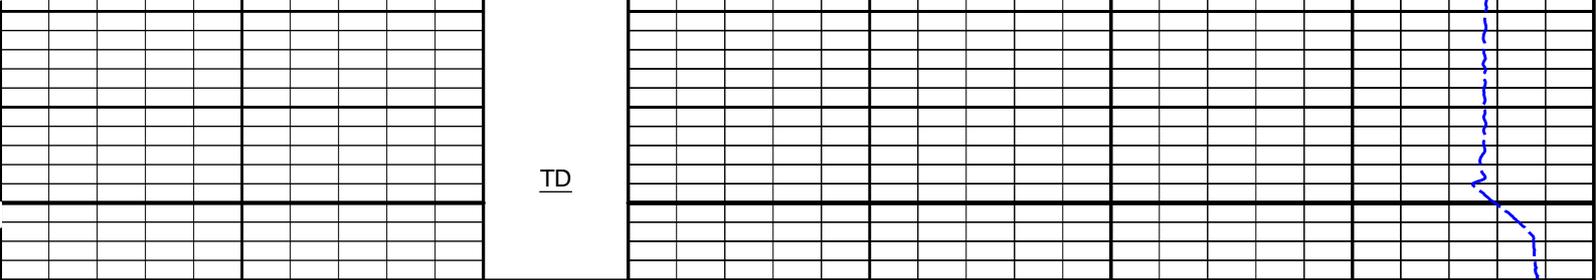

TD

6	Caliper inches	16	1 : 240 ft	0	Pe	10	-0.25	DensityCorr gram per cc	0.25
0	Gamma API api	150	BHV ft3				15K	Tension pounds	0
			AHV ft3	30	DensityPorosity				-10
								%	
				30	Neutron Porosity				-10
								%	

HALLIBURTON

Plot Time: 12-Aug-18 00:16:17
 Plot Range: 4680 ft to 4958.08 ft
 Data: MERIT_RIVERBND4\Well Based\REPEAT\
 Plot File: \\PORO\Poro_IQ_5_REPEAT

5 INCH REPEAT LOG

REPEAT SECTION 5" PER 100'

HALLIBURTON


Plot Time: 12-Aug-18 00:16:17
 Plot Range: 3480 ft to 4953.58 ft
 Data: MERIT_RIVERBND4\Well Based\DETAILS\
 Plot File: \\LOCAL-MERIT_RIVERBND4\Well Based\PORO\BULKD_5_MAIN


5 INCH MAIN LOG


MAIN SECTION 5" PER 100'


0	Gamma Ray api	150							
18	FarQuality	-2	AHV ft3	2	Bulk Density				3
								g/cc	
-18	NearQuality	2	BHV ft3				15K	Tension pounds	0
6	Caliper inches	16	1 : 240 ft	0	Pe	10	-0.25	DensityCorr g/cc	0.25




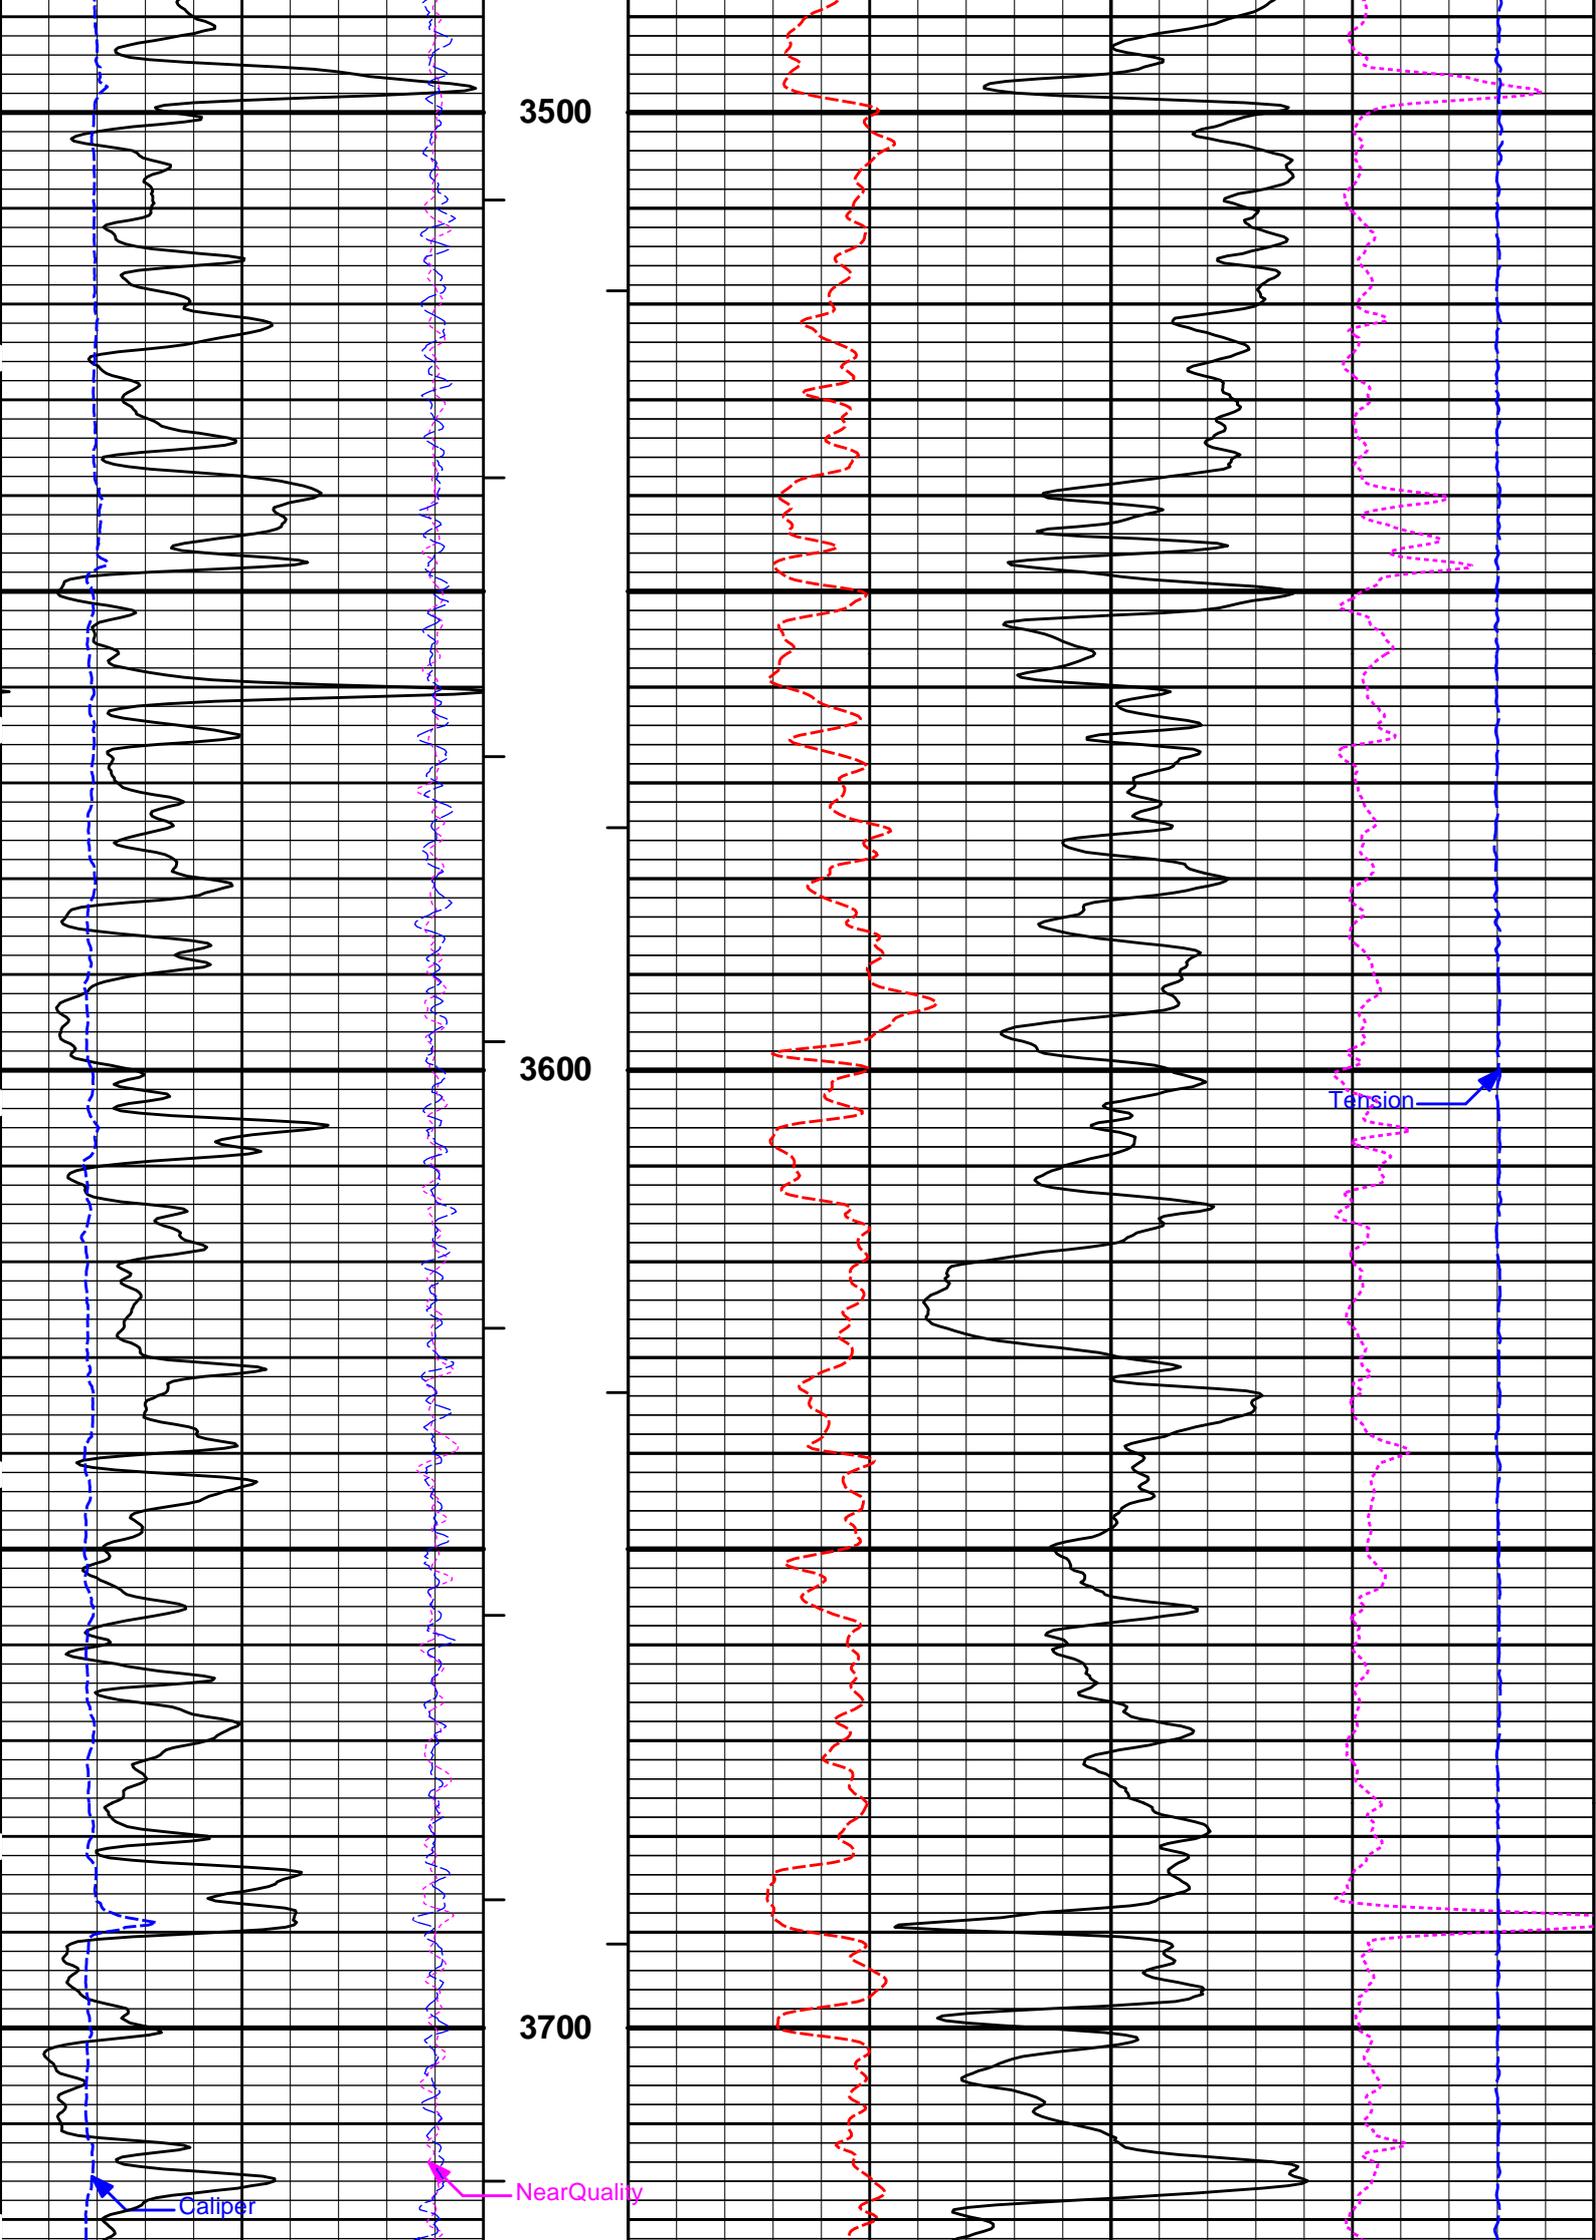


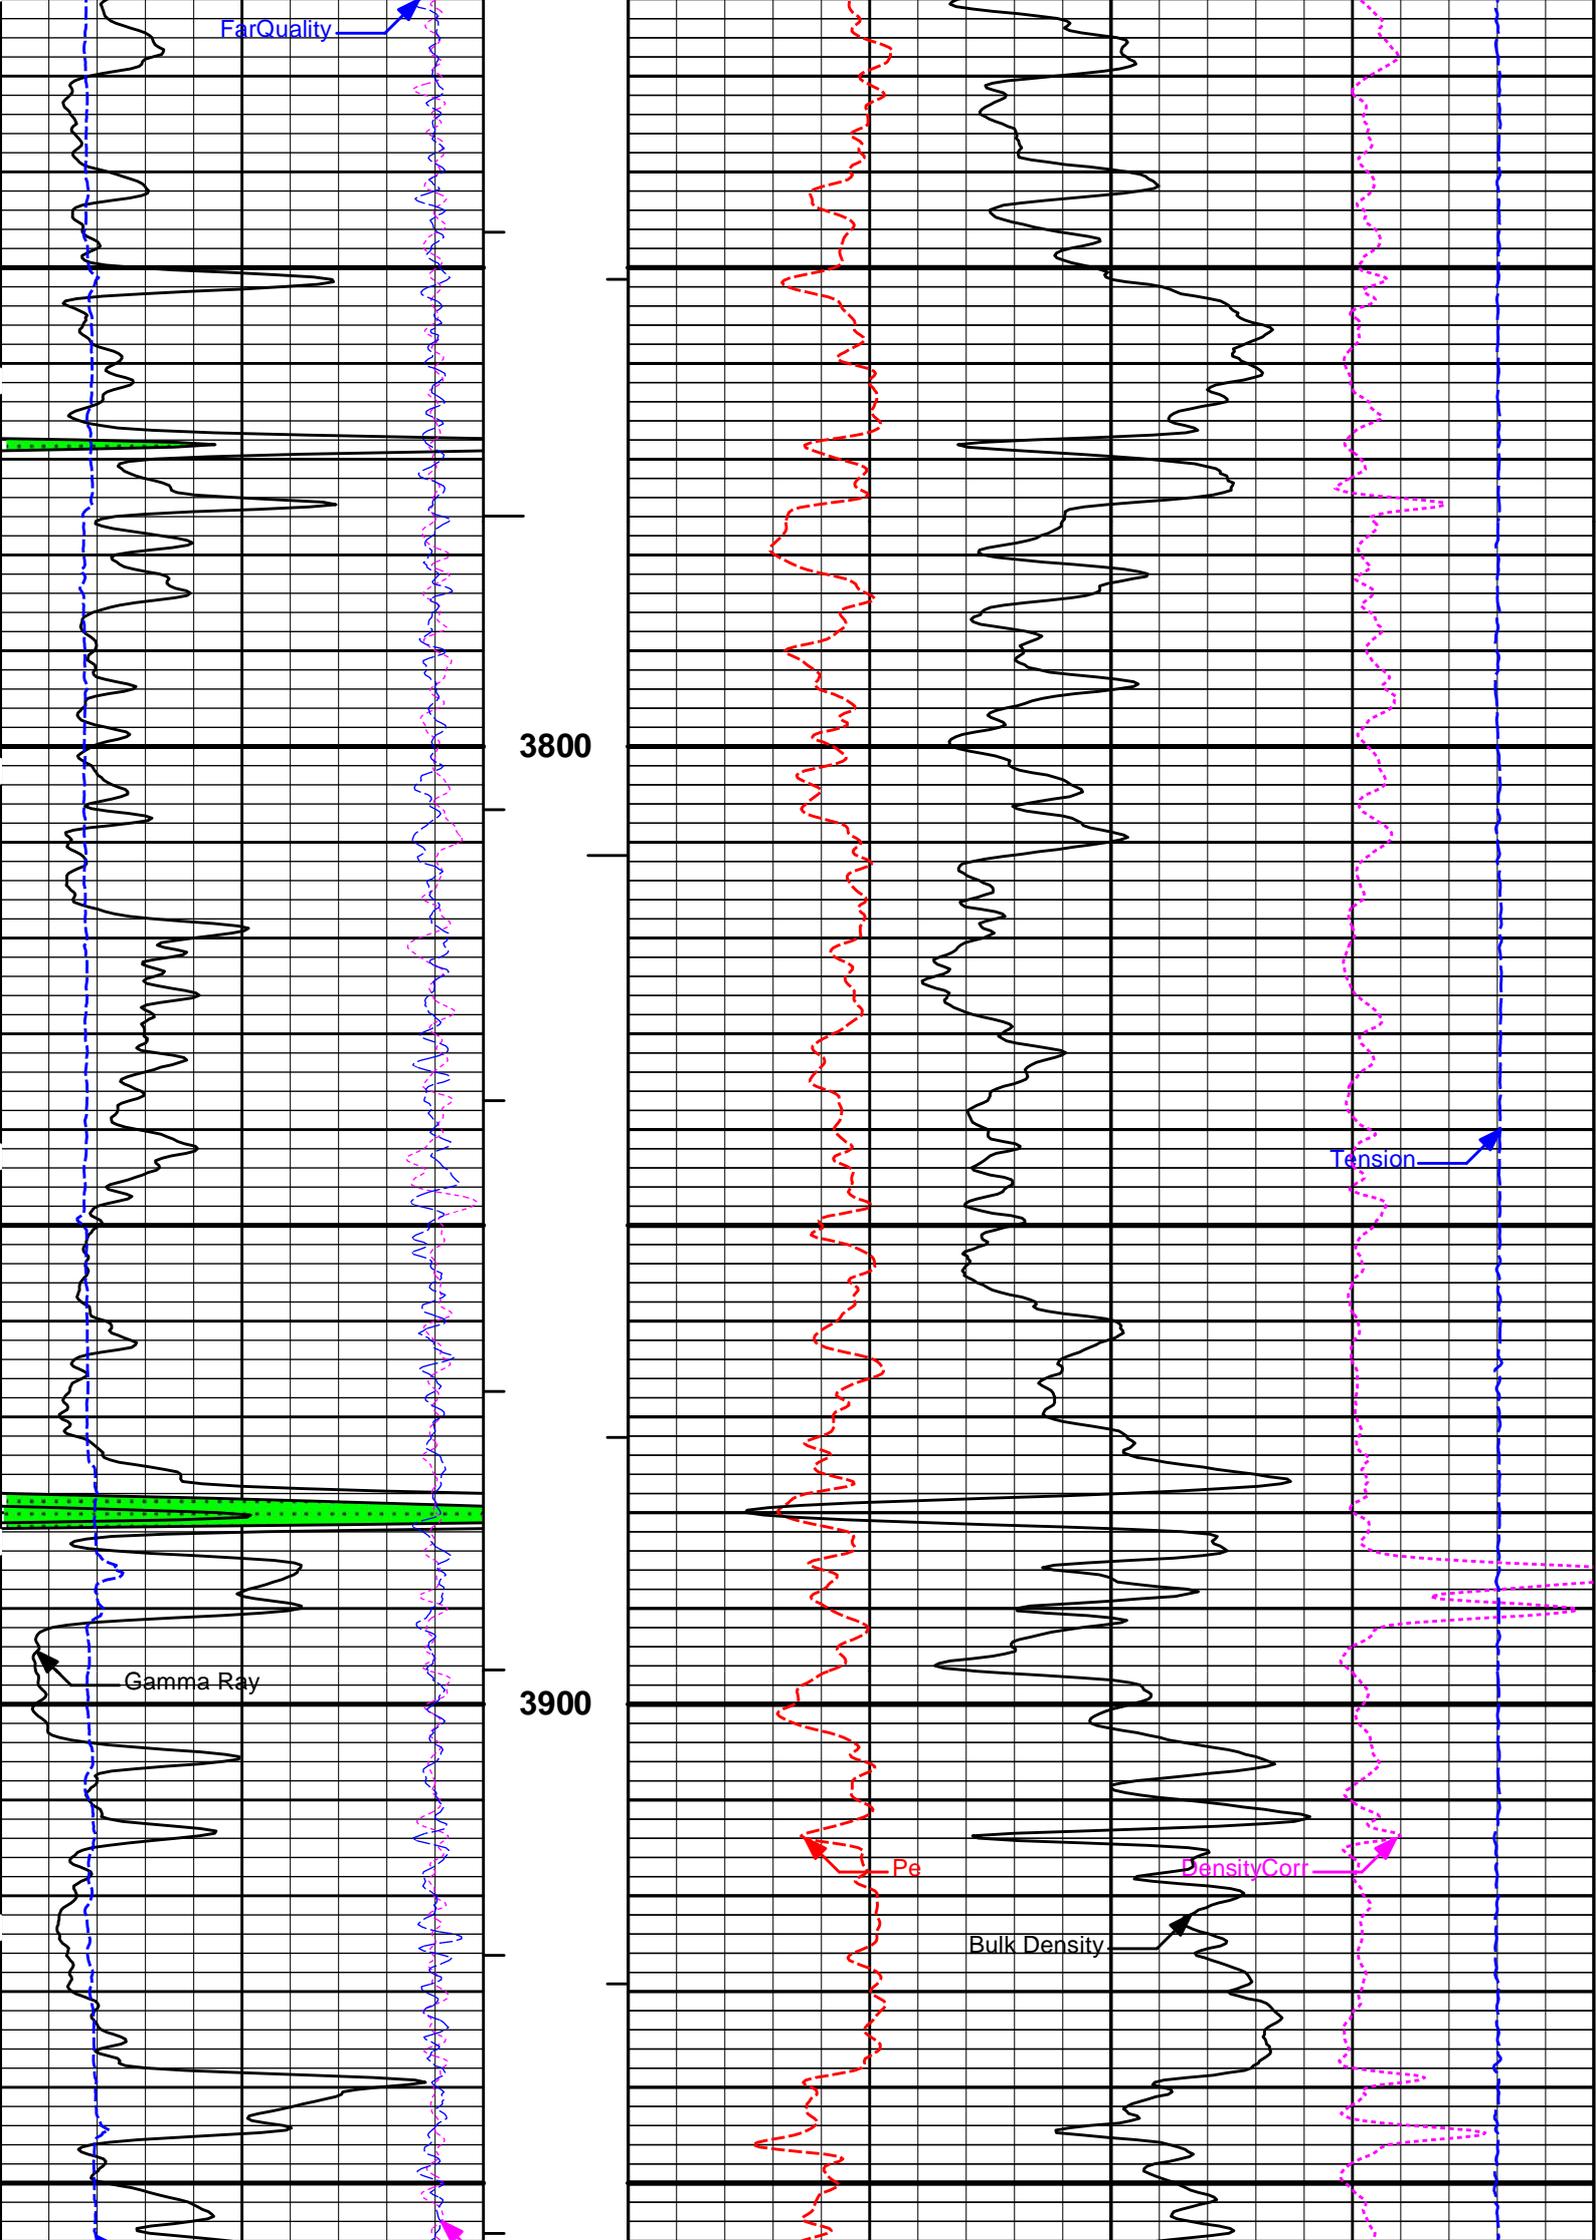


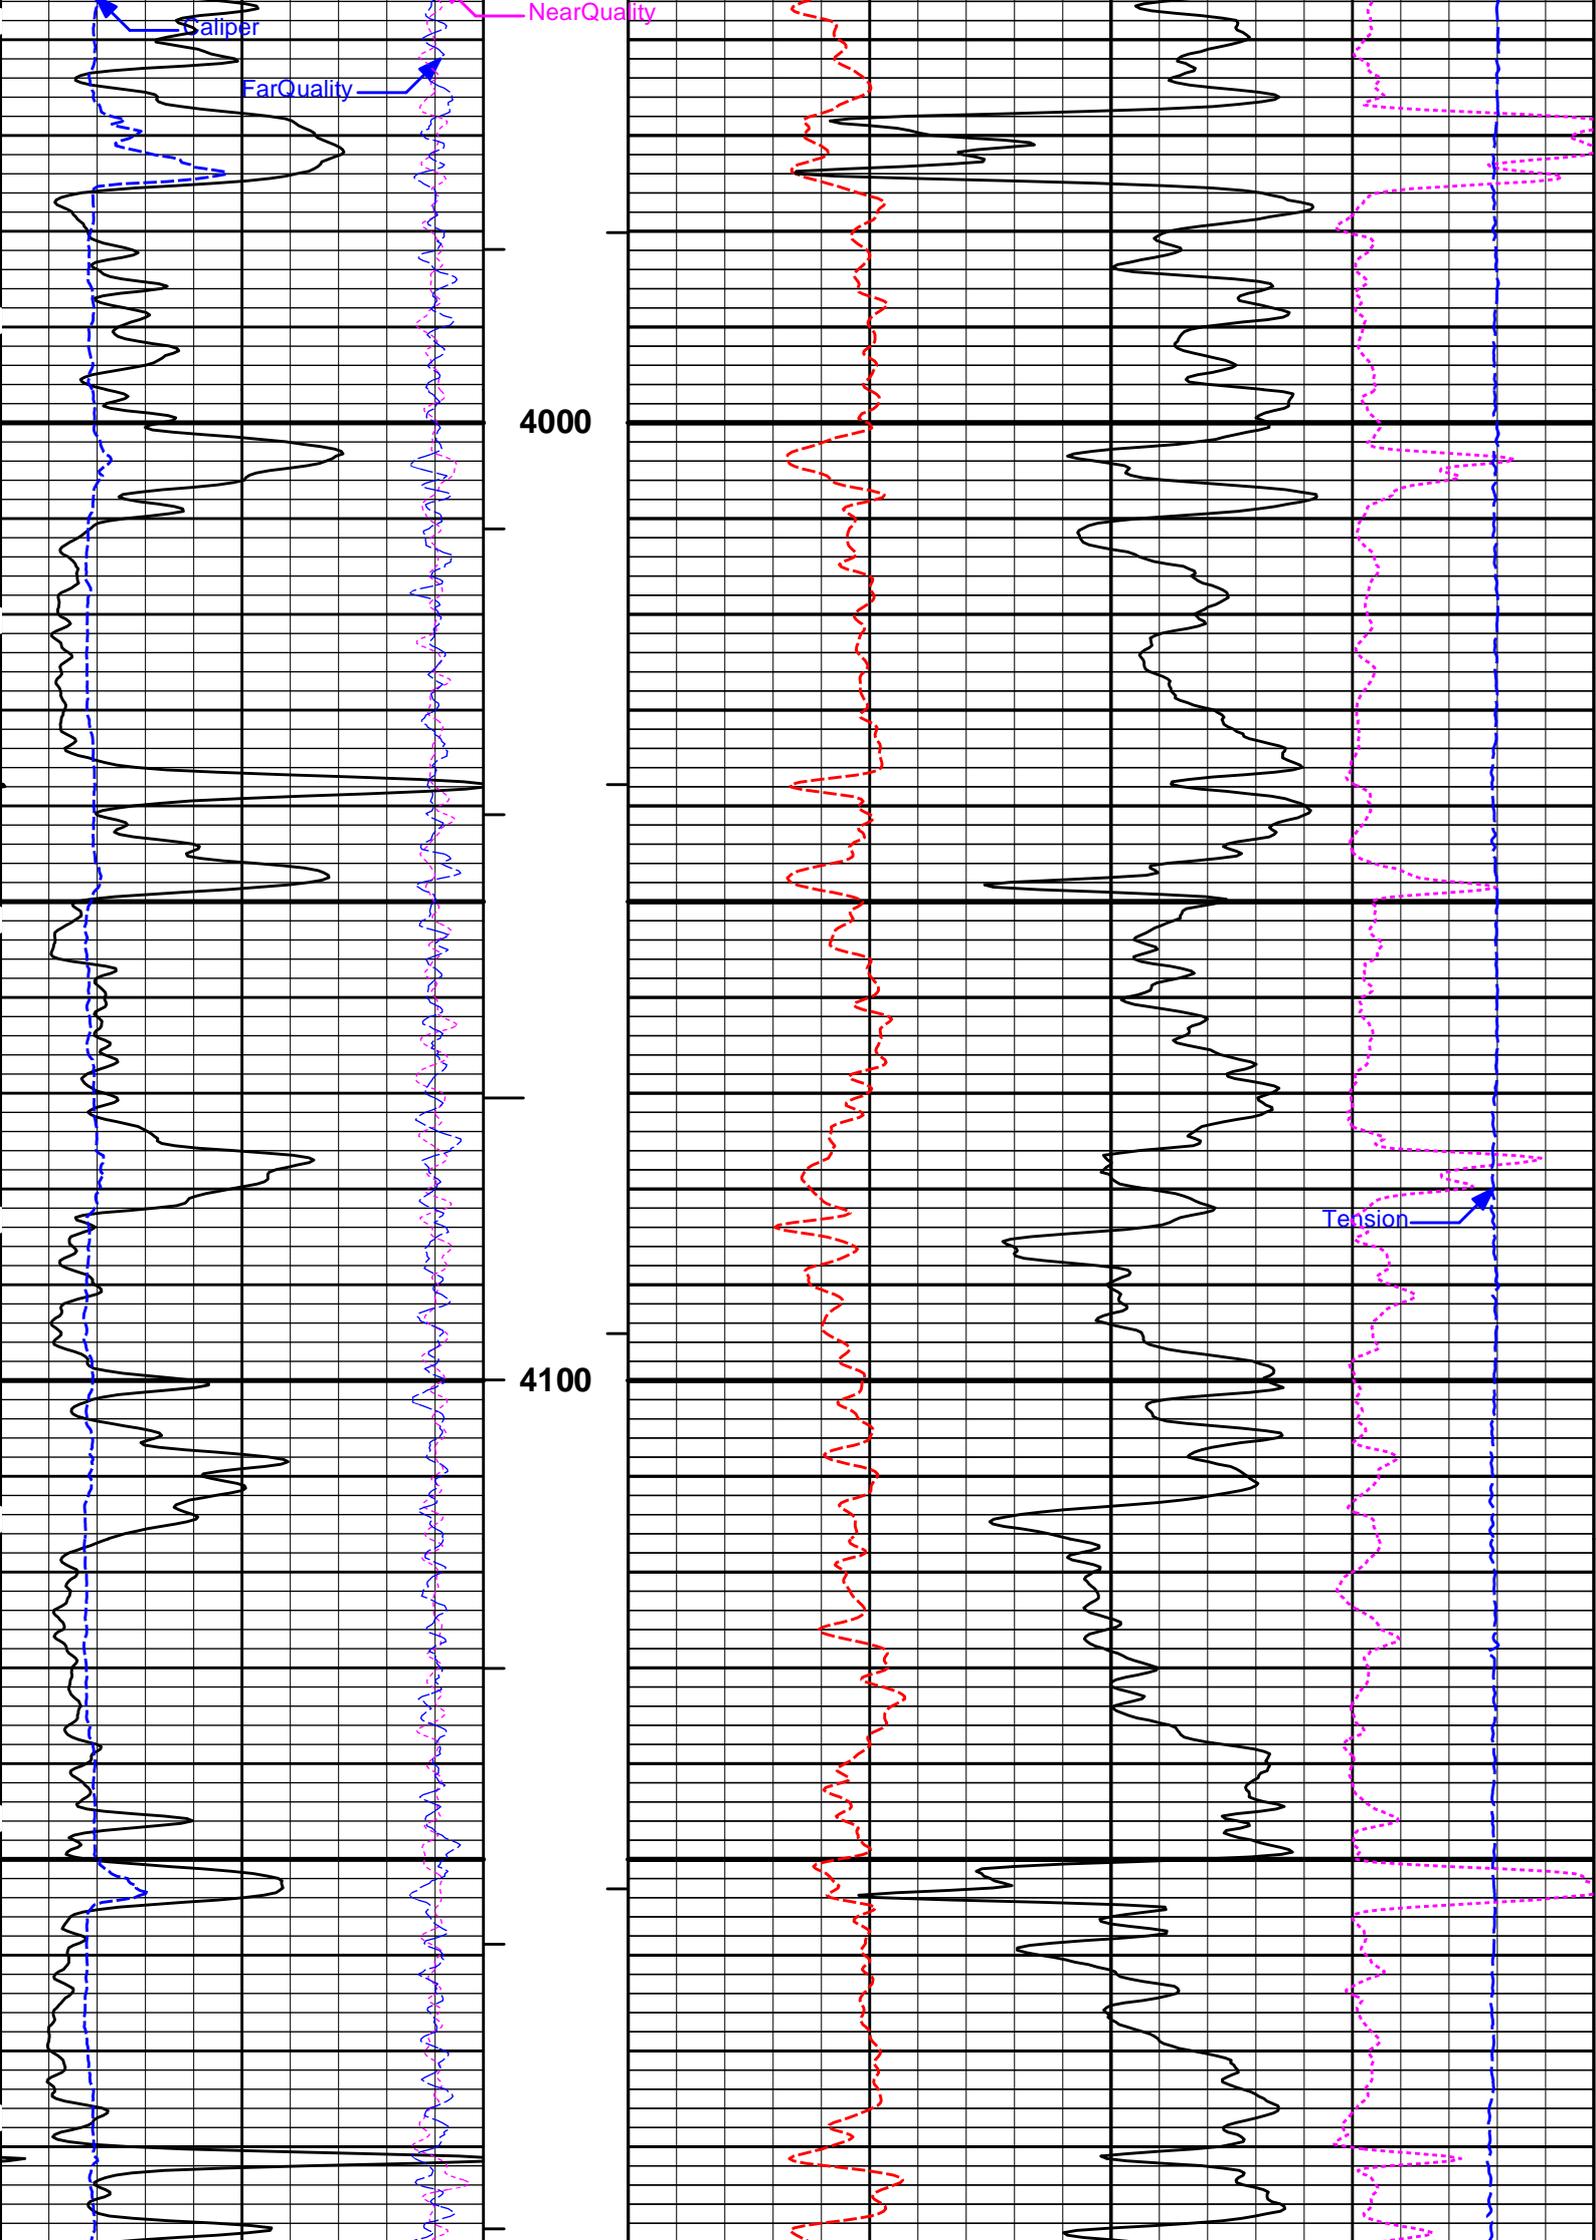

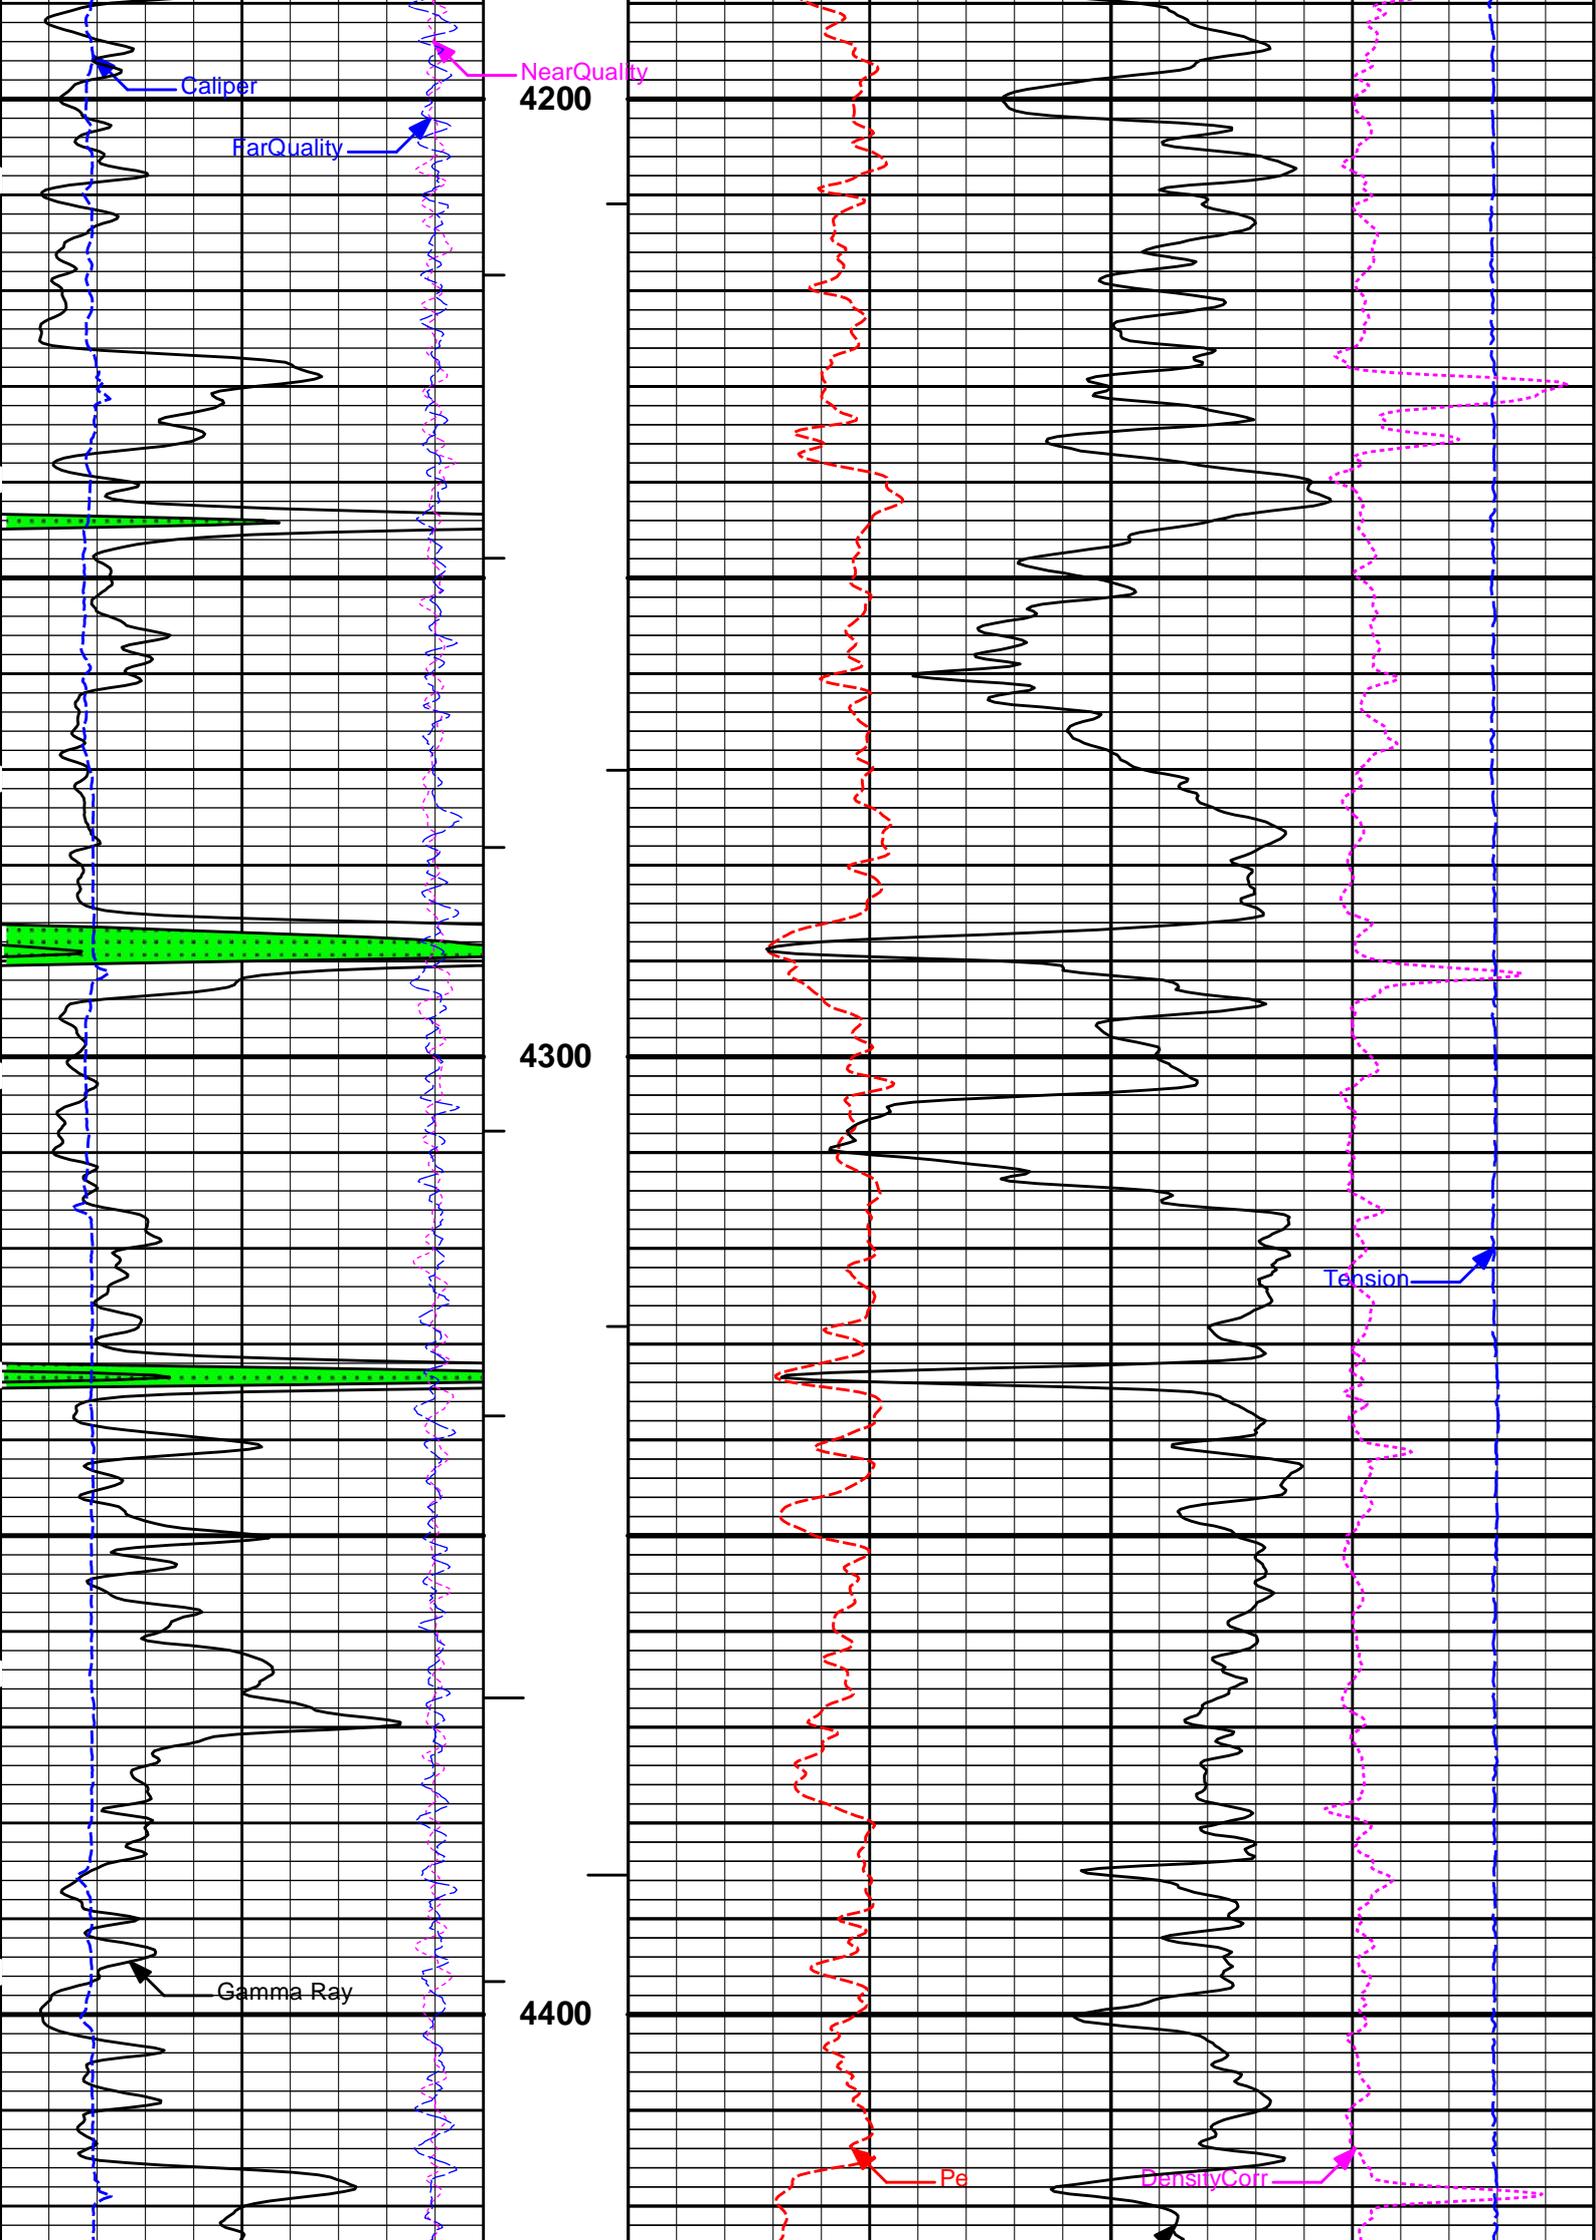

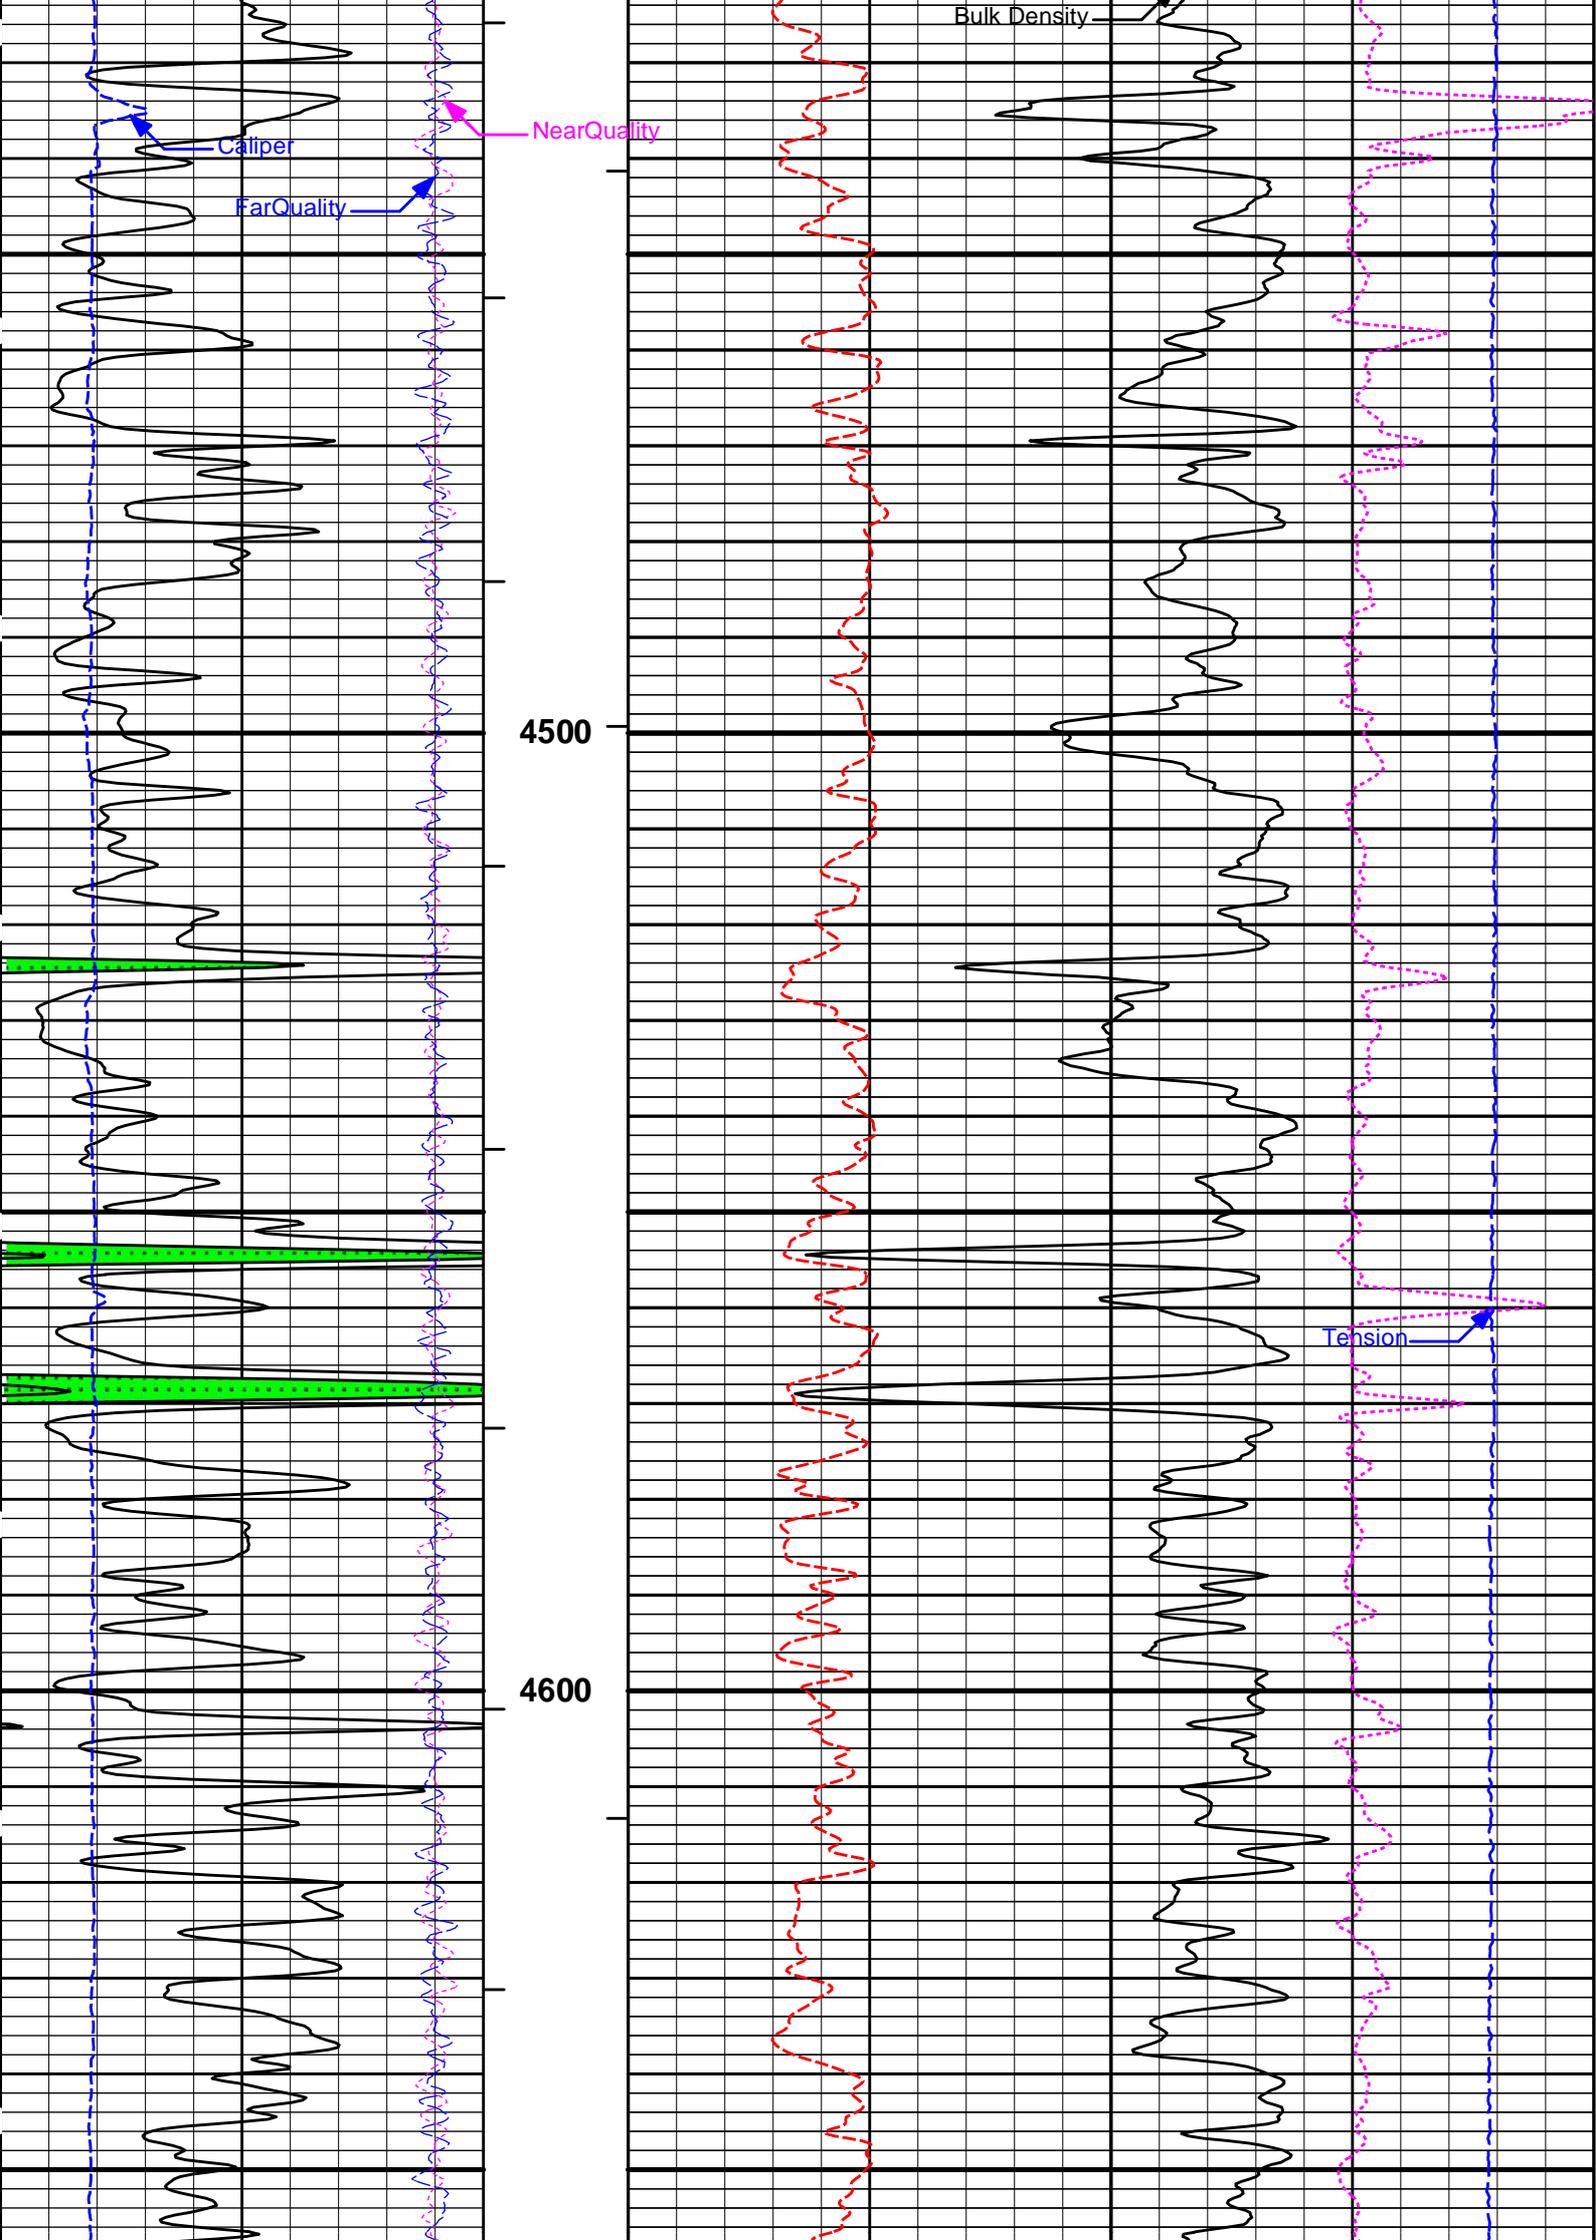

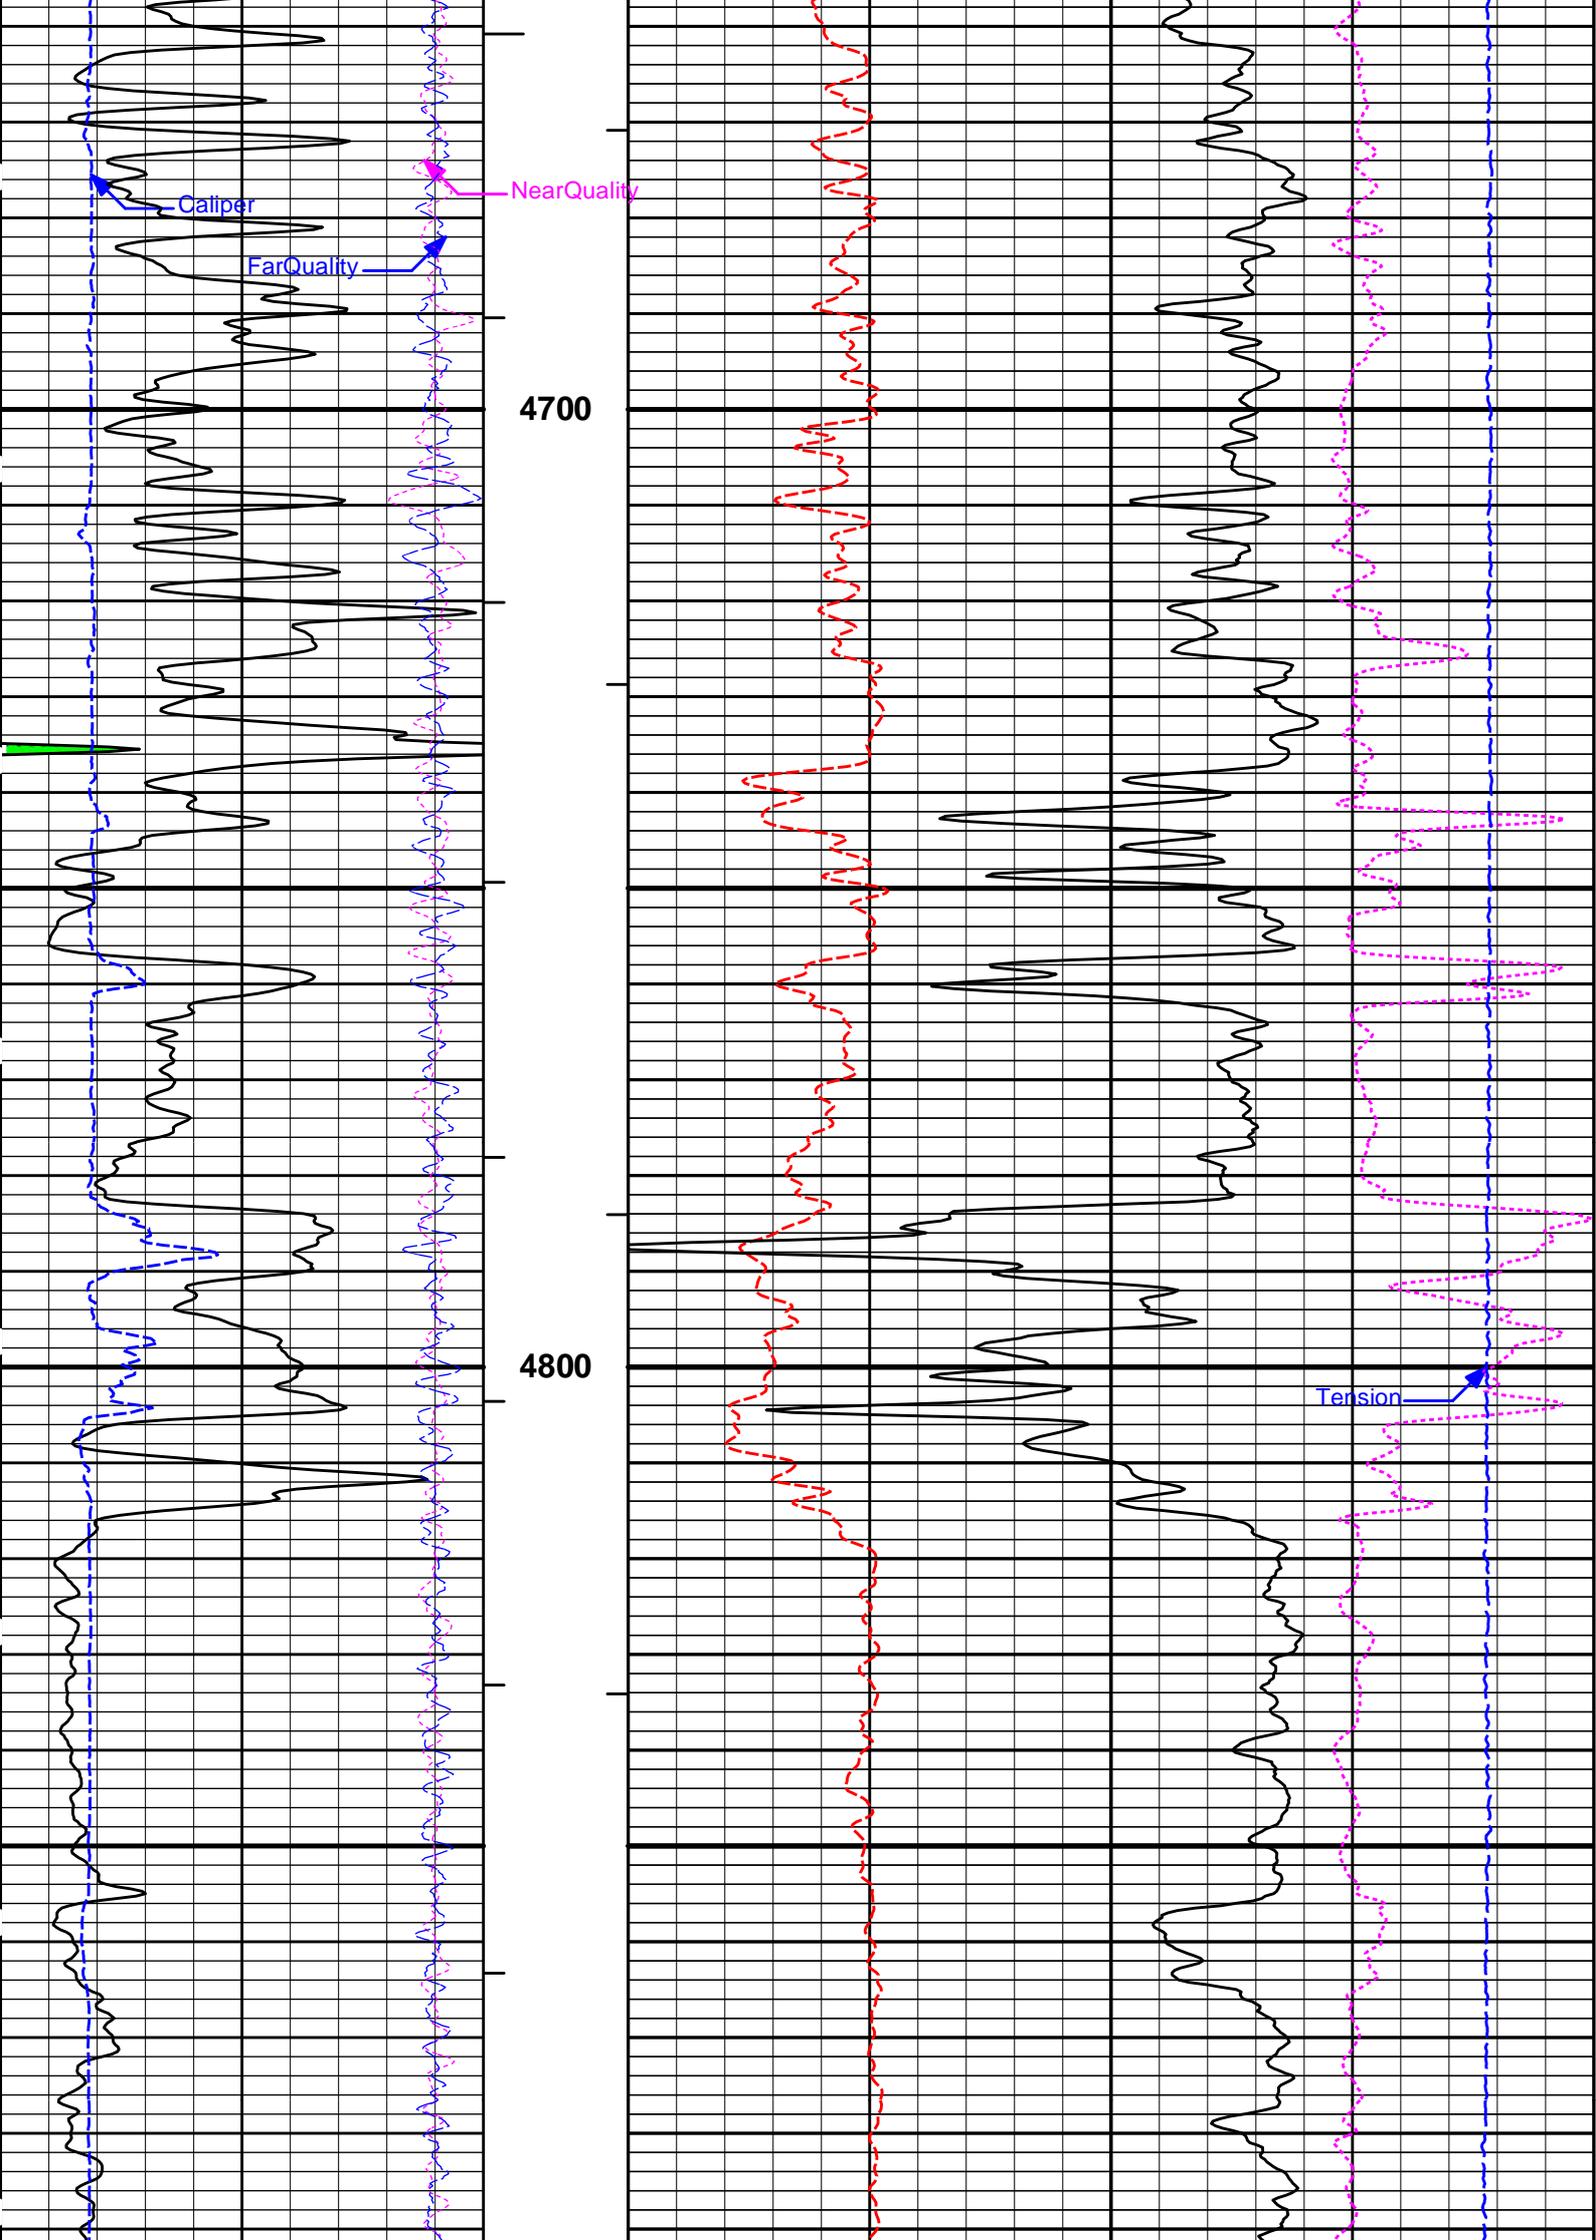

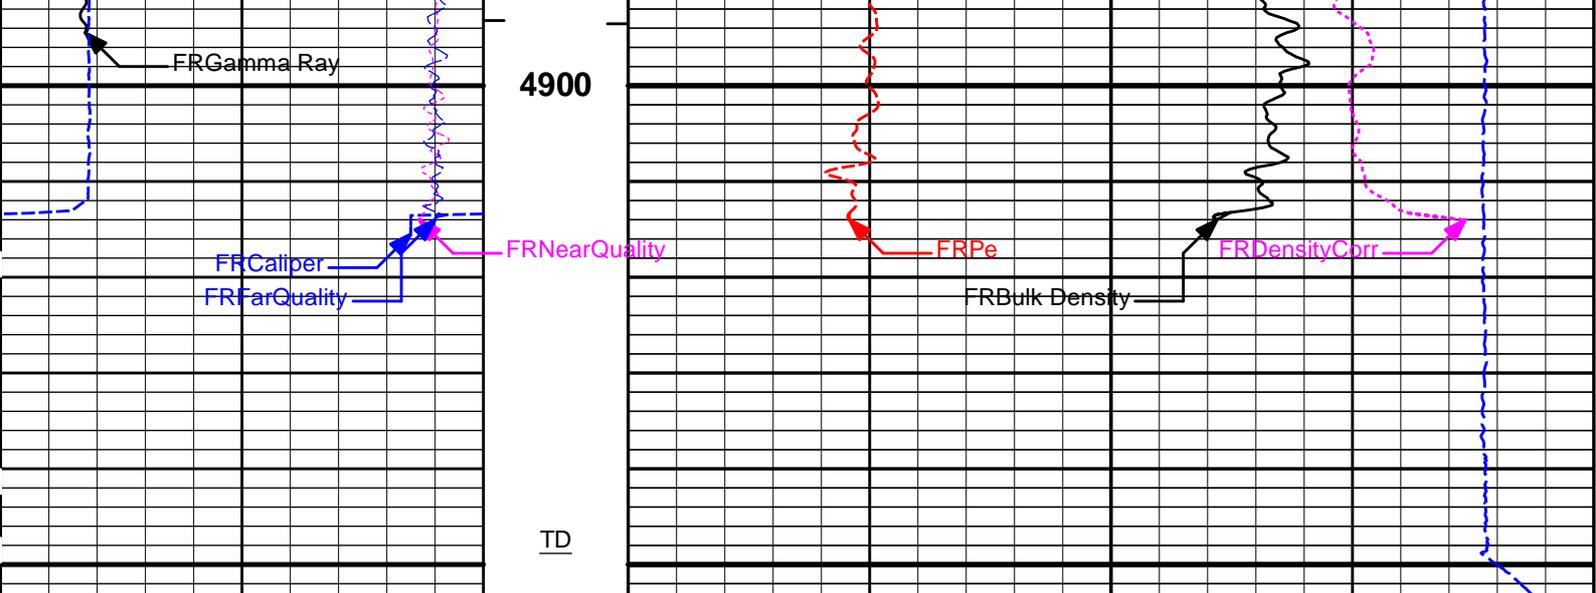

6	Caliper	16	1 : 240	0	Pe	10	-0.25	DensityCorr	0.25
	inches		ft					g/cc	
-18	NearQuality	2	BHV				15K	Tension	0
			ft3					pounds	
18	FarQuality	-2	AHV	2	Bulk Density				3
			ft3		g/cc				
0	Gamma Ray	150							
	api								

HALLIBURTON

Plot Time: 12-Aug-18 00:16:19
 Plot Range: 3480 ft to 4953.58 ft
 Data: MERIT_RIVERBND4\Well Based\DETAILS\
 Plot File: \\LOCAL-MERIT_RIVERBND4\Well Based\PORO\BULKD_5_MAIN

5 INCH MAIN LOG

MAIN SECTION 5" PER 100'


HALLIBURTON


Plot Time: 12-Aug-18 00:16:20
 Plot Range: 4680 ft to 4958.08 ft
 Data: MERIT_RIVERBND4\Well Based\REPEAT\
 Plot File: \\LOCAL-MERIT_RIVERBND4\Well Based\PORO\BULKD_5_REPEAT

5 INCH REPEAT LOG

REPEAT SECTION 5" PER 100'

0	Gamma Ray	150							
	api								
18	FarQuality	-2	AHV	2	Bulk Density				3
			ft3		g/cc				

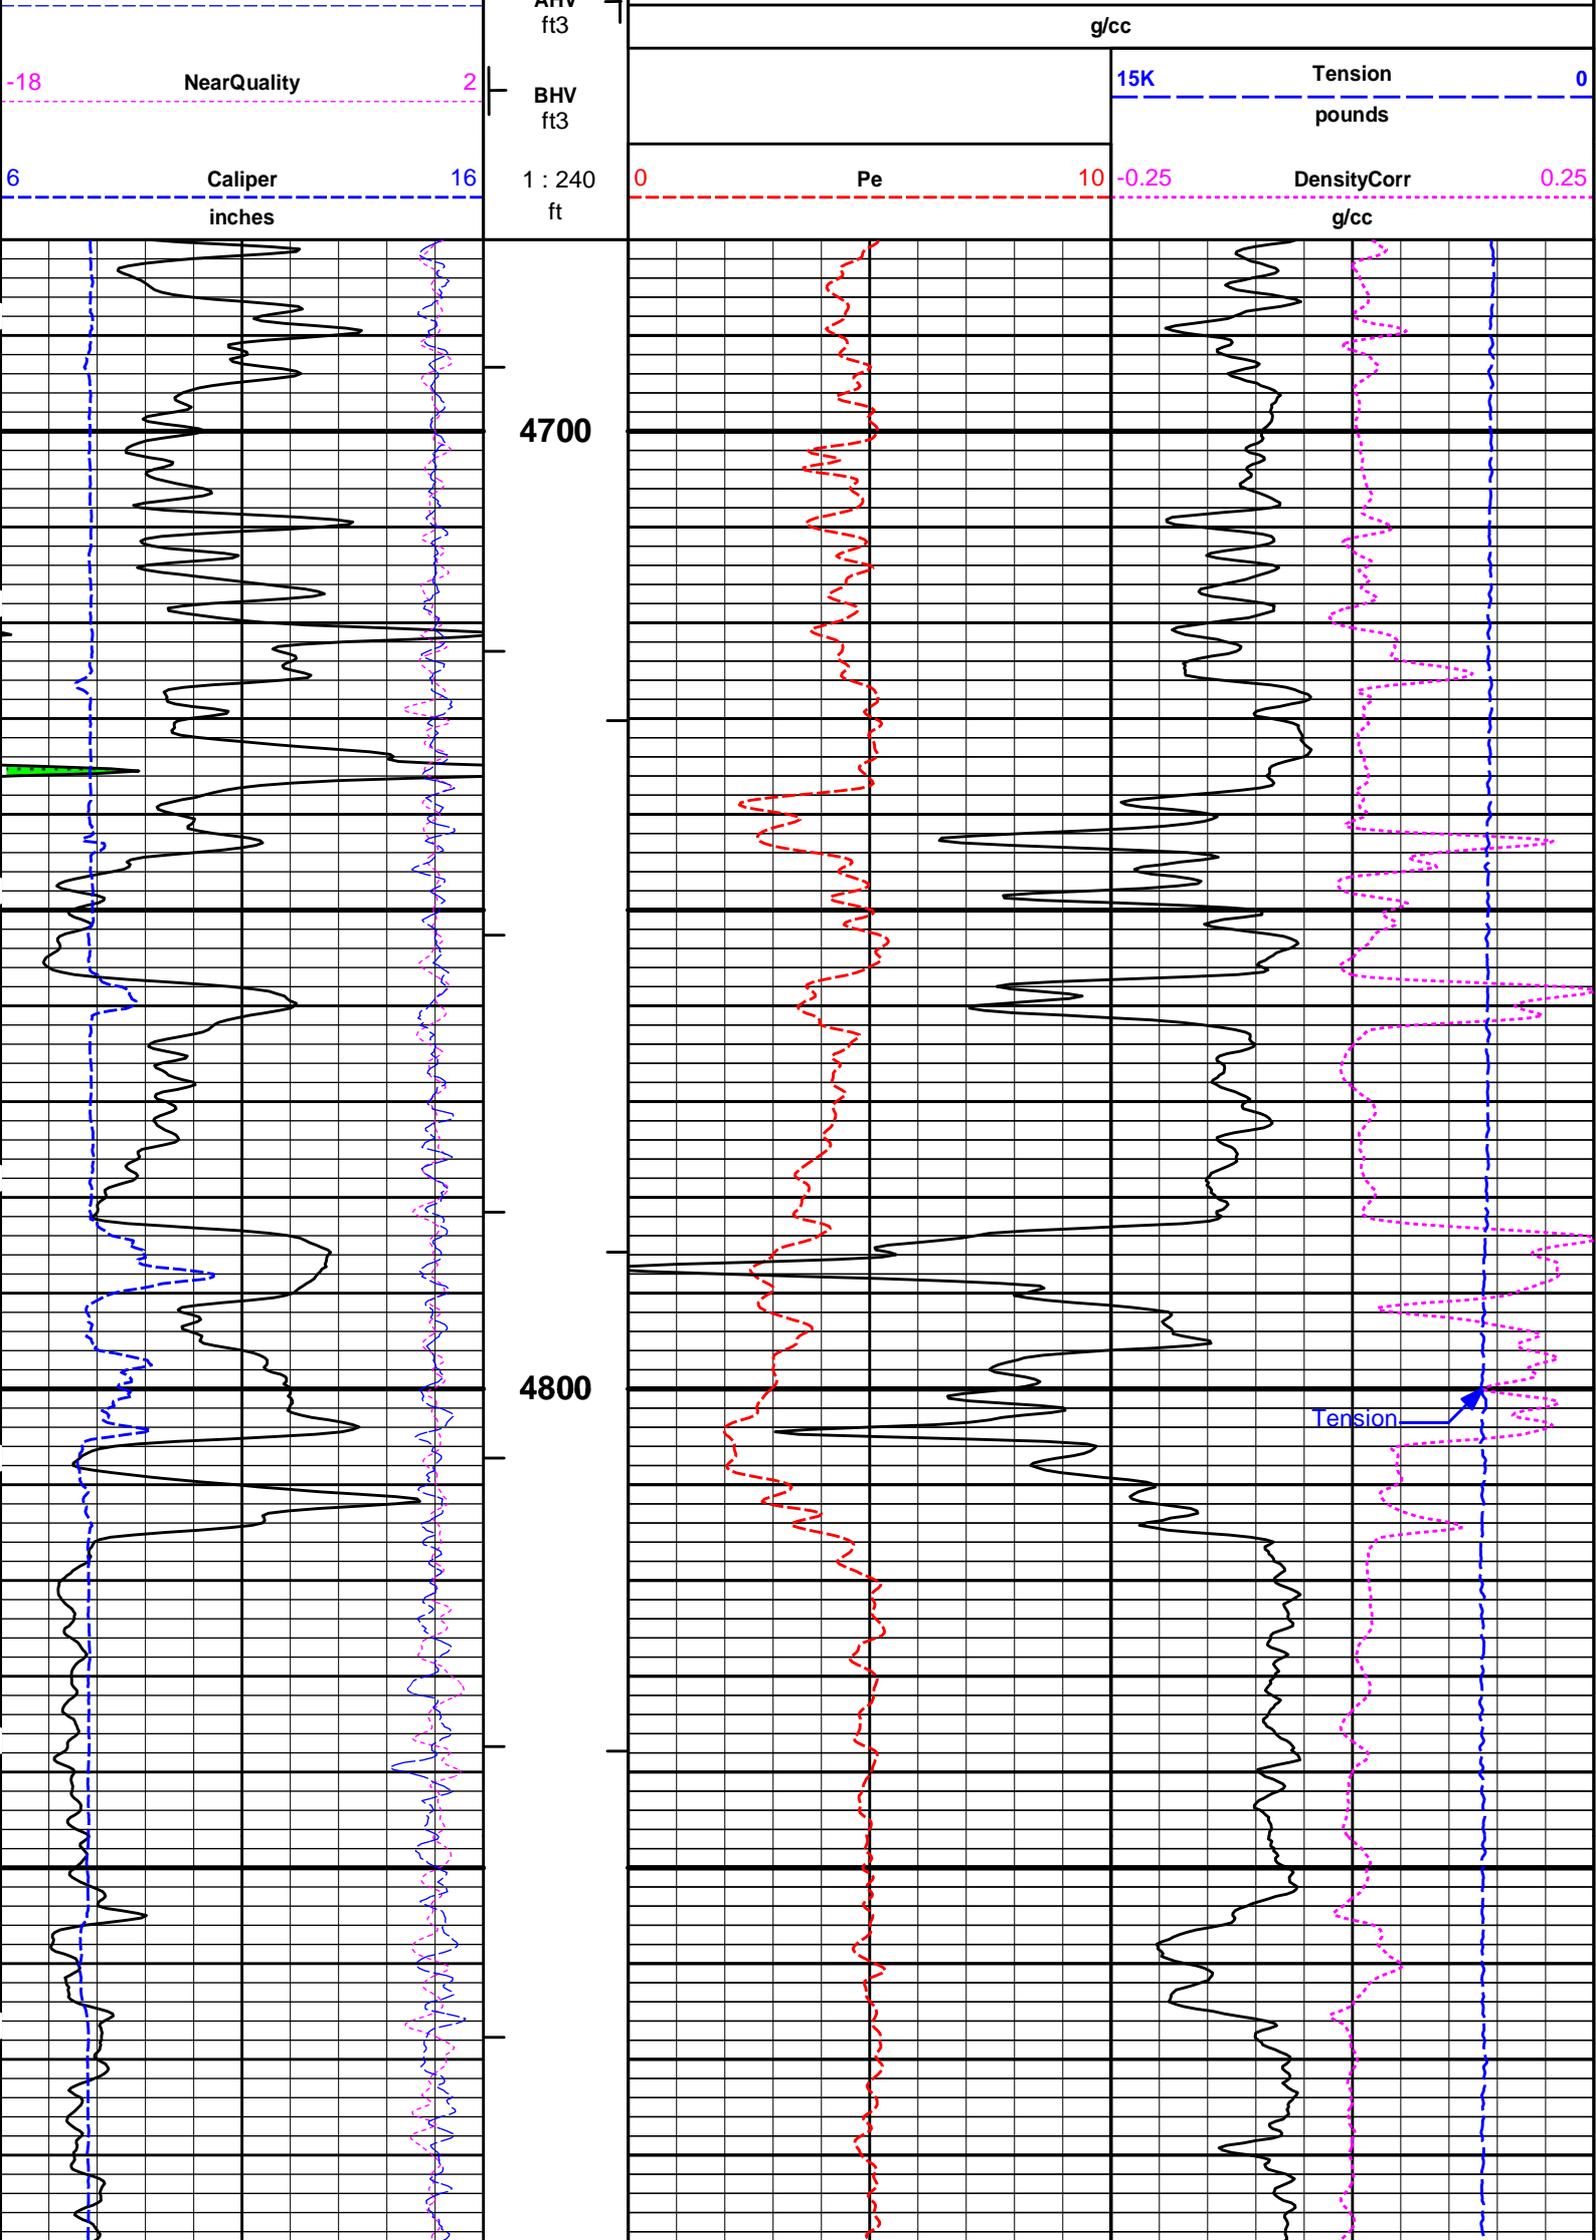

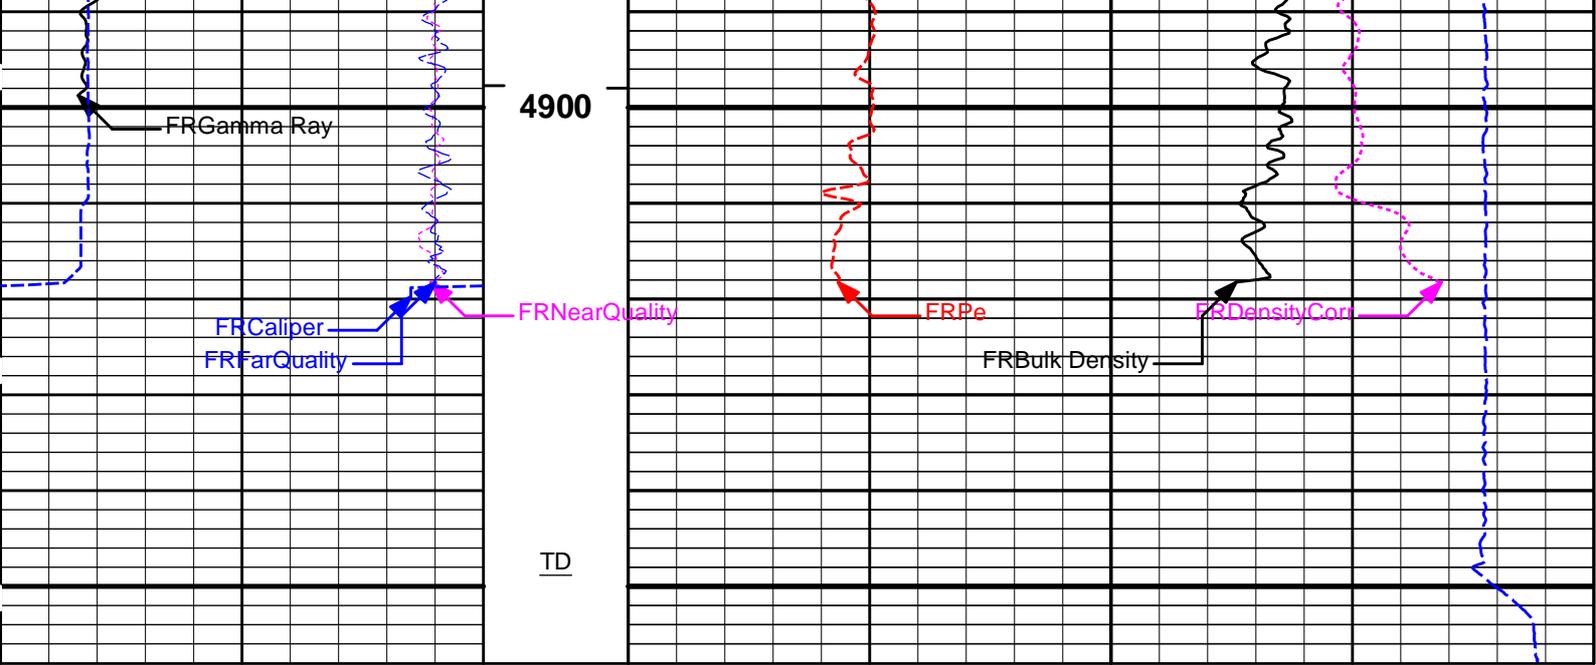

6	Caliper	16	1 : 240	0	Pe	10	-0.25	DensityCorr	0.25
	inches		ft					g/cc	
-18	NearQuality	2	BHV				15K	Tension	0
			ft3					pounds	
18	FarQuality	-2	AHV	2	Bulk Density				3
			ft3		g/cc				
0	Gamma Ray	150							
	api								

HALLIBURTON

Plot Time: 12-Aug-18 00:16:21
 Plot Range: 4680 ft to 4958.08 ft
 Data: MERIT_RIVERBND4\Well Based\REPEAT\
 Plot File: \\-LOCAL-MERIT_RIVERBND4\Well Based\PORO\BULKD_5_REPEAT

5 INCH REPEAT LOG

REPEAT SECTION 5" PER 100'

HALLIBURTON

PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.200	ppg
	SHARED	WAGT	Weighting Agent	Natural	
	SHARED	BSAL	Borehole salinity	0.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	2.000	ohmm

SHARED	TRM	Temperature of Mud	75.0	degF
SHARED	CSD	Logging Interval is Cased?	No	
SHARED	ICOD	AHV Casing OD	5.500	in
SHARED	CSTR	Compressive Strength	1000.00	psia
SHARED	ST	Surface Temperature	75.0	degF
SHARED	TD	Total Well Depth	4950.00	ft
SHARED	BHT	Bottom Hole Temperature	135.0	degF
SHARED	SVTM	Navigation and Survey Master Tool	NONE	
SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
SHARED	TEMM	CBM Temperature Master Tool	GTET	
SHARED	SOCI	Source of Casing Information	Parameters	
SHARED	MSAL	Water-base mud filtrate salinity	0.00	ppm
Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	
Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
Rwa / CrossPlot	BHSM	Borehole Size Source Tool	SDLT	
Rwa / CrossPlot	ROIN	Input for RO Calculation	Rwa	
GTET	GROK	Process Gamma Ray?	Yes	
GTET	GEOK	Process Gamma Ray EVR?	No	
GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
GTET	BHSM	Borehole Size Source Tool	SDLT	
DSNT	DNOK	Process DSN?	Yes	
DSNT	DEOK	Process DSN EVR?	No	
DSNT	NLIT	Neutron Lithology	Limestone	
DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
DSNT	DNTT	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
DSNT	UCLA	Classic Neutron Parameter utilized?	No	
DSNT	BHSM	Borehole Size Source Tool	SDLT	
SDLT	CLOK	Process Caliper Outputs?	Yes	
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
SDLT Pad	BHSM	Borehole Size Source Tool	SDLT	
BSAT	MBOK	Compute BCAS Results?	Yes	
BSAT	FLLO	Frequency Filter Low Pass Value?	5000	Hz
BSAT	FLHI	Frequency Filter High Pass Value?	27000	Hz
BSAT	DTFL	Delta -T Pore Fluid	189.00	uspf
BSAT	DTMT	Delta -T Matrix Type	Limestone 47.6	
BSAT	DTSH	Delta -T Shale	100.00	uspf
BSAT	SPEQ	Acoustic Porosity Equation	Wyllie	

ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Upr	
ACRt Sonde	TPOS	Tool Position	Eccentered	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMAX	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm
ACRt Sonde	BHSM	Borehole Size Source Tool	SDLT	
ACRt Sonde	MBFL	Apply Corkscrew Effect?	No	

BOTTOM

Data: MERIT_RIVERBND4\0001 GTET-DSNT-SDLT-BSAT-ACRT004 11-Aug-18 23:24 Up @4954.0f

Date: 11-Aug-18 23:45:32

HALLIBURTON

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name: GTET - 11013113

Reference Calibration Date: 02-May-18 11:20:36

Engineer: WHITLOCK

Calibration Date: 05-Aug-18 09:58:00

Software Version: WL INSITE R5.6.3 (Build 4)

Calibration Version: 1

Calibrator Source S/N: TB-79

Calibrator API Reference:222.00 api

Equivalent Calibrator API Reference:225.9 api

Measurement	Measured	Calibrated	Units
Background	26.4	26.2	api
Background + Calibrator	253.6	252.1	api
Calibrator	227.2	225.9	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION

Tool Name: GTET - 11013113

Reference Calibration Date: 05-Aug-18 09:58:00

Engineer: WHITLOCK

Calibration Date: 05-Aug-18 10:00:58

Software Version: WL INSITE R5.6.3 (Build 4)

Calibration Version: 1

Calibrator Source S/N: TB-79

Calibrator API Reference:222.00 api

Equivalent Calibrator API Reference:225.9 api

Field Verification	Shop	Field	Units
Background	26.2	26.1	api
Background + Calibrator	252.1	251.2	api
Calibrator	225.9	225.0	api

Shop	Field	Difference	Tolerance
225.9	225.0	0.9	+/- 9.00

DUAL SPACED NEUTRON SHOP CALIBRATION

Tool Name: DSNT - 11019641

Reference Calibration Date: 04-Aug-18 12:03:14

Engineer: SCHLIEM

Calibration Date: 04-Aug-18 12:26:27

Software Version: WL INSITE R5.6.3 (Build 4)

Calibration Version: 1

Logging Source S/N: DSN-436

Tank Serial Number: EL RENO HWT

Reference value assigned to Tank: 56.100

Snow Block S/N: 12156883

Calibration Tank Water Temperature: 89 degF

CALIBRATION CONSTANTS			
Measurement	Prev. Value	New Value	Control Limit On New Value
Gain:	0.97922	0.97742	0.900 - 1.100

WATER TANK SUMMARY (Horizontal Water Tank)				
Measurement	Current Reading (Previous Coef.)	Calibrated (New Coef.)	Change	Control Limit On Change
Porosity (decp):	0.2364	0.2358	0.0006	+/- 0.0020
Calibrated Ratio:	10.5794	10.5599	0.019	+/- 0.050

VERIFIER		
Measurement	Value	Control Limit
Snow-Block Porosity (decp):	0.0667	0.02000 - 0.09000

PASS/FAIL SUMMARY	
Background Check:	Passed
Gain-Range Check:	Passed
Snow-Block Check:	Passed

DUAL SPACED NEUTRON FIELD CALIBRATION			
Tool Name:	DSNT - 11019641	Reference Calibration Date:	04-Aug-18 12:26:27
Engineer:	WHITLOCK	Calibration Date:	05-Aug-18 09:45:13
Software Version:	WL INSITE R5.6.3 (Build 4)	Calibration Version:	1

Logging Source S/N: DSN-436
 Snow Block S/N: 12156883

NEUTRON FIELD-CHECK SUMMARY				
	Shop	Field	Difference	Control Limit On Change
Snow-Block Porosity (decp):	0.0667	0.0665	-0.0002	+/- 0.0150

PASS/FAIL SUMMARY	
Block Change Check:	Passed
Snow Block Stat Check:	Passed
Temperature Check:	Passed

DENSITY CALIPER SHOP CALIBRATION			
Tool Name:	SDLT - 10960494	Reference Calibration Date:	01-Jan-70 00:00:00
Engineer:	WHITLOCK	Calibration Date:	08-Jun-18 16:19:27
Software Version:	WL INSITE R5.6.3 (Build 4)	Calibration Version:	1
Host Tool Name:	DSNT - 11019641		

CALIBRATION COEFFICIENTS			
Measurement	Previous Value	New Value	Control Limit On New Value
Pad Offset	-3977.11	-3977.11	-7000.00 - -1000.00
Pad Gain	0.0003897	0.0003897	0.0002000 - 0.0006000
Arm Offset	-3073.13	-3073.13	-5000.00 - 3000.00
Arm Gain	0.0005210	0.0005210	0.000300 - 0.000700
Arm Power	-0.000005094	-0.000005094	-0.000010000 - 0.000010000

The ring diameter is computed from: $DIAMETER = PAD\ EXTENSION + ARM\ EXTENSION + TOOL\ DIAMETER$
 Tool Diameter: 4.50 in

CALIBRATION RINGS				
Measurement	Current Reading (Previous Coef.)	Calibrated (New Coef.)	Change	Control Limit On New Value

PAD EXTENSION:

Small Ring (in)	2.00	2.00	0.00	+/- 0.20
Medium Ring (in)	3.75	3.75	0.00	+/- 0.20

RING DIAMETER:

Small Ring (in)	6.50	6.50	0.00	+/- 0.20
Medium Ring (in)	8.25	8.25	0.00	+/- 0.20
Large Ring (in)	15.00	15.00	0.00	+/- 0.20

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check:	Passed
Ring-Measurement Check:	Passed

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check:	Passed
---------------------------------------	--------

SDLT CALIPER FIELD CALIBRATION

Tool Name: SDLT - 10960494	Reference Calibration Date: 08-Jun-18 16:19:27
Engineer: WHITLOCK	Calibration Date: 05-Aug-18 09:46:30
Software Version: WL INSITE R5.6.3 (Build 4)	Calibration Version: 1

MEASURED CALIPER VALUES

Measurement	Shop	Field	Change	Control Limit On New Value
Pad Extension	3.75	3.79	0.04	+/- 0.10
Ring Diameter	8.25	8.25	-0.00	+/- 0.15

PASS/FAIL SUMMARY

Pad Extension Check:	Passed
Diameter Check:	Passed

MICRO LOG SHOP CALIBRATION

Tool Name: Microlog Pad - 10960494	Reference Calibration Date: 01-Jan-70 00:00:00
Engineer: WHITLOCK	Calibration Date: 08-Jun-18 16:08:54
Software Version: WL INSITE R5.6.3 (Build 4)	Calibration Version: 1
Host Tool Name: DSNT - 11019641	

CALIBRATION COEFFICIENT SUMMARY

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Measured	Calibrated	Measured	Calibrated	
Tool Zero	-0.07	-0.07	-0.01	-0.01	ohmm
Calibration Point #1	0.00	0.00	0.00	0.00	ohmm
Calibration Point #2	20.00	20.00	20.00	20.00	ohmm
Internal Reference	19.92	19.92	19.98	19.98	ohmm

Measurement	Micro Log Normal Tool Value	Micro Log Lateral Tool Value	Units
Tool Zero	-0.11	0.18	V
Calibration Point #1	18.42	2.03	V
Calibration Point #2	5354.08	6974.83	V
Internal Reference	5331.77	6967.38	V

MICRO LOG FIELD CHECK

Tool Name: Microlog Pad - 10960494	Reference Calibration Date: 08-Jun-18 16:08:54
Engineer: WHITLOCK	Calibration Date: 05-Aug-18 09:54:07
Software Version: WL INSITE R5.6.3 (Build 4)	Calibration Version: 1

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Shop	Field	Shop	Field	
Tool Zero	-0.07	-0.07	-0.01	-0.00	ohmm

Internal Reference 19.92 19.89 19.98 19.95 ohmm

Summary				
Signal	Shop	Field	Difference	Tolerance
Microlog Normal	19.92	19.89	0.03	+/- 0.80
Microlog Lateral	19.98	19.95	0.03	+/- 0.80

SPECTRAL DENSITY SHOP CALIBRATION

Tool Name: SDLT Pad - 11213308	Reference Calibration Date: 08-Jun-18 10:39:59
Engineer: WHITLOCK	Calibration Date: 08-Jun-18 11:01:29
Software Version: WL INSITE R5.6.3 (Build 4)	Calibration Version: 1

Logging Source S/N: 5475GW		
Aluminum Block S/N: EL RENO	Density: 2.581g/cc	Pe: 3.170
Magnesium Block S/N: EL RENO	Density: 1.687g/cc	Pe: 2.594

DENSITY CALIBRATION SUMMARY				
Measurement	Previous Value	New Value	Control Limit	
Near Bar Gain	1.0041	1.0112	0.90 - 1.10	
Near Dens Gain	0.9869	0.9898	0.90 - 1.10	
Near Peak Gain	0.9943	0.9998	0.90 - 1.10	
Near Lith Gain	1.0181	1.0093	0.90 - 1.10	
Far Bar Gain	1.0040	1.0066	0.90 - 1.10	
Far Dens Gain	0.9932	0.9944	0.90 - 1.10	
Far Peak Gain	0.9916	0.9923	0.90 - 1.10	
Far Lith Gain	0.9744	0.9710	0.90 - 1.10	
Near Bar Offset	0.0934	0.0300	NONE	
Near Dens Offset	0.2485	0.2218	NONE	
Near Peak Offset	0.1593	0.1112	NONE	
Near Lith Offset	-0.0690	0.0007	NONE	
Far Bar Offset	0.0165	-0.0022	NONE	
Far Dens Offset	0.1281	0.1192	NONE	
Far Peak Offset	0.1238	0.1182	NONE	
Far Lith Offset	0.2190	0.2467	NONE	
Near Bar Background	955.07	955.02	700 - 1450	
Near Dens Background	316.53	316.75	230 - 480	
Near Peak Background	138.87	138.74	100 - 210	
Near Lith Background	168.67	169.41	125 - 260	
Far Bar Background	482.41	482.24	450 - 900	
Far Dens Background	194.46	191.91	175 - 345	
Far Peak Background	77.48	77.25	70 - 140	
Far Lith Background	79.35	80.04	75 - 145	

CALIBRATION BLOCK SUMMARY				
Measurement	Current Reading (Previous Coef)	Calibrated (New Coef)	Change	Control Limit On Change
MAGNESIUM				
Density (g/cc)	1.688	1.687	-0.001	+/- 0.015
Pe	2.517	2.559	0.042	+/- 0.150
ALUMINUM				
Density (g/cc)	2.582	2.581	-0.001	+/- 0.01500
Pe	3.106	3.132	0.026	+/- 0.150

TOOL SUMMARY				
Measurement	Near Detector		Far Detector	
	Value	Control Limits	Value	Control Limits

QUALITY				
Background	0.0017	+/- 0.0110	0.0006	+/- 0.0140
Magnesium Block	-0.0008	+/- 0.0110	-0.0008	+/- 0.0140
Aluminum Block	-0.0005	+/- 0.0110	-0.0001	+/- 0.0140
Resolution	9.21	6.00 - 11.50	9.21	6.00 - 11.50
Internal Verifier(B+D+P+L)	1580	1200 - 2700	831	800 - 1700

PASS/FAIL SUMMARY	
Background Quality Check:	Passed
Background Range Check:	Passed
Background Resolution Check:	Passed
Background Verification Check:	Passed
Magnesium Quality Check:	Passed
Aluminum Quality Check:	Passed
Gains Check:	Passed
Changes in Calibration Blocks:	Passed

SPECTRAL DENSITY FIELD CHECK

Tool Name: SDLT Pad - 11213308	Reference Calibration Date: 08-Jun-18 11:01:29
Engineer: WHITLOCK	Calibration Date: 05-Aug-18 09:57:45
Software Version: WL INSITE R5.6.3 (Build 4)	Calibration Version: 1

Pad Temperature: 89.3 degF

DENSITY FIELD CALIBRATION SUMMARY				
Measurement	Shop	Field	Change	Control Limit +/-
Near (B+D+P+L) cps	1579.927	1575.636	-4.291	15.990
Far (B+D+P+L) cps	831.441	827.695	-3.746	15.874
Near Resolution	9.21	9.13	-0.080	0.50
Far Resolution	9.21	9.31	0.100	1.00

PASS/FAIL SUMMARY	
Bkg Quality Check:	Passed
Bkg Resolution Check:	Passed
Bkg Verification Check:	Passed

ARRAY COMPENSATED TRUE RESISTIVITY SHOP CALIBRATION

Tool Name: ACRt Sonde - 11830728	Reference Calibration Date: 23-Feb-18 10:15:37
Engineer: WHITLOCK	Calibration Date: 06-Jun-18 13:24:46
Software Version: WL INSITE R5.6.3 (Build 4)	Calibration Version: 1
Host Tool Name: ACRt Instrument - 11830684	

TYPICAL GAIN RANGE									
Subarray	R12KHz			R36KHz			R72KHz		
	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper
A1 (80")	0.95	1.0279	1.05	0.95	1.0076	1.05	0.95	0.9997	1.05
A2 (50")	0.95	1.0334	1.05	0.95	1.0139	1.05	0.95	1.0097	1.05
A3 (29")	0.95	1.0346	1.05	0.95	1.0146	1.05	0.95	1.0081	1.05
A4 (17")	0.95	1.0279	1.05	0.95	1.0063	1.05	0.95	1.0018	1.05
A5 (10")	N/A	N/A	N/A	0.95	1.0001	1.05	0.95	0.9950	1.05
A6 (6")	N/A	N/A	N/A	0.95	0.9869	1.05	0.95	0.9818	1.05

SONDE OFFSET				
Subarray	R12KHz		R36KHz	
	(mmho/m)		(mmho/m)	
A1 (80")	0.315		-4.964	
			-5.711	

A2 (50")	0.409	-3.450	-5.485
A3 (29")	-11.648	-3.720	-3.783
A4 (17")	-90.980	-28.724	-23.707
A5 (10")	N/A	-76.200	-37.537
A6 (6")	N/A	280.488	149.005

TRANSMITTER CURRENT GAIN			
Signal	Lower	R	Upper
12K	0.6	0.82	1.3
36K	1.0	1.80	2.0
72K	1.0	1.05	2.0

R-MUD VERIFICATION			
Signal	Lower (ohm-m)	Measured (ohm-m)	Upper (ohm-m)
Mud Cell	0.95	0.99	1.05

PASS/FAIL SUMMARY	
GAIN RANGE CHK	PASS
SONDE OFFSET CHK	PASS

TOOL OK TO LOG

CALIBRATION SUMMARY


Sensor	Shop	Field	Post	Difference	Tolerance	Units
GTET-11013113						
Gamma Ray Calibrator	225.9	225.0	-----	0.9	+/- 9.00	api
DSNT-11019641						
Snow-Block Porosity	0.0667	0.0665	-----	0.0002	+/- 0.0150	decp
SDLT-10960494						
Pad Extension	3.75	3.79	-----	-0.04	+/-0.10	in
Ring Diameter	8.25	8.25	-----	0.00	+/-0.15	in
Microlog Pad-10960494						
MicroLog Normal	19.92	19.89	-----	0.03	+/-0.80	ohmm
MicroLog Lateral	19.98	19.95	-----	0.03	+/-0.80	ohmm
SDLT Pad-11213308						
Near(B+D+P+L)	1579.927	1575.636	-----	4.291	+/-15.990	cps
Far(B+D+P+L)	831.441	827.695	-----	3.746	+/-15.874	cps
ACRt Sonde-11830728						
Mud Cell	0.99	-----	-----	0	-----	ohm-m

Data: MERIT_RIVERBND4\0001 GTET-DSNT-SDLT-BSAT-ACRTIDLE

Date: 11-Aug-18 22:35:44



TOOL STRING DIAGRAM REPORT

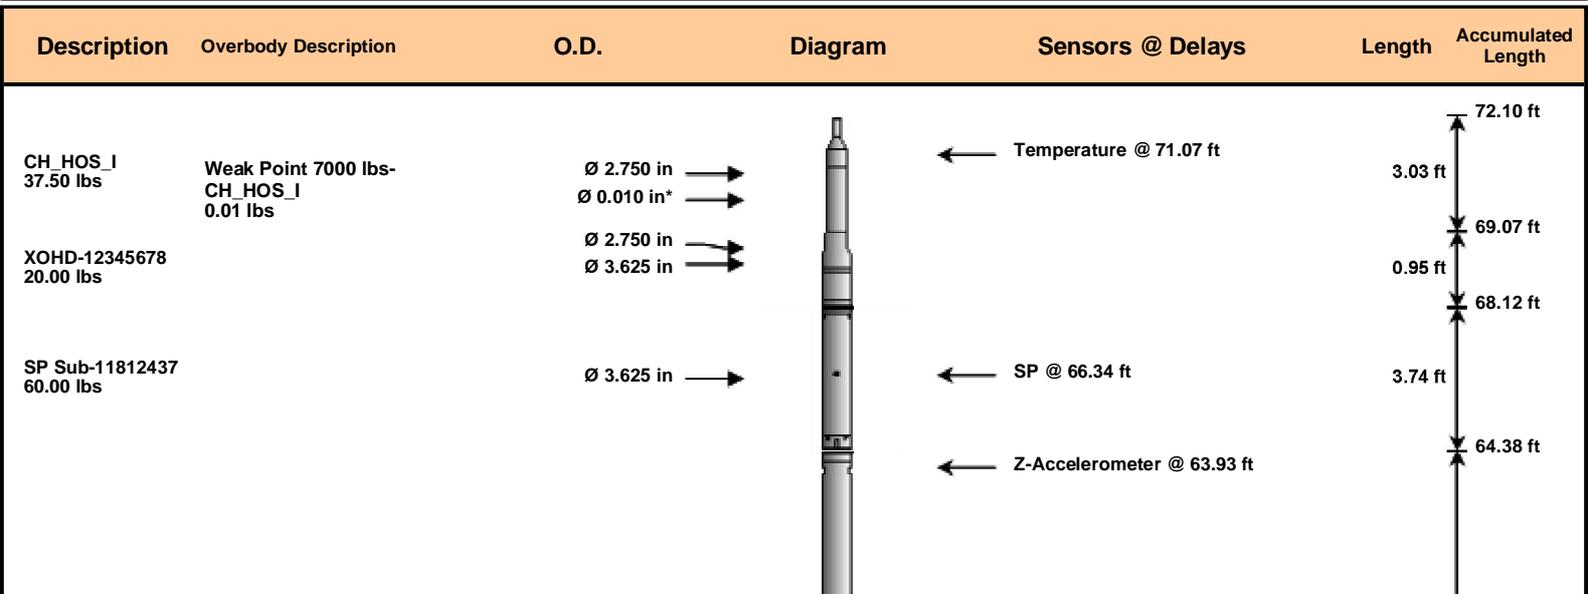

GTET-11013113
165.00 lbs

Ø 3.625 in →

8.52 ft

← GammaRay @ 58.32 ft

55.86 ft

DSNT-11019641
174.00 lbs

DSN Decentralizer-
11019641
6.60 lbs

Ø 5.000 in* →

Ø 3.625 in →

9.69 ft

← DSN Far @ 48.92 ft

← DSN Near @ 48.17 ft

46.17 ft

SDLT-10960494
360.00 lbs

SDLT Pad-11213308
65.00 lbs
Microlog Pad-10960494
8.00 lbs

RAM-Cs137-00005475
1.00 lbs

Ø 4.500 in →

Ø 4.500 in* →

Ø 4.750 in* →

Ø 0.800 in* →

10.81 ft

Microlog @ 38.36 ft

SDL Caliper @ 38.17 ft

SDL @ 38.16 ft

35.36 ft

BSAT-12173982
300.00 lbs

Ø 3.625 in →

15.77 ft

Receiver Array @ 26.84 ft
Sonic Receivers @ 26.84 ft

19.58 ft

ACRt Instrument-
11830684
50.00 lbs

Ø 3.625 in →

5.03 ft

← Mud Resistivity @ 13.19 ft

14.55 ft

ACRt Sonde-
11830728
200.00 lbs

Ø 3.625 in →

14.22 ft

← ACRt @ 9.21 ft



Bull Nose-12345678
5.00 lbs

Ø 2.750 in →



0.33 ft
0.33 ft
0.00 ft

Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)
CH_HOS	Hostile Cable Head with Load Cell	CH_HOS_I	37.50	3.03	69.07	300.00
WP7K	Weak Point 7000 lbs	CH_HOS_I	0.01	0.01	* 69.87	300.00
XOHD	Hostile to Dits Cross Over	12345678	20.00	0.95	68.12	300.00
SP	SP Sub	11812437	60.00	3.74	64.38	300.00
GTET	Gamma Telemetry Tool	11013113	165.00	8.52	55.86	60.00
DSNT	Dual Spaced Neutron	11019641	174.00	9.69	46.17	60.00
DCNT	DSN Decentralizer	11019641	6.60	5.13	* 49.50	300.00
SDLT	Spectral Density Tool	10960494	360.00	10.81	35.36	60.00
SDLP	Density Insite Pad	11213308	65.00	2.55	* 37.57	60.00
Cs137	Logging Source, SDLT-I, 1.78 Ci - Cs137	00005475	1.00	0.80	* 37.80	300.00
MICP	Microlog Pad	10960494	8.00	1.00	* 37.86	60.00
BSAT	Borehole Sonic Array Tool	12173982	300.00	15.77	19.58	60.00
ACRt	Array Compensated True Resistivity Instrument Section	11830684	50.00	5.03	14.55	120.00
ACRt	Array Compensated True Resistivity Sonde Section	11830728	200.00	14.22	0.33	120.00
BLNS	Bull Nose	12345678	5.00	0.33	0.00	300.00

Total **1,452.11** **72.10**

* Not included in Total Length and Length Accumulation.

Data: MERIT_RIVERBND4\0001 GTET-DSNT-SDLT-BSAT-ACRT\004 11-Aug-18 23:24 Up @4954.0f

Date: 11-Aug-18 23:44:38

COMPANY	MERIT ENERGY COMPANY		
WELL	RIVER BEND 4		
FIELD	ARKANSAS RIVER		
COUNTY	FINNEY	STATE	KANSAS

HALLIBURTON

SPECTRAL DENSITY
DUAL SPACED NEUTRON
LOG