



DUAL
INDUCTION
LOG

Company		WHITE EXPLORATION, INC.	
Well		POWERS - BARLOW UNIT #1	
Field		WILDCAT	
County		FINNEY	
State		KANSAS	
Location:		API # : 15-055-22498-0000 2580' FNL & 1480' FEL	
Permanent Datum		GROUND LEVEL Elevation 2984	
Log Measured From		KELLY BUSHING 11' A.G.L.	
Drilling Measured From		KELLY BUSHING	
SEC 5 TWP 22S RGE 34W		Elevation K.B. 2995 D.F. 2993 G.L. 2984	
Date	9/5/18		
Run Number	ONE		
Depth Driller	5000		
Depth Logger	4999		
Bottom Logged Interval	4997		
Top Log Interval	00		
Casing Driller	8 5/8" @ 1775'		
Casing Logger	1770		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2800 PPM	
Density / Viscosity	9.2/59		
pH / Fluid Loss	10.5/8.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.0 @ 88F		
Rmf @ Meas. Temp	.75 @ 88F		
Rmc @ Meas. Temp	1.2 @ 88F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.70 @ 126F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	125F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	JASON CAPPELLUCCI		
Witnessed By	ANDY WHITE		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
SCOTT CITY, KS. - 18 SOUTH TO GANO RD. - 11 WEST TO BYRD RD.
1 1/2 SOUTH - EAST INTO




MAIN SECTION

Database File	3002pe8.db
Dataset Pathname	pass3.2
Presentation Format	_dil2
Dataset Creation	Wed Sep 05 17:47:38 2018
Charted by	Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150	1000	CILD (mmho/m)	0
-100	SP (mV)	100	0	RLL3 (Ohm-m)	50
-----			0	Deep Induction (Ohm-m)	50
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500

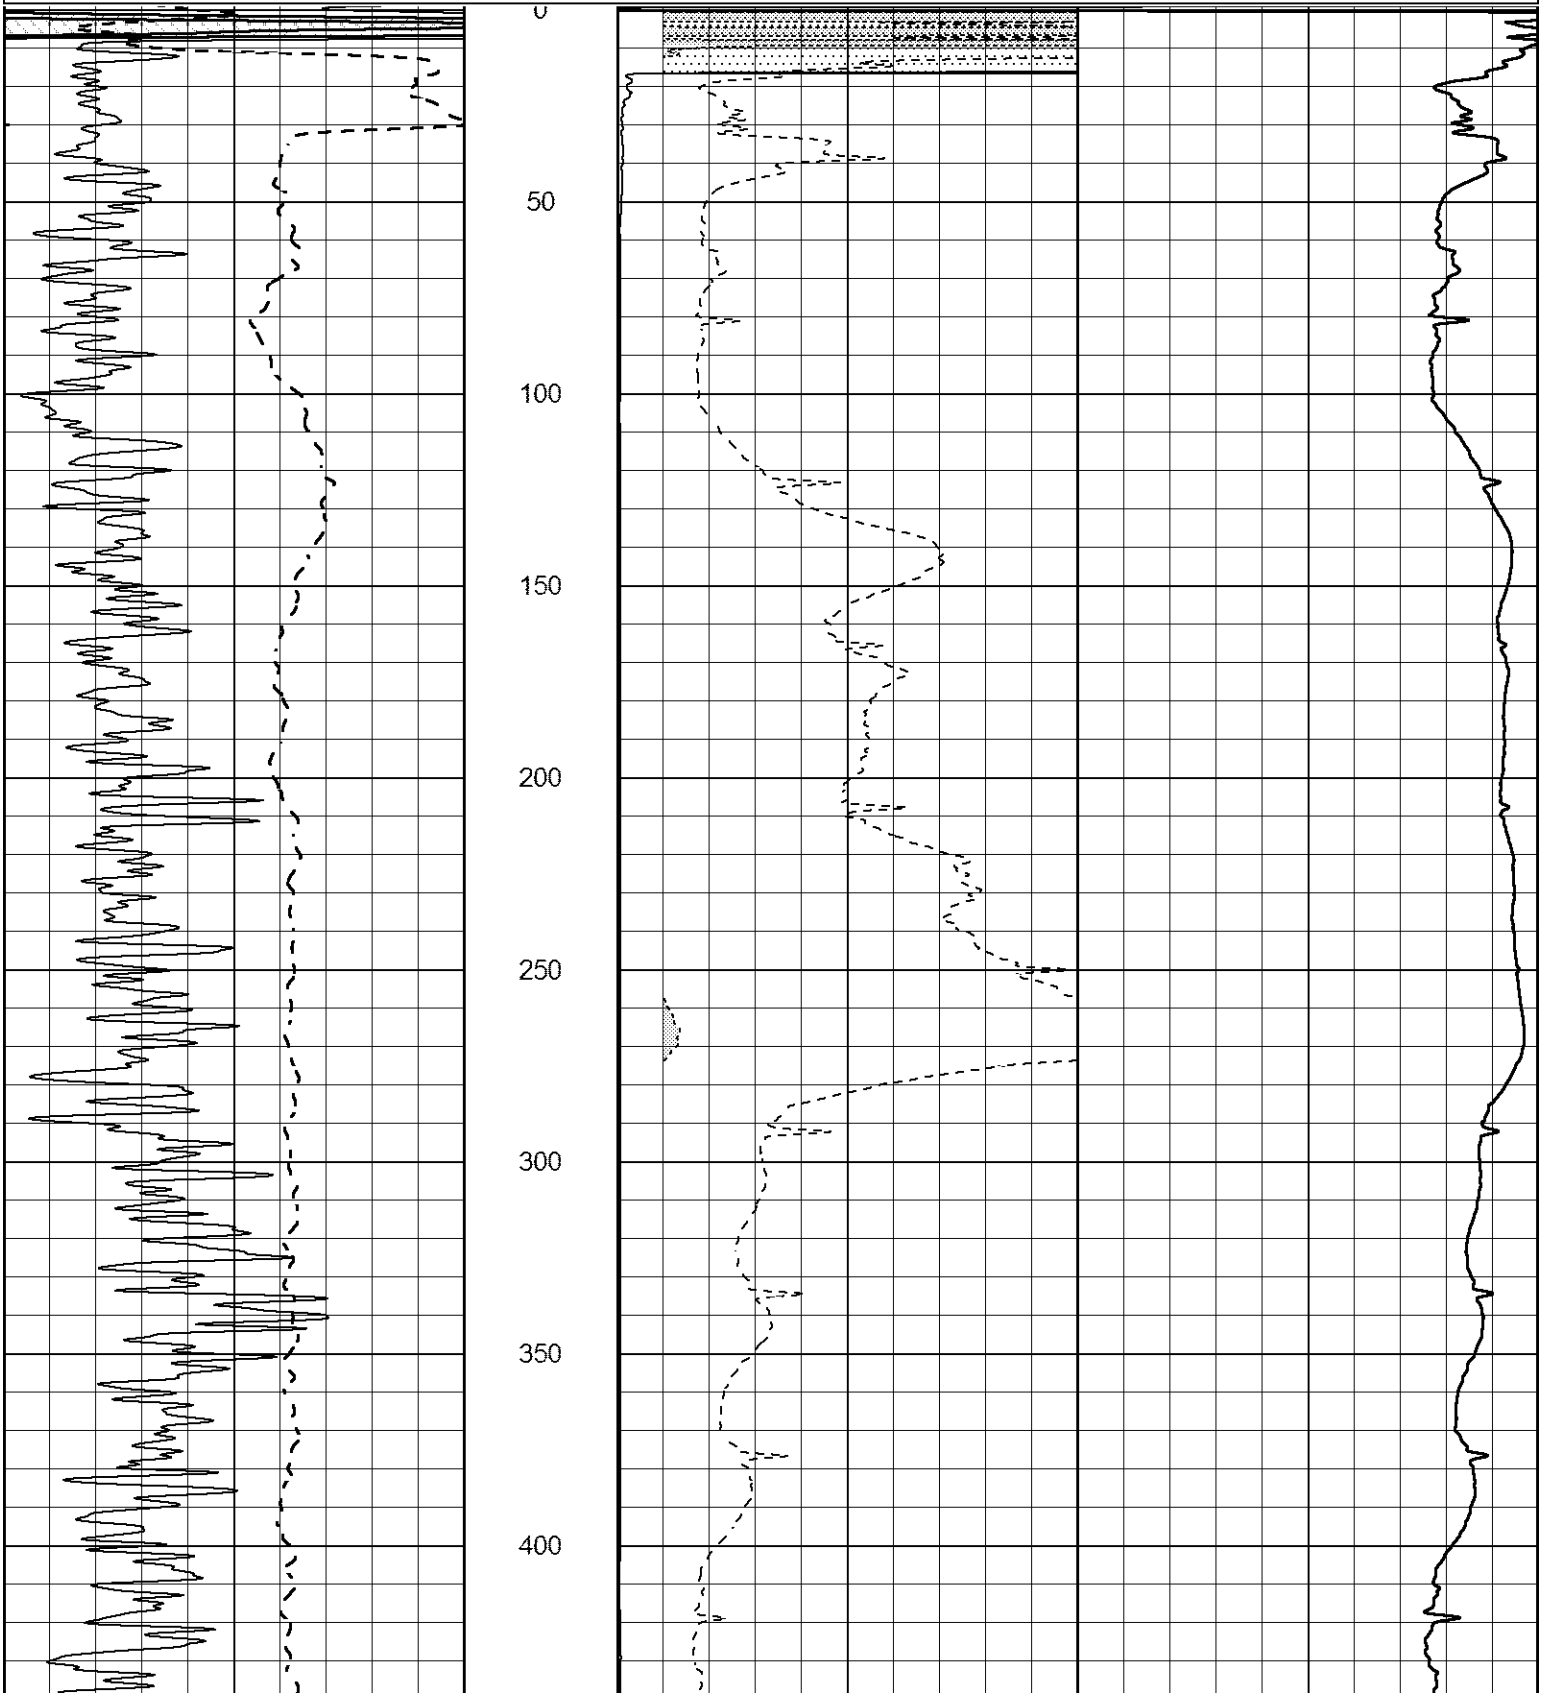



450

500

550

600

650

700


750


800

850


900



950

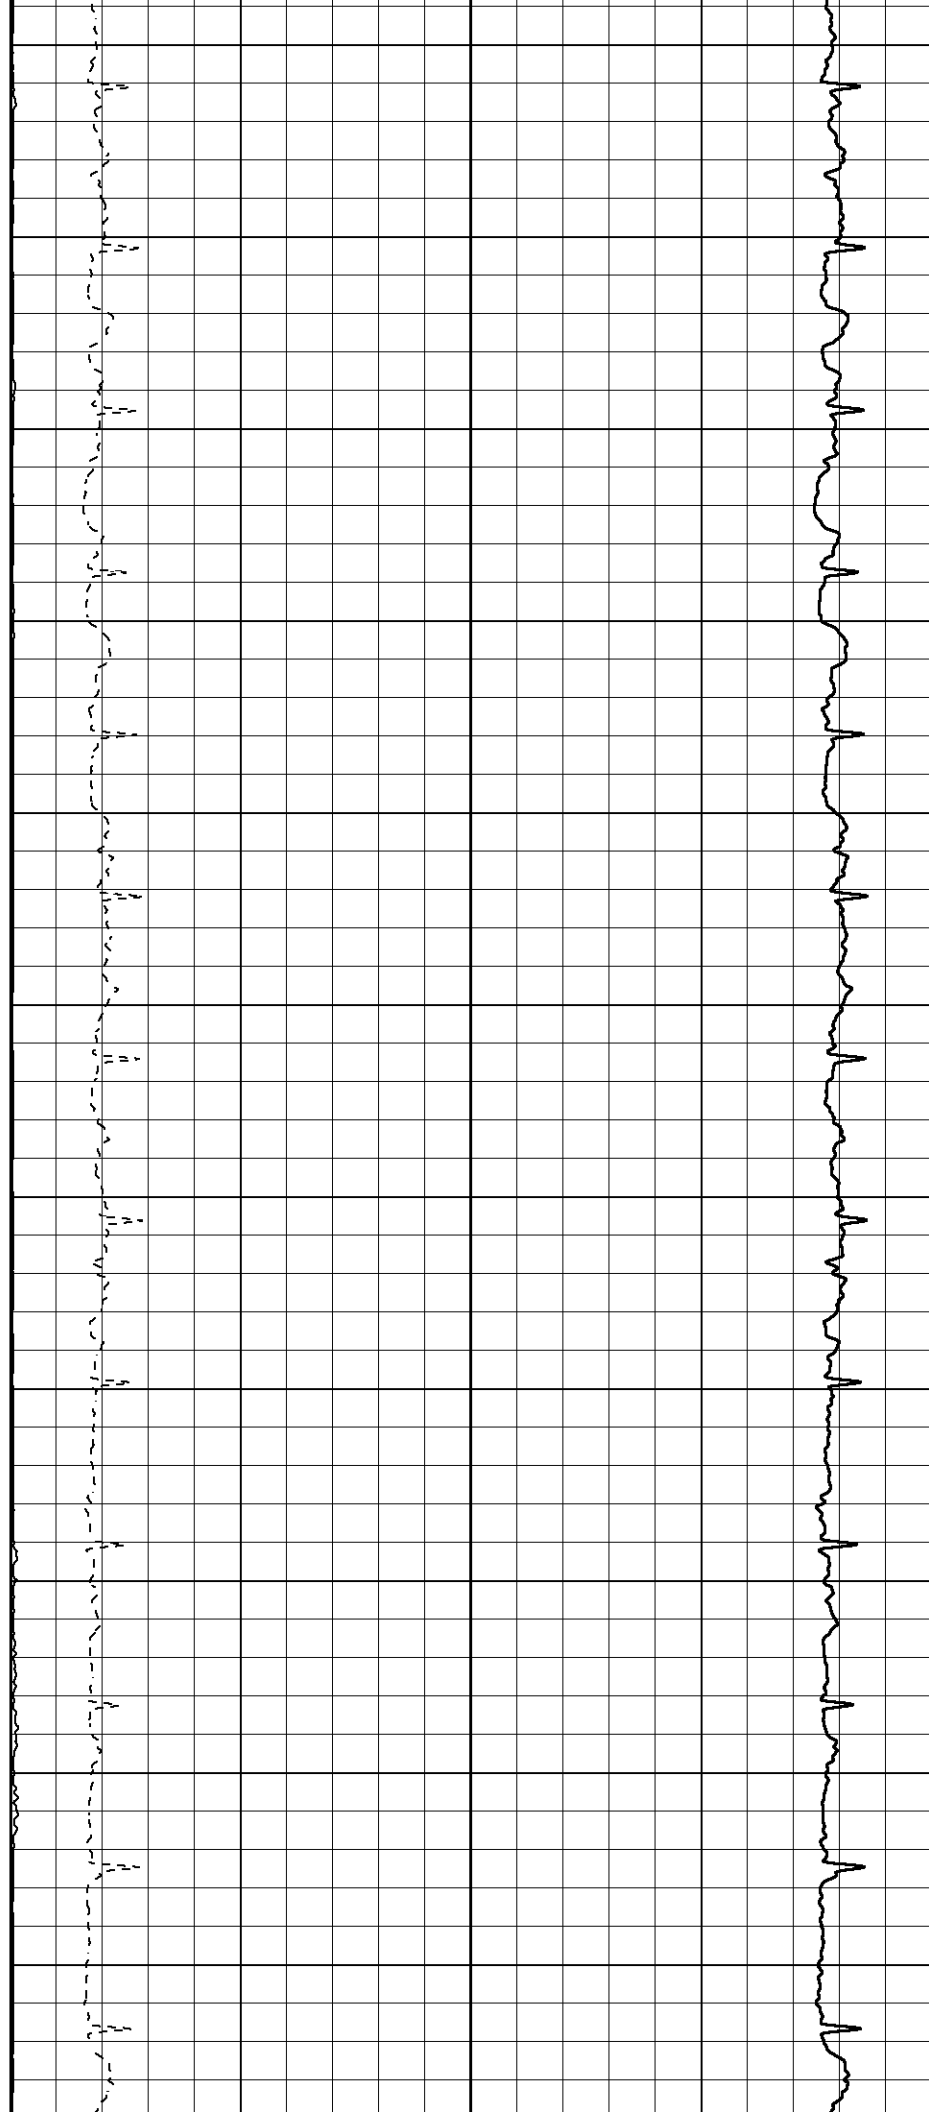


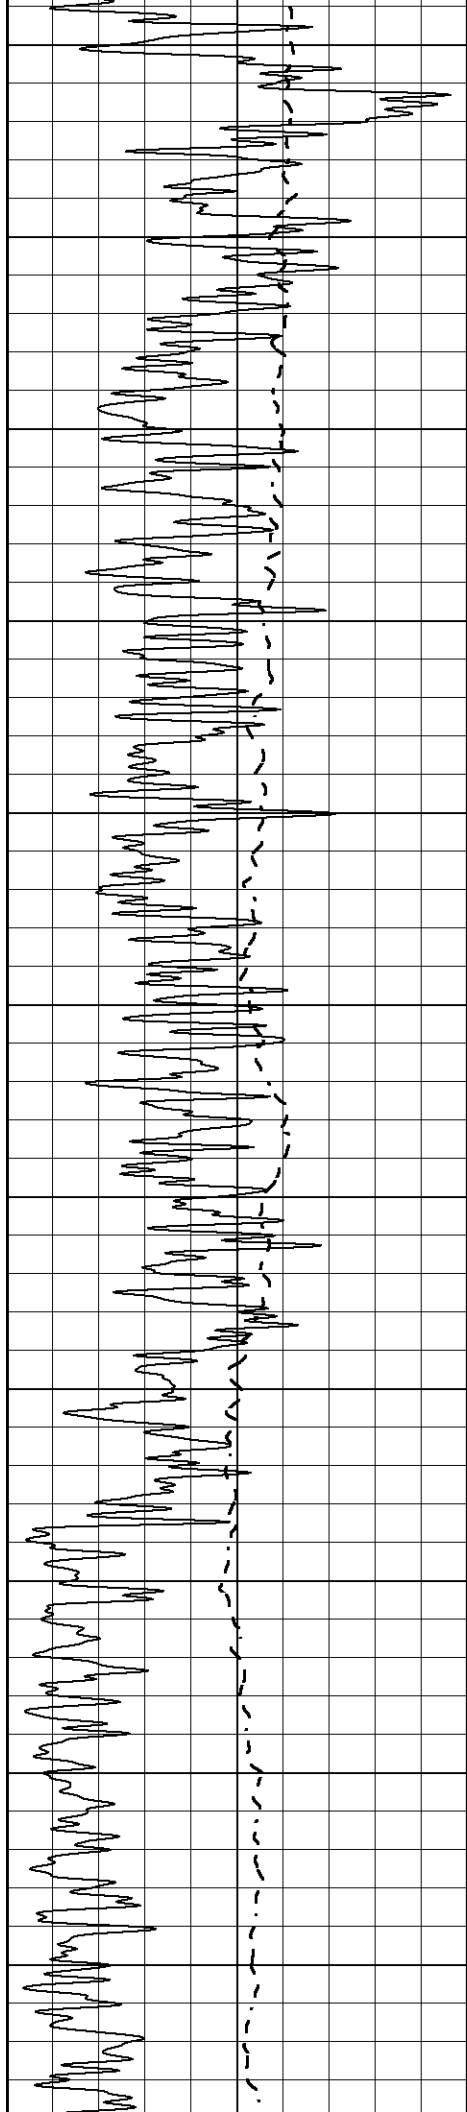

1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500

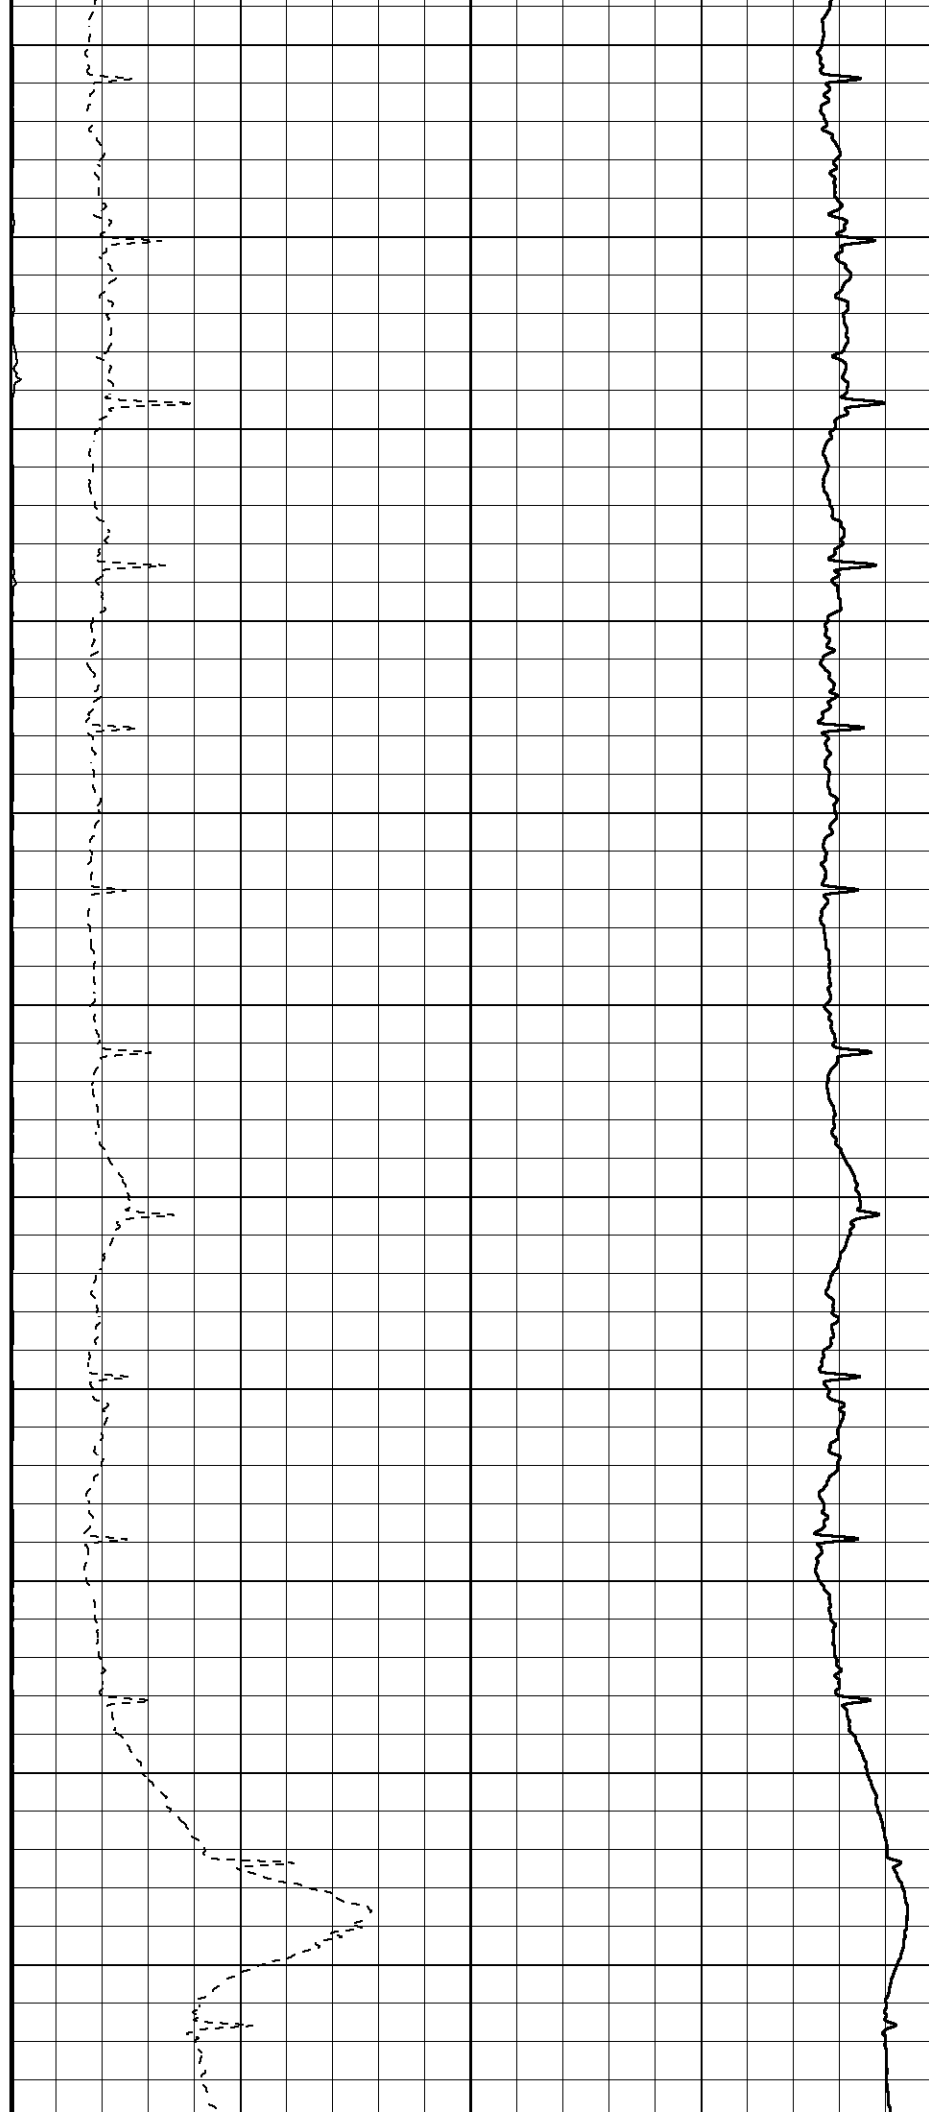

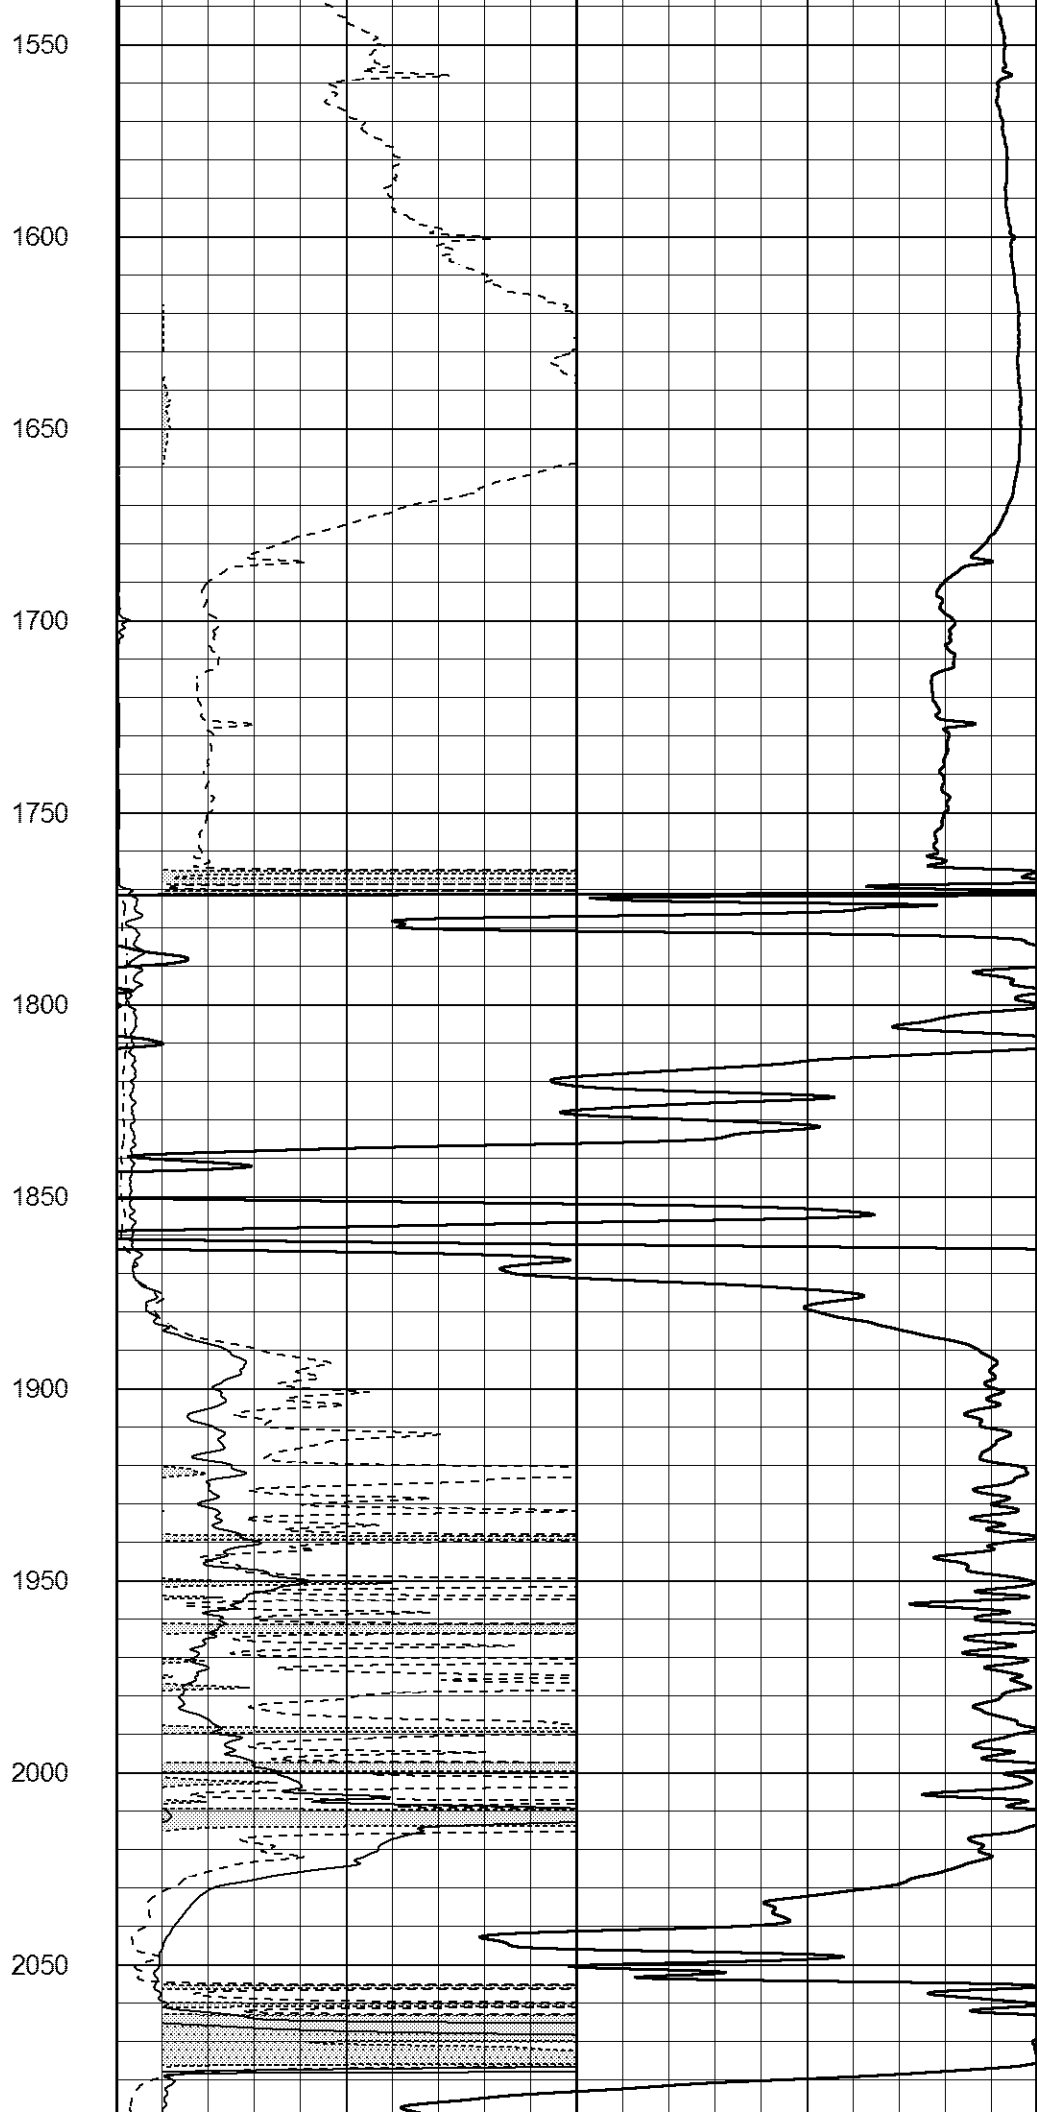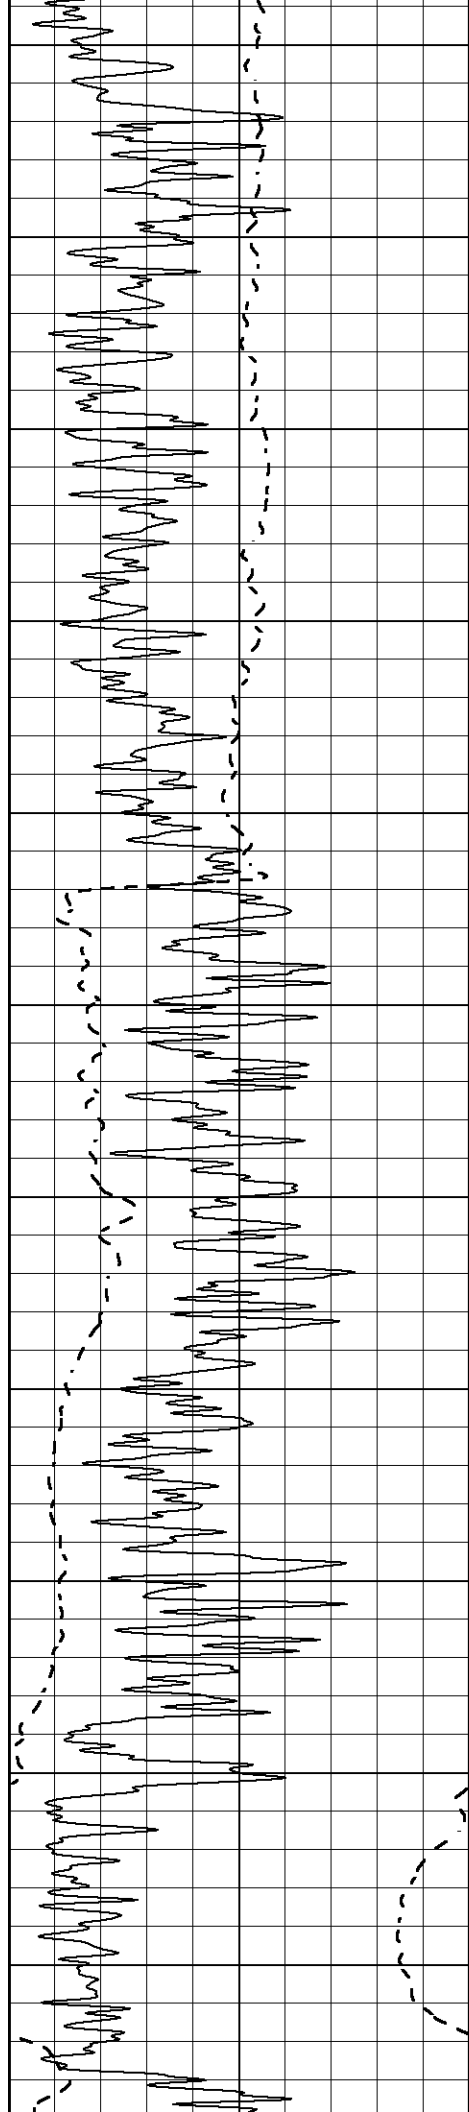

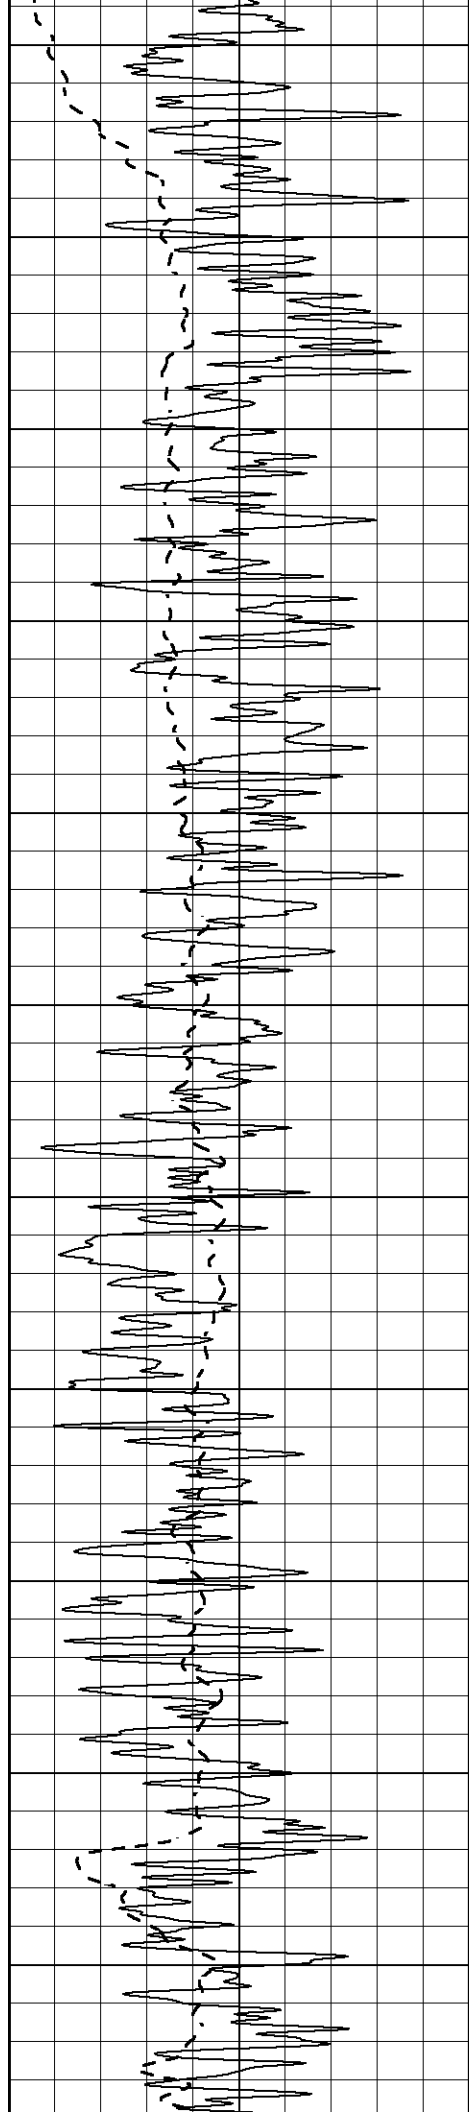

2100

2150

2200

2250

2300

2350



2400



2450


2500

2550

2600

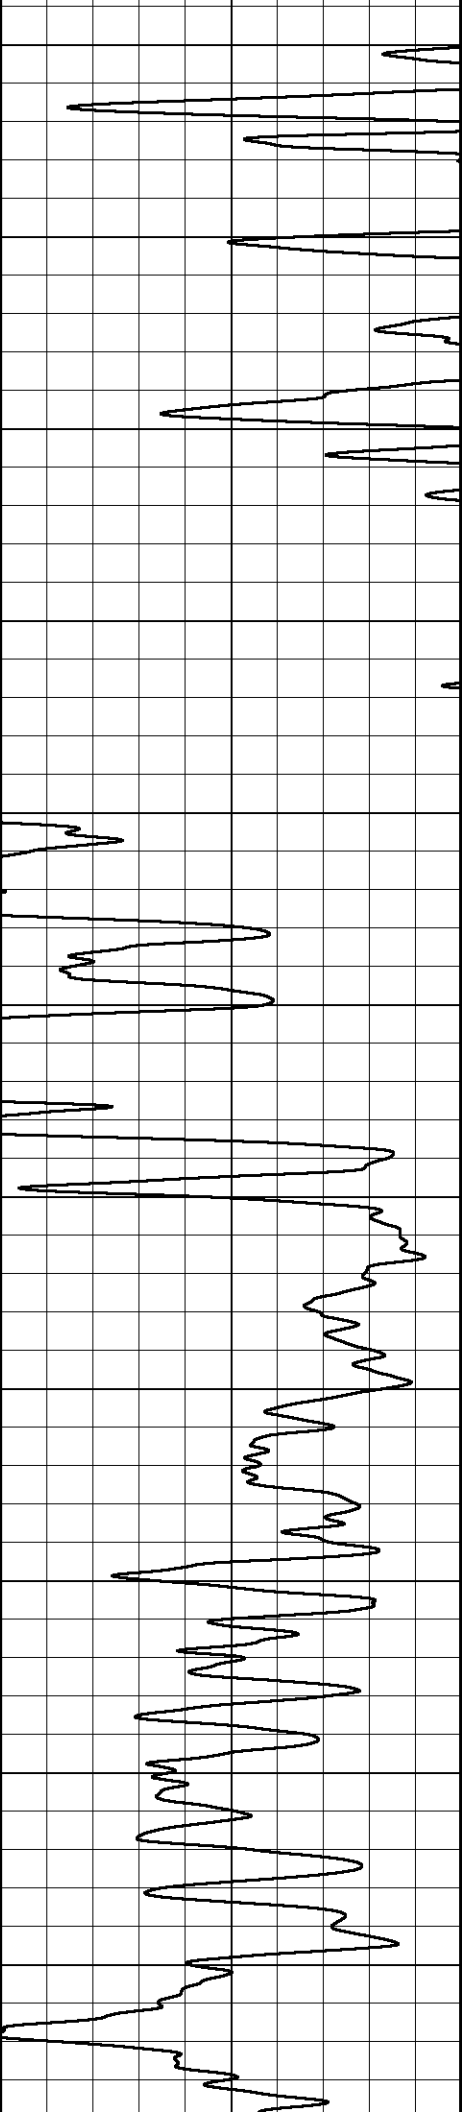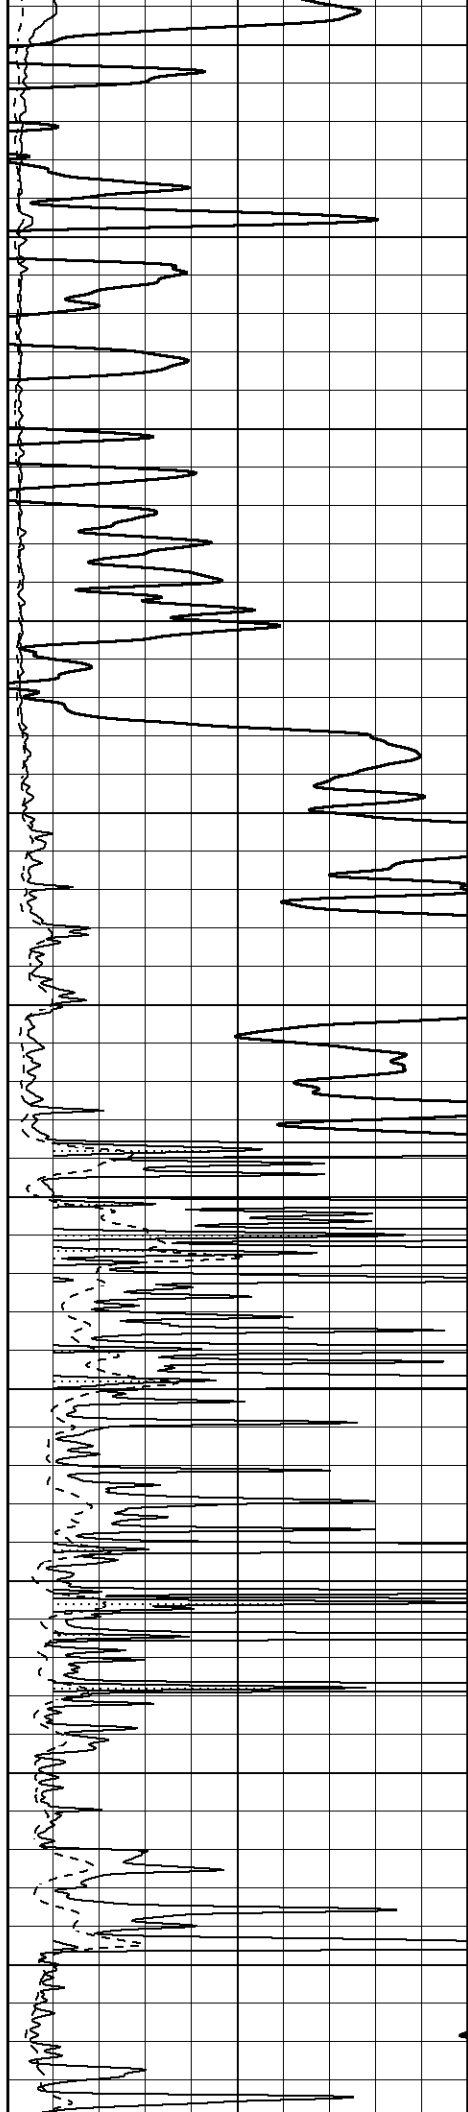

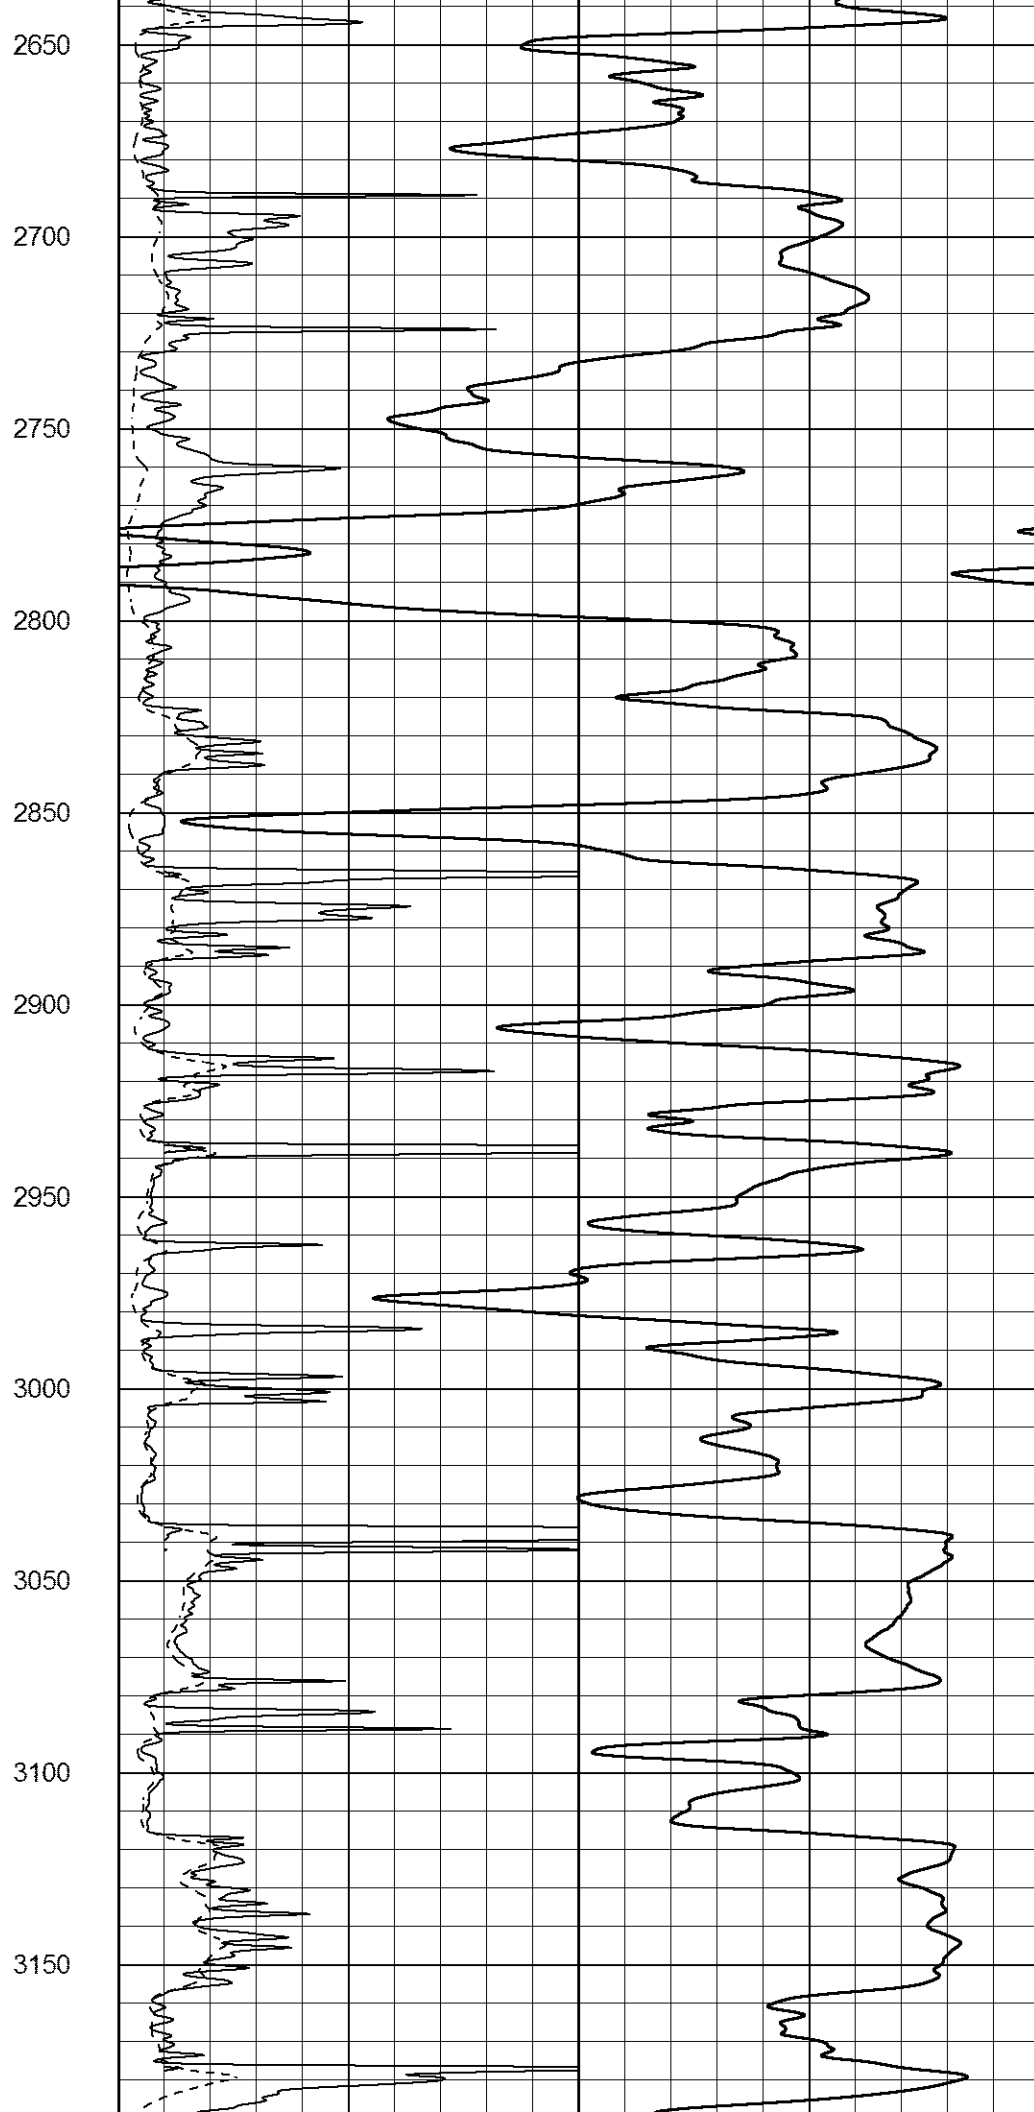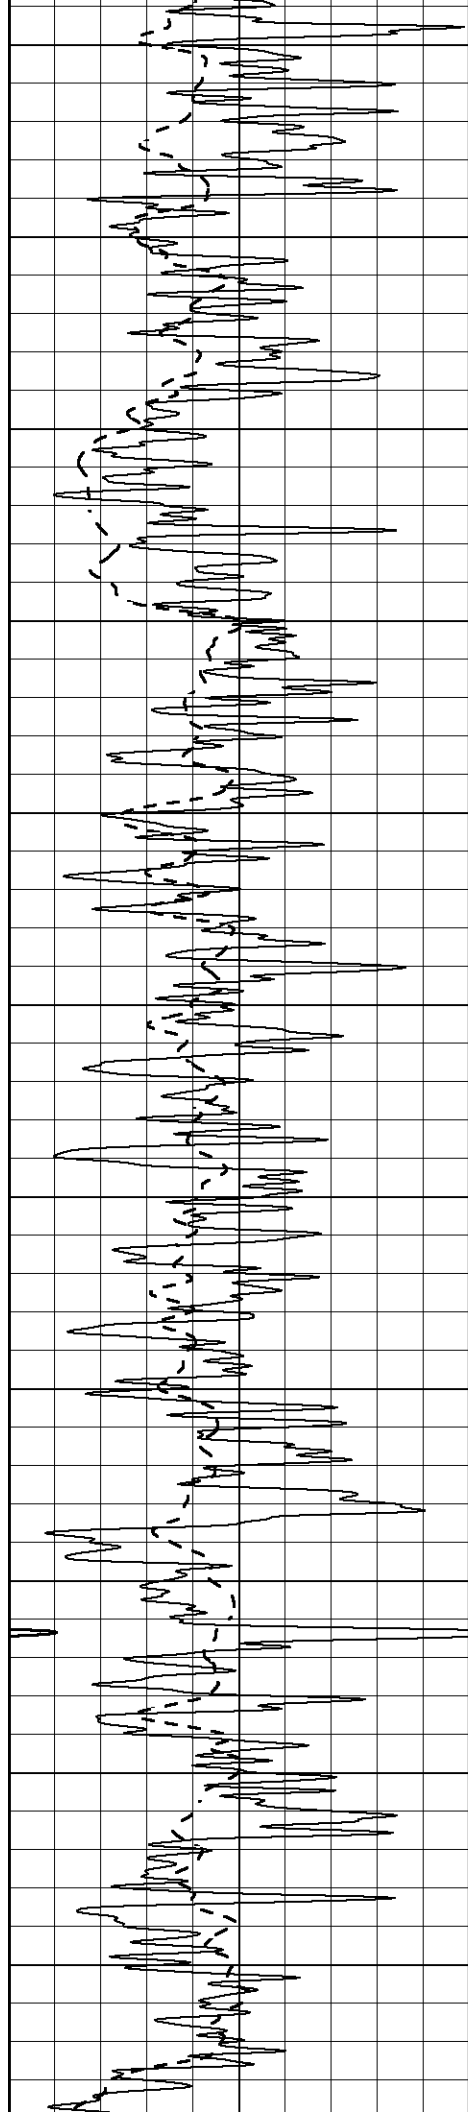

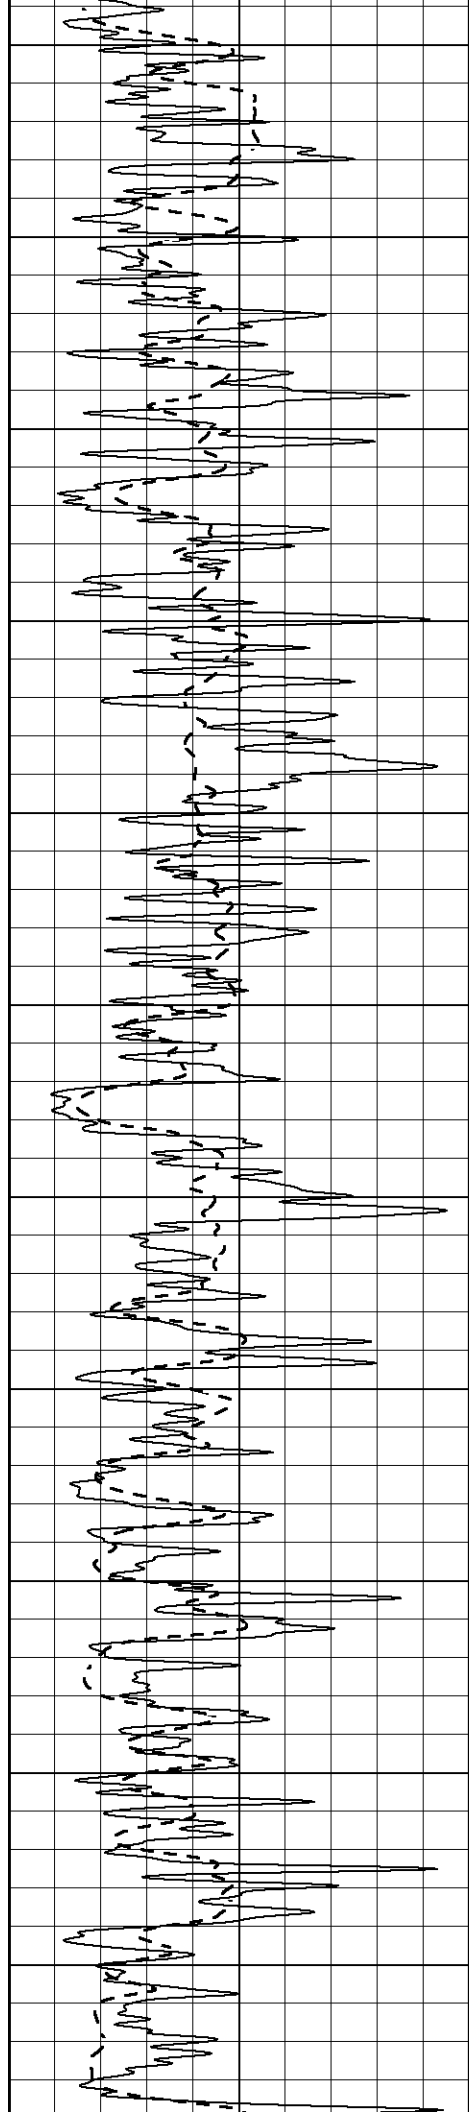

3200

3250

3300

3350

3400

3450



3500


3550

3600

3650

3700

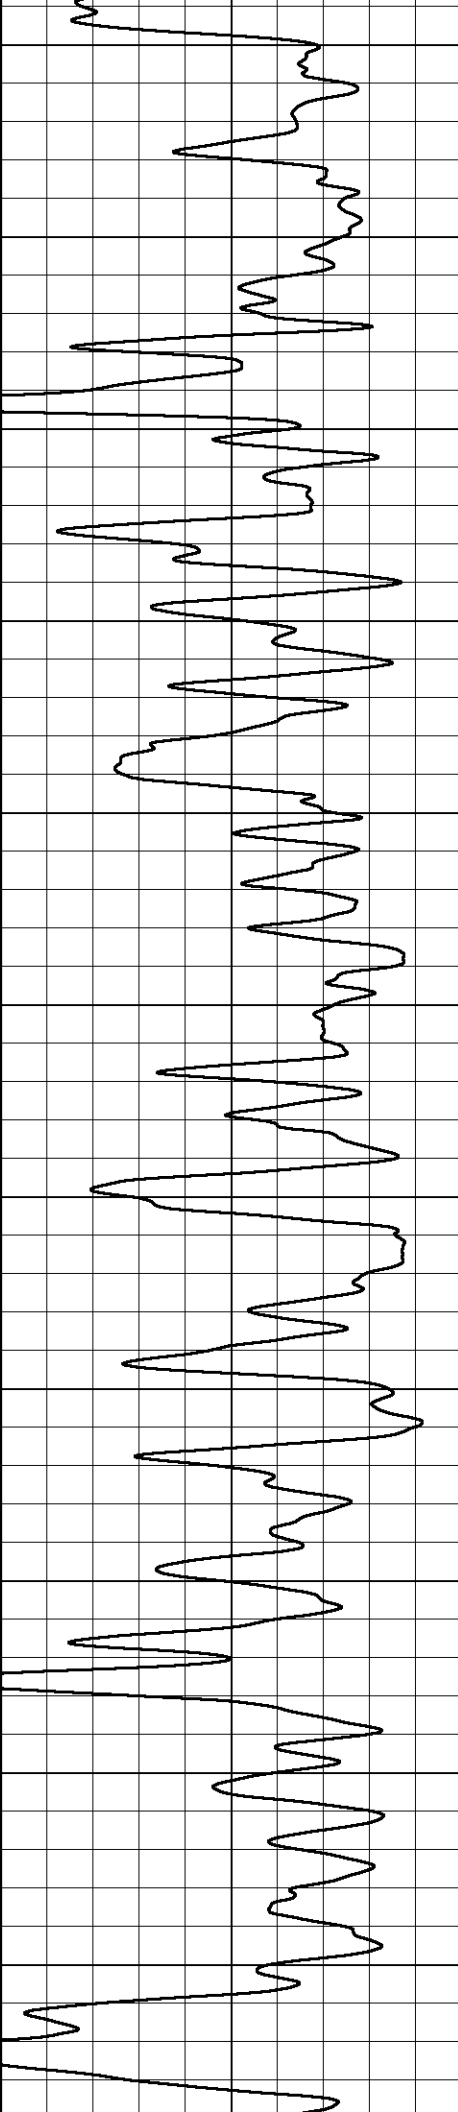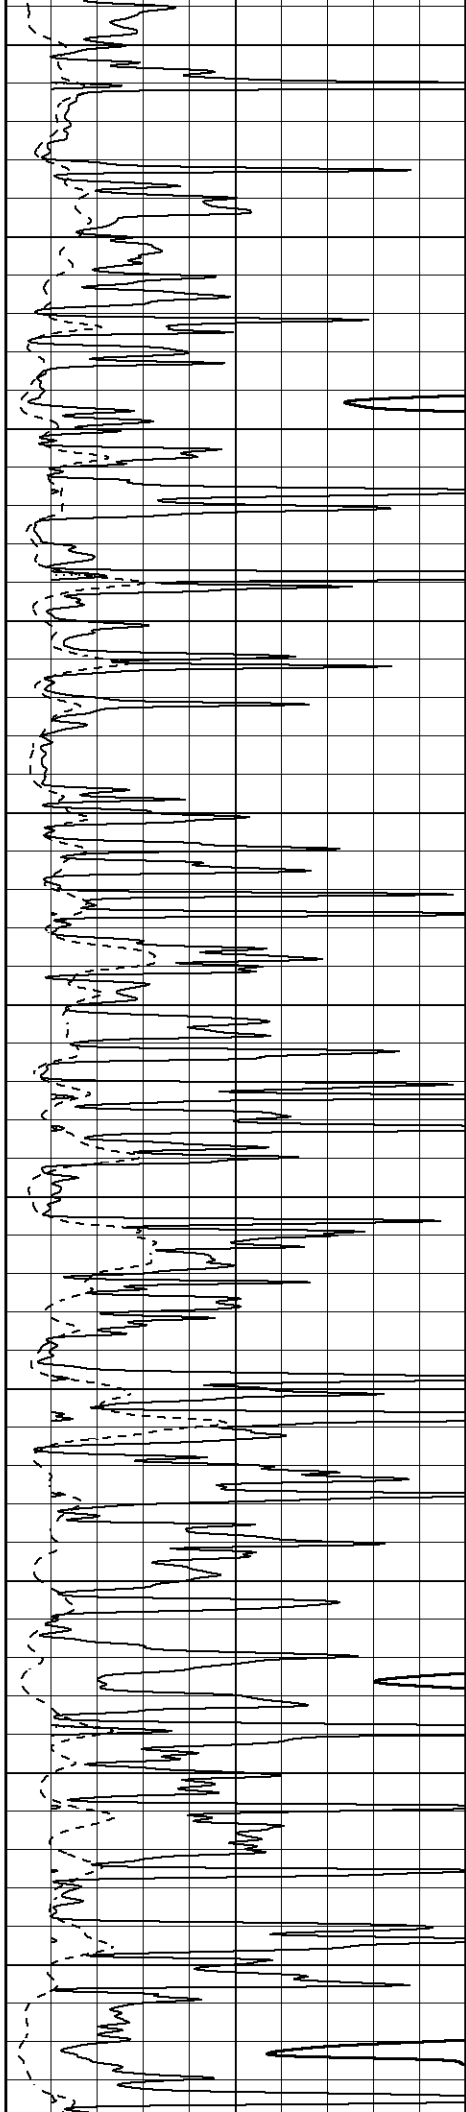

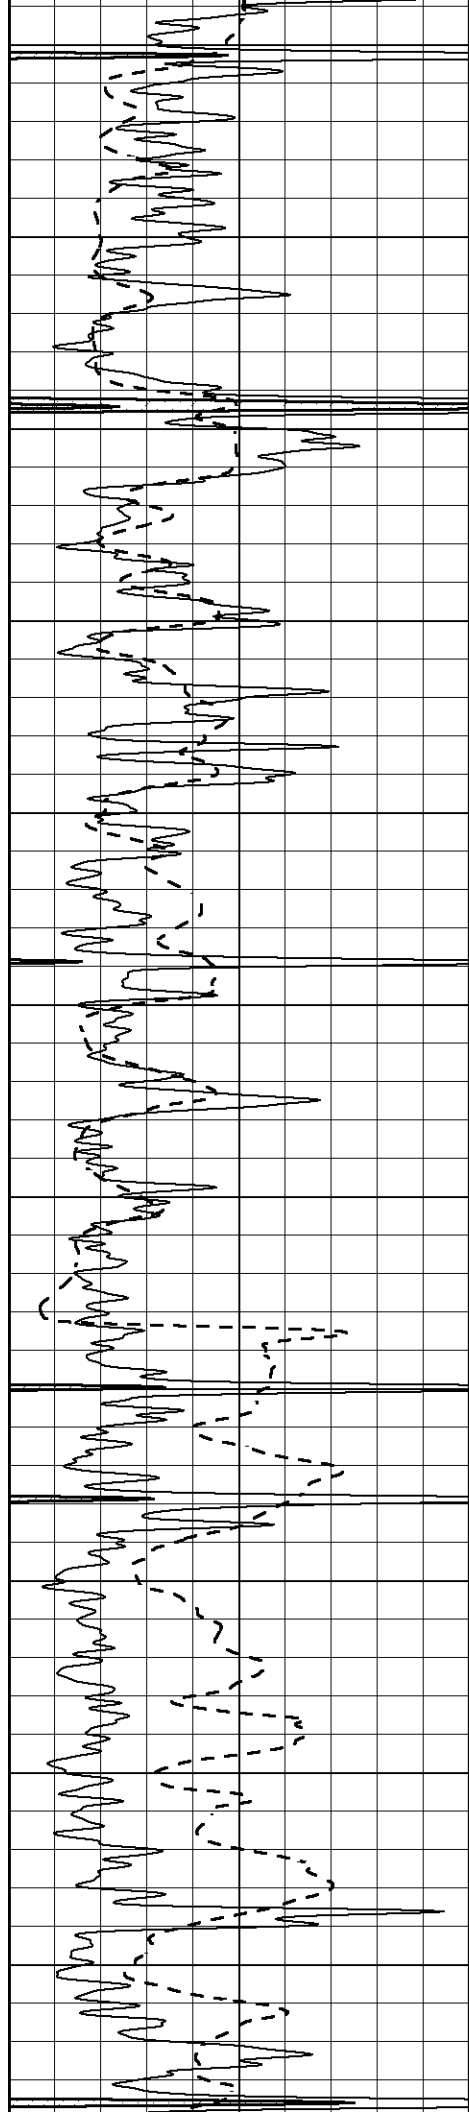

3750

3800

3850

3900

3950

4000


4050


4100

4150

4200

4250

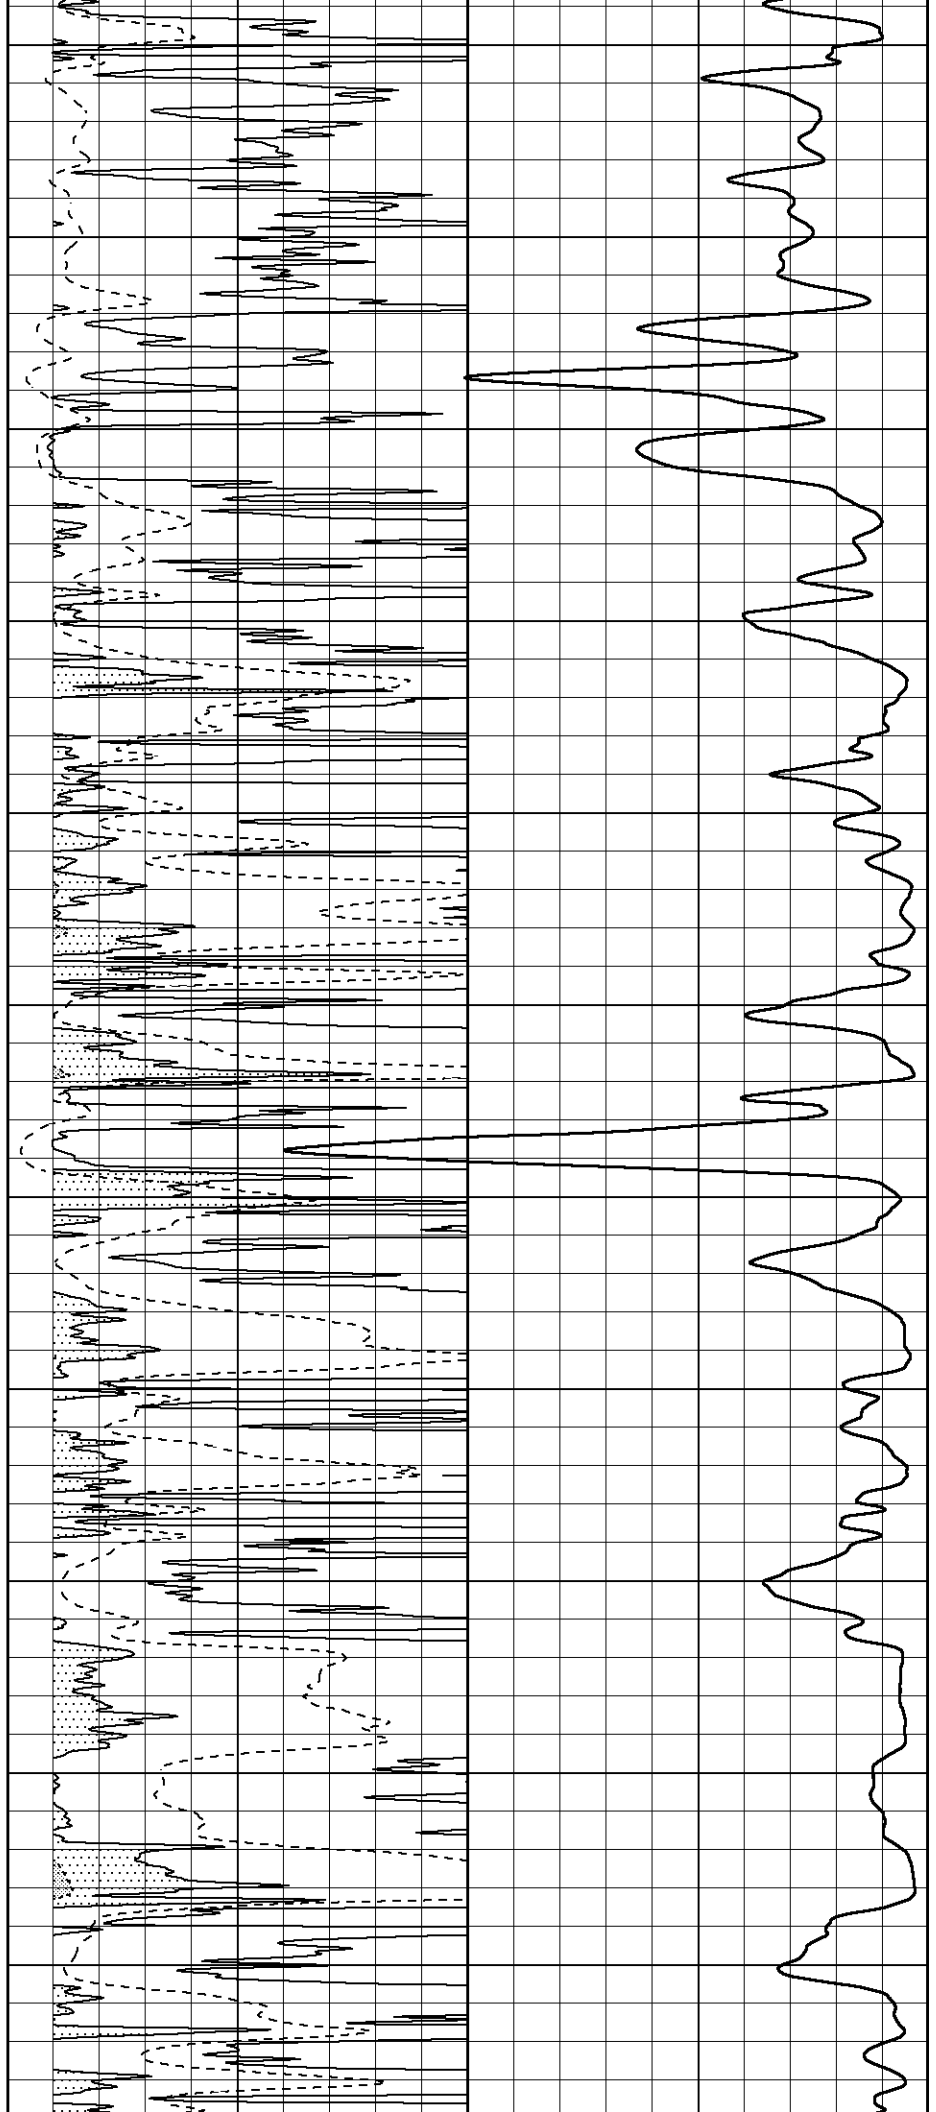

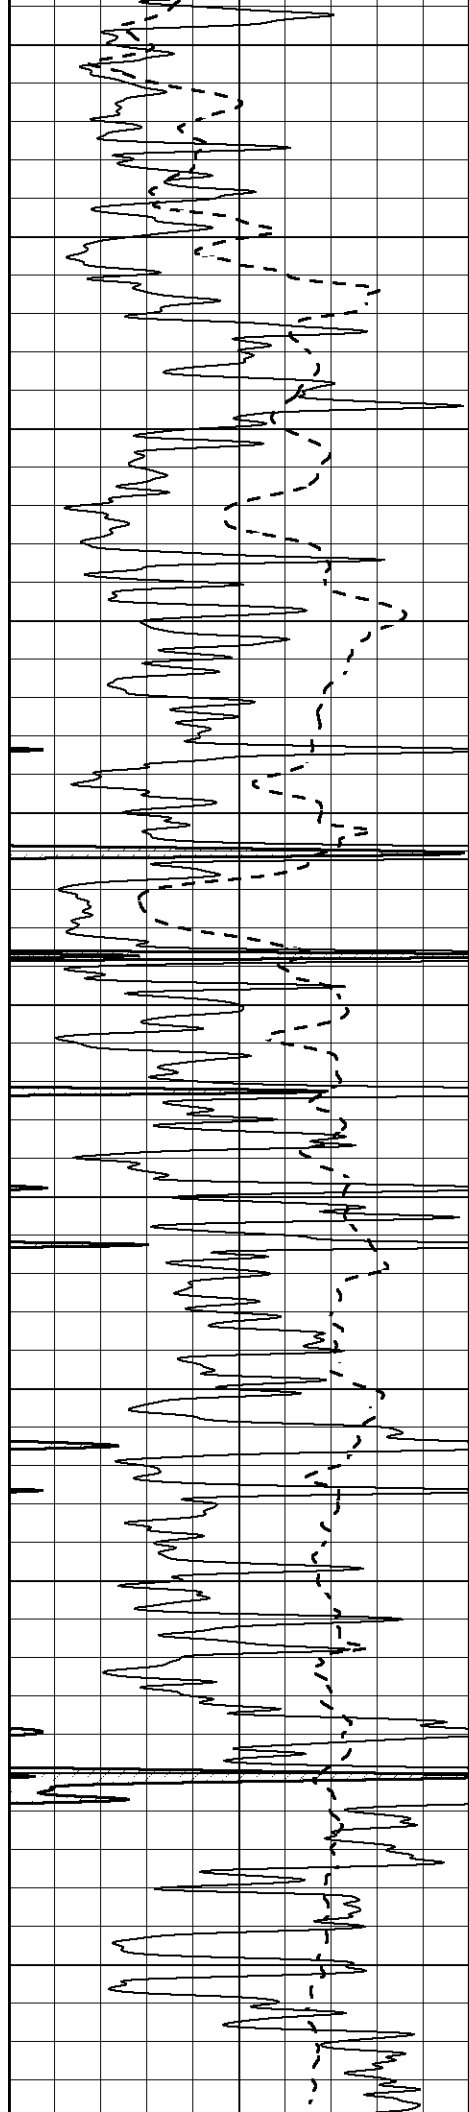

4300

4350

4400

4450

4500

4550



4600


4650

4700

4750

4800

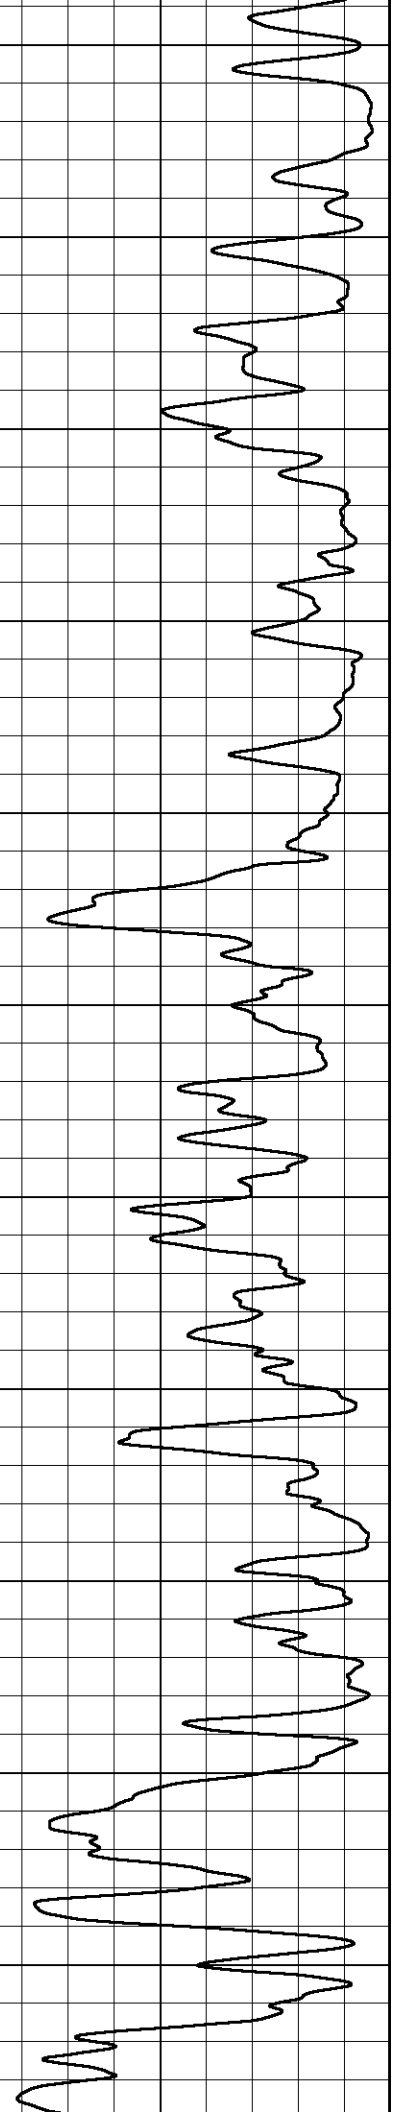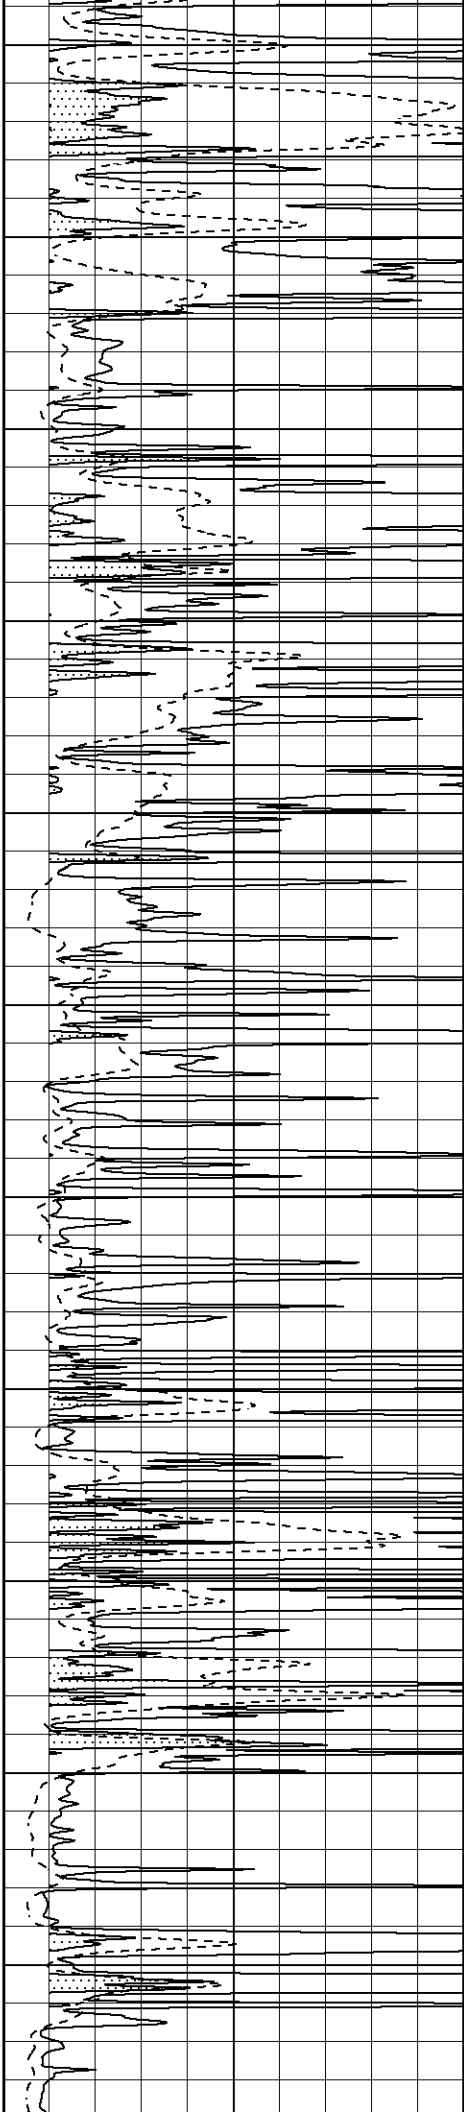

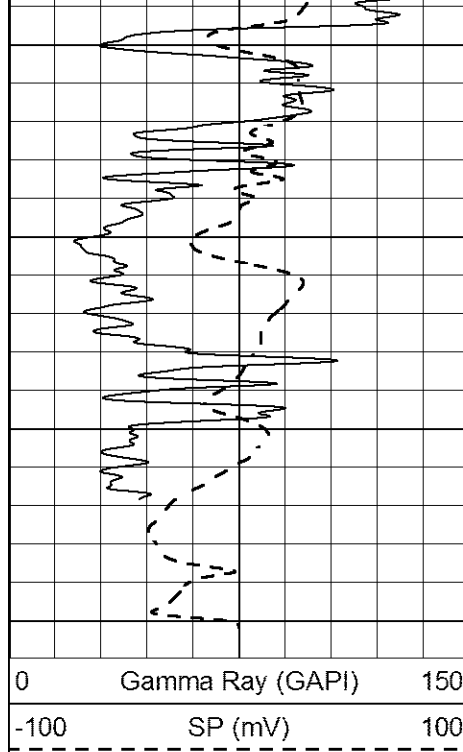


4850


4900

4950

5000

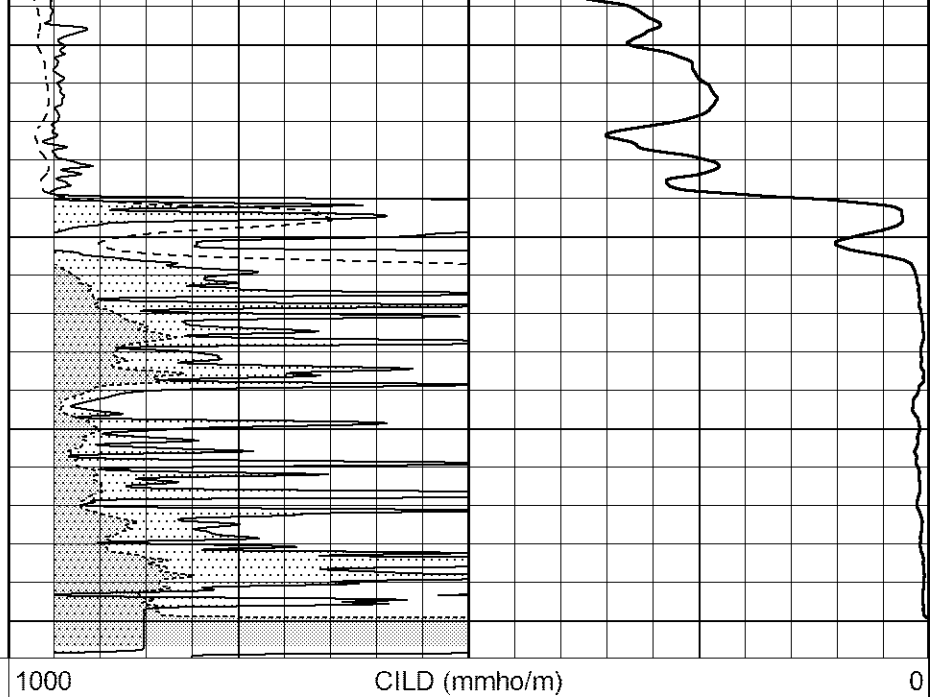

0	RLL3 (Ohm-m)	50
0	Deep Induction (Ohm-m)	50
50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

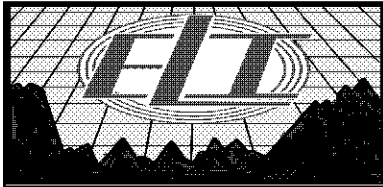


MAIN SECTION

Database File 3002pe8.db
 Dataset Pathname pass3.1
 Presentation Format _dil
 Dataset Creation Wed Sep 05 16:47:10 2018
 Charted by Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

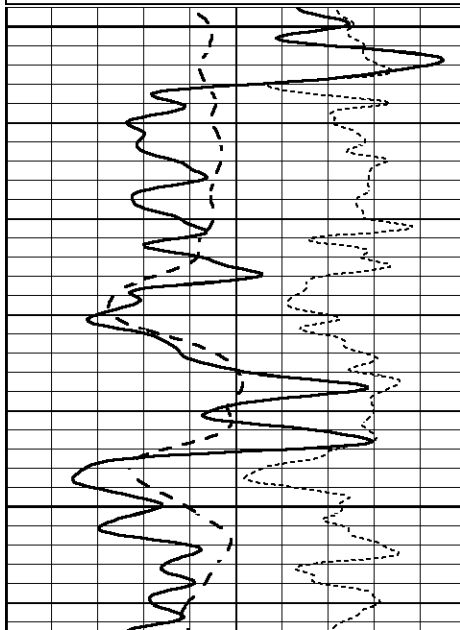

3500

3550

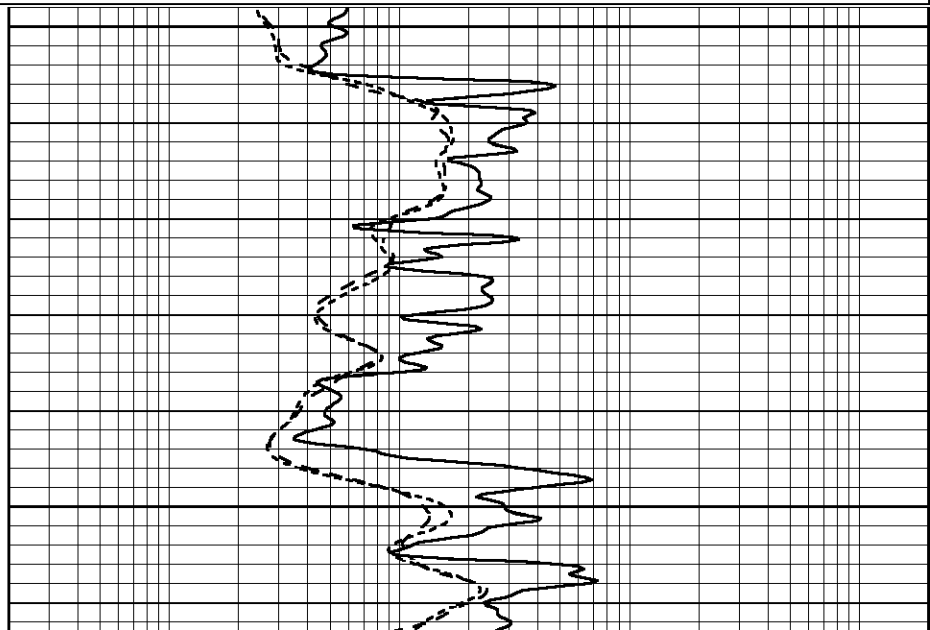

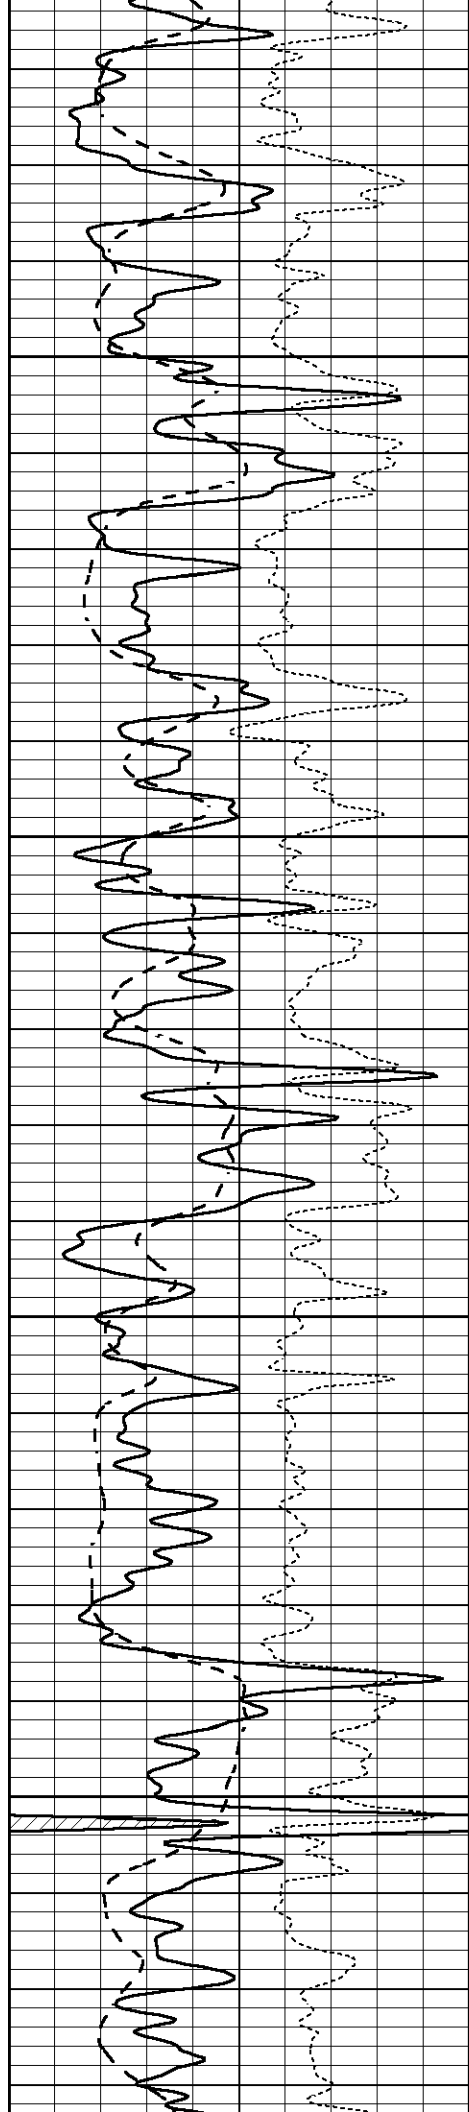



3600

3650

3700

3750

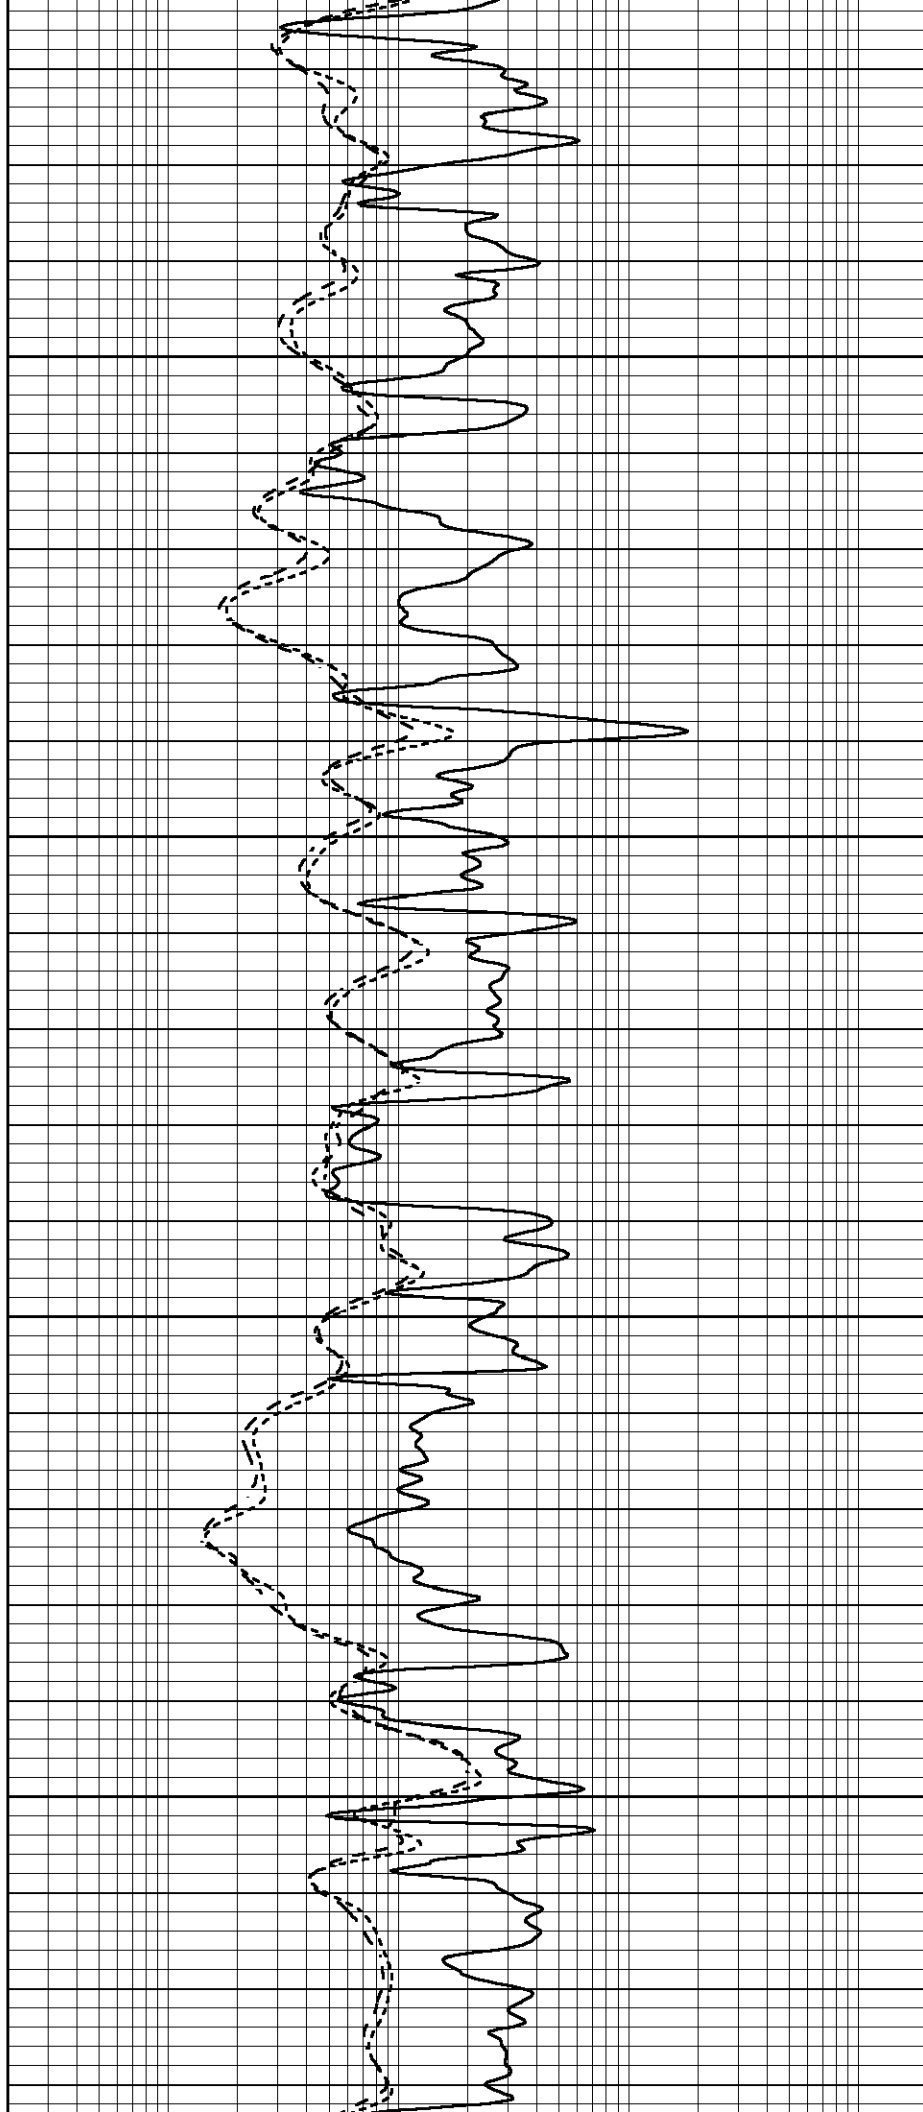

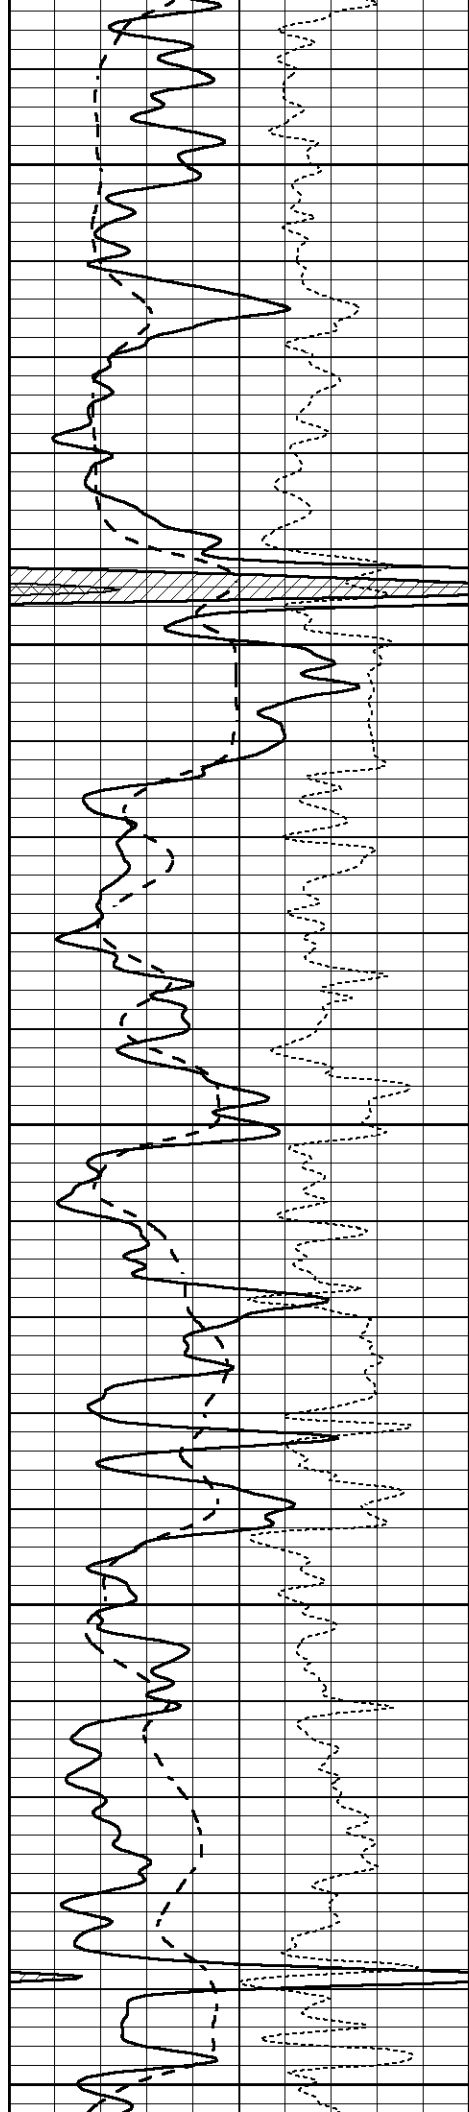


3800


3850

3900

3950

4000

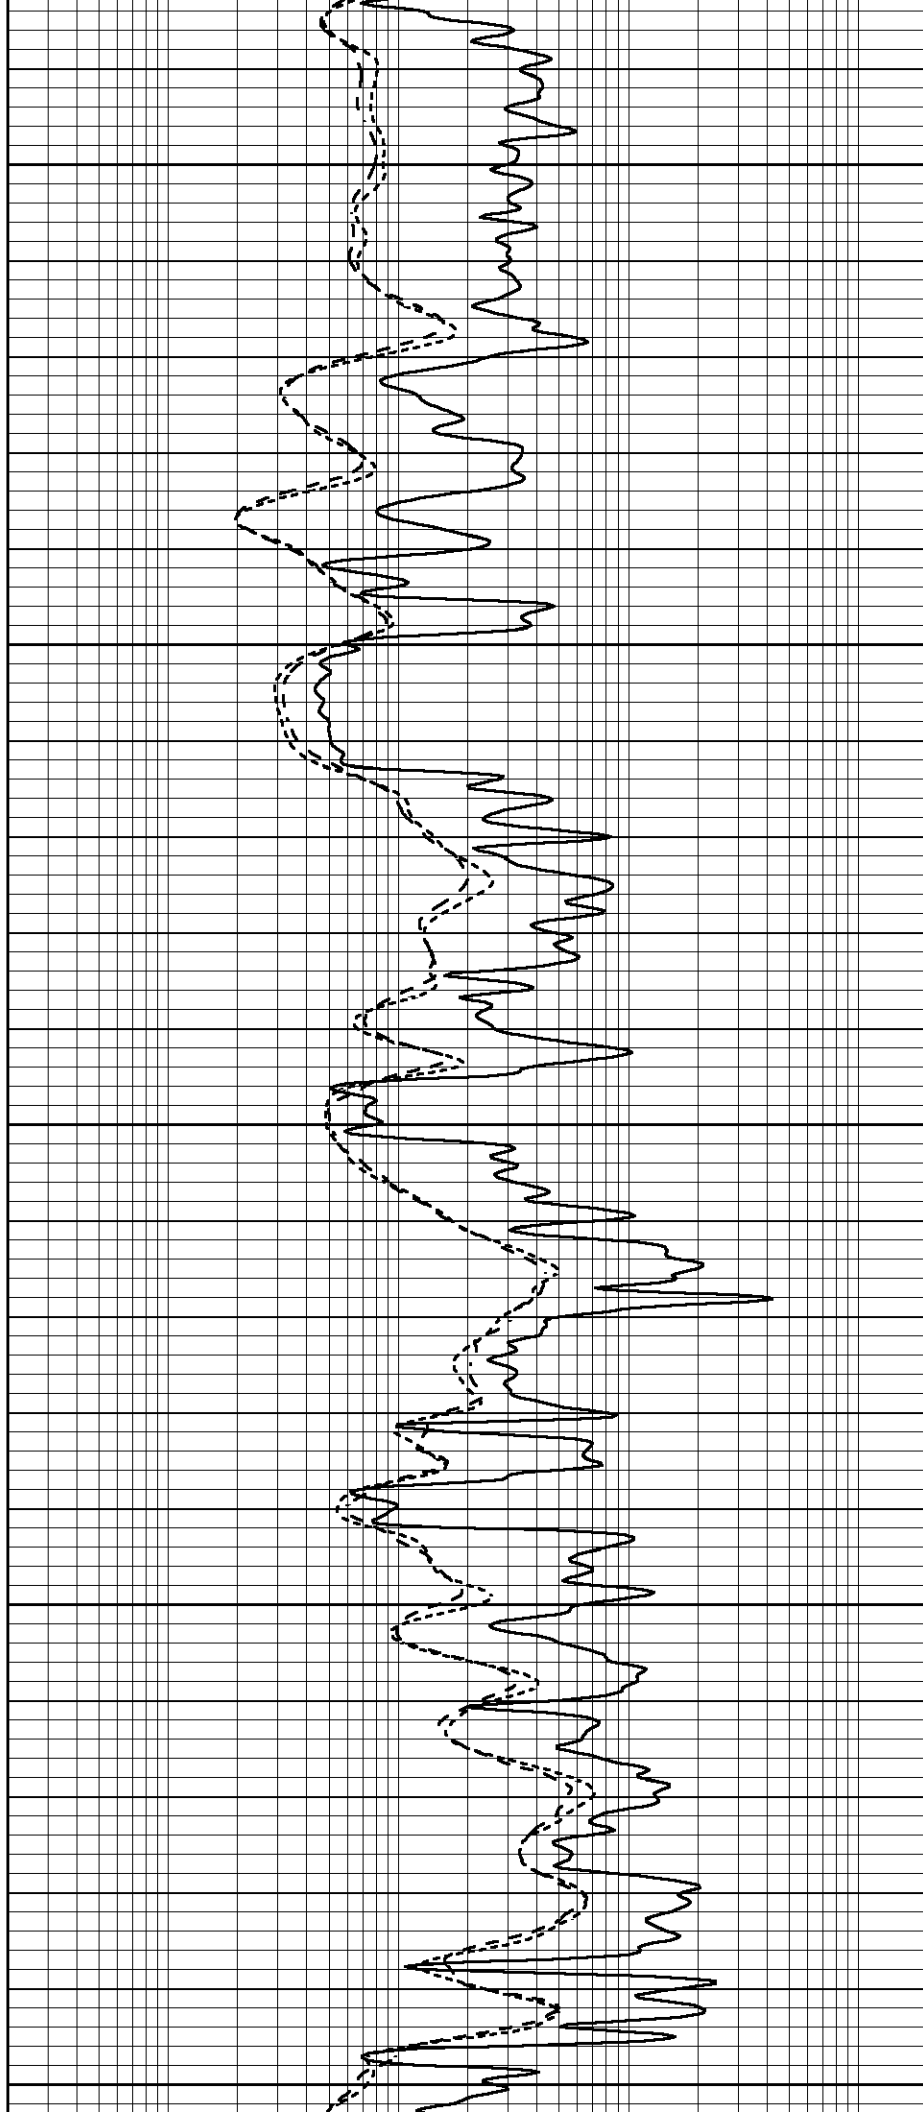

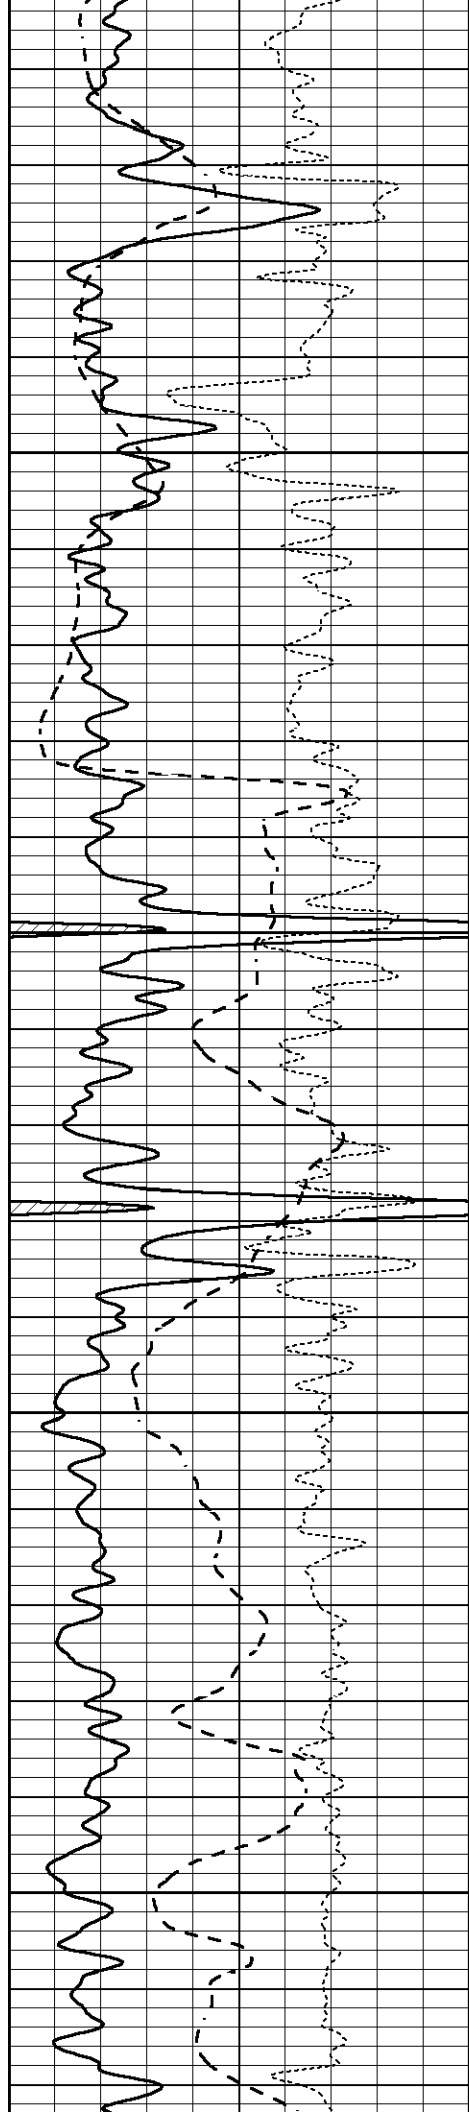



4050

4100

4150

4200

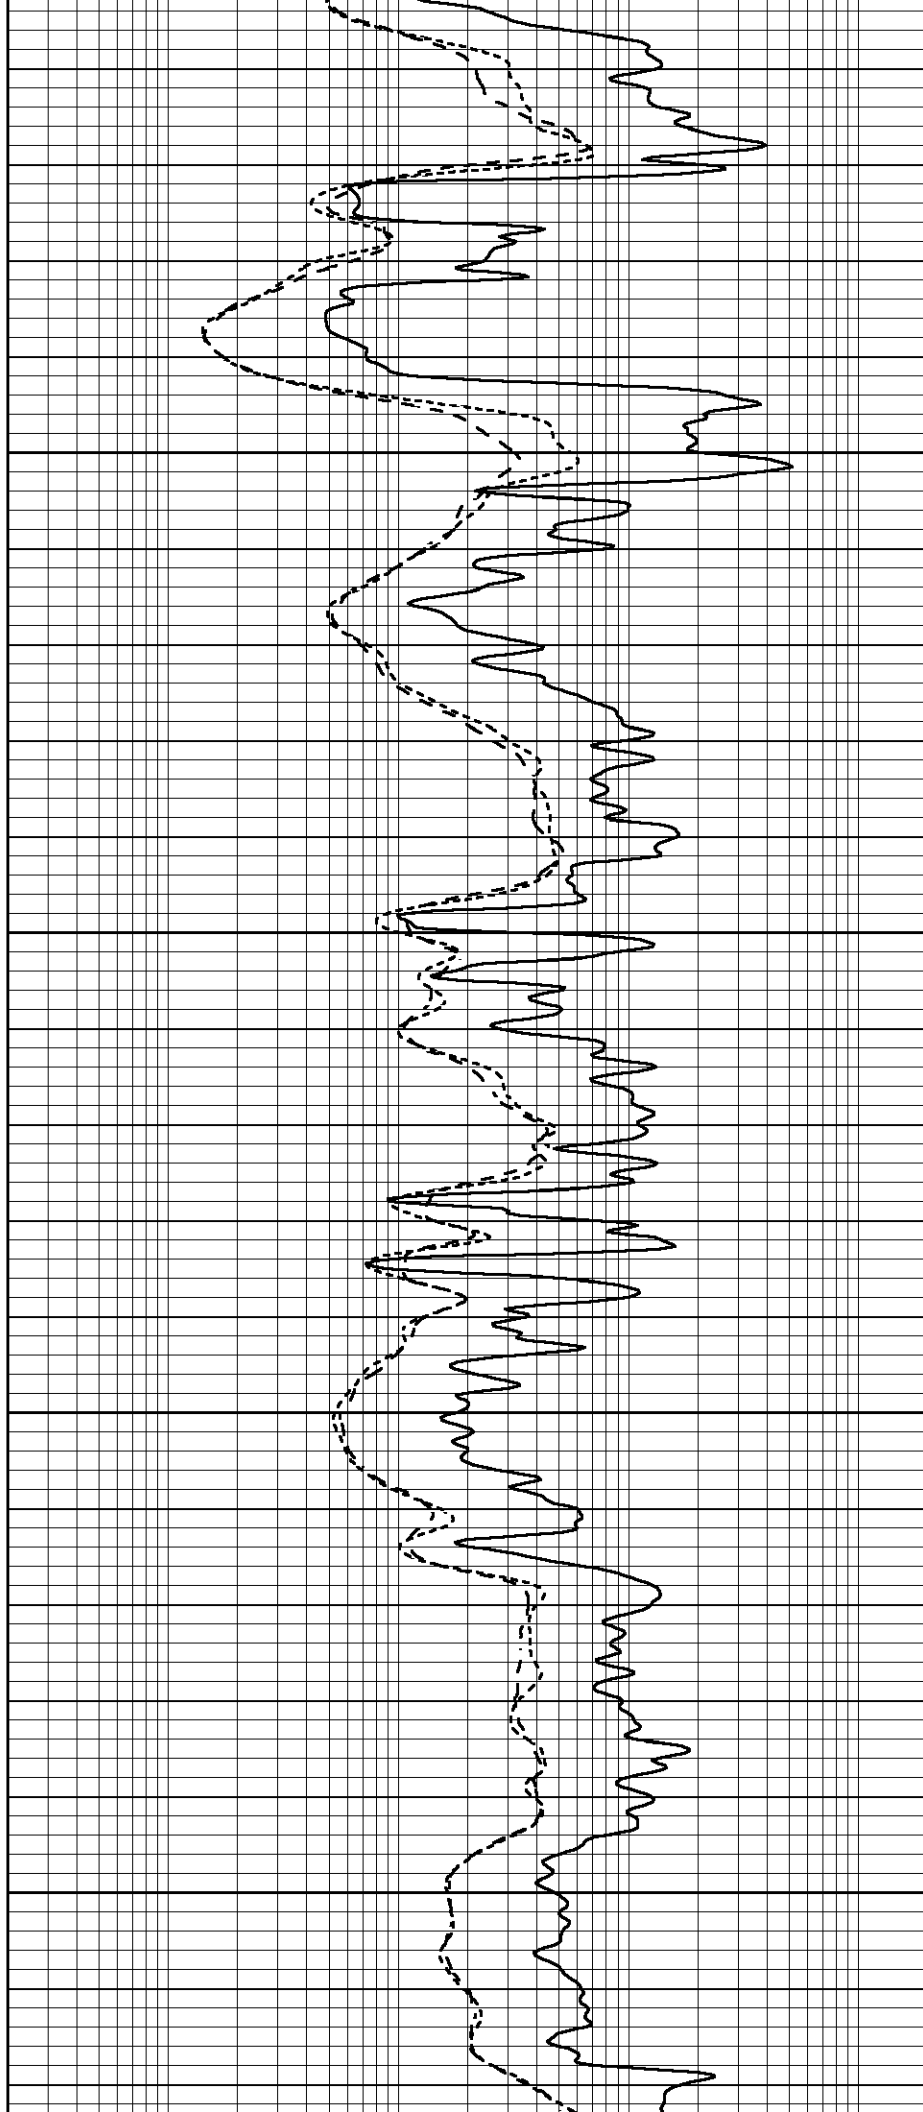

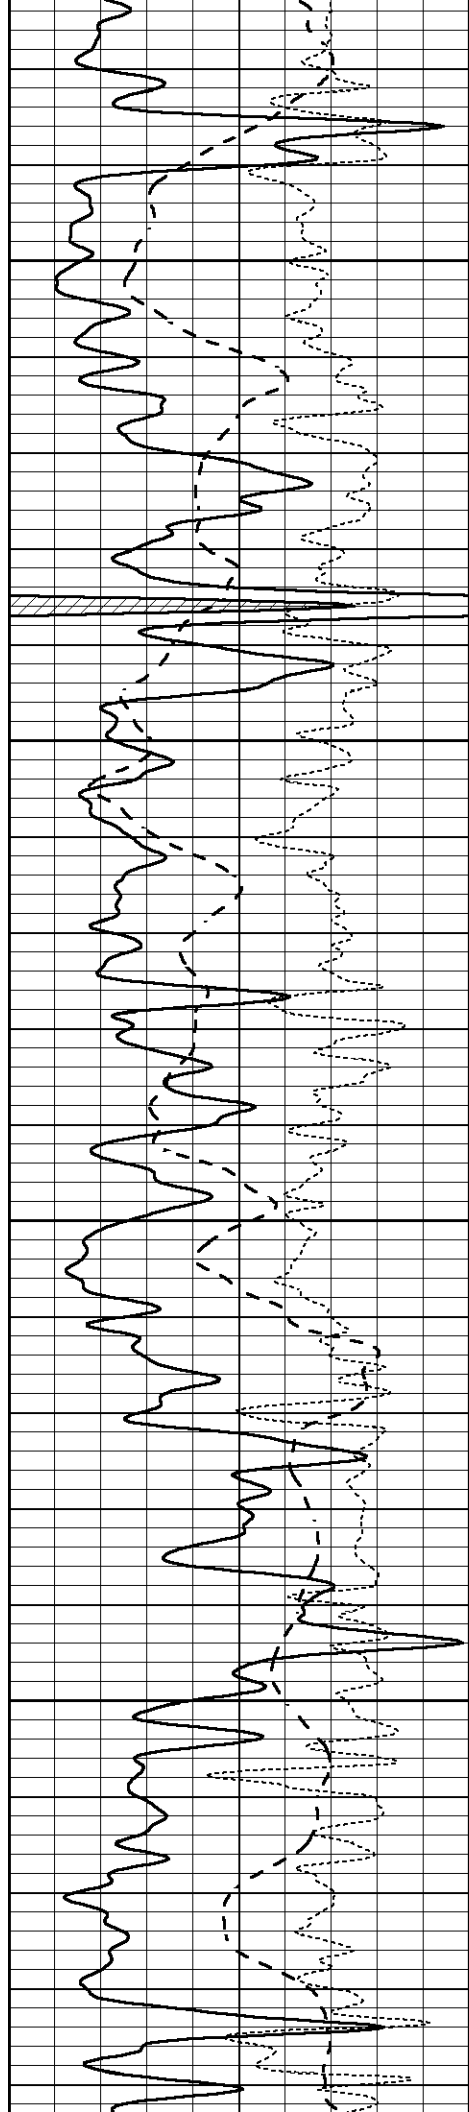



4250

4300

4350

4400

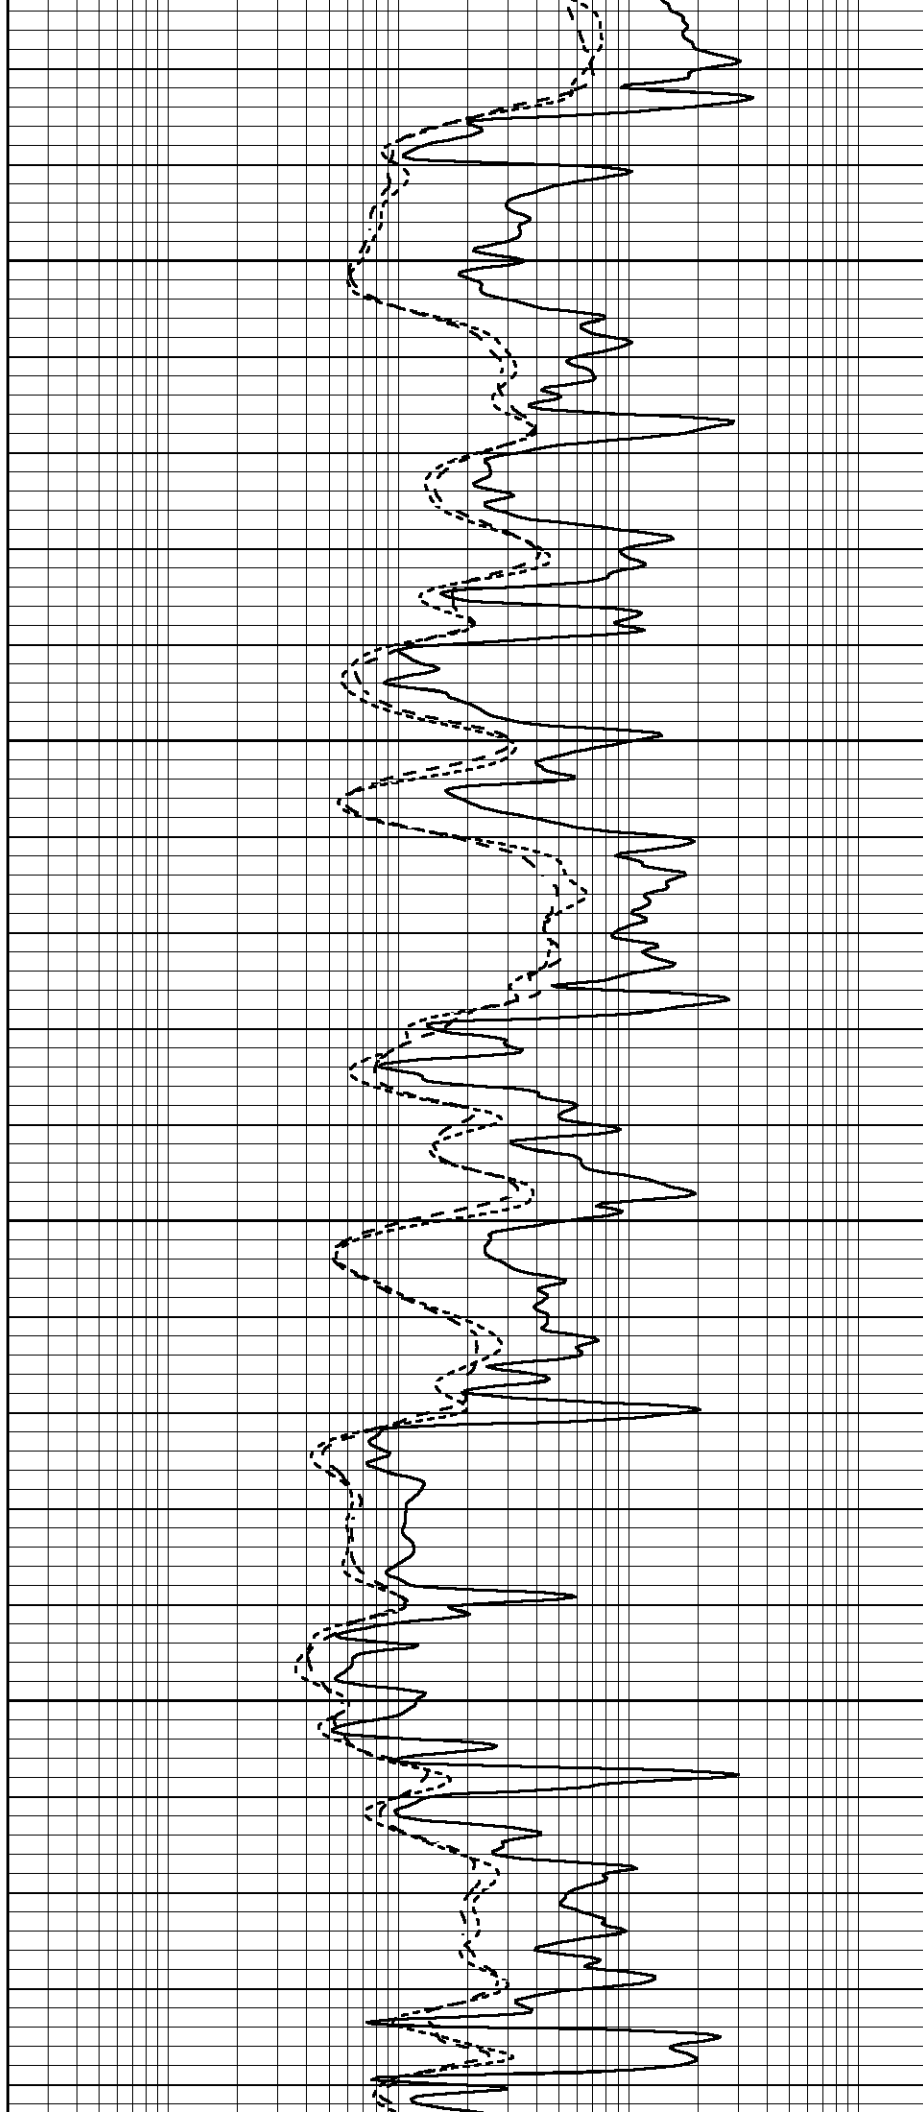

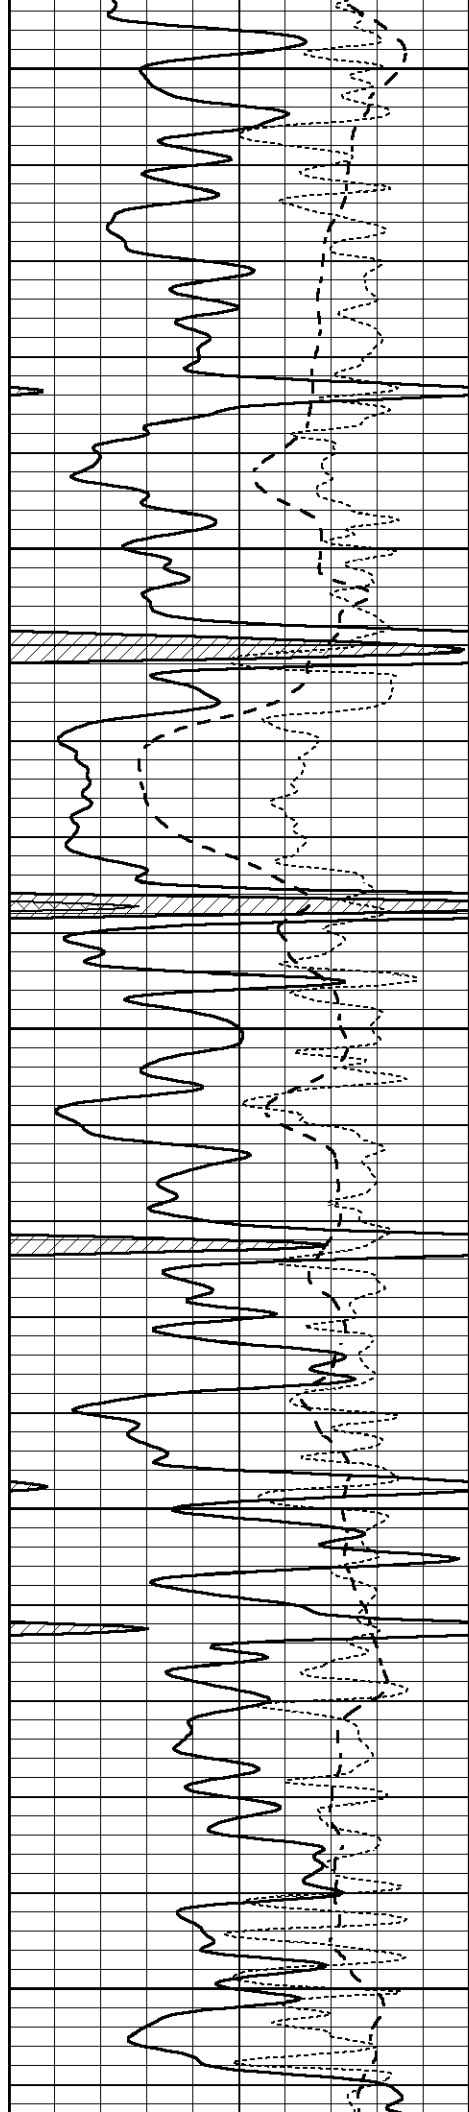


4450


4500

4550

4600

4650

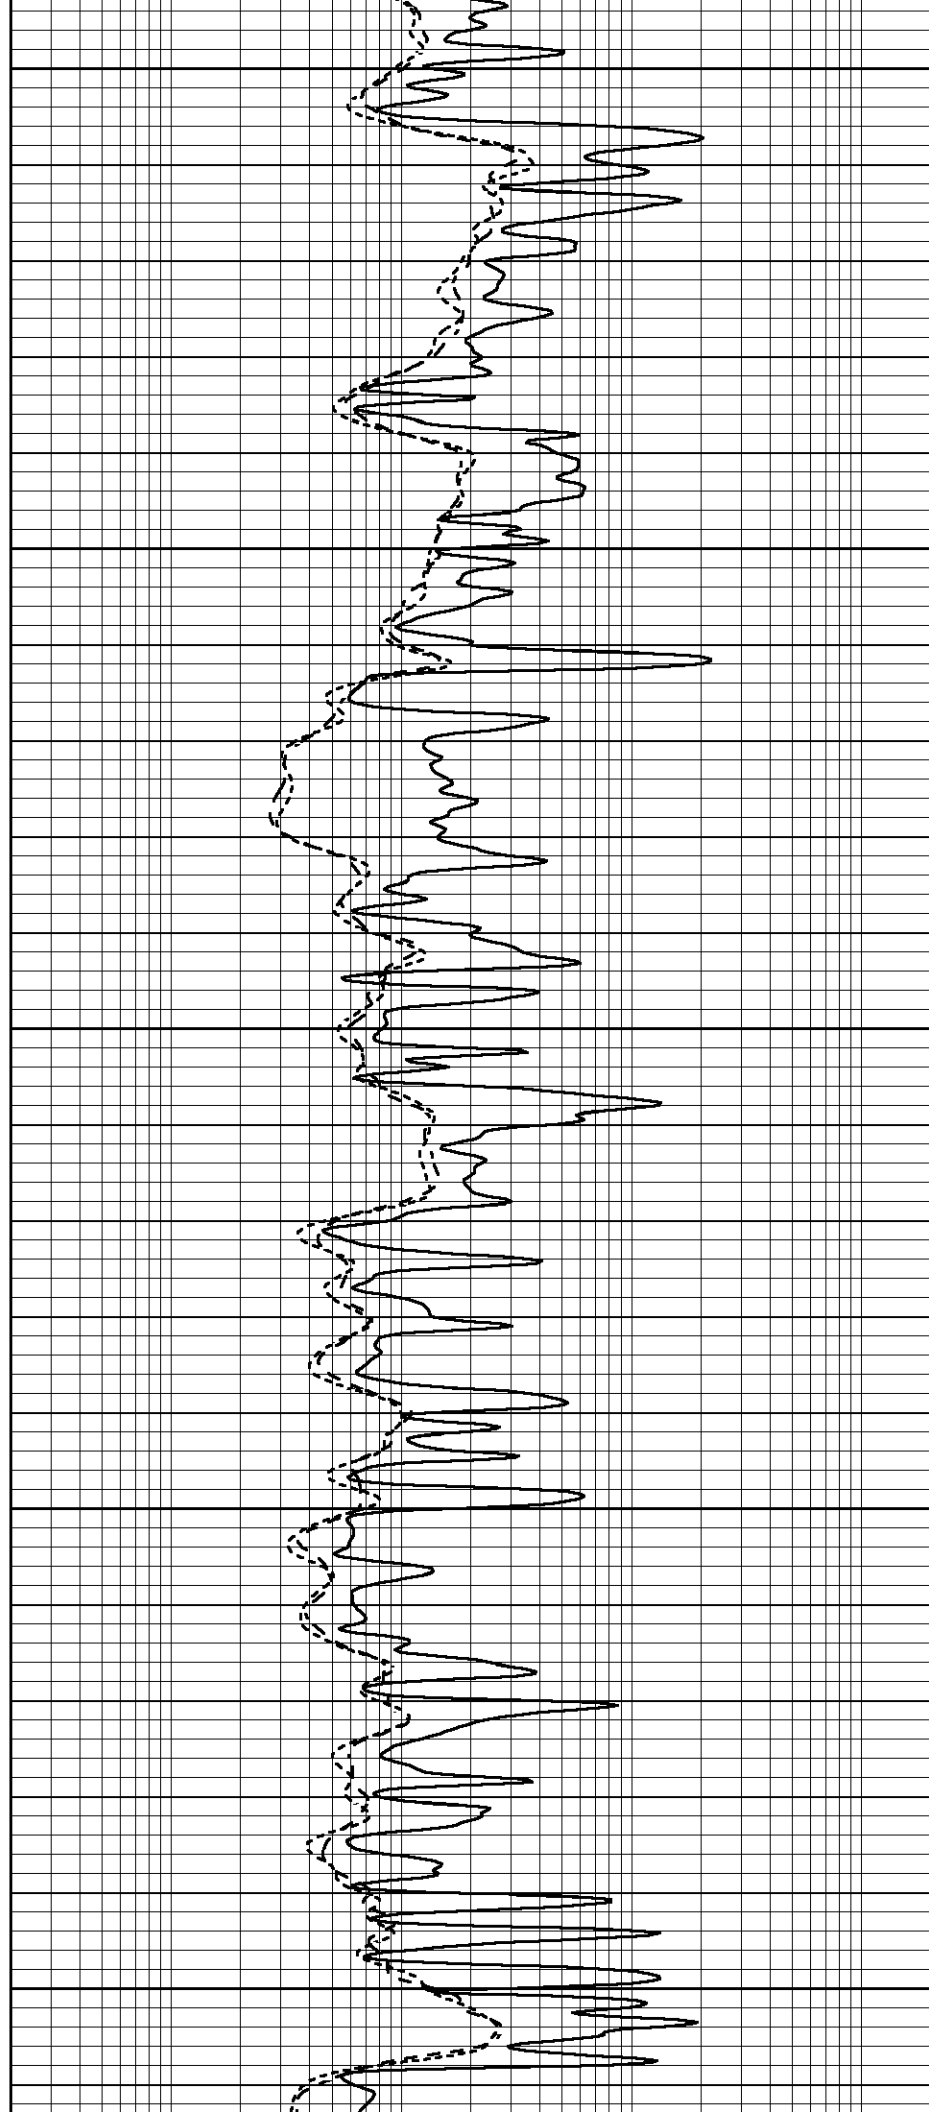

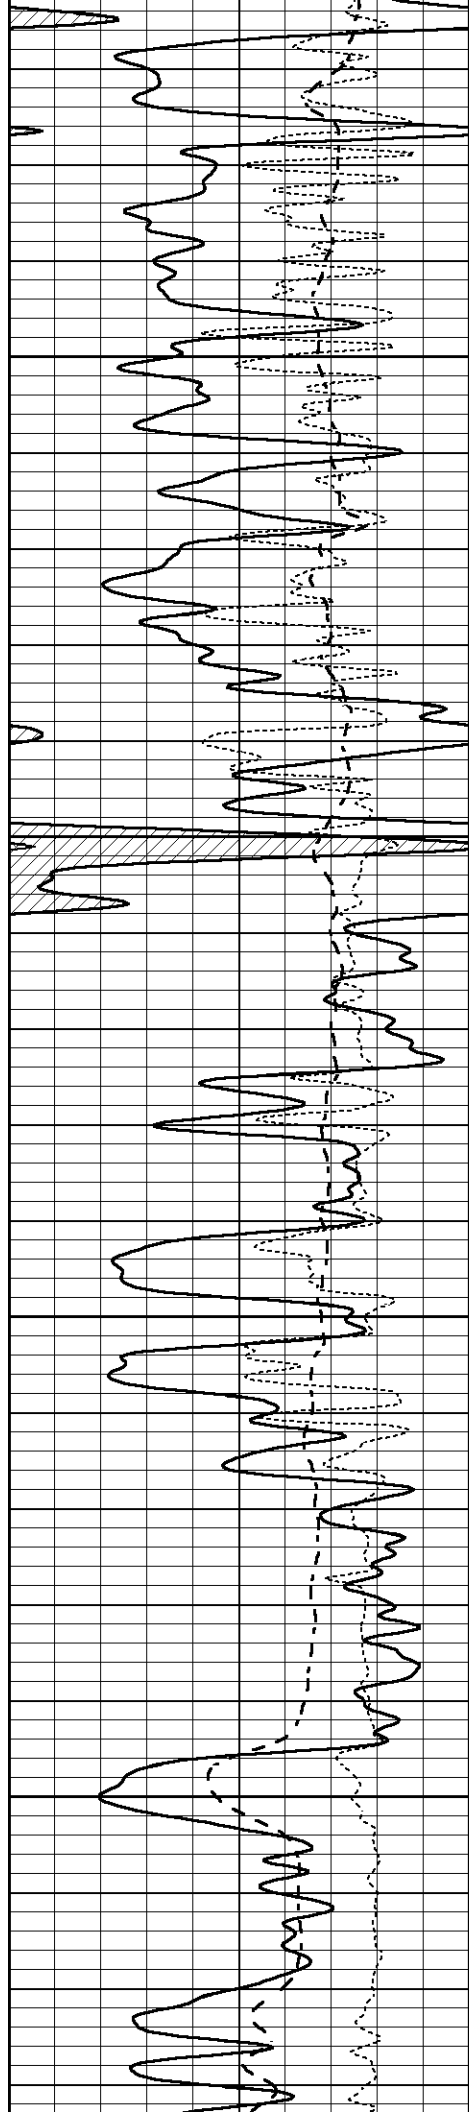



4700

4750

4800

4850

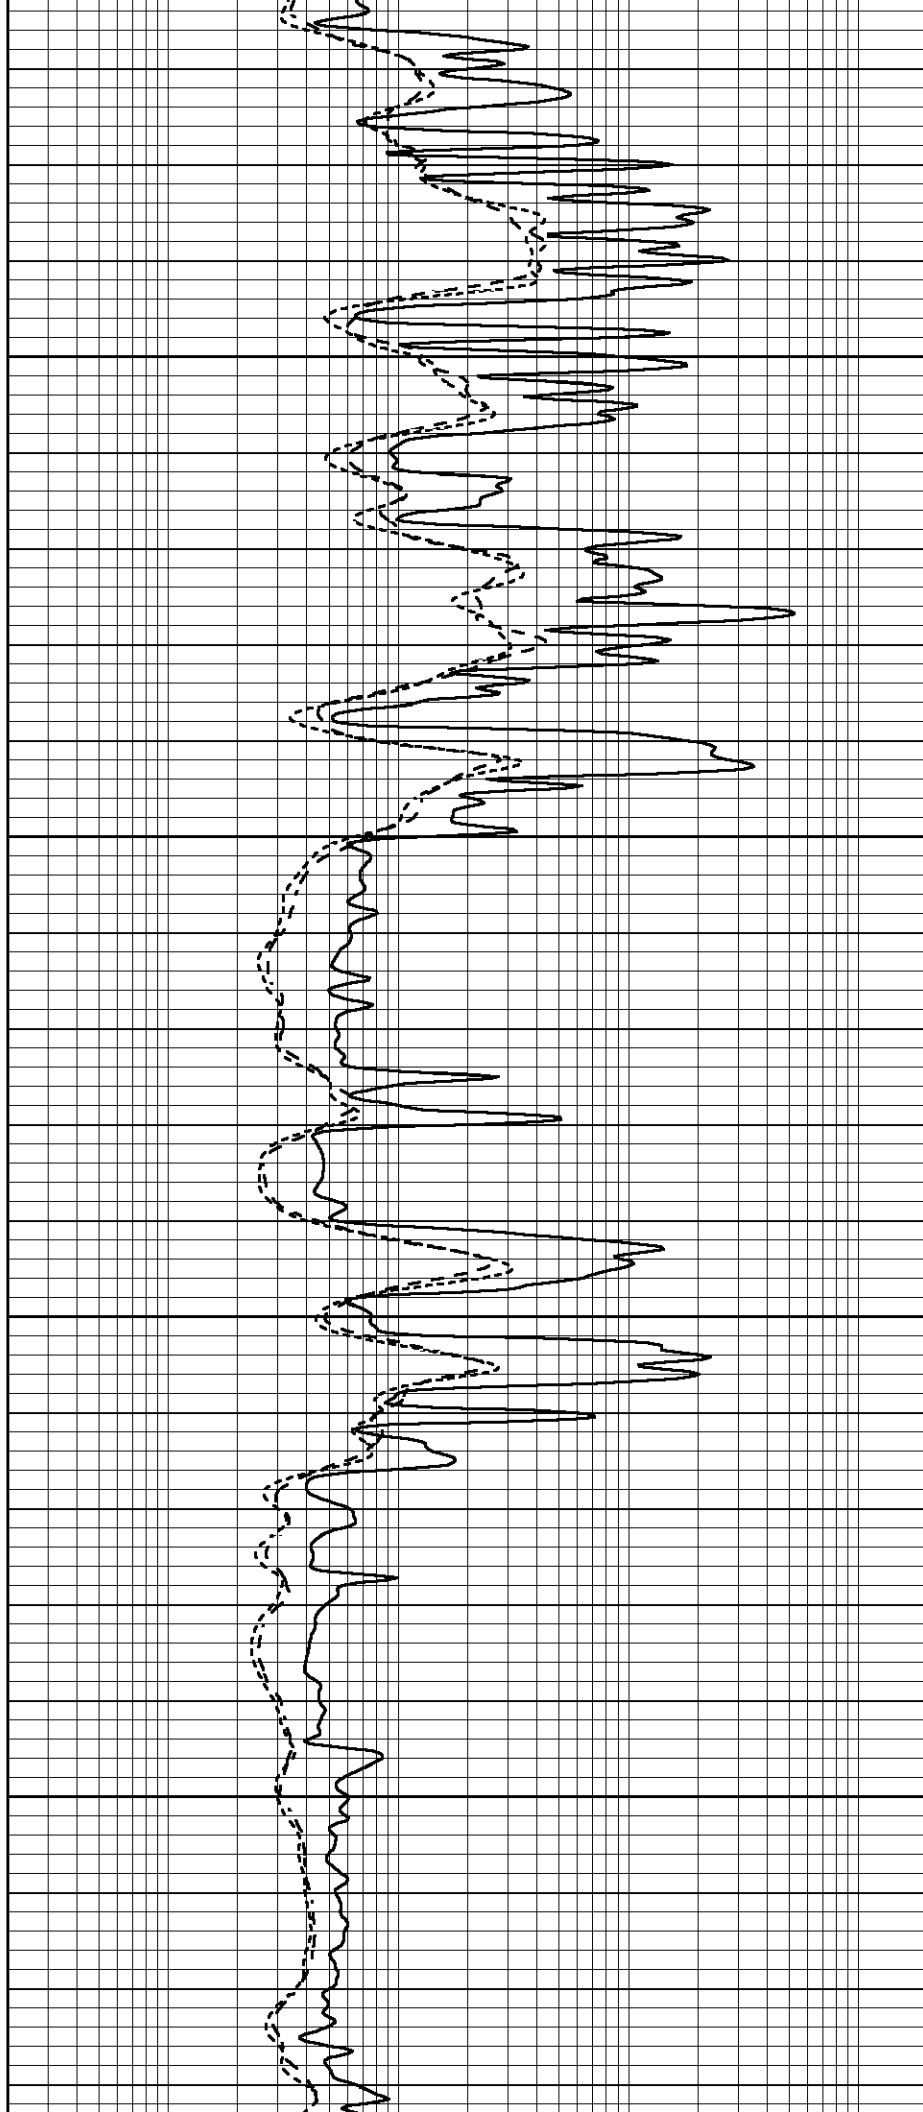

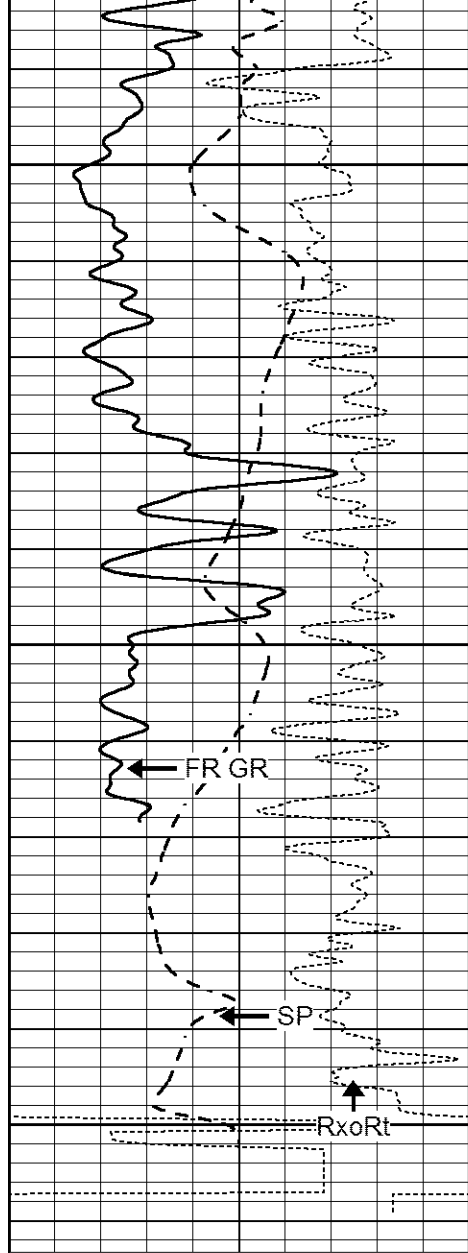


4900


4950

5000

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

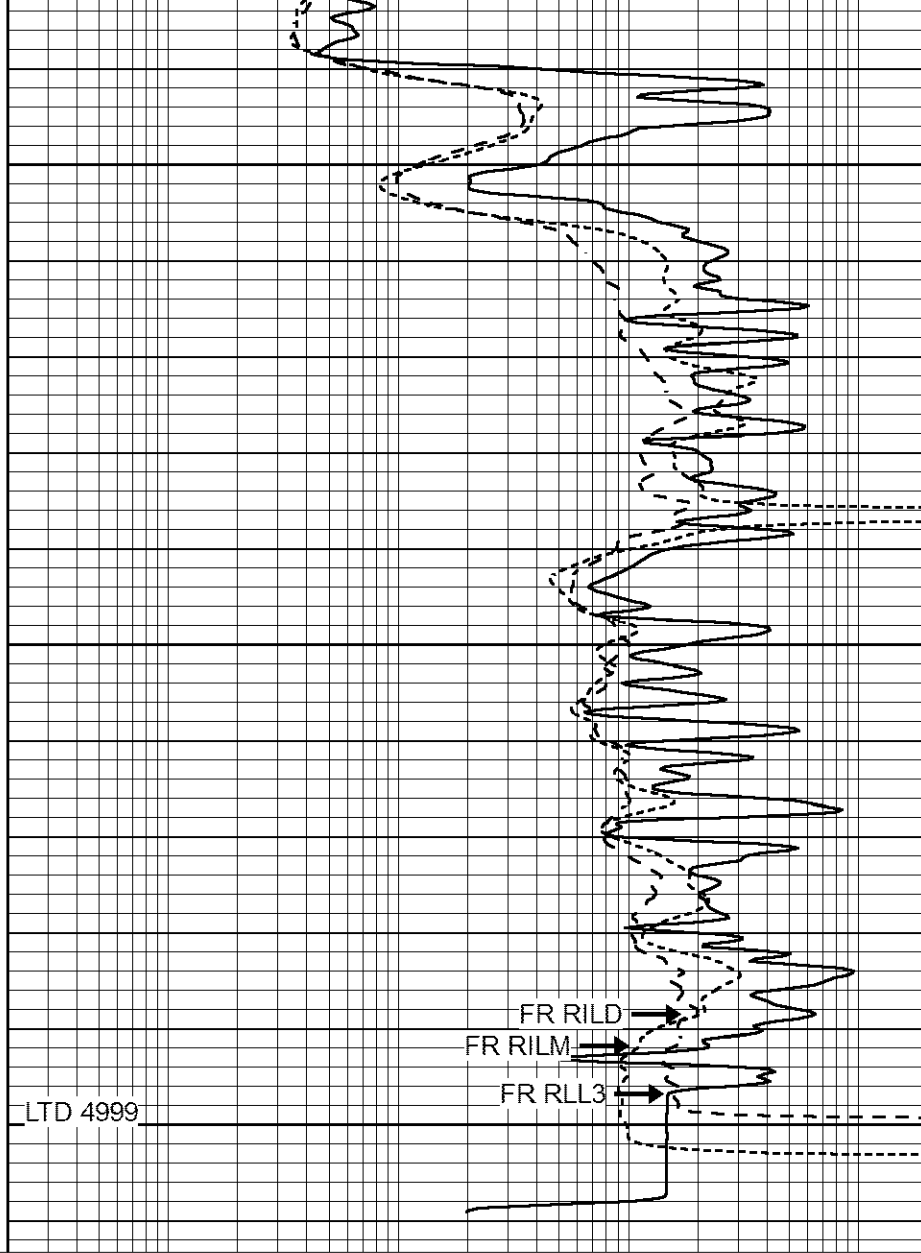

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

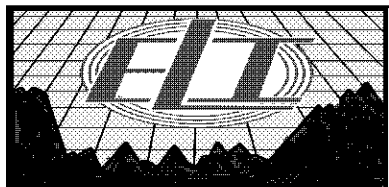


REPEAT SECTION


Database File 3002pe8.db
 Dataset Pathname pass2.2
 Presentation Format _dil
 Dataset Creation Wed Sep 05 16:18:46 2018
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

4700

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000



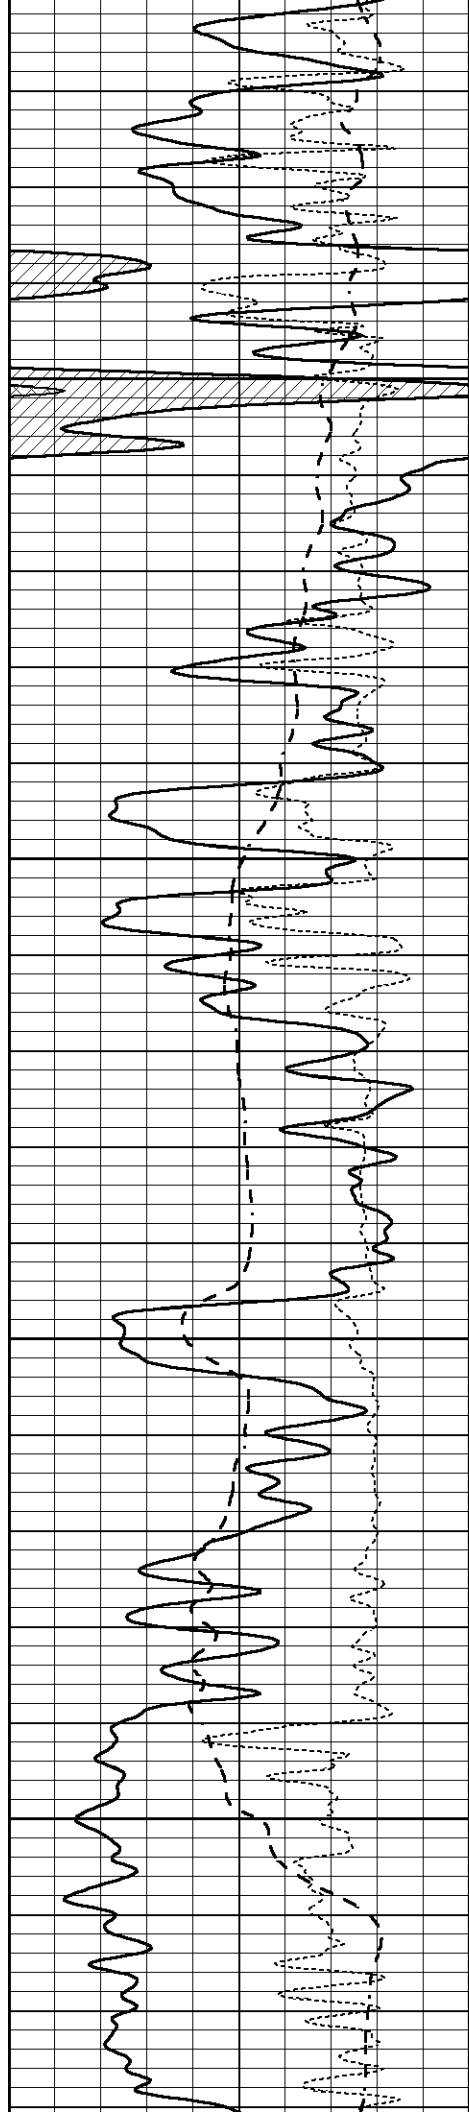



4750

4800

4850

4900

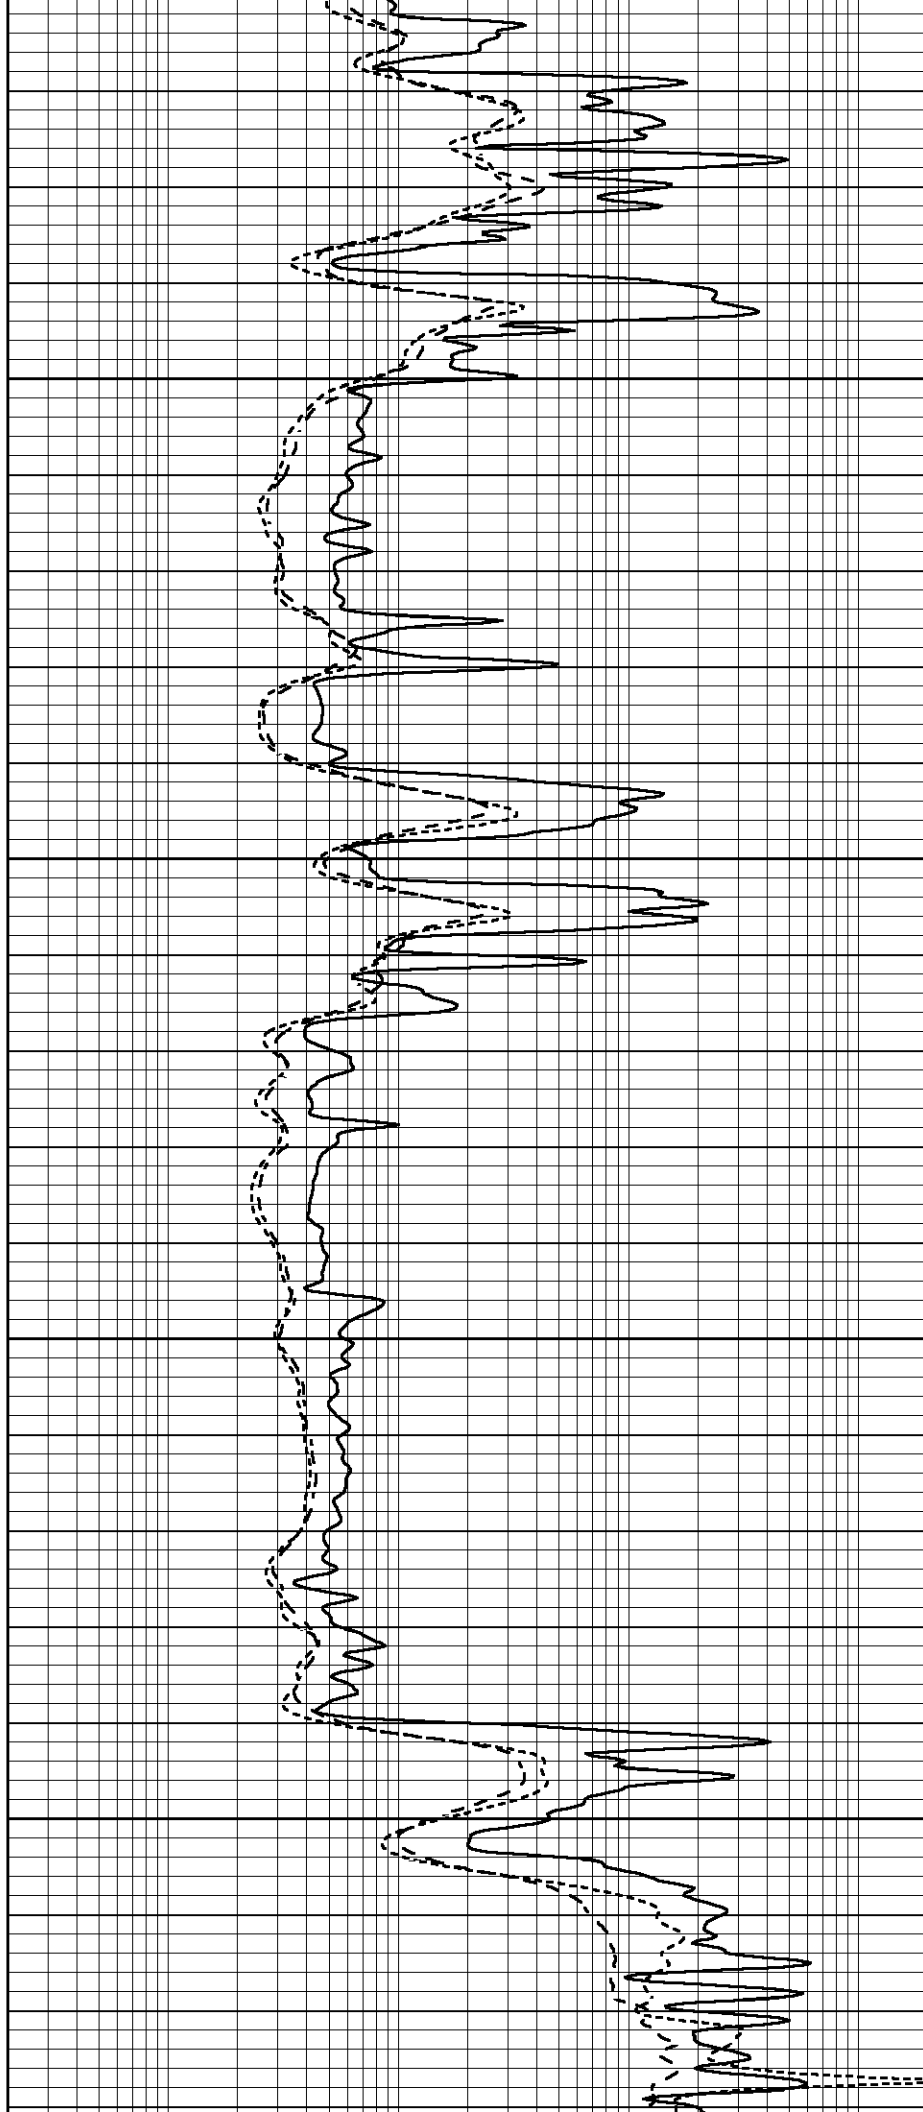

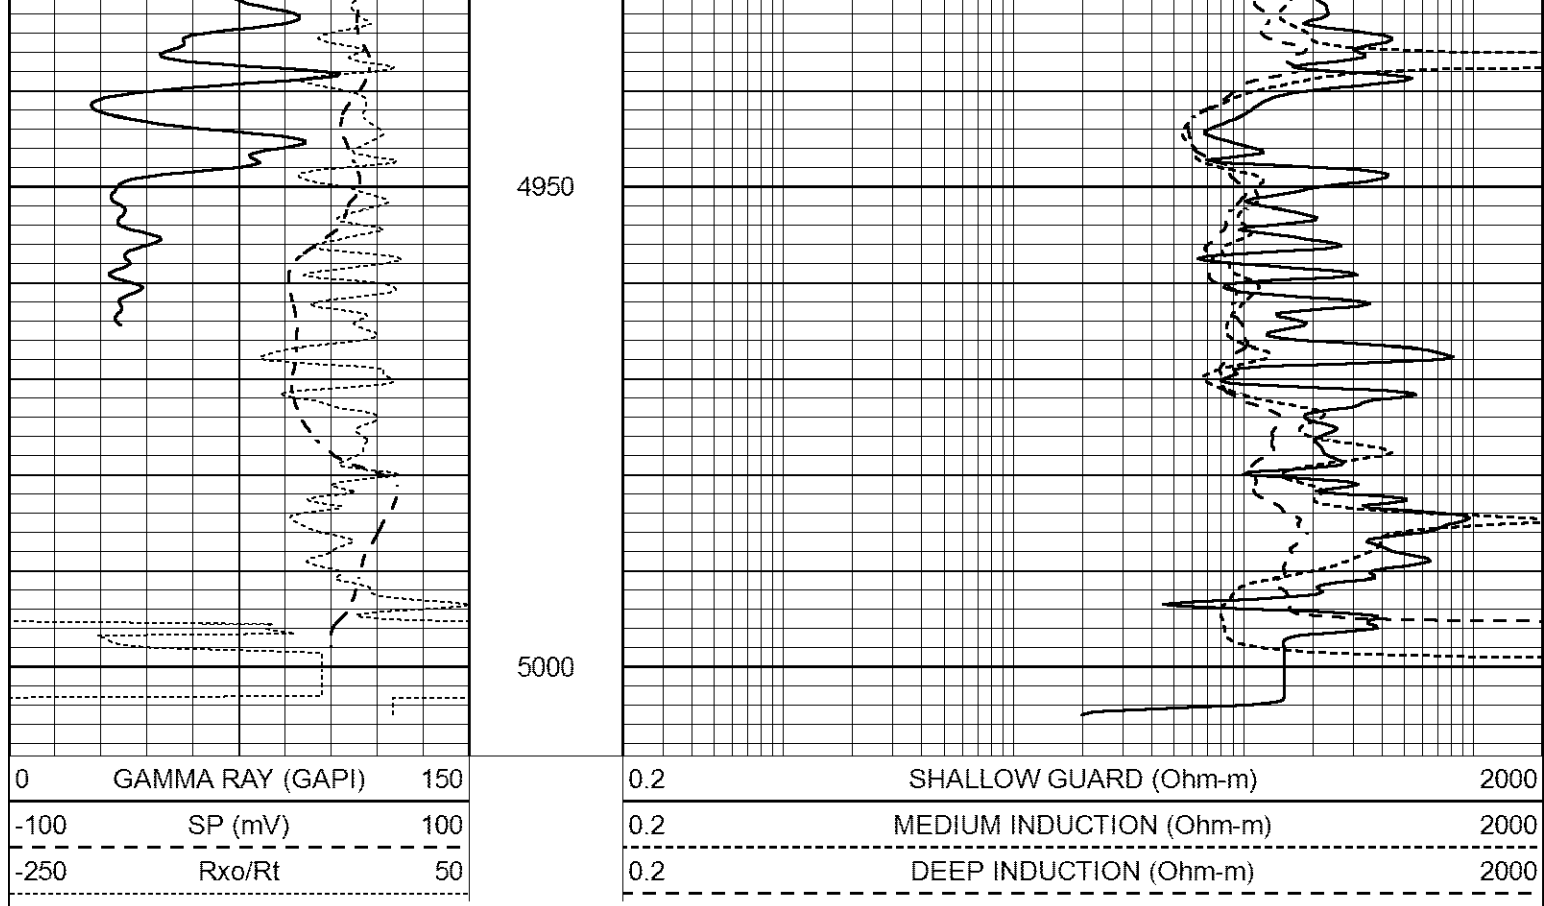

Calibration Report									
Database File	3002pe8.db								
Dataset Pathname	pass3.1								
Dataset Creation	Wed Sep 05 16:47:10 2018								
Dual Induction Calibration Report									
Serial-Model:				FW1410-55-Probe					
Surface Cal Performed:				Mon May 22 14:23:32 2017					
Downhole Cal Performed:				Thu Mar 12 09:29:20 2015					
After Survey Verification Performed:				Thu Mar 12 09:29:20 2015					
Surface Calibration									
		Readings			References			Results	
Loop:	Air	Loop		Air	Loop		m	b	
Deep	0.011	0.656	V	1.000	400.000	mmho/m	618.595	-5.524	
Medium	-0.000	0.731	V	1.000	464.000	mmho/m	632.856	1.197	
Internal:	Zero	Cal		Zero	Cal		m	b	
Deep	0.007	0.649	V	0.000	400.000	mmho/m	623.784	-4.595	
Medium	0.004	0.743	V	0.000	464.000	mmho/m	627.284	-2.251	
Downhole Calibration									
		Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'	
Deep	-0.824	395.917	mmho/m	-0.976	397.550	mmho/m	1.004	-0.149	
Medium	3.565	471.327	mmho/m	3.468	471.590	mmho/m	1.001	-0.099	
LL3		7.503	V		1500.000	Ohm-m			
		0.001	V		20.000	Ohm-m			
		-7.481	V		3745.000	mmho-m			

After Survey Verification

	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	-0.824	395.917	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	3.565	471.327	mmho/m	1.000	0.000
LL3		0.000	Ohm-m		1500.000	Ohm-m		
		0.000	Ohm-m		20.000	Ohm-m		
		0.000	mmho-m		3745.000	mmho-m		

Compensated Neutron Calibration Report
--

Serial Number:	080621PMC
Tool Model:	NABORS

PRE-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	

POST-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	

Gamma Ray Calibration Report

Serial Number:	7	
Tool Model:	Probe1	
Performed:	Wed Jun 29 11:10:58 2016	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.4300	GAPI/cps