

MICRO LOG


Company	PALOMINO PETROLEUM, INC.		
Well	RIVERSIDE - CAMBRON #1		
Field	WILDCAT		
County	NESS	State	KANSAS
Location:	API # : 15-135-26013-0000 1352' FNL & 142' FEL NE - NE - SE - NE		Other Services CDL/CNL/PE DIL/SONIC
Permanent Datum	GROUND LEVEL	Elevation	2648
Log Measured From	KELLY BUSHING 5' A.G.L.	Elevation	K.B. 2653 D.F. 2651 G.L. 2648
Drilling Measured From	KELLY BUSHING		
Date	8/30/18		
Run Number	TWO		
Depth Driller	4720		
Depth Logger	4722		
Bottom Logged Interval	4706		
Top Log Interval	3700		
Casing Driller	8 5/8"@853'		
Casing Logger	853		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2,100 PPM	
Density / Viscosity	9.1/46		
pH / Fluid Loss	10.0/9.2		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	1.30@90F		
Rmf @ Meas. Temp	.975@90F		
Rmc @ Meas. Temp	1.56@90F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.951@123F		
Time Circulation Stopped	4.5 HOURS		
Time Logger on Bottom	4:30 A.M.		
Maximum Recorded Temperature	123F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	ANDREW STENZEL		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
UTICA, KS., 3W. ON HWY 4 TO "QUINTER RD.", 1/2N., W. INTO

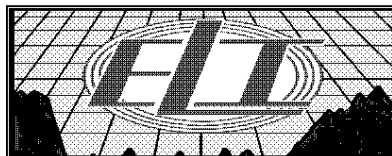


MAIN SECTION

Database File: 2930pe.db
Dataset Pathname: pass6.3
Presentation Format: micro
Dataset Creation: Thu Aug 30 05:22:50 2018 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

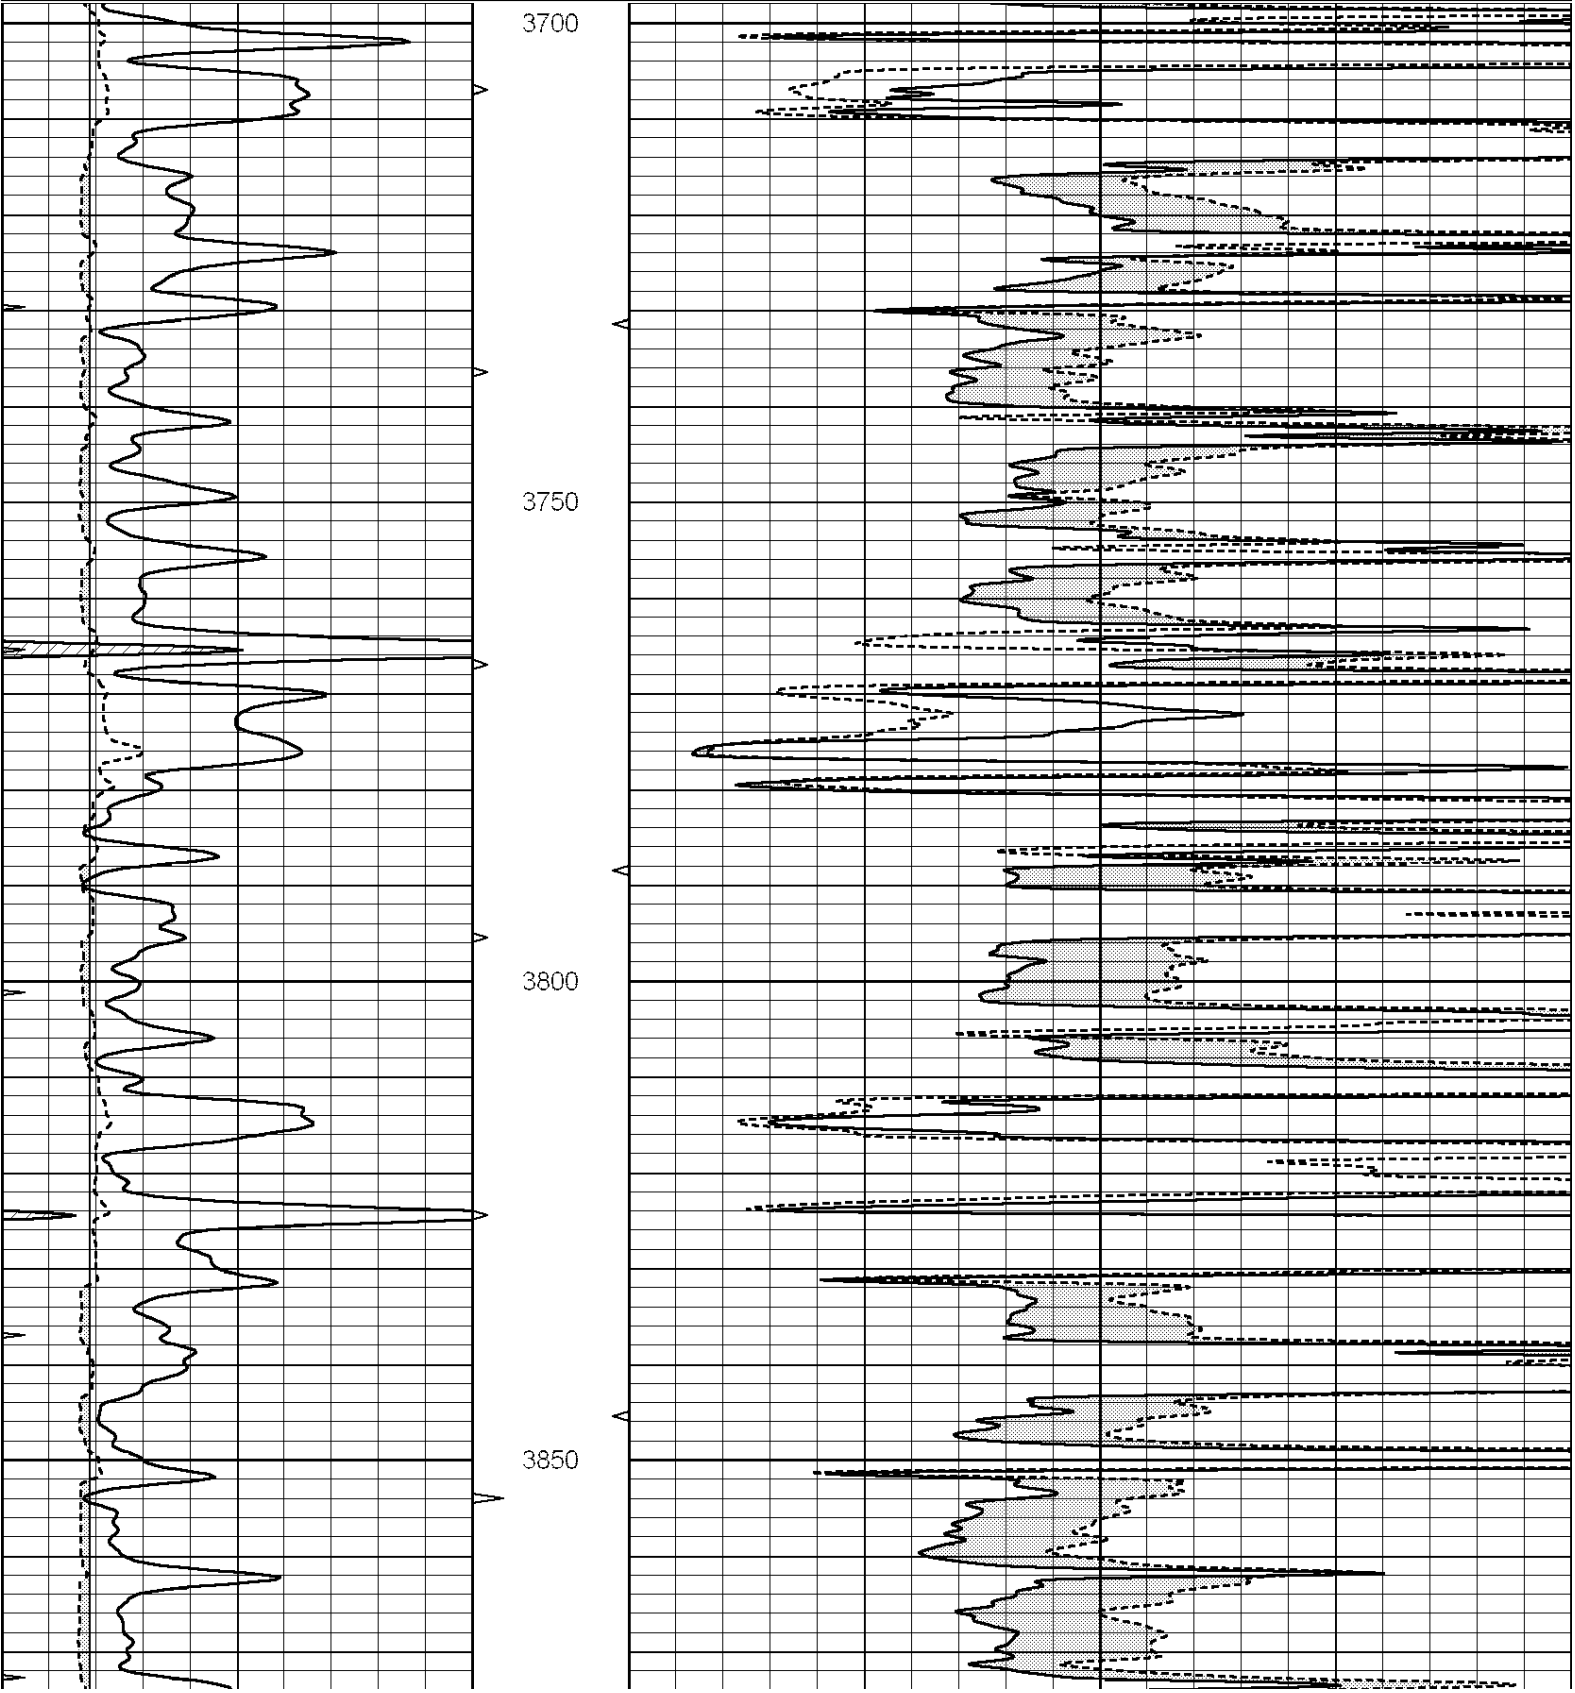

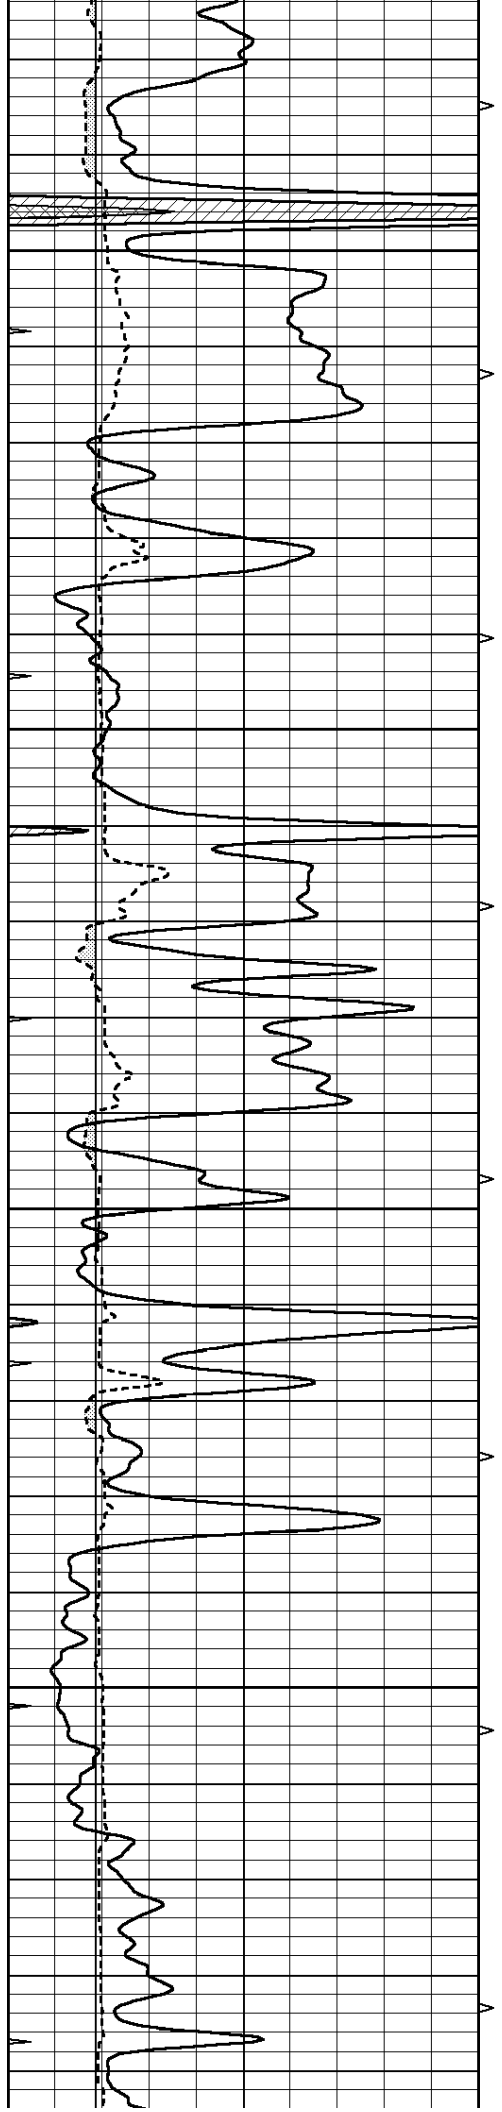



3900

3950

4000

4050

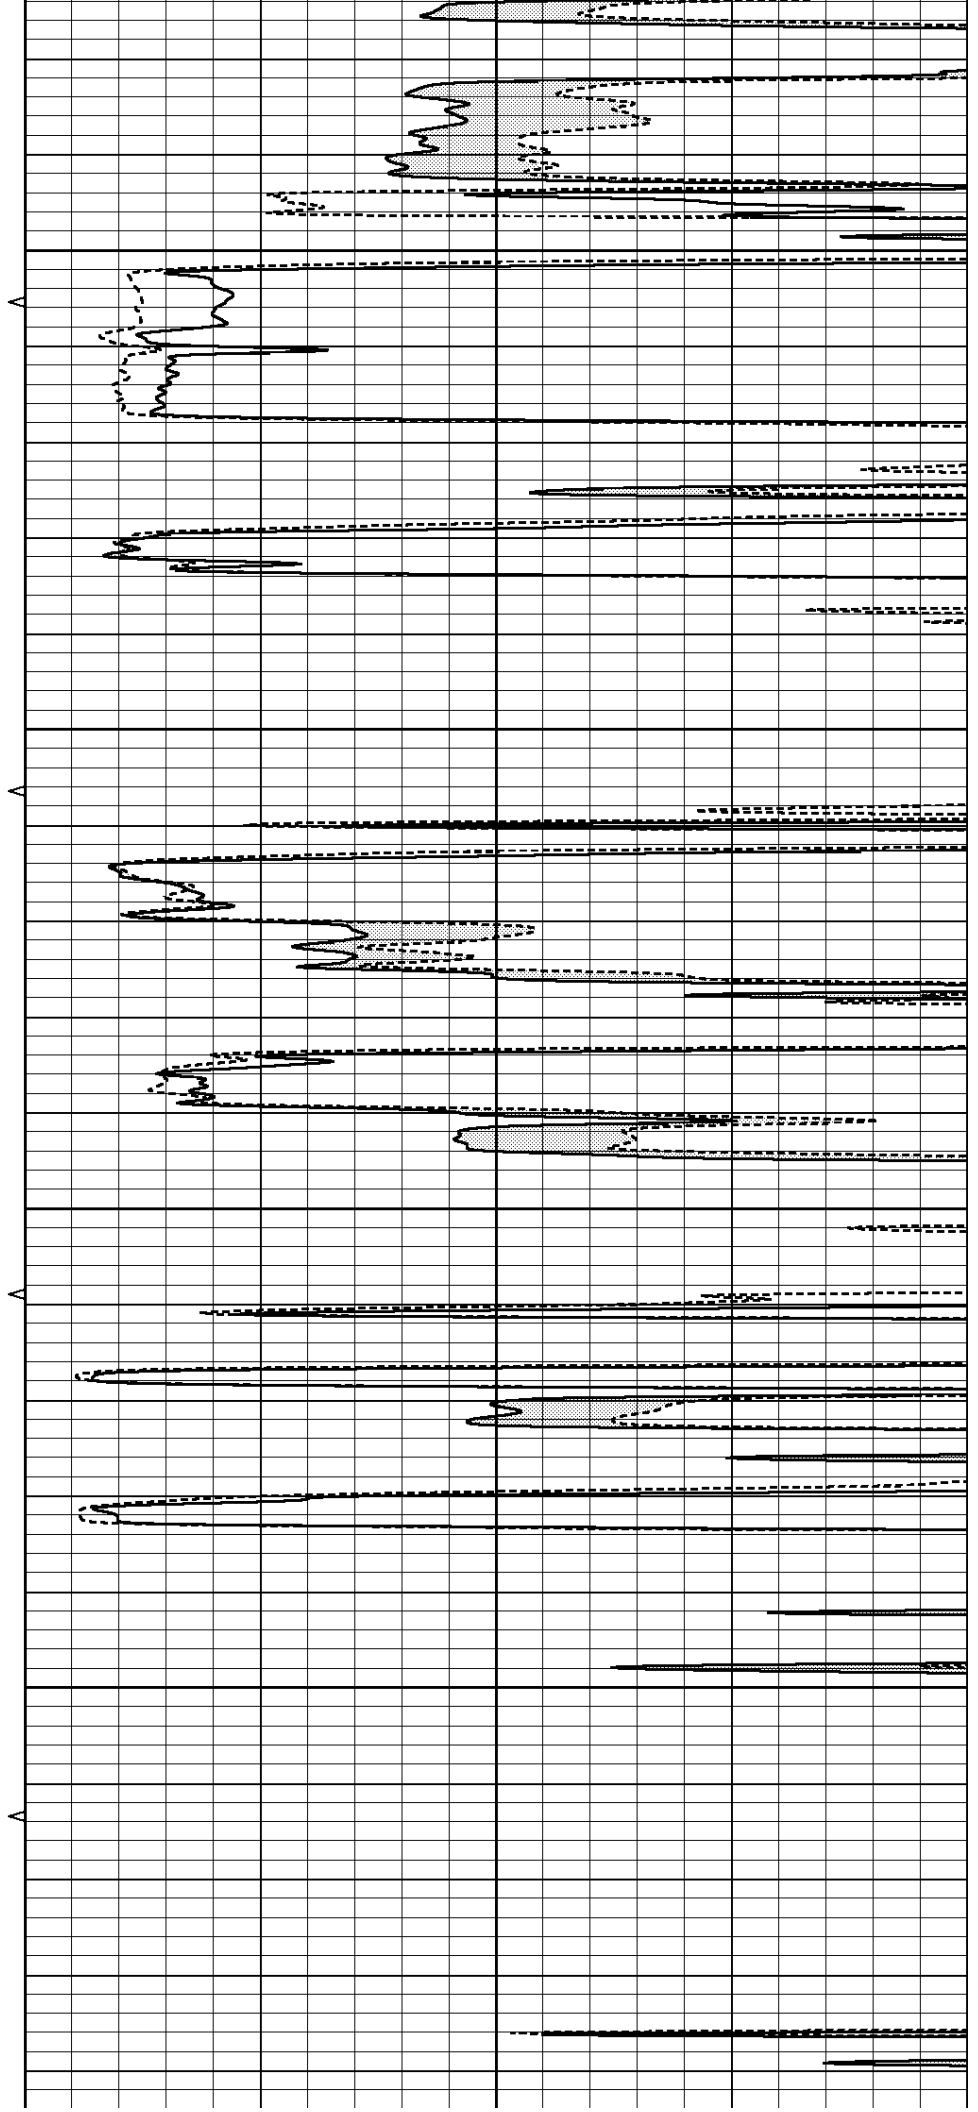

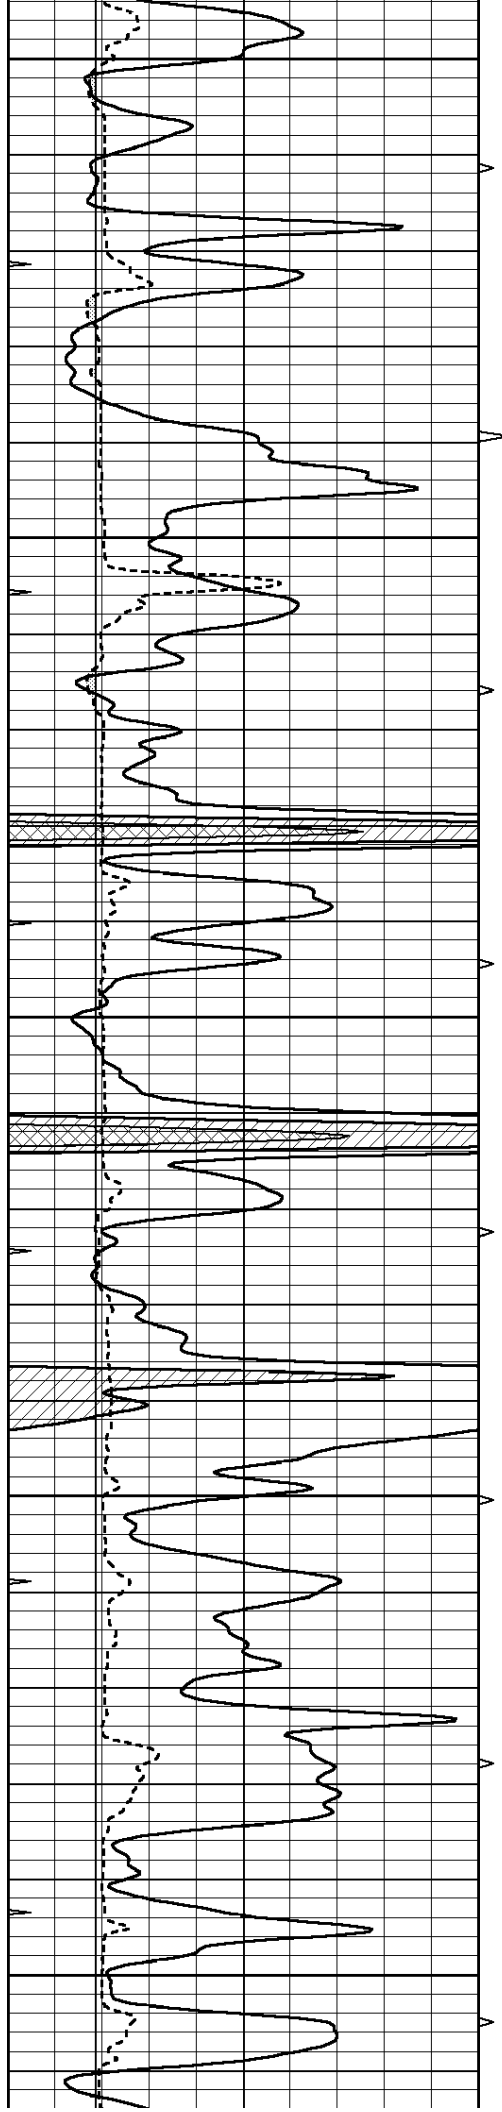


4100



4150


4200


4250

4300

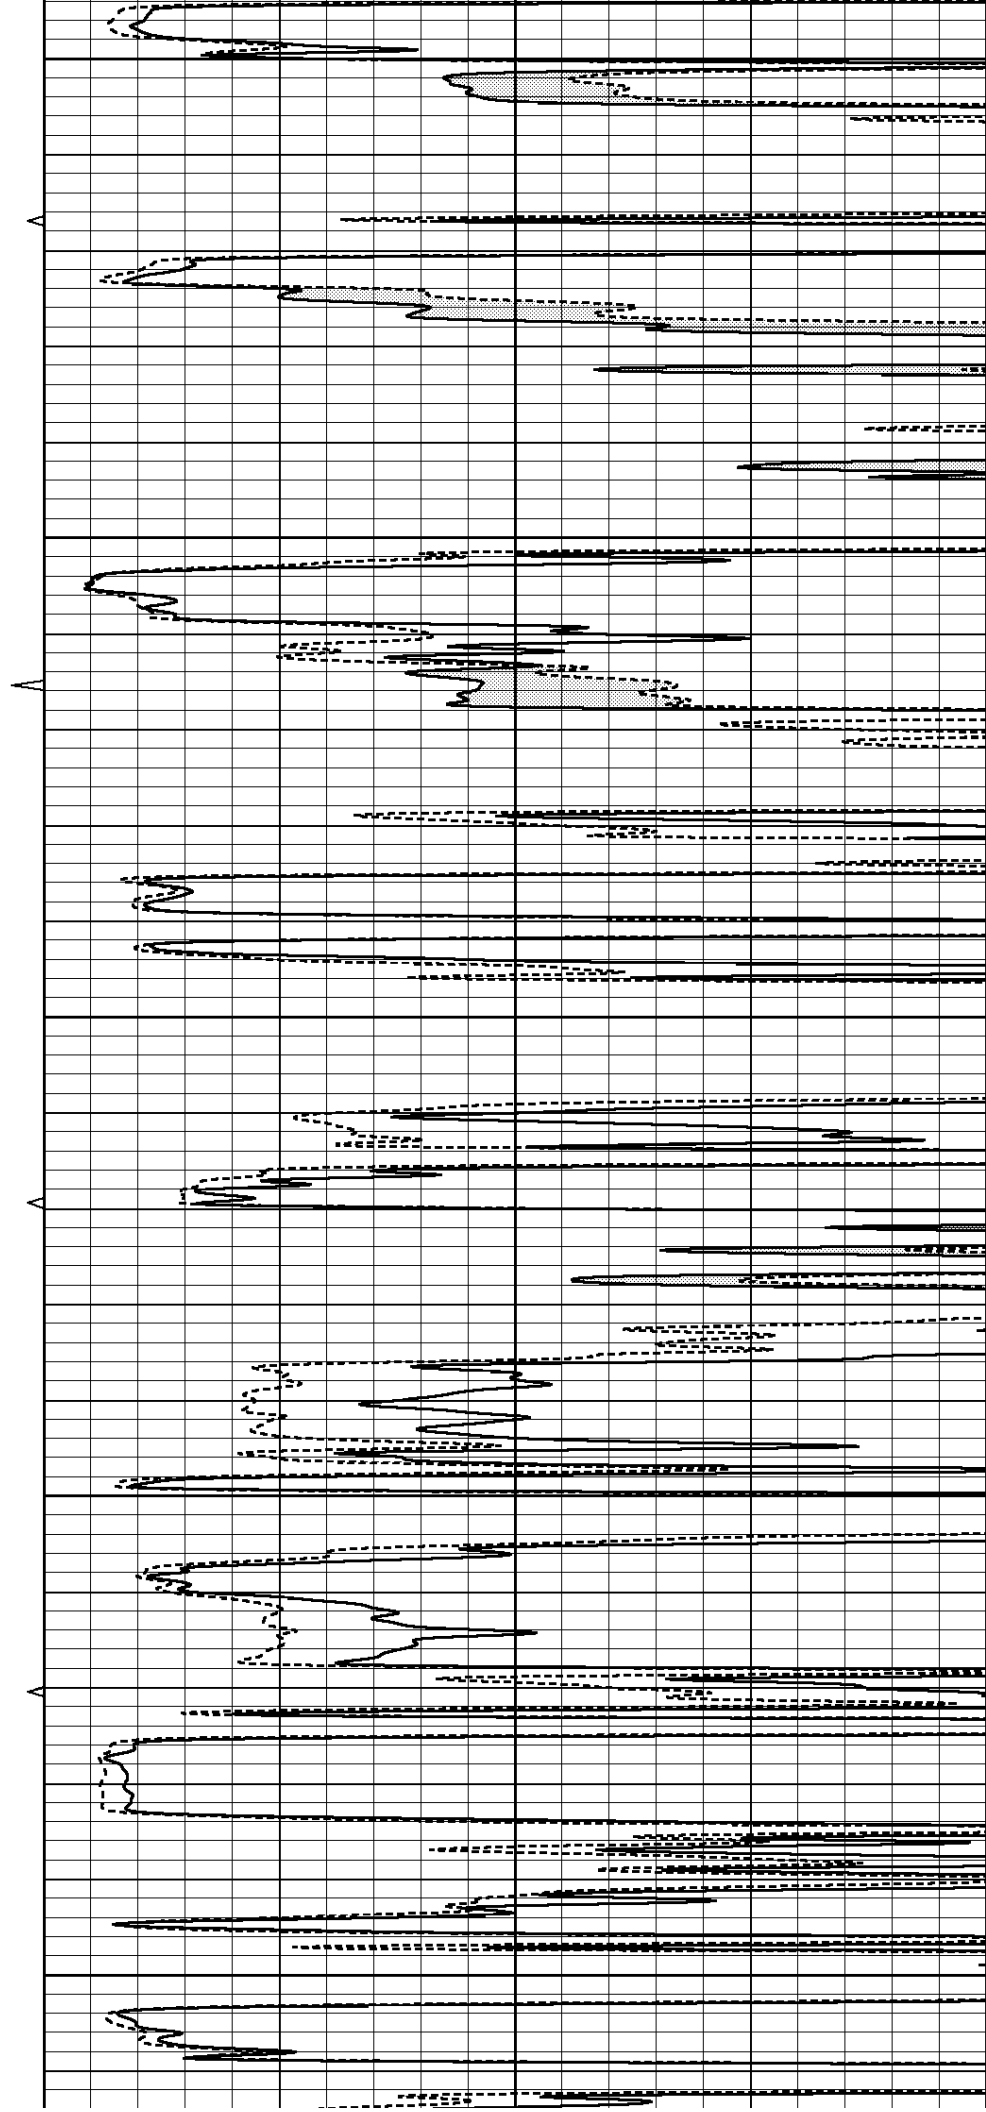

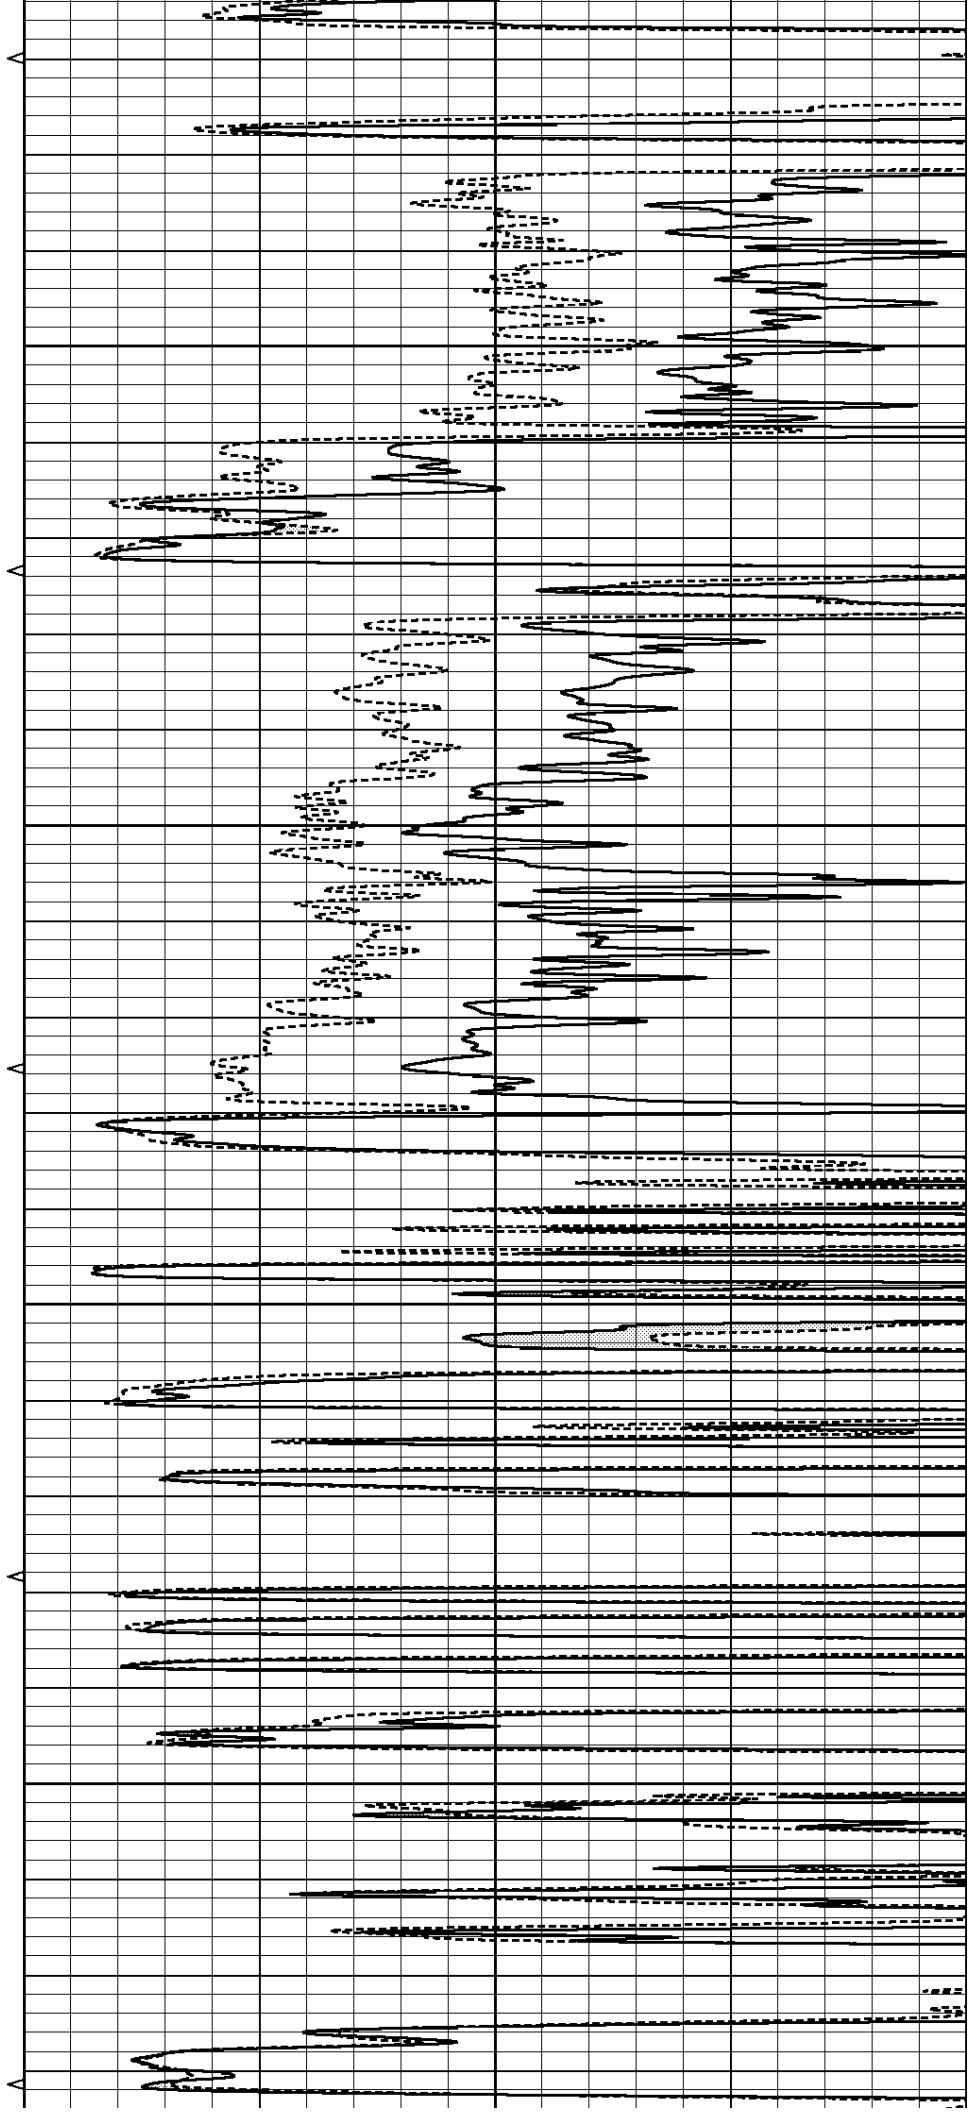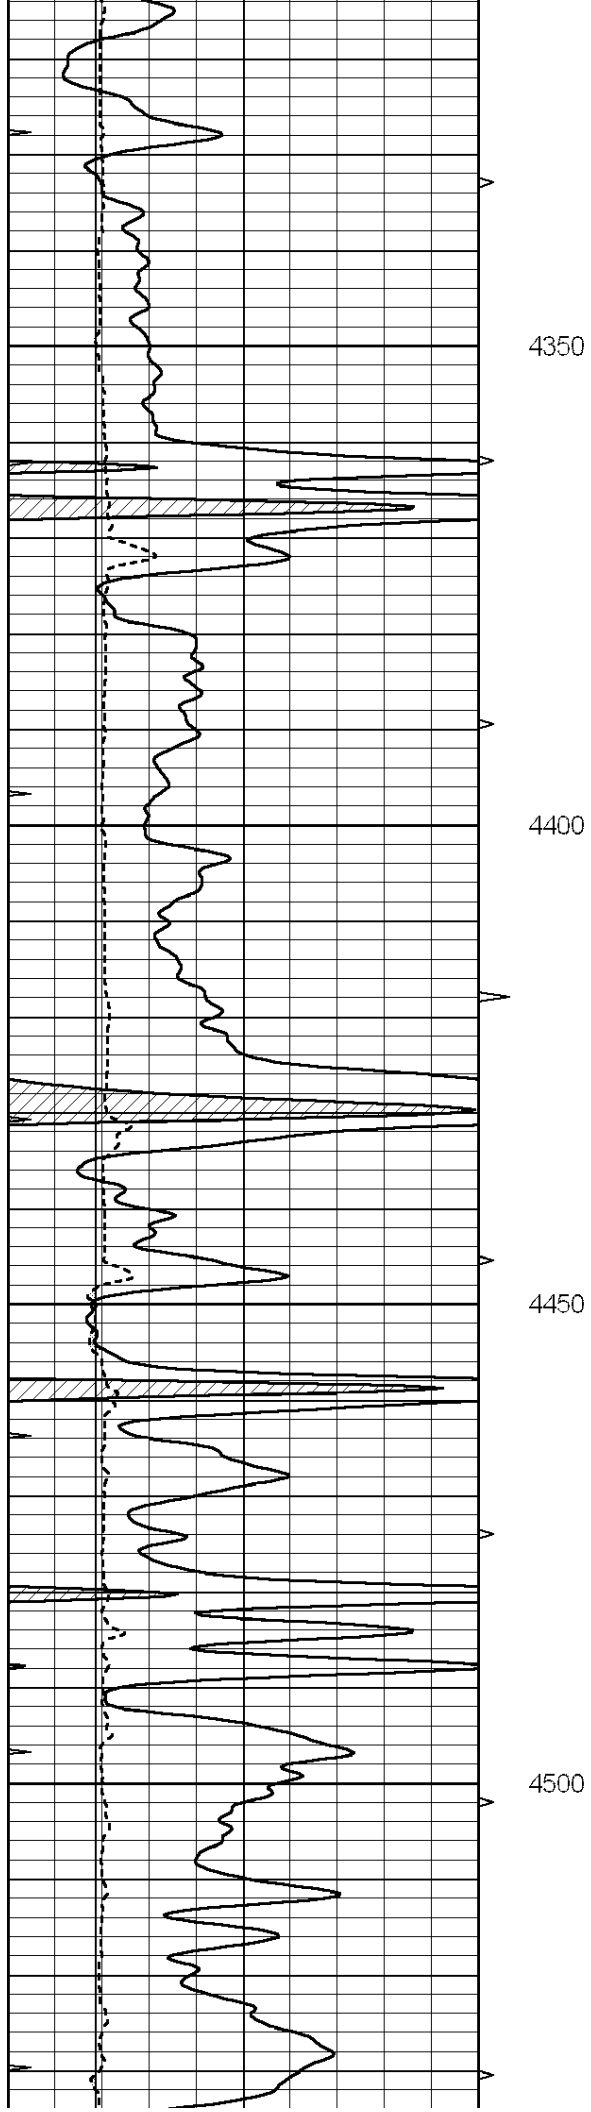

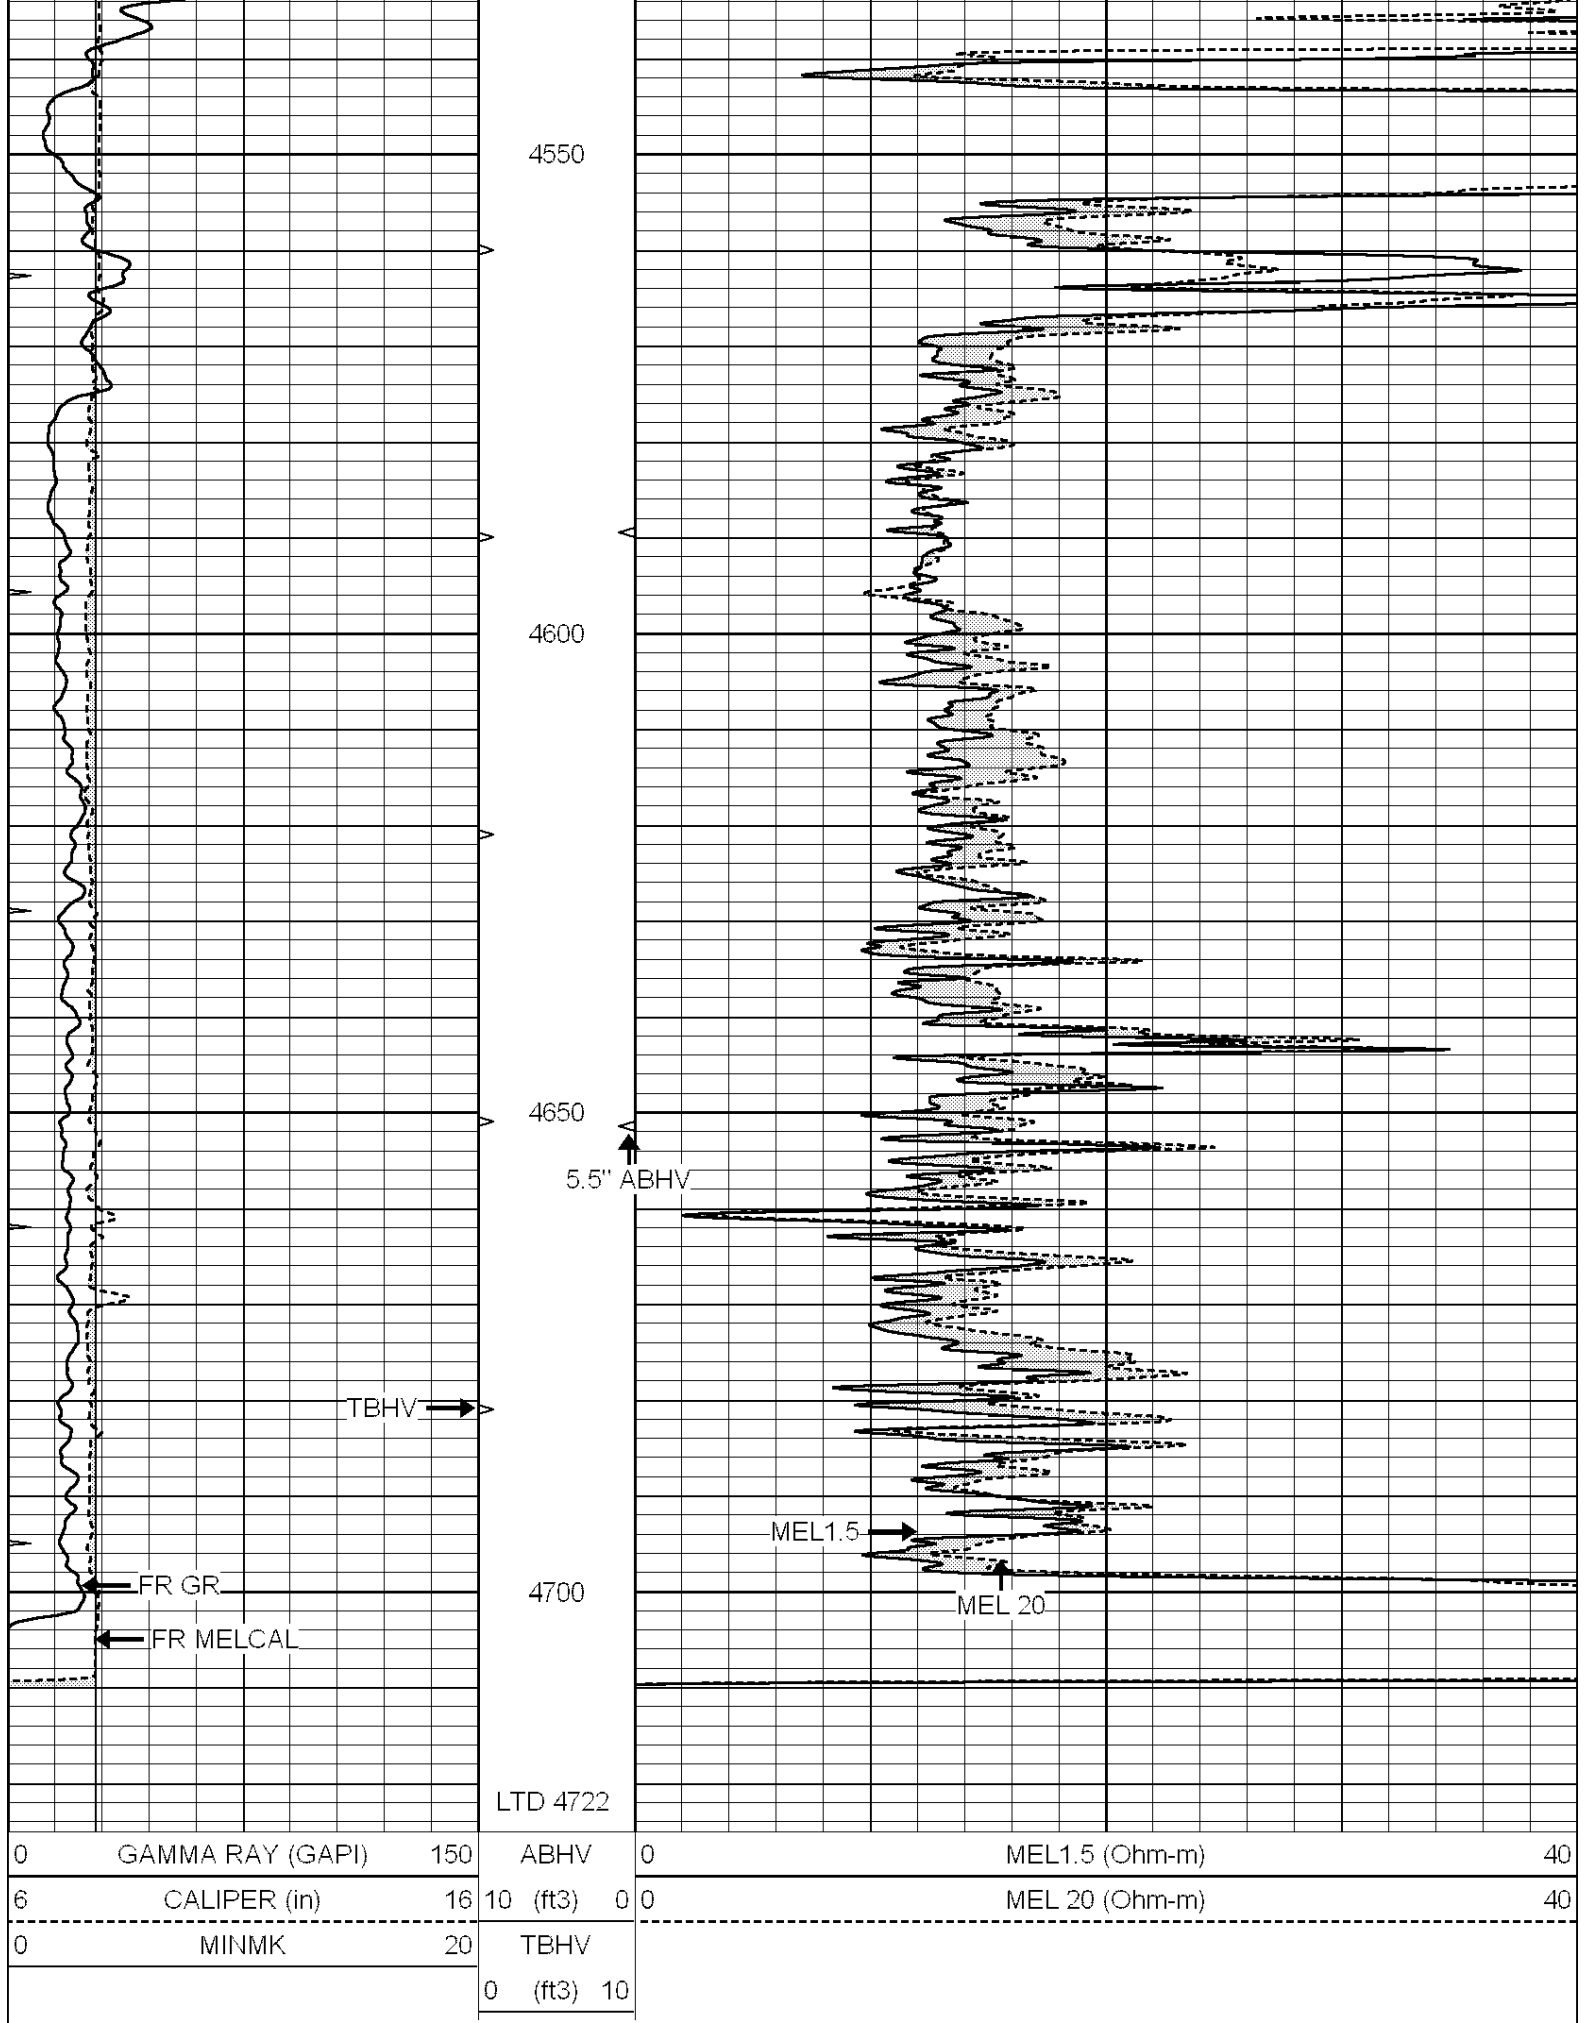


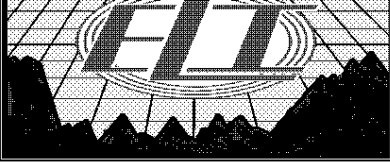


REPEAT SECTION

Database File: 2930pe.db
Dataset Pathname: pass5.5
Presentation Format: micro
Dataset Creation: Thu Aug 30 05:34:00 2018 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

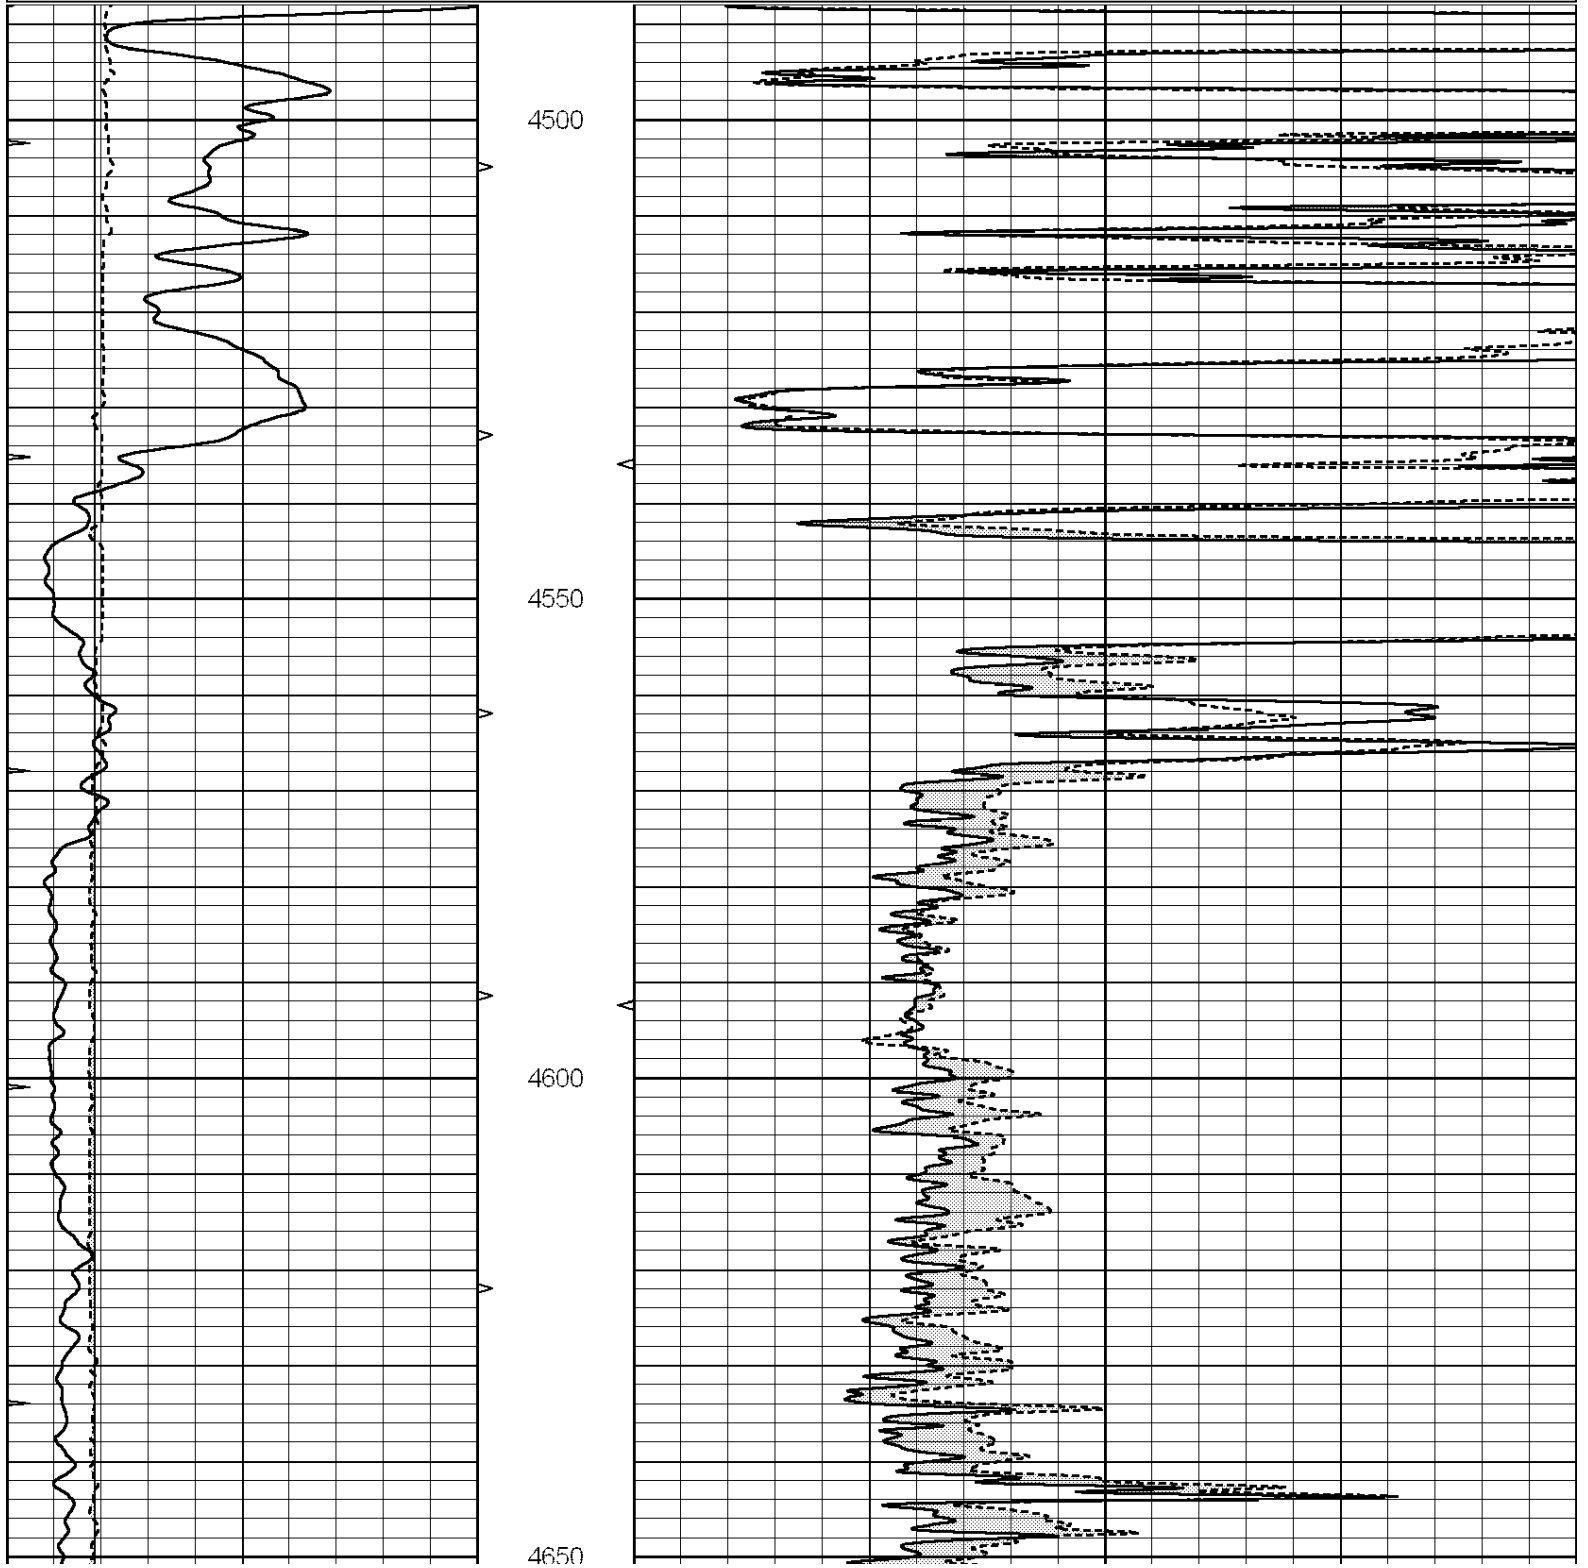

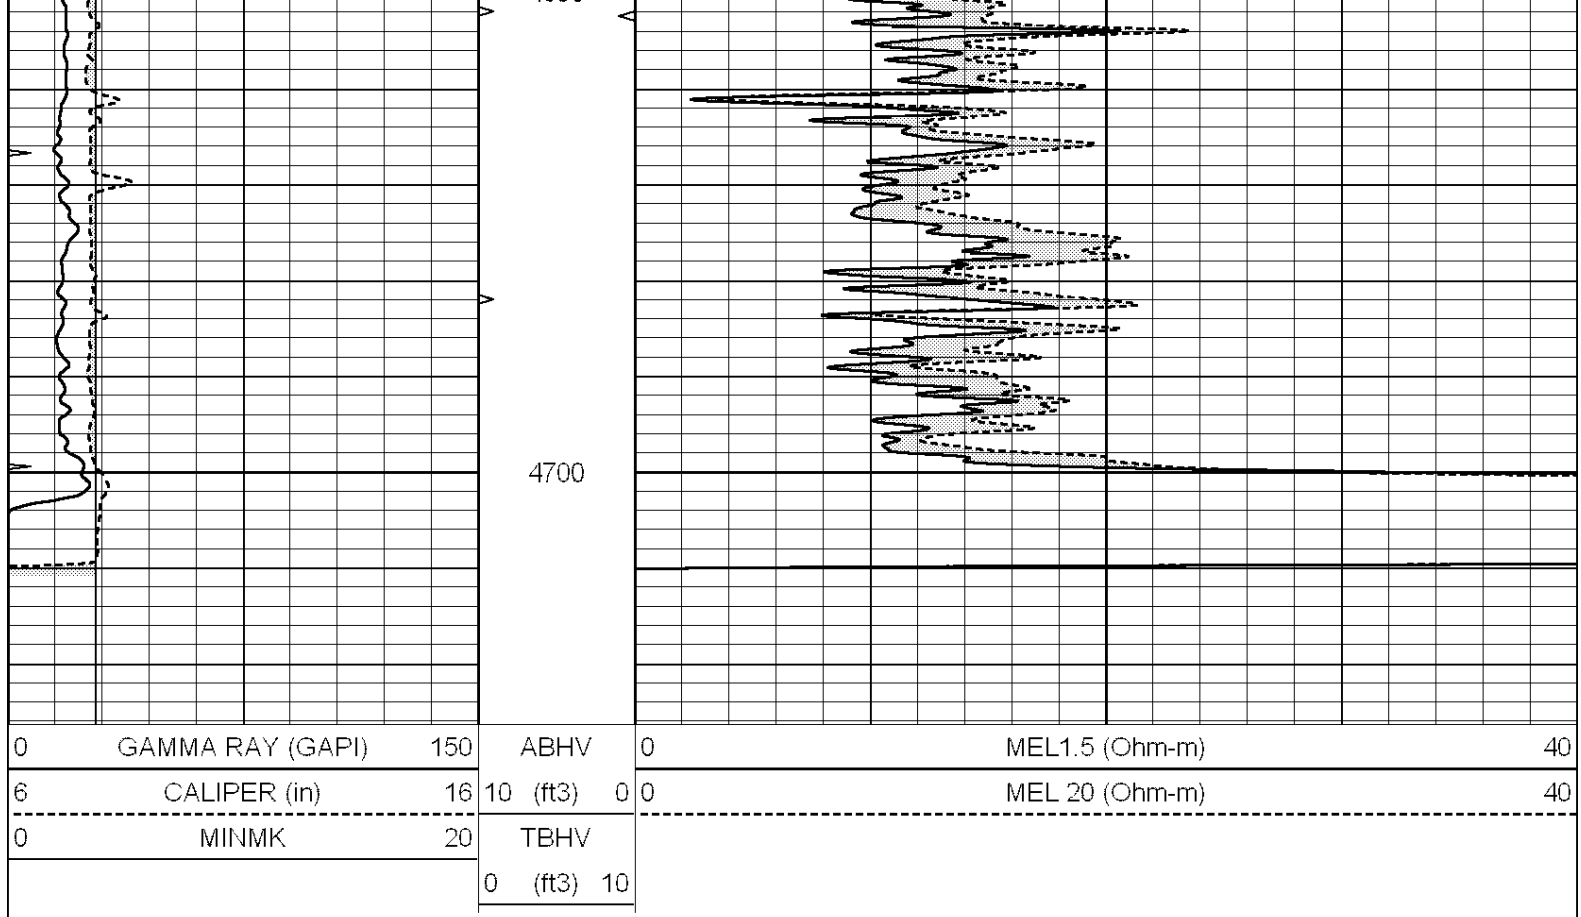

Calibration Report			
Database File:	2930pe.db		
Dataset Pathname:	pass6.3		
Dataset Creation:	Thu Aug 30 05:22:50 2018 by Calc SOC 120430		
MICRO Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeN		
Performed:	Fri Aug 24 06:40:03 2018		
Caliper Calibration:	Gain=3.856	Offset=2.285	
	Low Cal	High Cal	
References	7.800	18.000	
Readings	1.430	4.075	
1.5" Calibration:	Gain=60.000	Offset=-2.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.001	1.240	
2" Calibration:	Gain=66.000	Offset=-1.500	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.001	1.076	
Gamma Ray Calibration Report			
Serial Number:	110959		
Tool Model:	OPEN_GR		
Performed:	Mon Aug 13 21:11:43 2018		
Calibrator Value:	1.0	GAPI	

Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2300	GAPI/cps