

HALLIBURTON

BOREHOLE COMPENSATED SONIC ARRAY LOG

CULBREATH OIL & GAS
COMPANY INC

BREEDEN 1-30

MORLAND-KANACO

SHERIDAN

KANSAS

COMPANY
WELL
FIELD/BLOCK
COUNTY
STATE

COMPANY
WELL
FIELD/BLOCK
COUNTY
STATE

API No. 15-179-21452-00-00
Location (SHL) 2310' FNL & 2310' FWL
SE SE NW
LAT: 39.241774997 N
LONG: 100.26699298 W

Permanent Datum GL
Log measured from KB
Drilling measured from KB

Other Services:
GTET
IDT
DSNT
SDLT
MICROLOG
BSAT
ACRT

Date 11-Aug-18
Run No. ONE
Depth - Driller 4160.0 ft
Depth - Logger 4160.0 ft
Bottom - Logged Interval 4133.0 ft
Top - Logged Interval 263.0 ft
Casing - Driller 8.625 in @ 265.0 ft
Casing - Logger 263.0 ft
Bit Size 7.875 in @
Type Fluid in Hole Water Based Mud @
Density 9.20 g/cc 50.00 sl/qt
PH 9.50 pH 1.5 cpm
Source of Sample MUD PIT

Rm @ Meas. Temperature 1.19 ohmm @ 75.00 degF
Rmf @ Meas. Temperature 0.95 ohmm @ 75.00 degF
Rmc @ Meas. Temperature 1.43 ohmm @ 75.00 degF
Source Rmf Rmc MEAS MEAS
Rm @ BHT 0.84 ohmm @ 140.0 degF
Time Since Circulation 06:44 hr
Time on Bottom 11-Aug-18 04:14
Max. Rec. Temperature 140.00 degF @ 4160.0 ft
Equipment Location 12156883 EL RENO, OK
Recorded By SEAN WOLTEMATH
Witnessed By LARRY NICHOLSON

Fold here

Service Ticket No.: 905062355 API No.: 15-179-21452-00-00 PGM Version: WL INSITE R5.6.3 (Build 4)

CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE				RESISTIVITY SCALE CHANGES				
Date	Sample No.			Type Log	Depth	Scale Up Hole	Scale Down Hole	
Depth-Driller								
Type Fluid in Hole								
Density	Viscosity							
Ph	Fluid Loss							
Source of Sample				RESISTIVITY EQUIPMENT DATA				
Rm @ Meas. Temp	@	@		Run No.	Tool Type & No.	Pad Type	Tool Pos.	Other
Rmf @ Meas. Temp.	@	@		ONE	ACRT	N/A	ECEN	N/A
Rmc @ Meas. Temp.	@	@			I-11830684			
Source Rmf	Rmc				S-11830728			
Rm @ BHT	@	@						
Rmf @ BHT	@	@						
Rmc @ BHT	@	@						

EQUIPMENT DATA							
GAMMA		ACOUSTIC		DENSITY		NEUTRON	
Run No.	ONE	Run No.	ONE	Run No.	ONE	Run No.	ONE
Serial No.	11013113	Serial No.	12173982	Serial No.	11213308	Serial No.	11019641
Model No.	GTET	Model No.	BSAT	Model No.	SDLT	Model No.	DSNT
Diameter	3.625"	No. of Cent.	N/A	Diameter	5.5"	Diameter	3.625"
Detector Model No.	GTET	Spacing	N/A	Log Type	GAM-GAM	Log Type	NEU-NEU
Type	SCINT			Source Type	Cs-137	Source Type	Am241Be
Length	8"	LSA [Y/N]		Serial No.	5475GW	Serial No.	DSN-436
Distance to Source	10'	FWDA [Y/N]		Strength	1.78 Ci	Strength	15.0 Ci

LOGGING DATA															
GENERAL				GAMMA		ACOUSTIC				DENSITY			NEUTRON		
Run No.	Depth		Speed ft/min	Scale		Scale		Matrix	Scale		Matrix	Scale		Matrix	
	From	To		L	R	L	R		L	R		L	R		
ONE	TD	CSG	REC	0	150	30	-10	17.6 us/ft	30	-10	2.71 g/cc	30	-10	LIME	

ONE	TD	CSG	REC	0	150	30	-10	47.0 us/ft	30	-10	2.77 g/cc	30	-10	LIML
-----	----	-----	-----	---	-----	----	-----	------------	----	-----	-----------	----	-----	------

DIRECTIONAL INFORMATION

Maximum Deviation @ _____ KOP @ _____

Remarks:
 GTET-IDT-DSNT-SDLT-BSAT-ACRT RUN IN COMBINATION
 ANNULAR HOLE VOLUME CALCULATED FOR 5.5 INCH CASING
 CHLORIDES REPORTED AT 2000 PPM


HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.



HALLIBURTON



HALLIBURTON Plot Time: 11-Aug-18 08:28:49
 Plot Range: 250 ft to 4163.5 ft
 Data: CULBRTH_BREEDENWell Based\MAIN_TD-CSG\
 Plot File: \BSAT\BSAT_2inch



2 INCH MAIN LOG



2" MAIN LOG SECTION


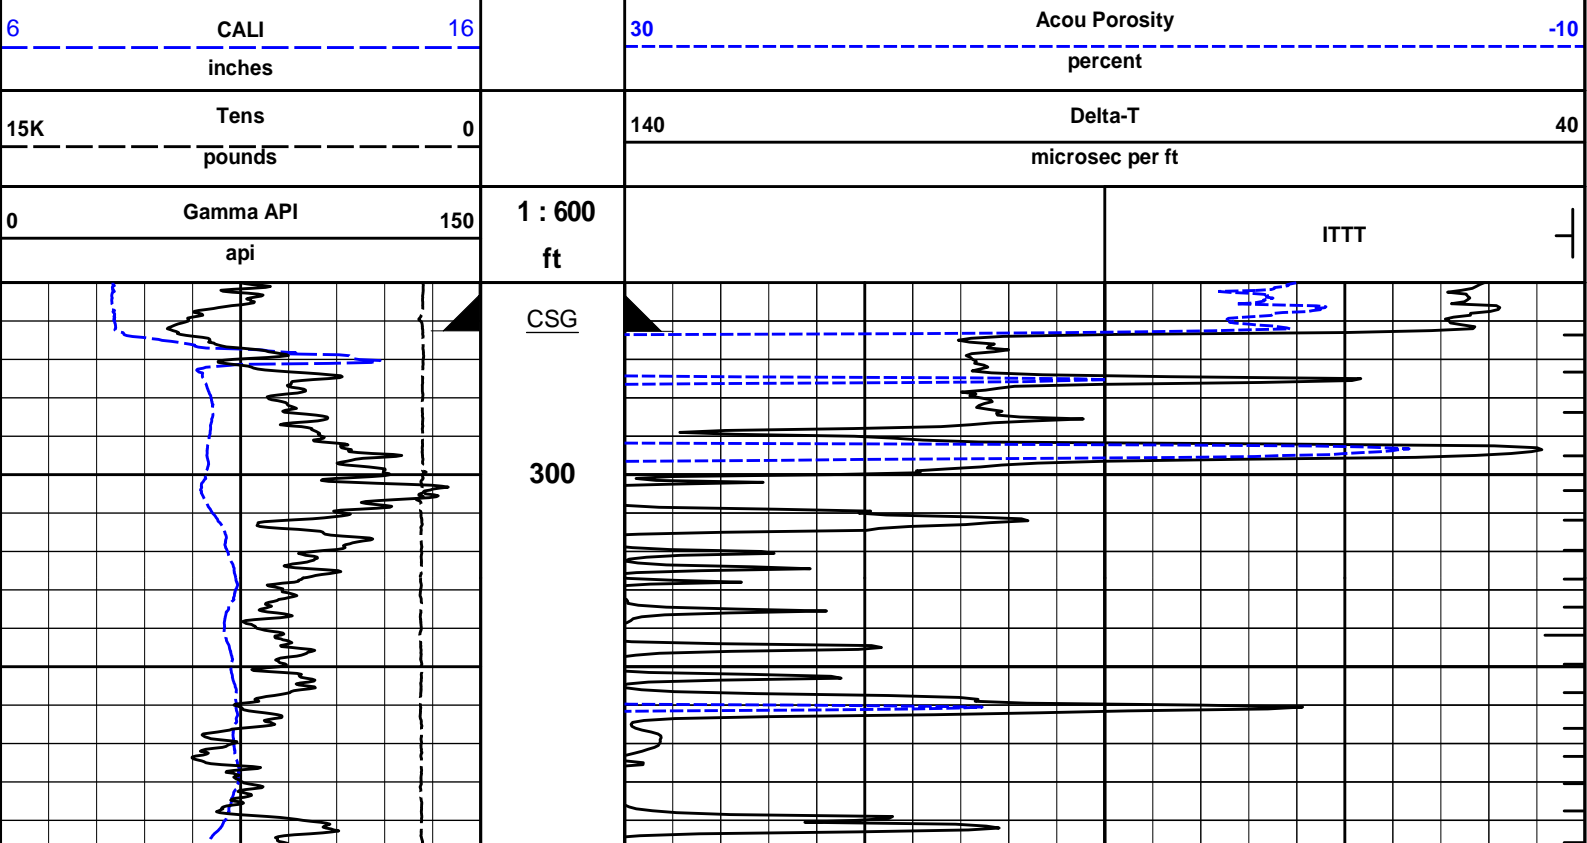


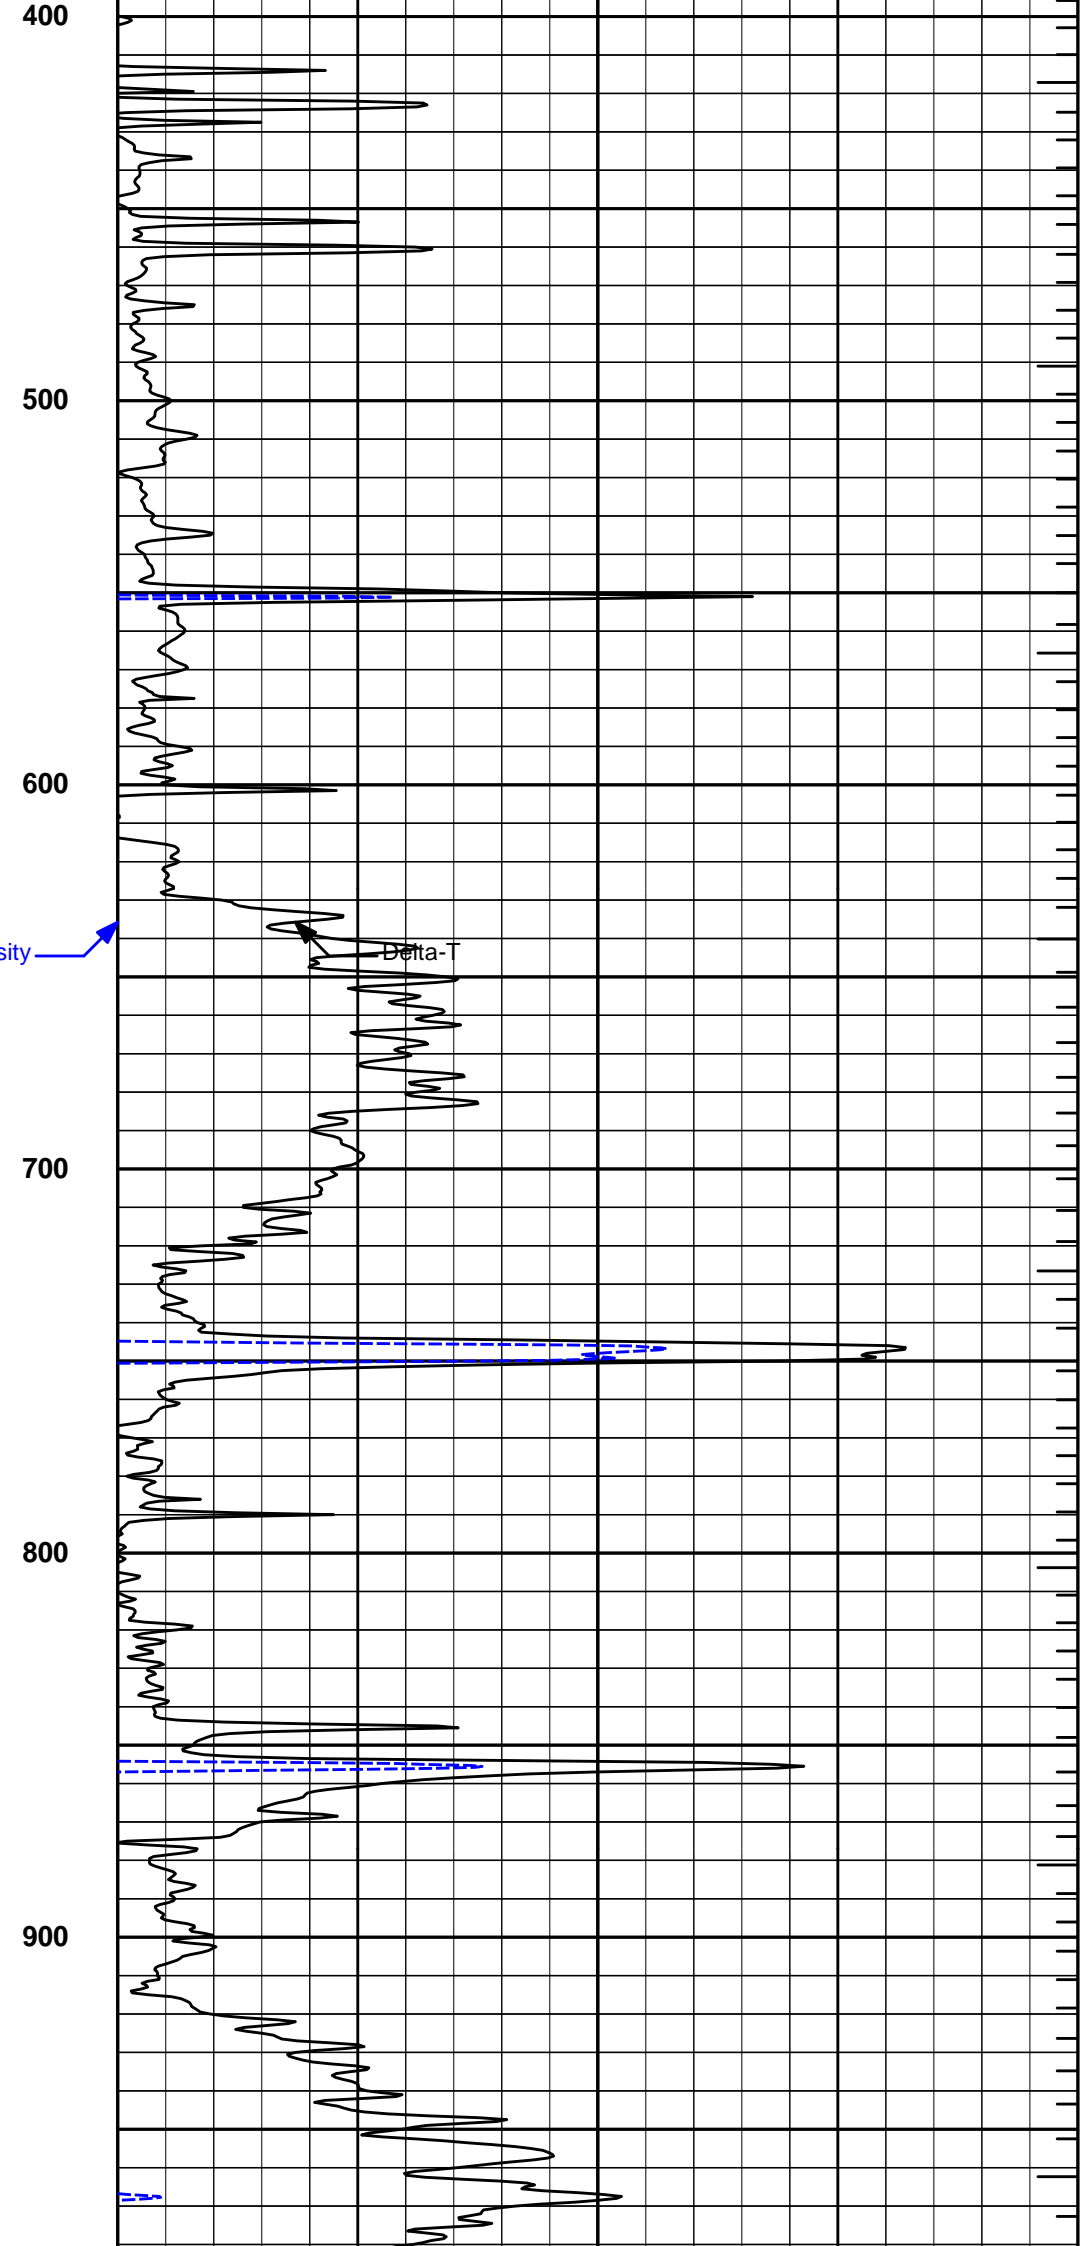
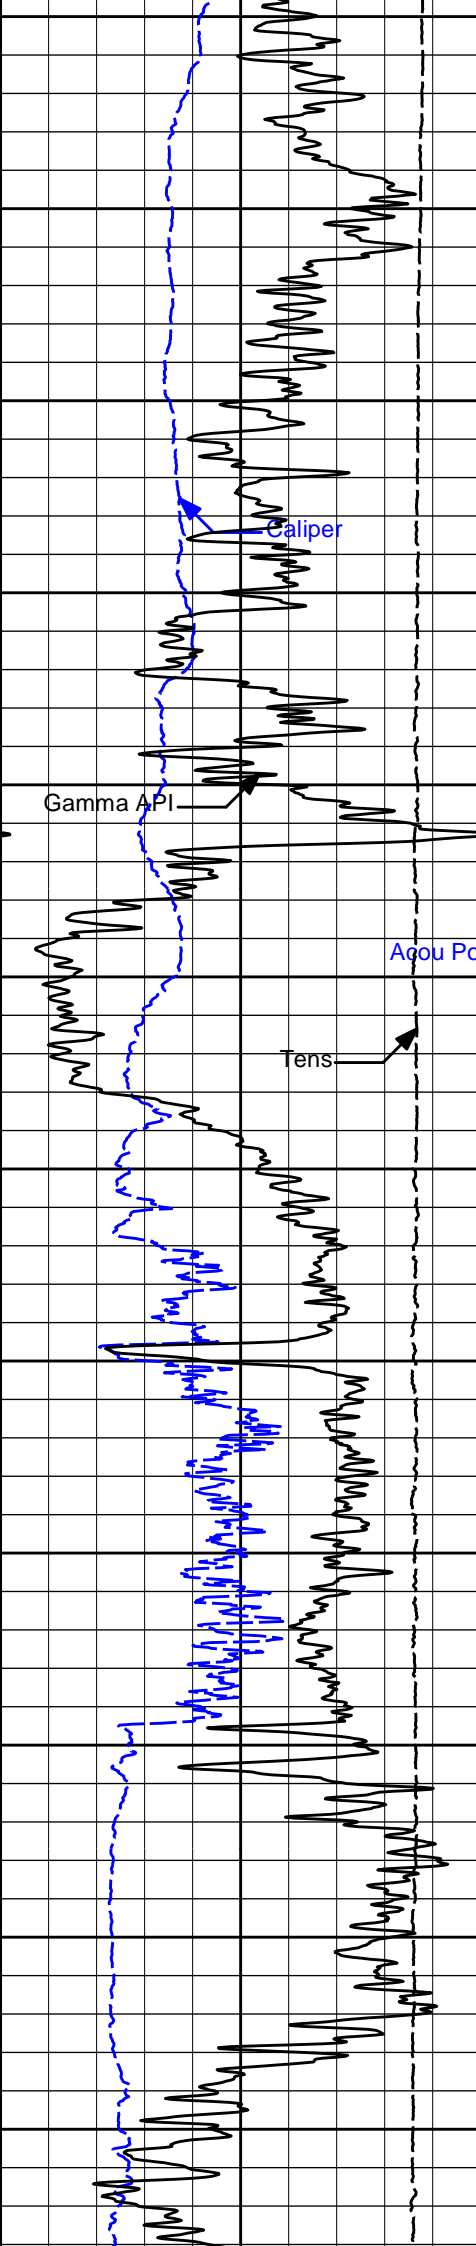


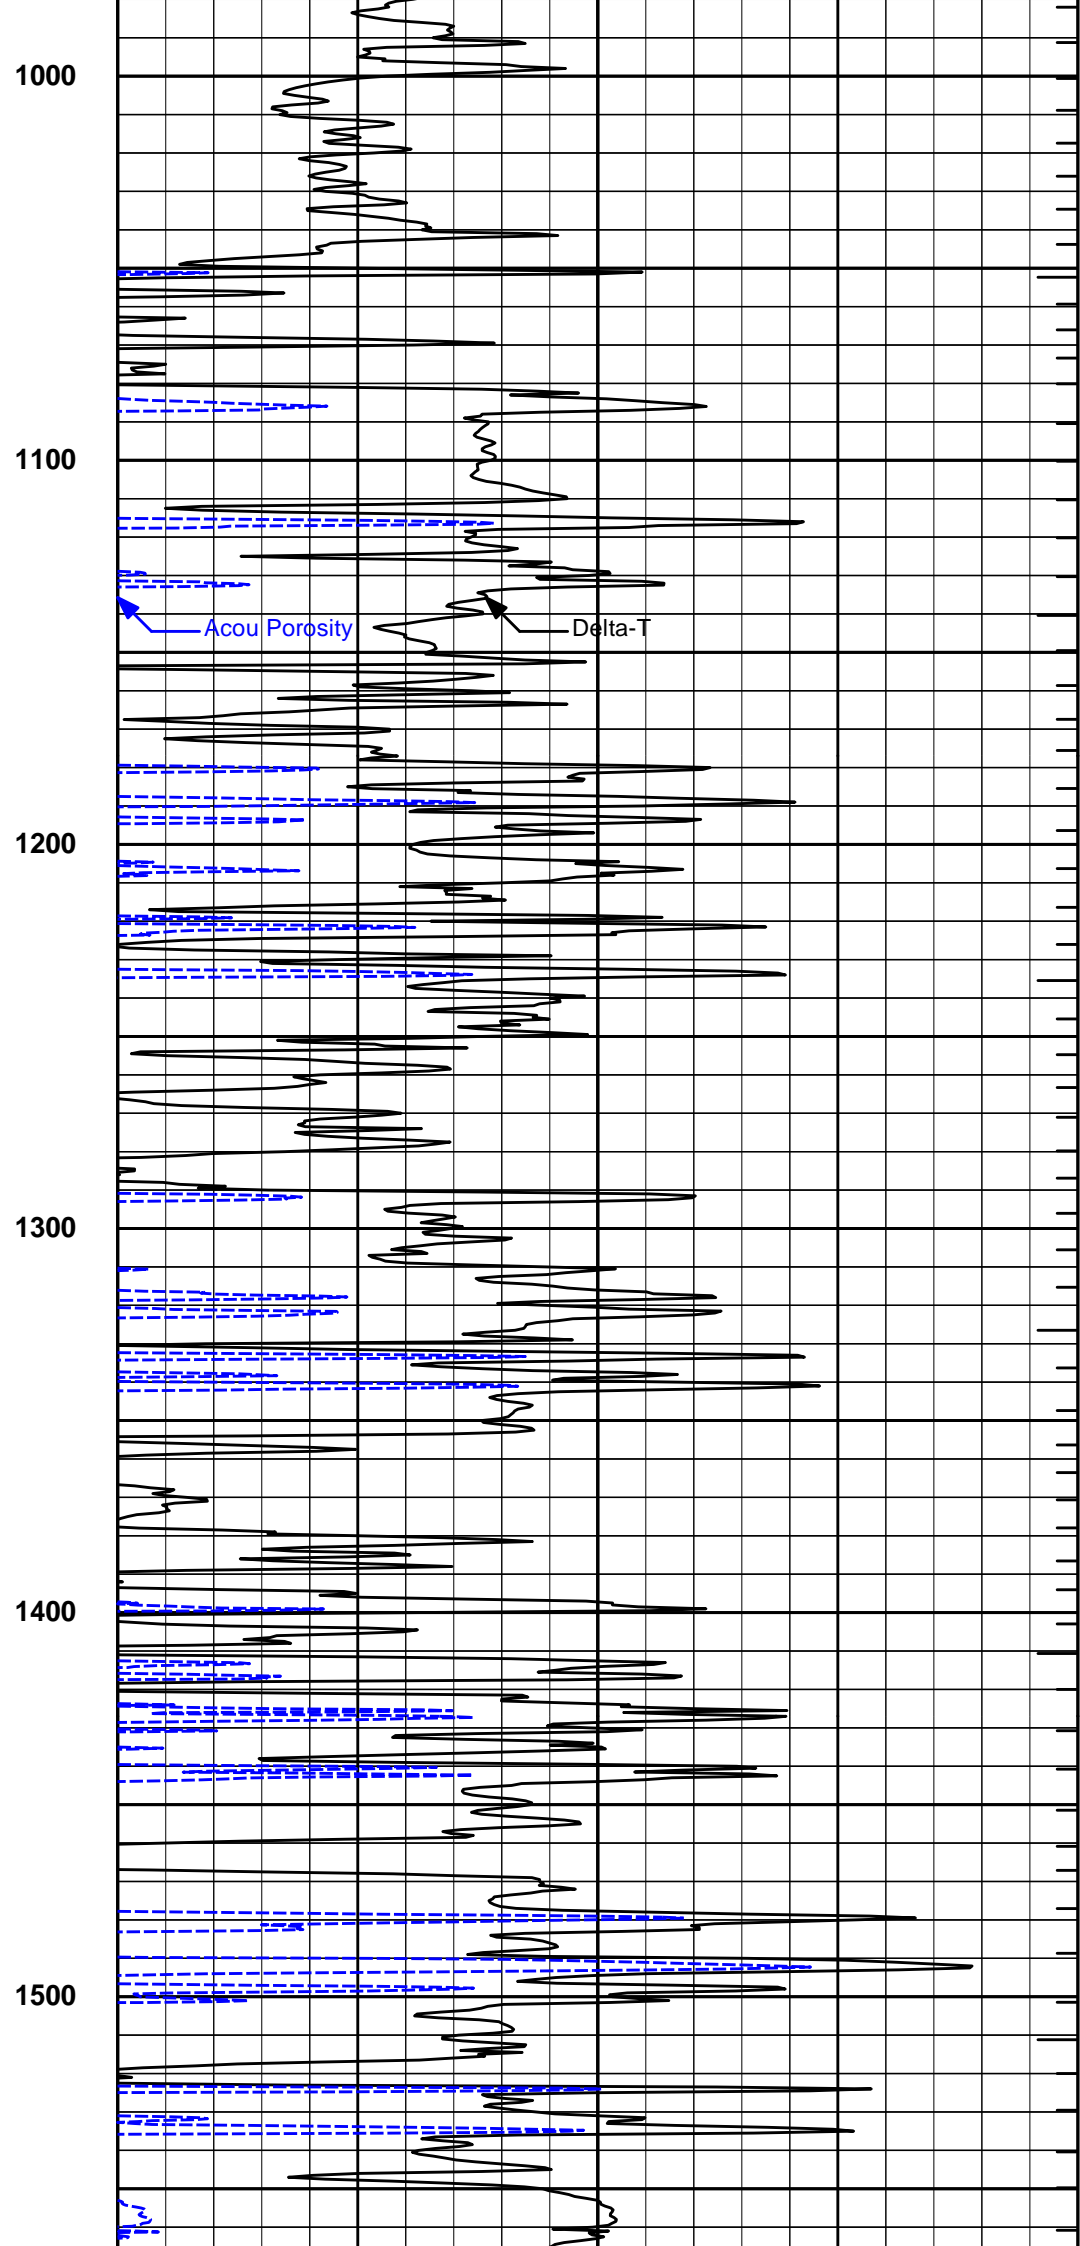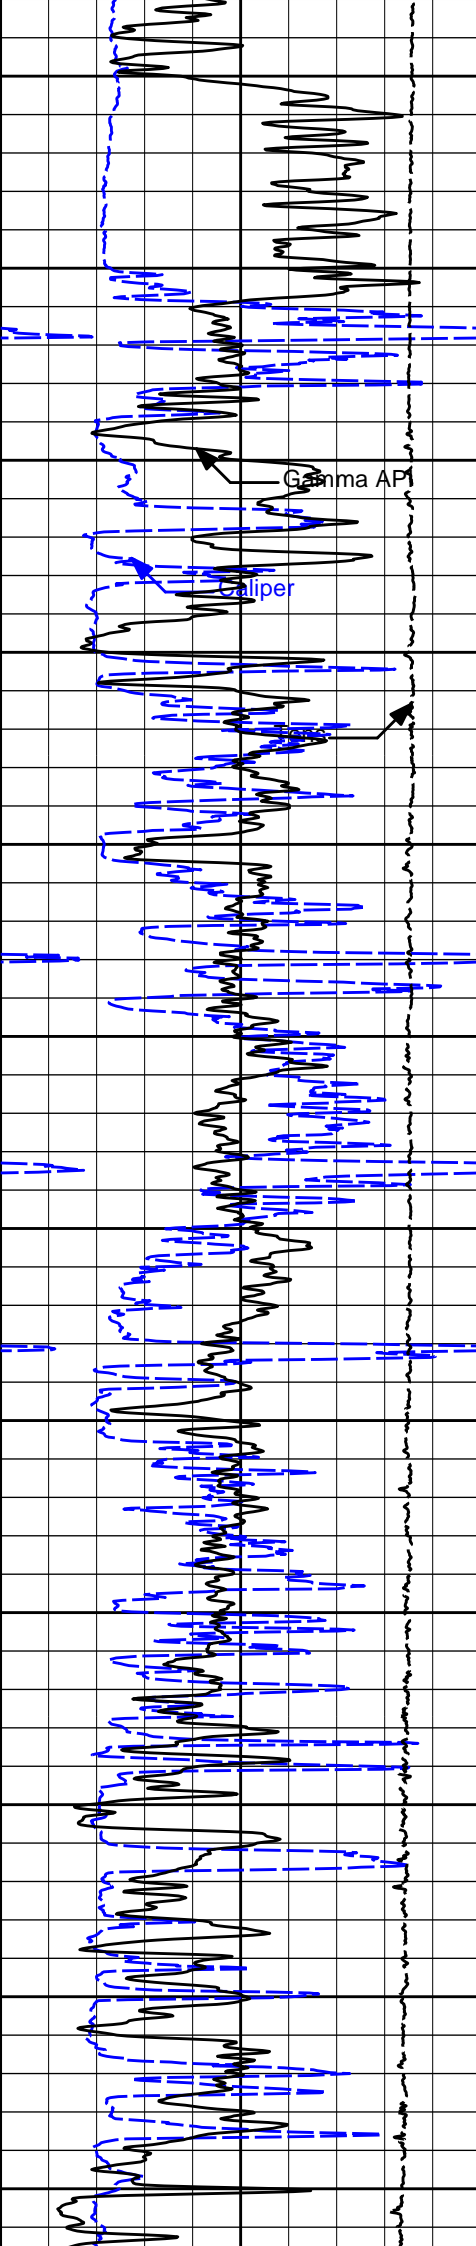


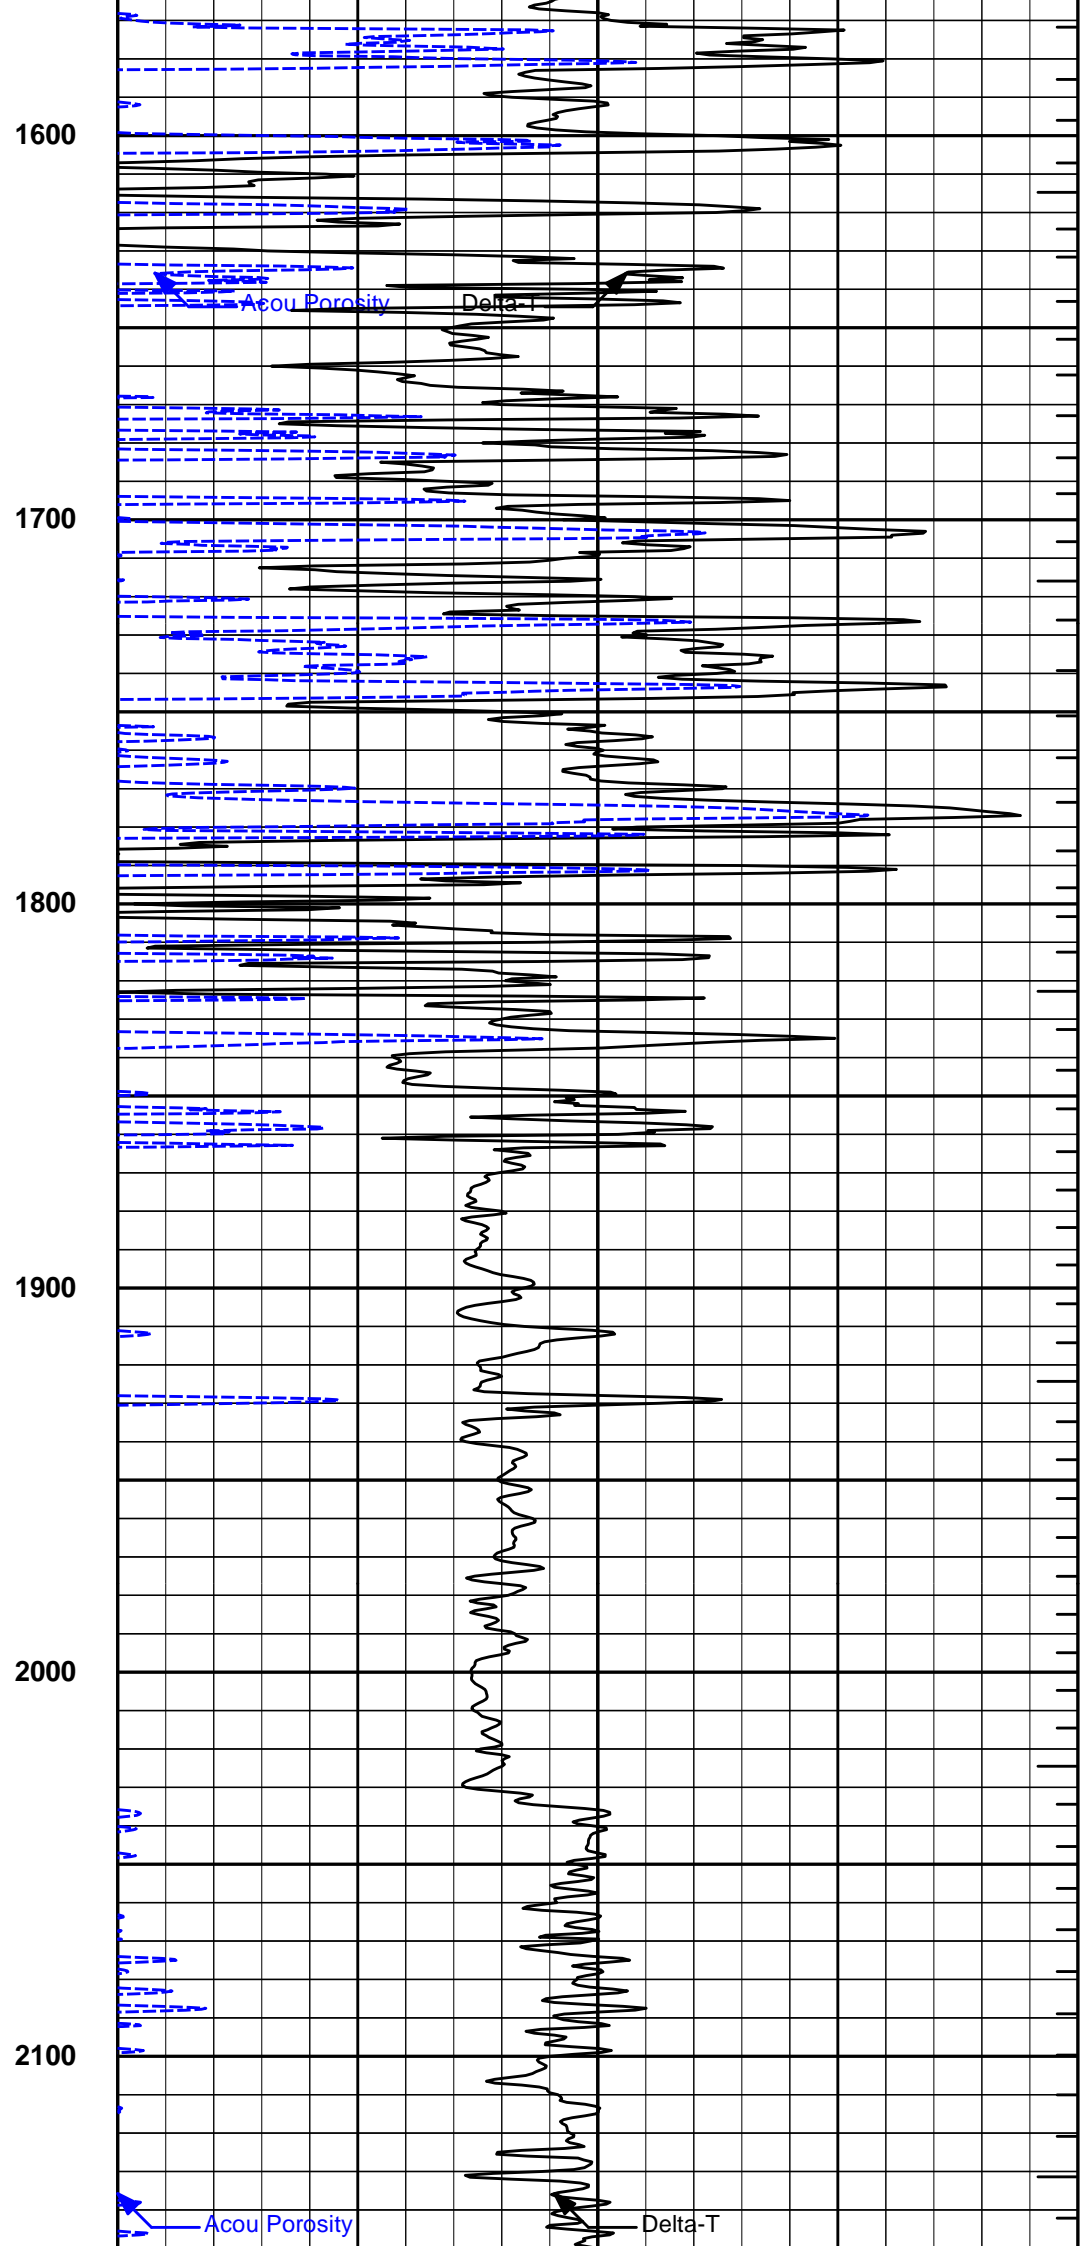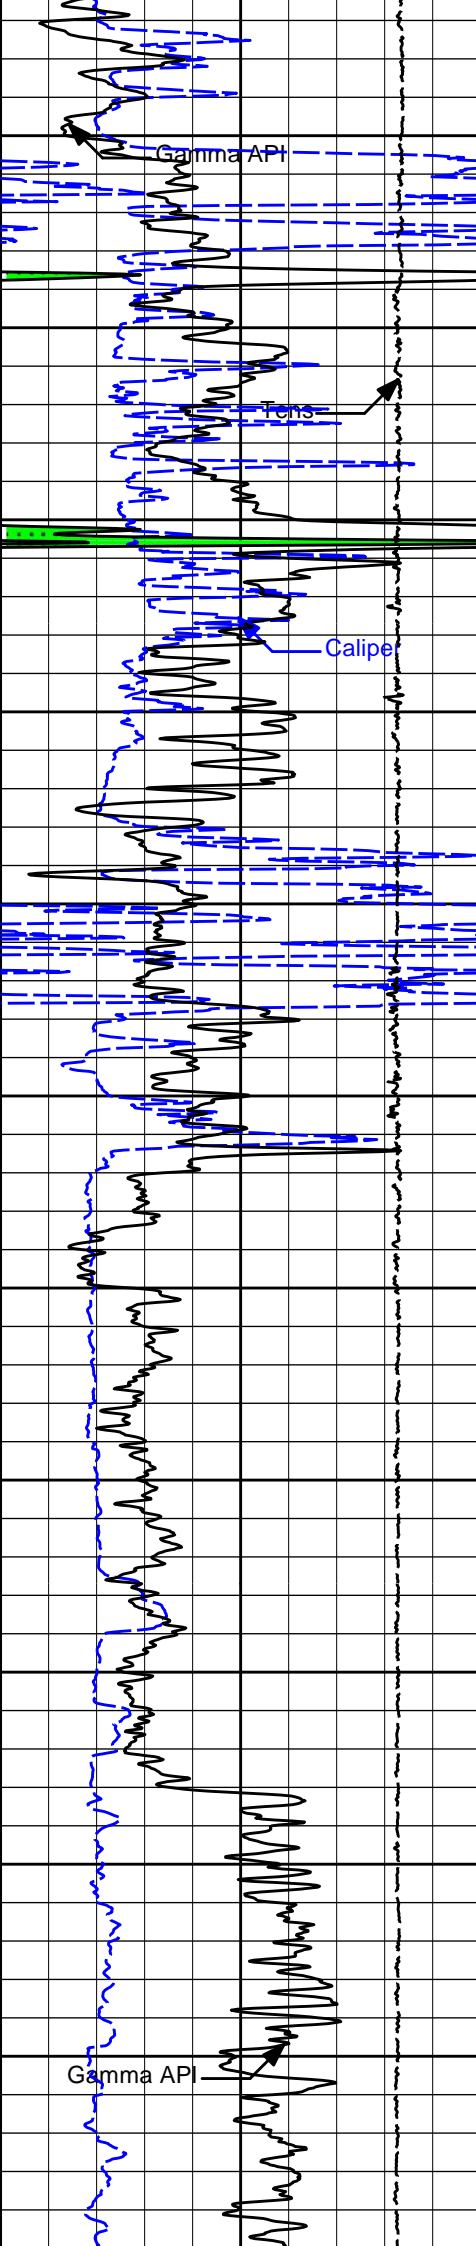

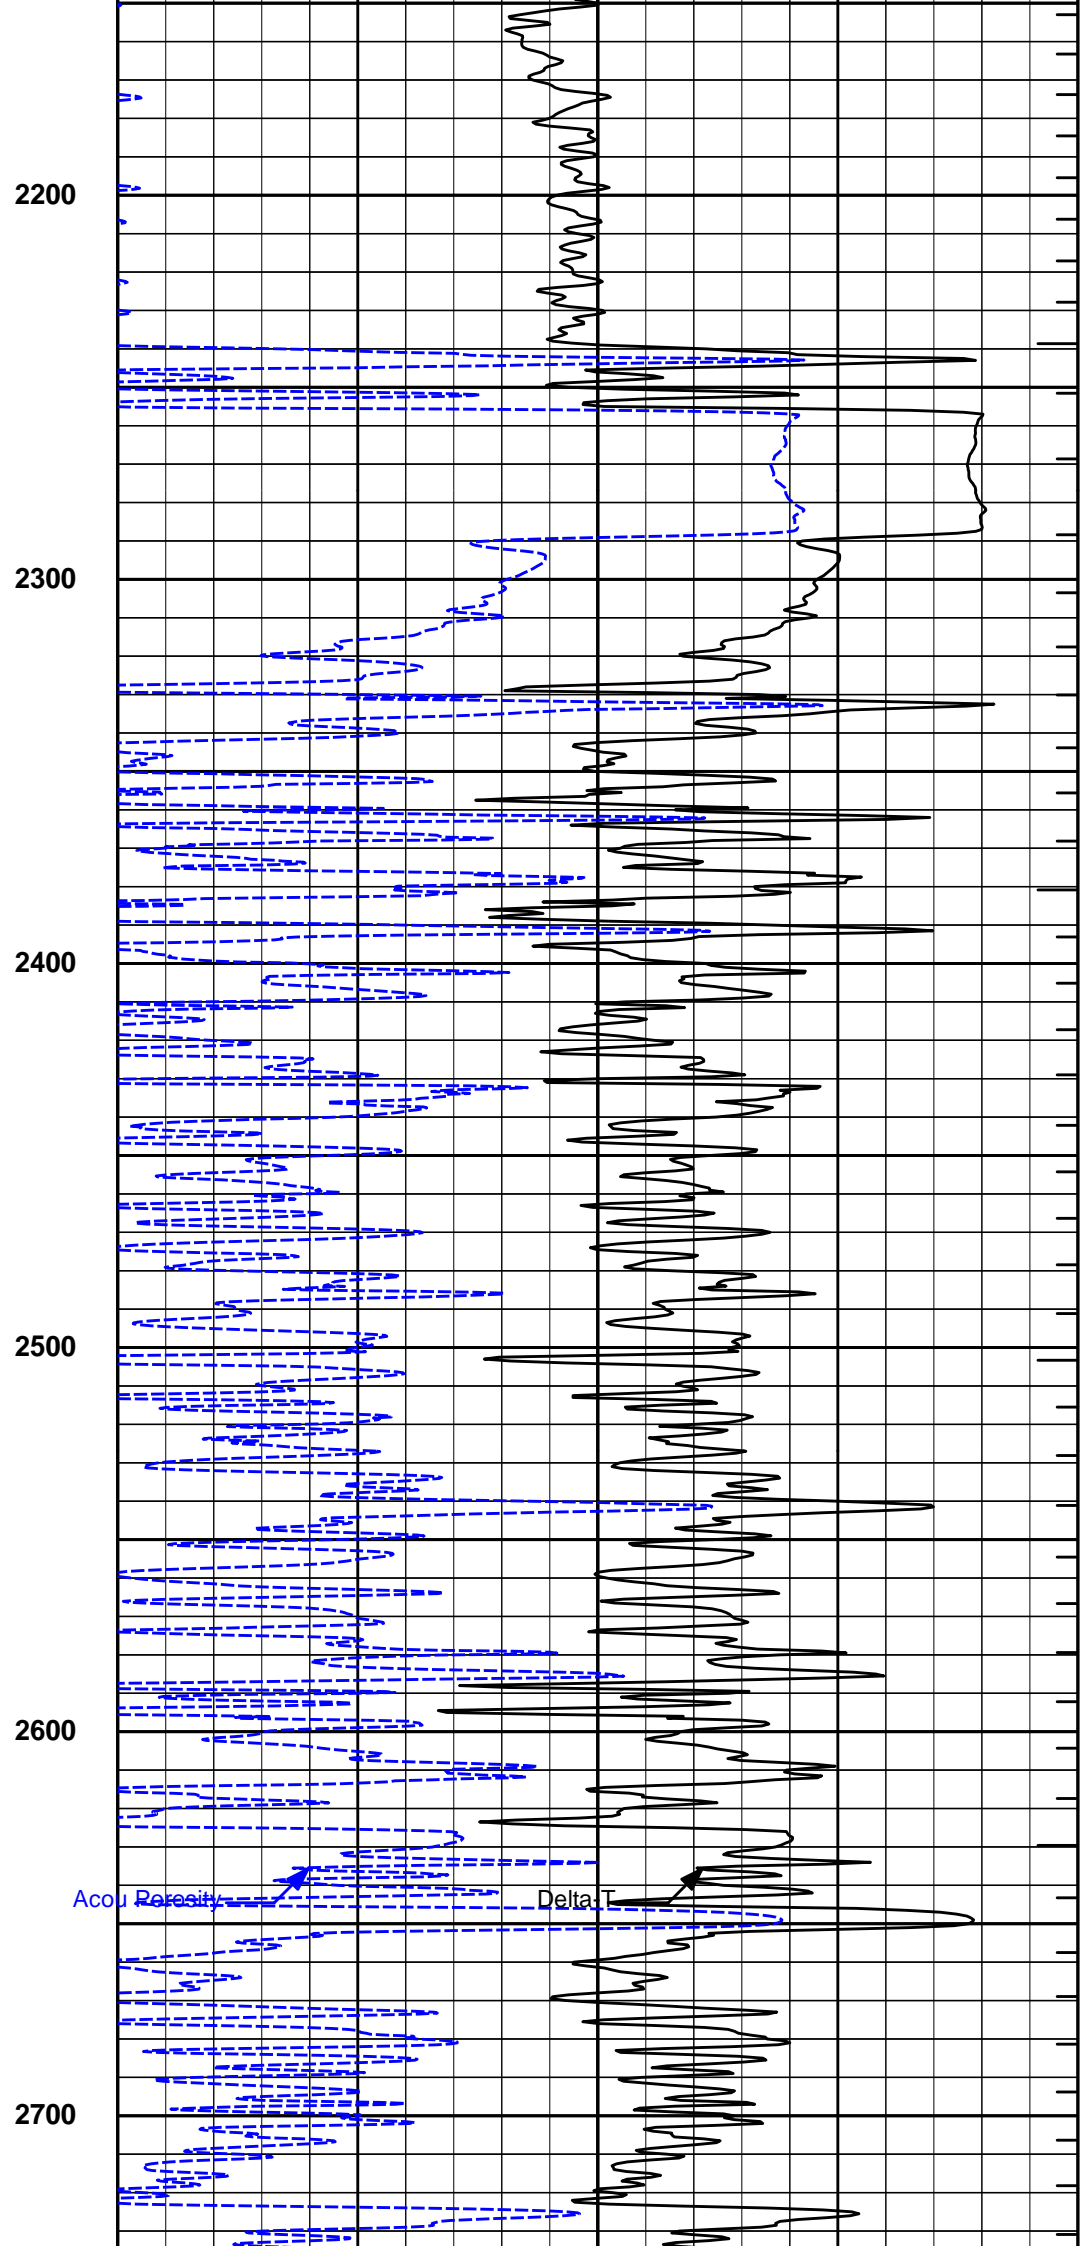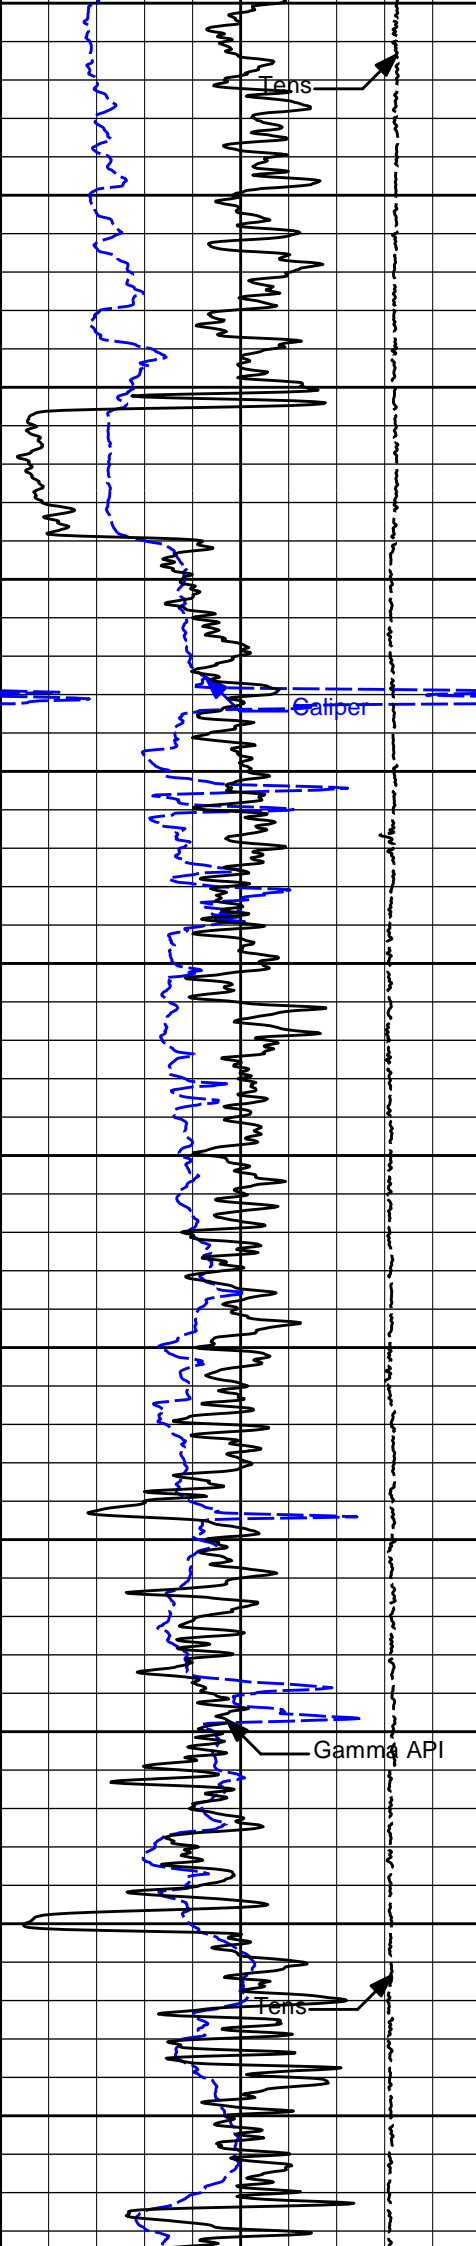

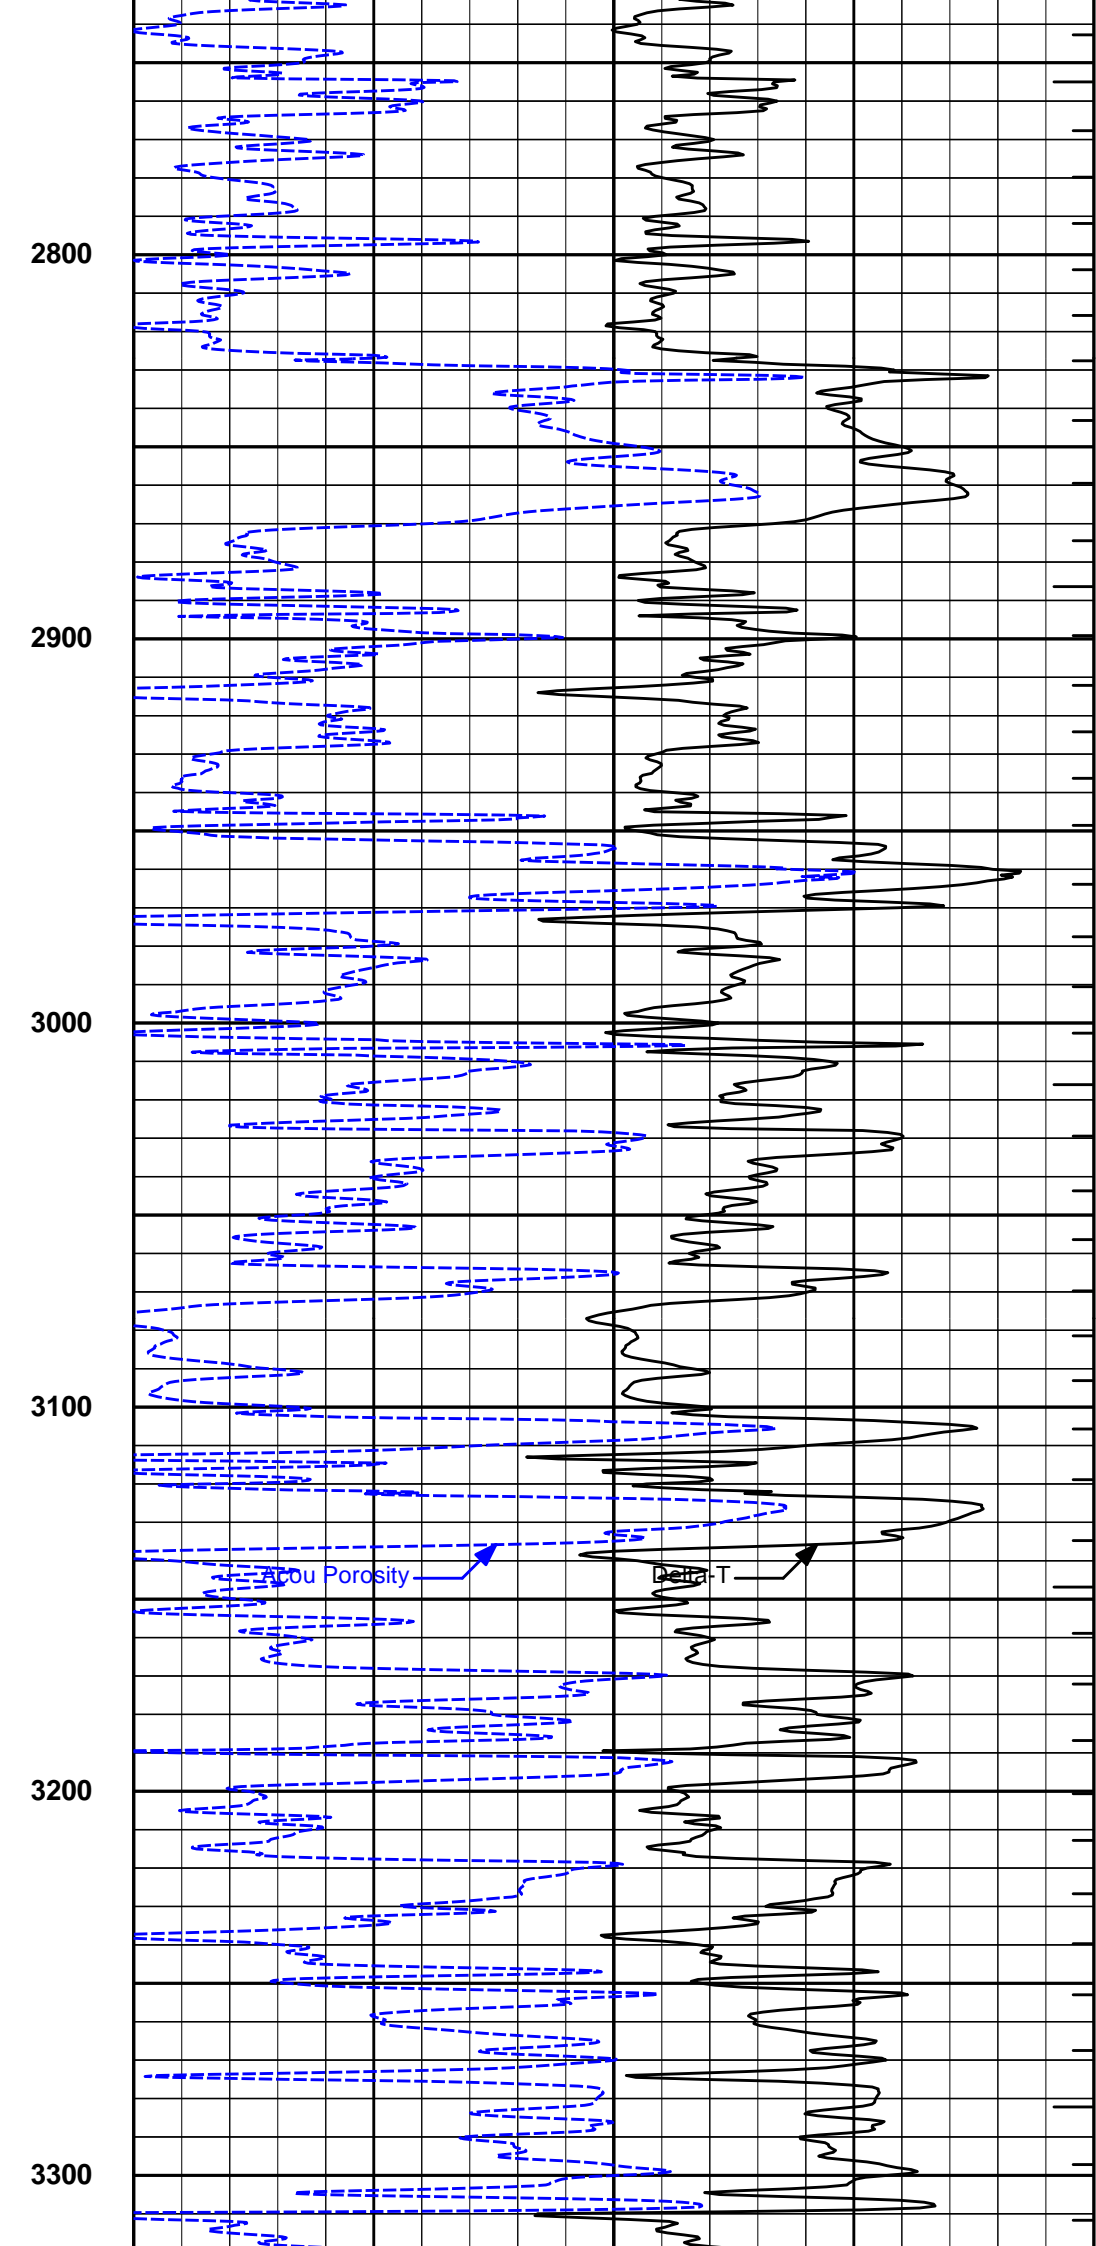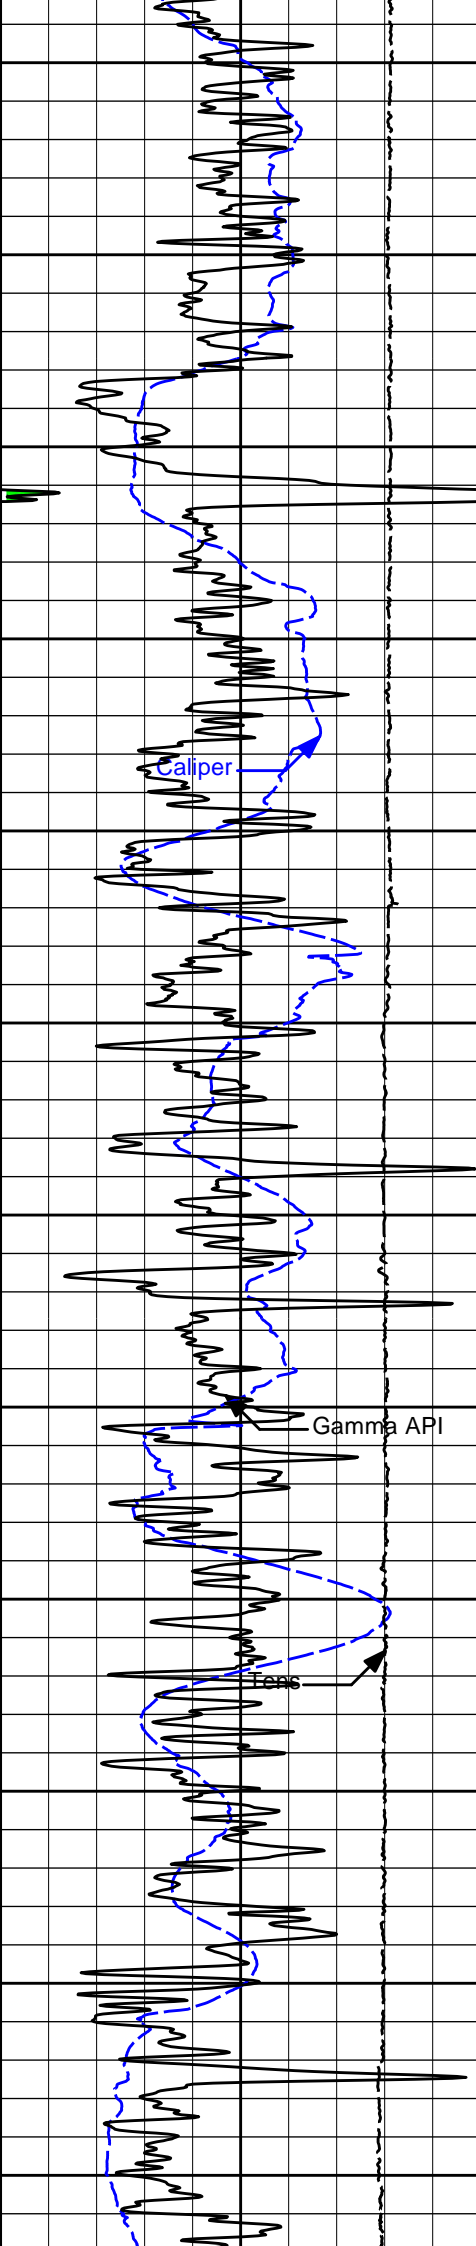

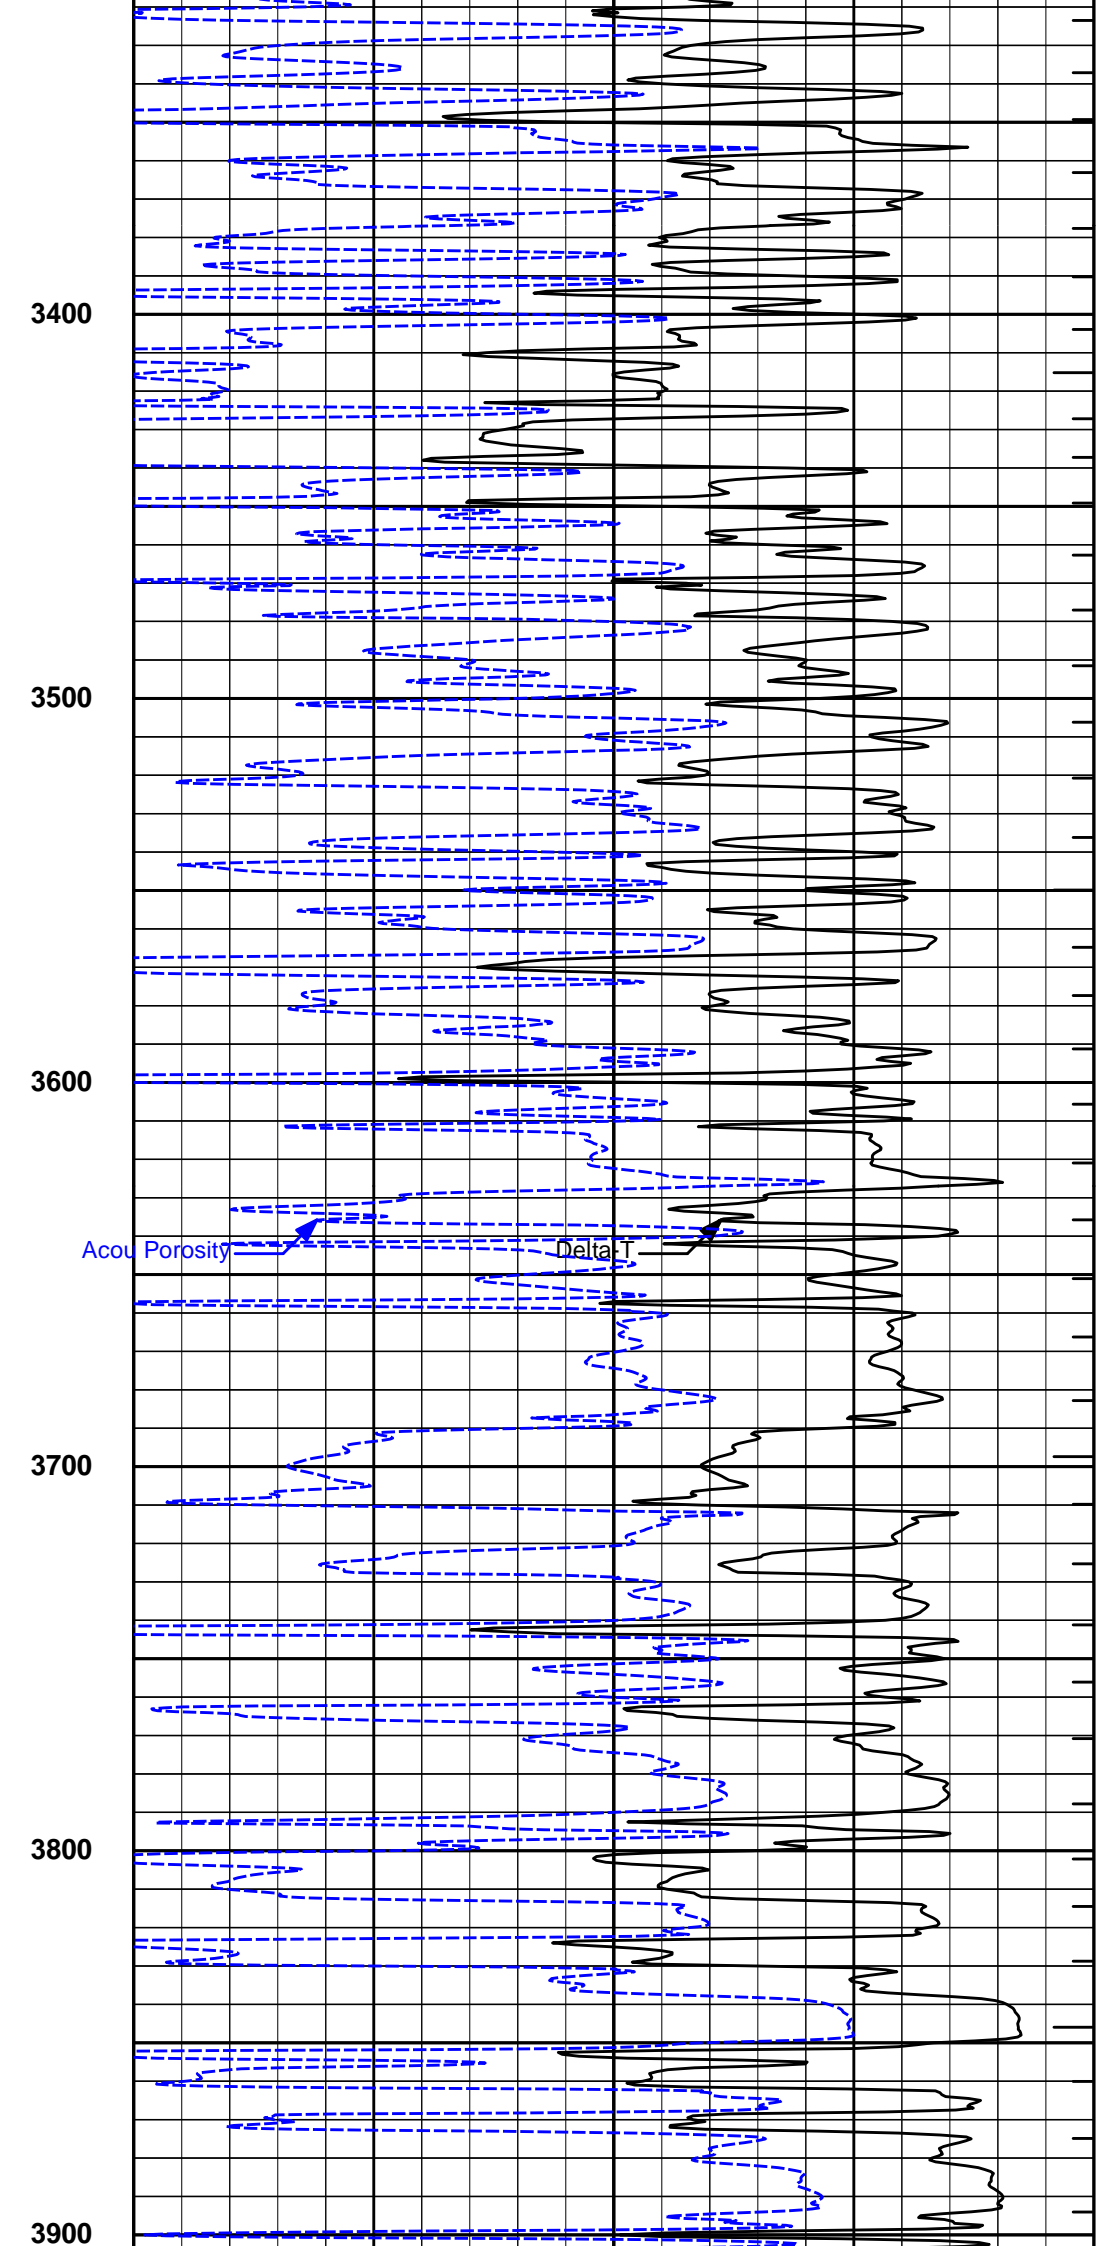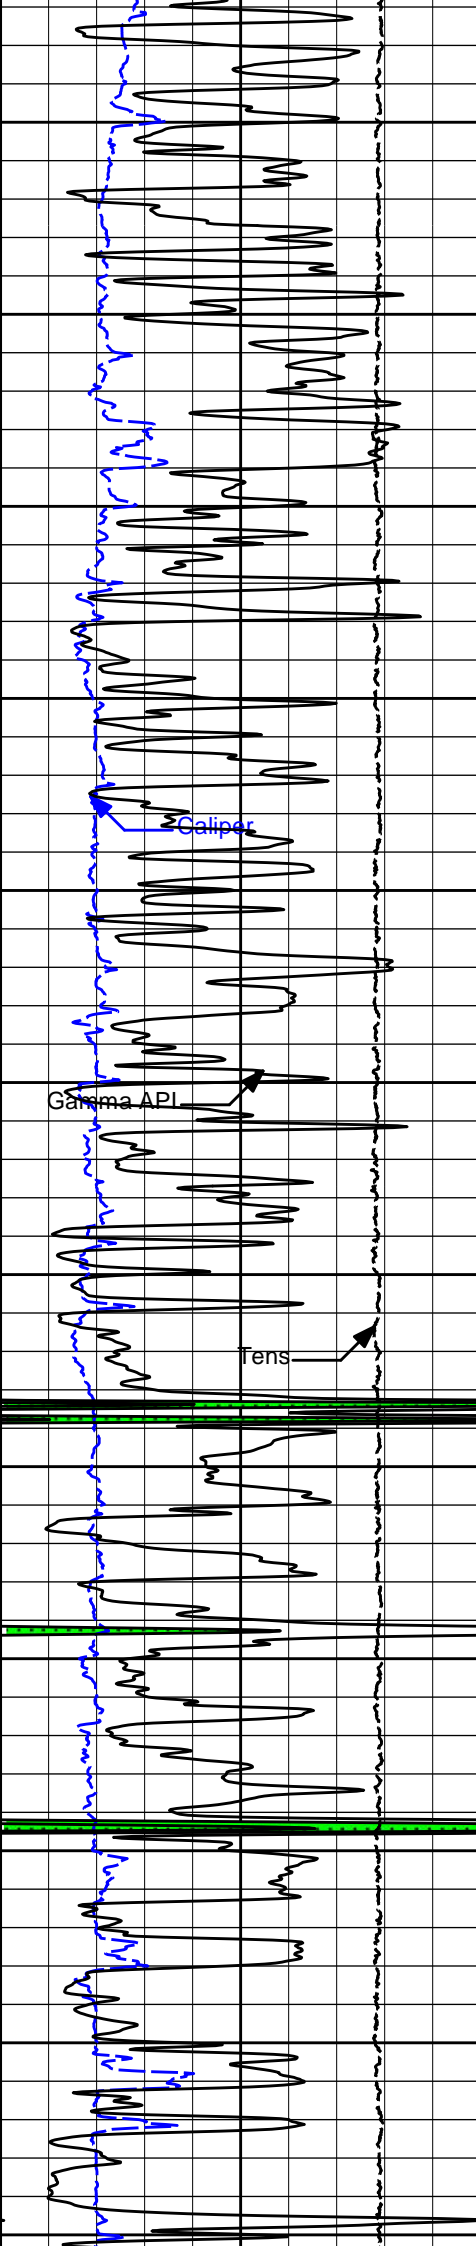

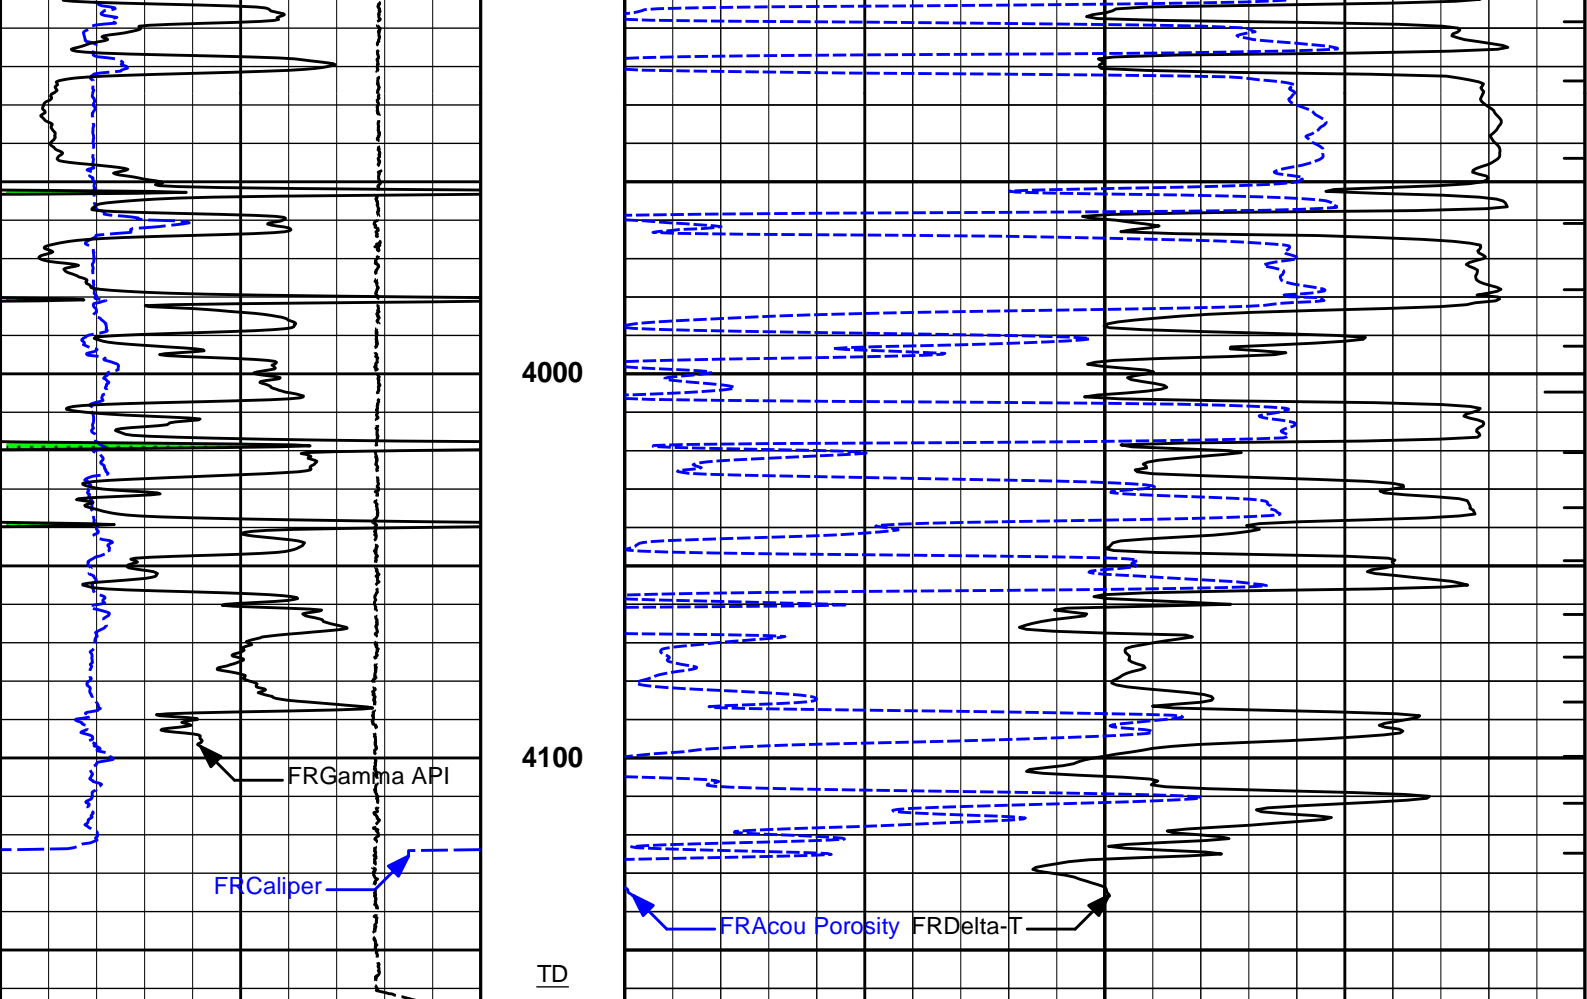

0	Gamma API	150	1 : 600 ft		ITTT	
	api					
15K	Tens	0		140	Delta-T	40
	pounds				microsec per ft	
6	CALI	16		30	Acou Porosity	-10
	inches				percent	

HALLIBURTON Plot Time: 11-Aug-18 08:28:52
 Plot Range: 250 ft to 4163.5 ft
 Data: CULBRTH_BREEDENWell Based\MAIN_TD-CSG\
 Plot File: \BSAT\BSAT_2inch

2 INCH MAIN LOG

2" MAIN LOG SECTION

HALLIBURTON Plot Time: 11-Aug-18 08:28:53
 Plot Range: 250 ft to 4163.5 ft
 Data: CULBRTH_BREEDENWell Based\MAIN_TD-CSG\
 Plot File: \BSAT\BSAT_5inch_MAIN




5 INCH MAIN LOG


5" MAIN LOG


6 CALI 16
 inches
 15K Tens 0
 pounds
 0 Gamma API 150
 api


1 : 240
 ft

30 Acou Porosity -10
 percent
 140 Delta-T 40
 microsec per ft
 ITTT

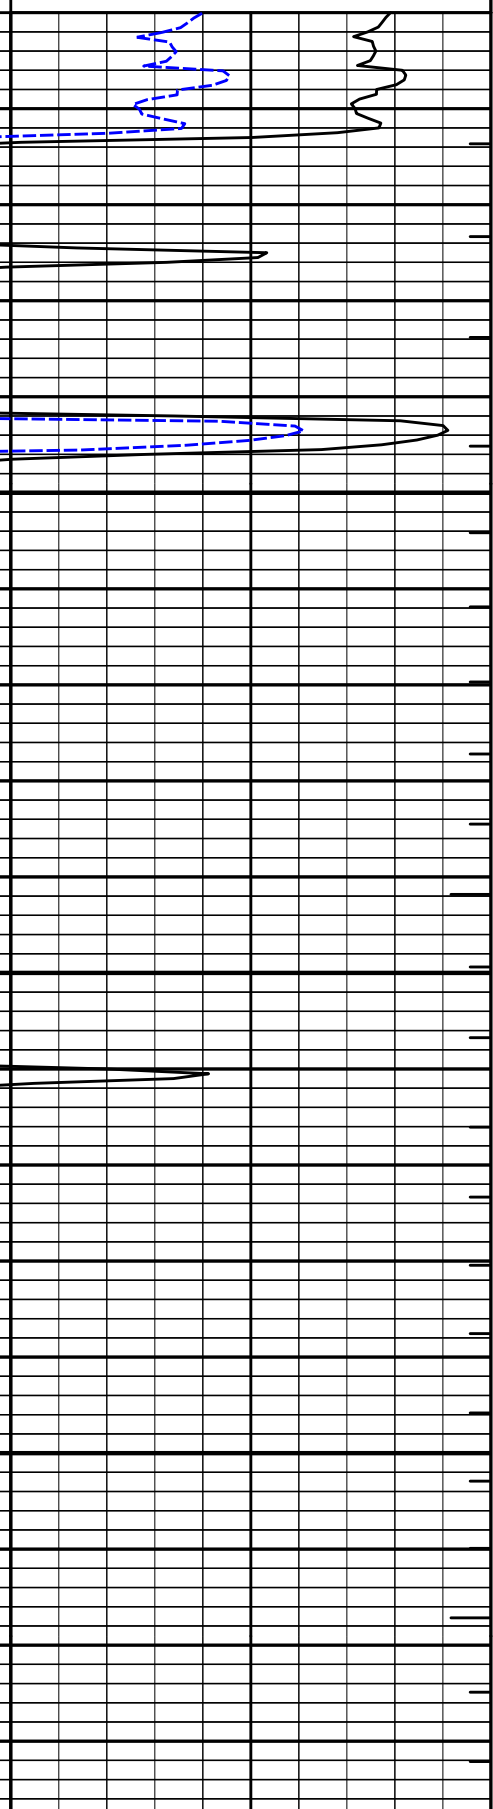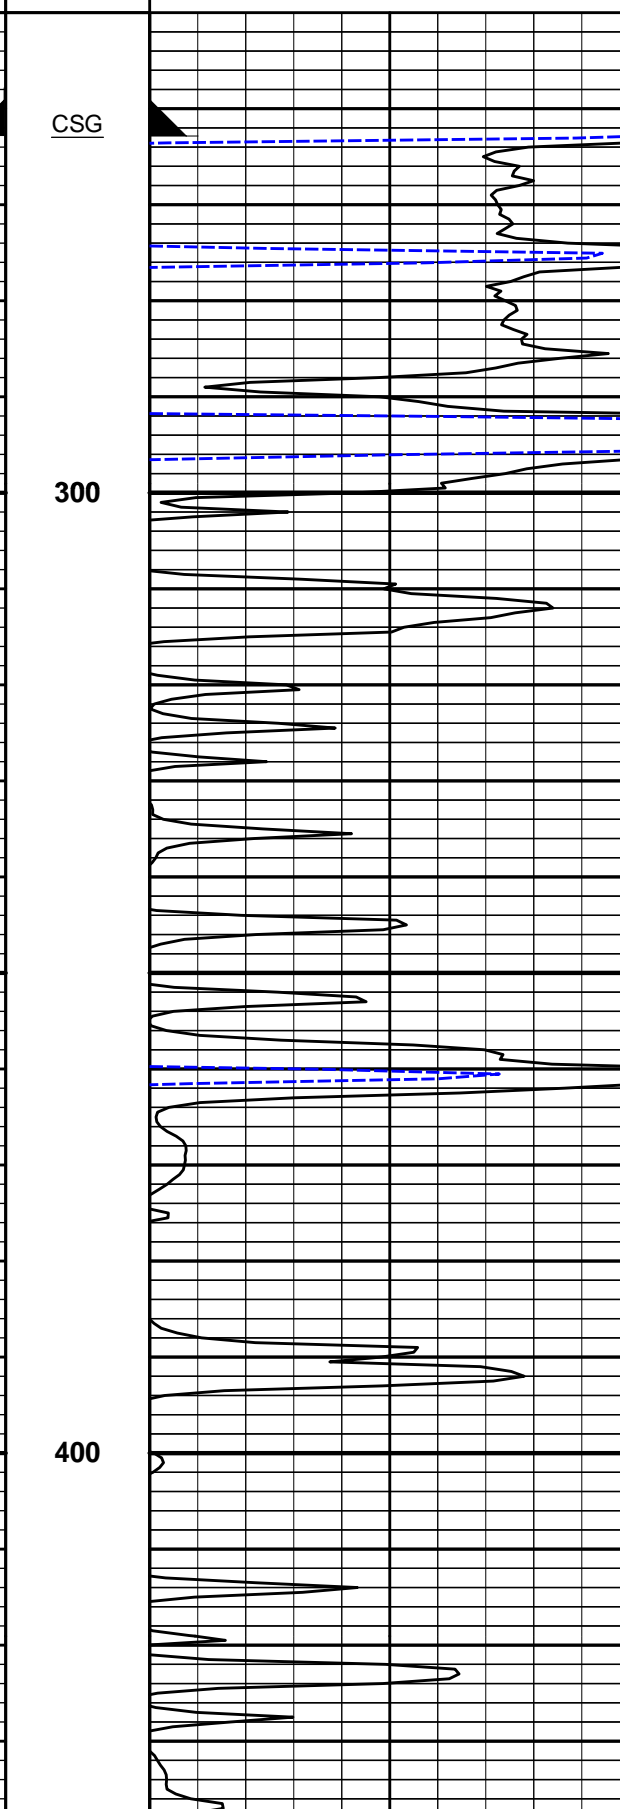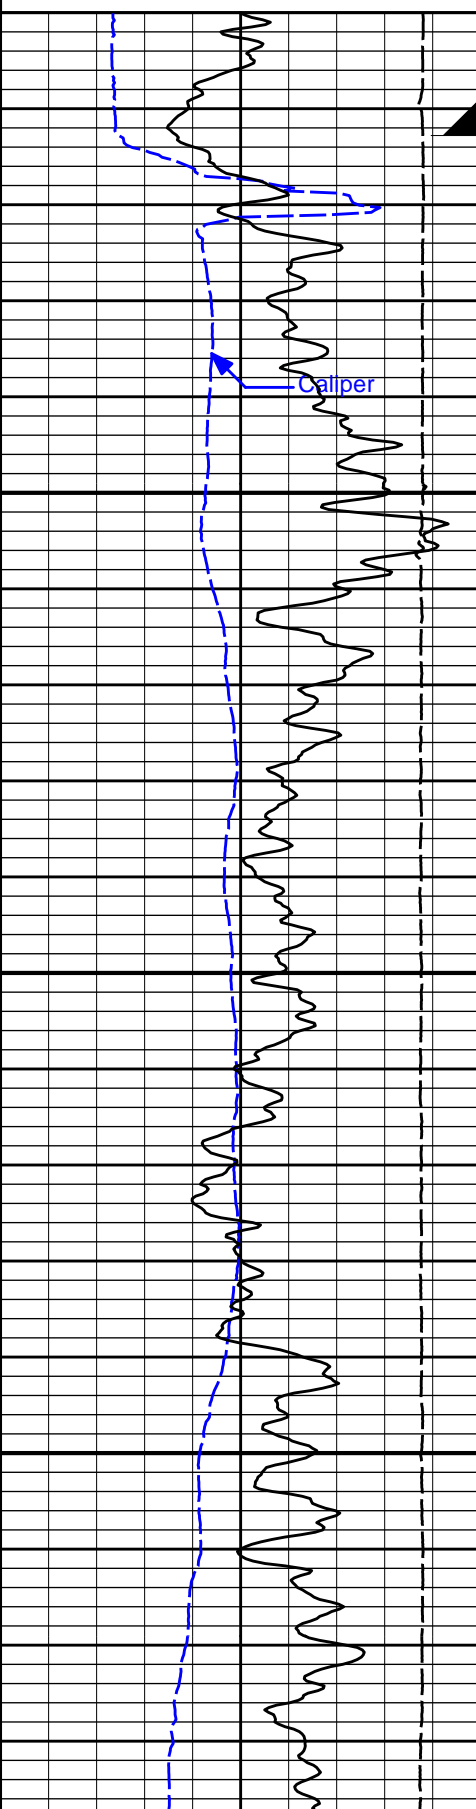

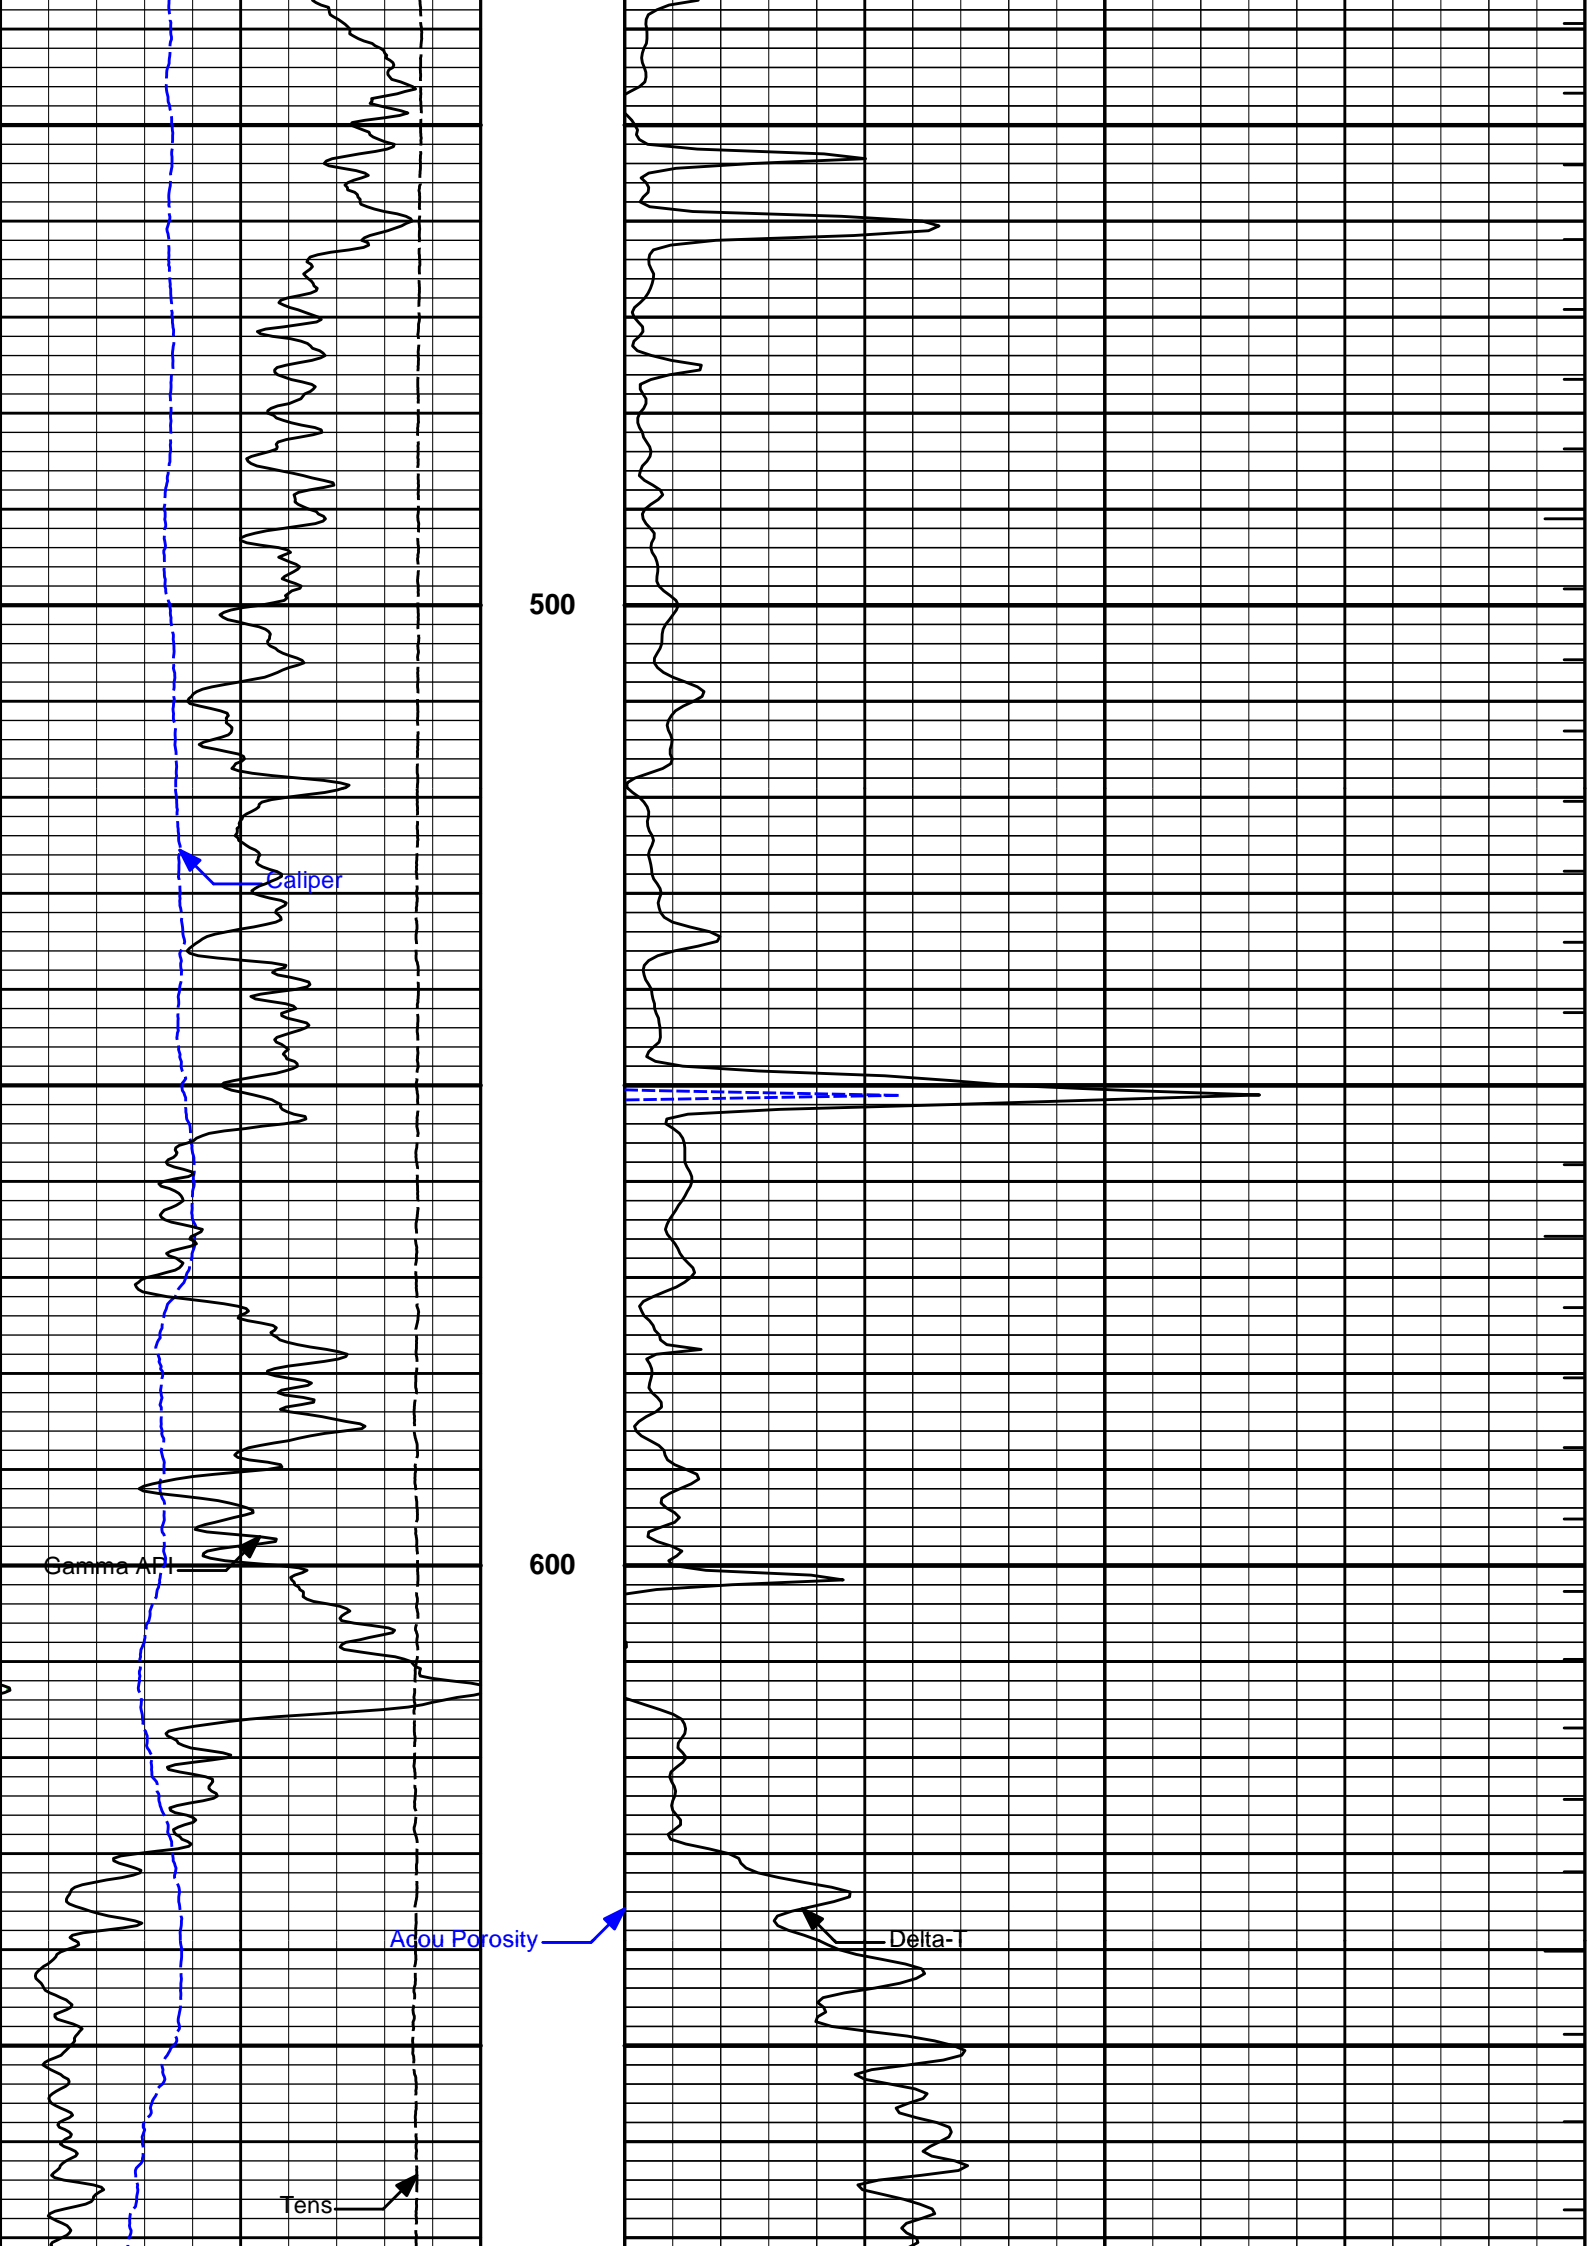


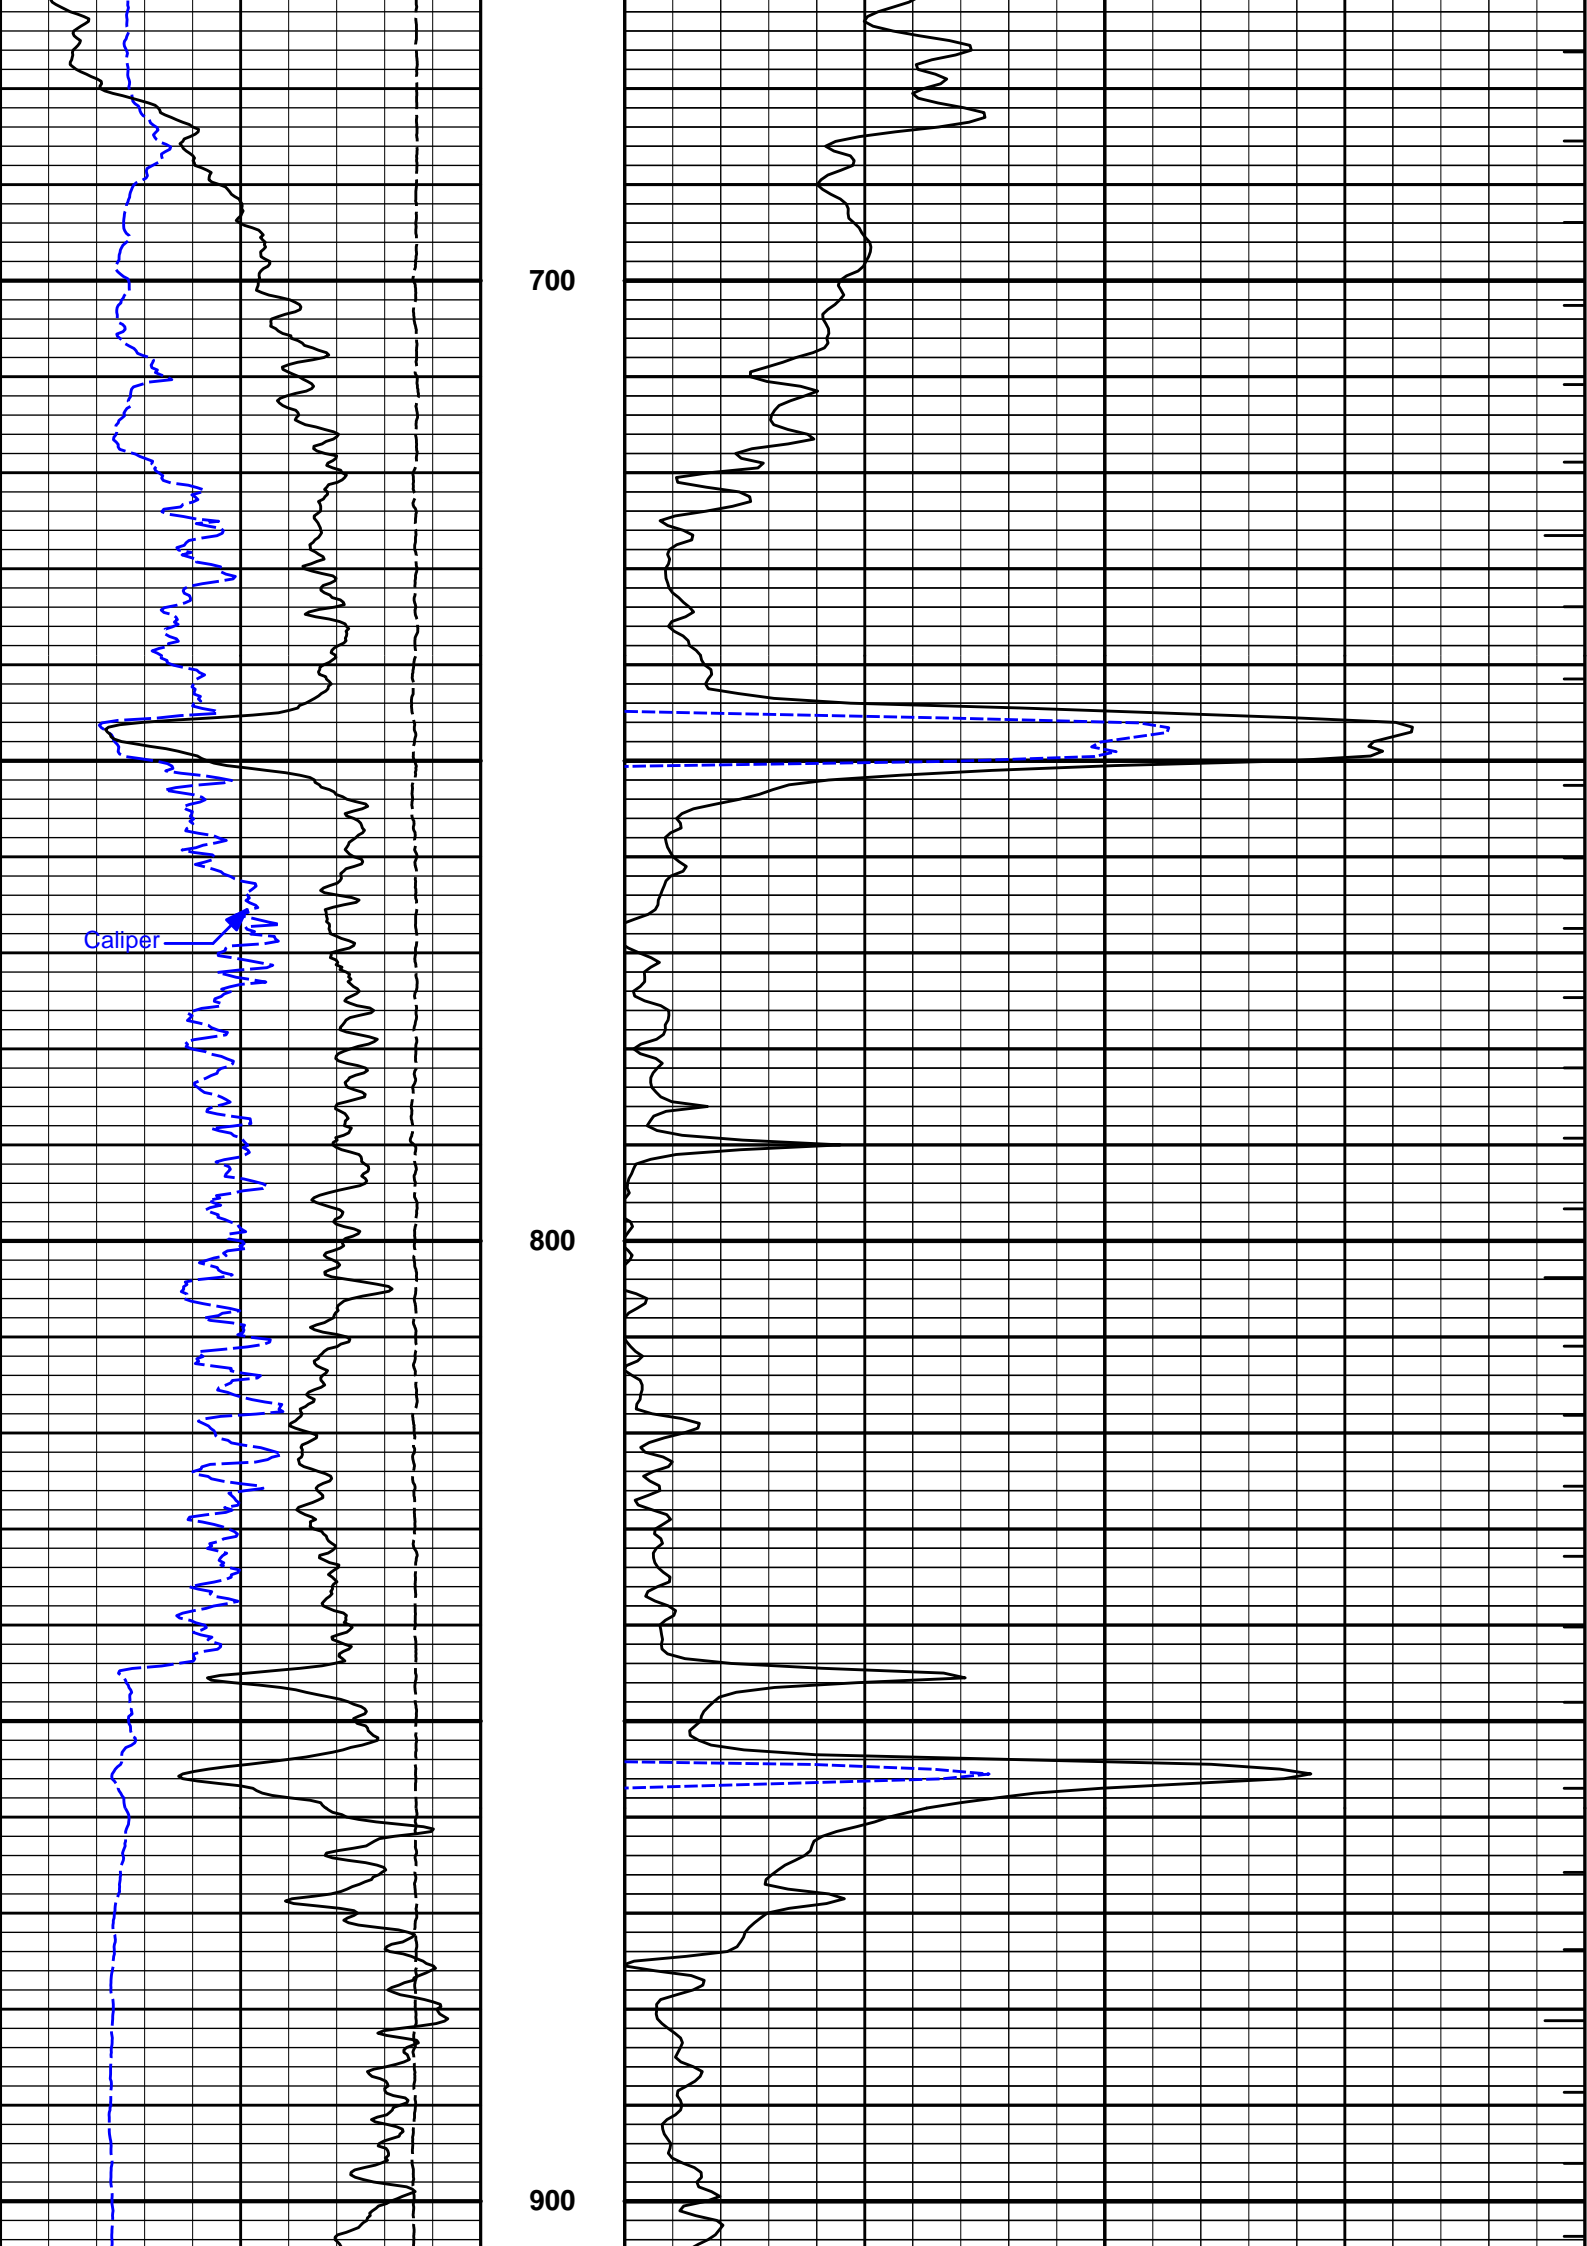


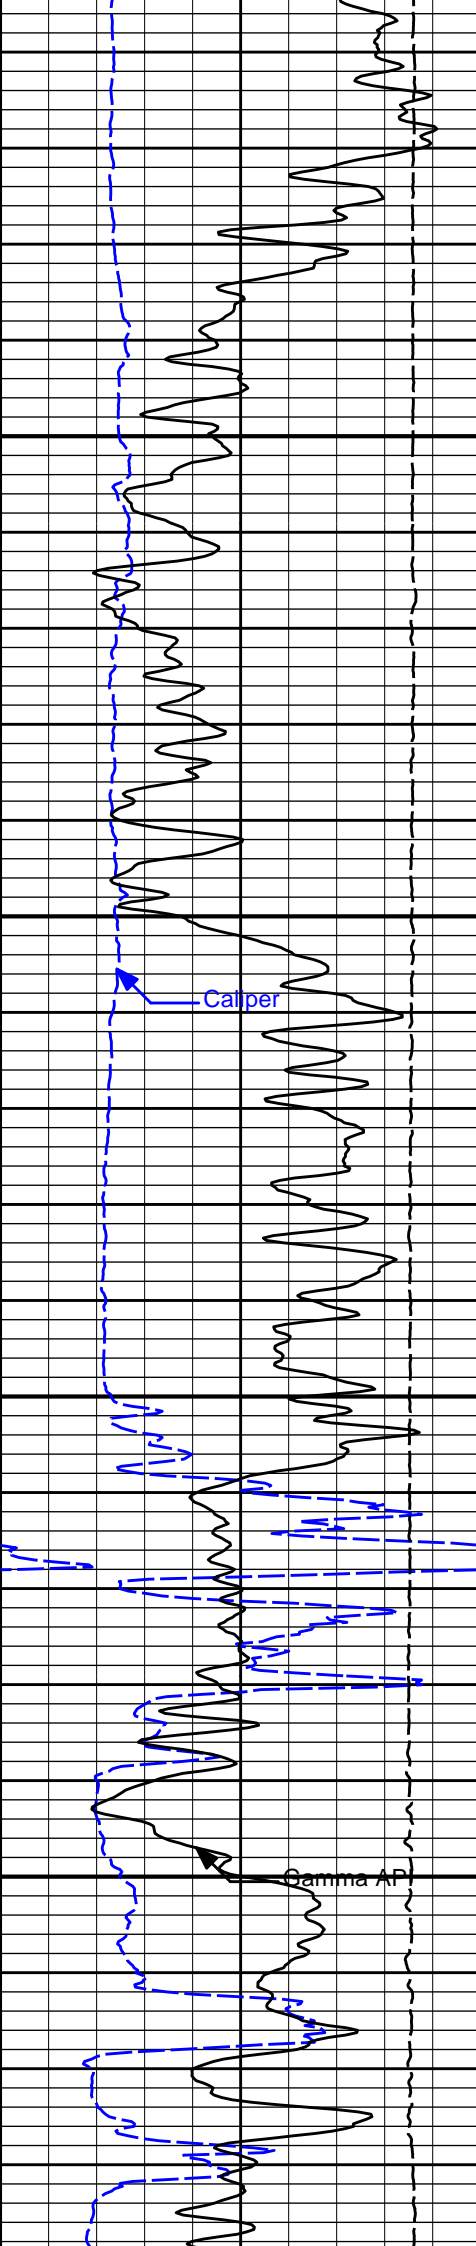

1000


1100

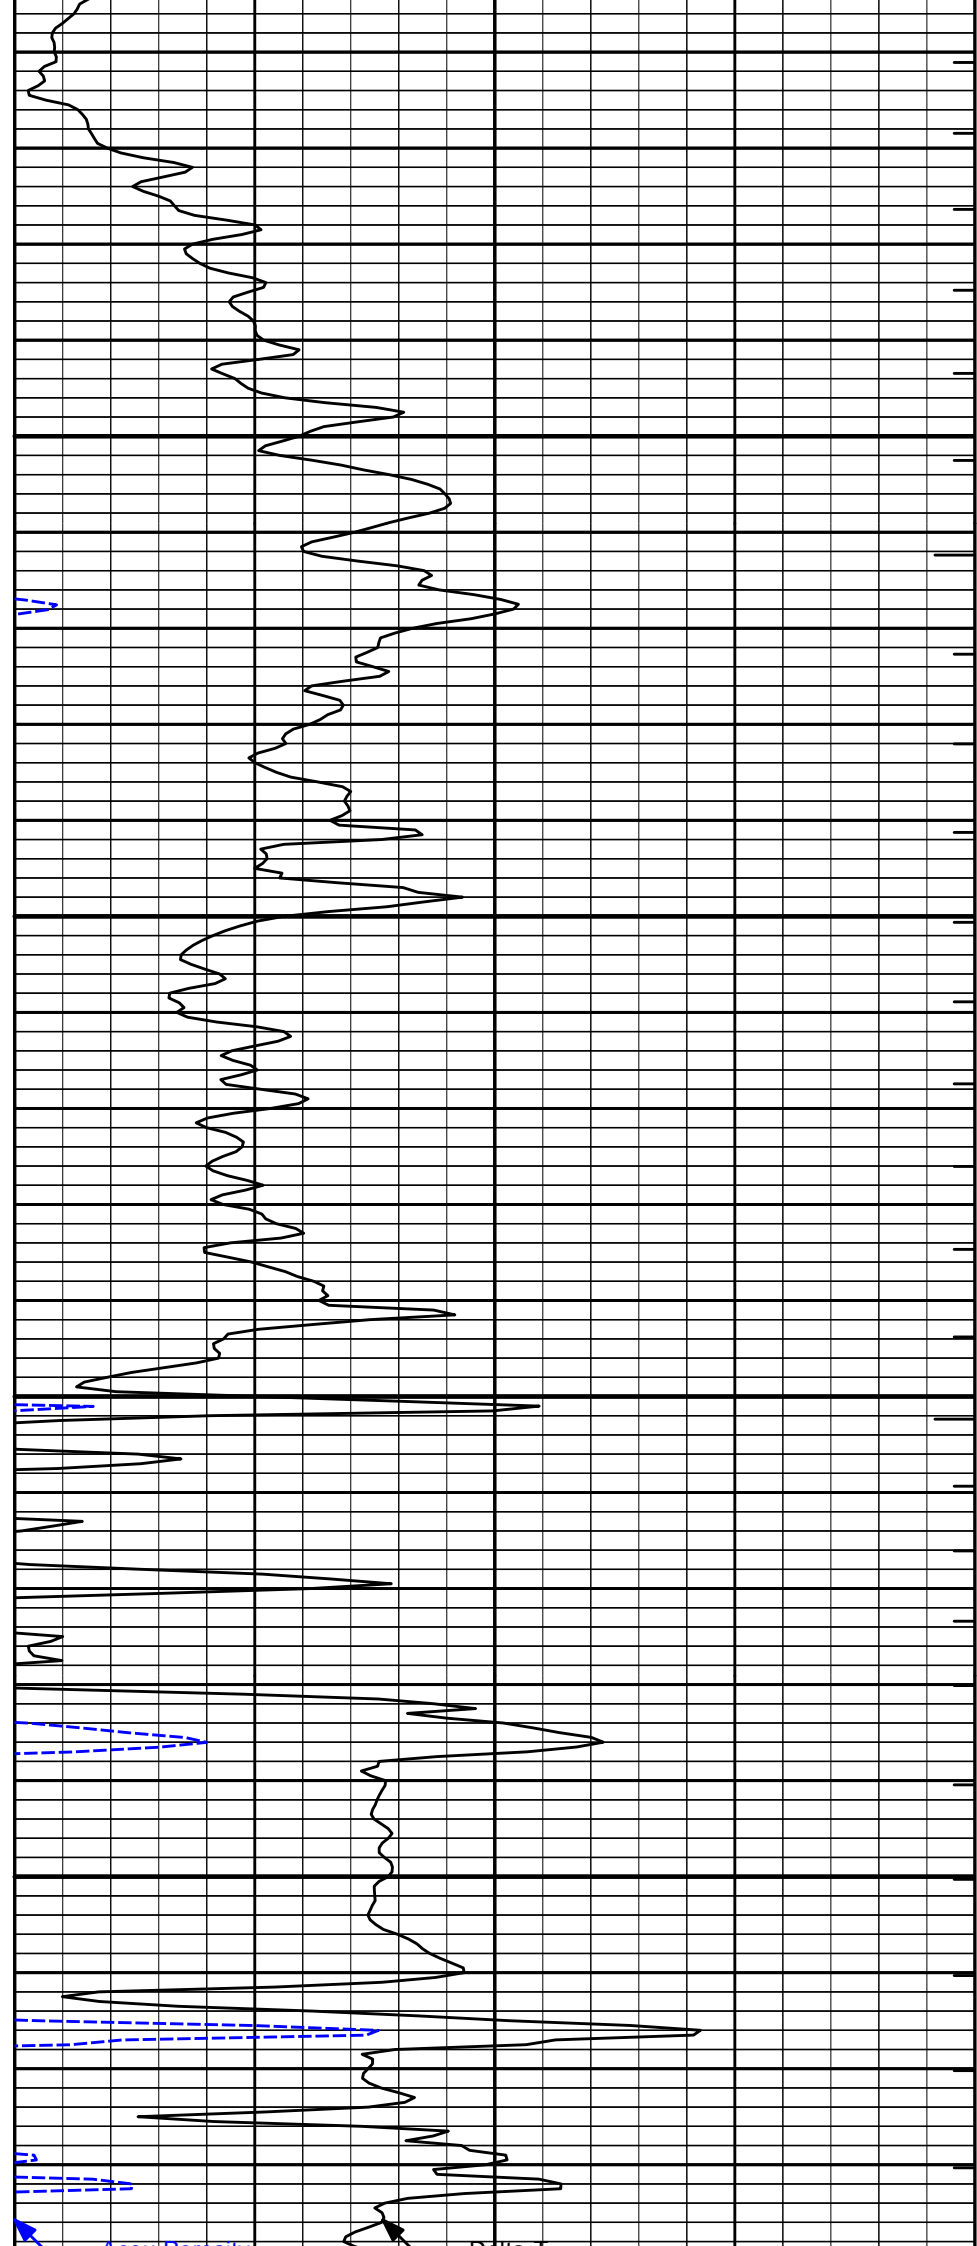


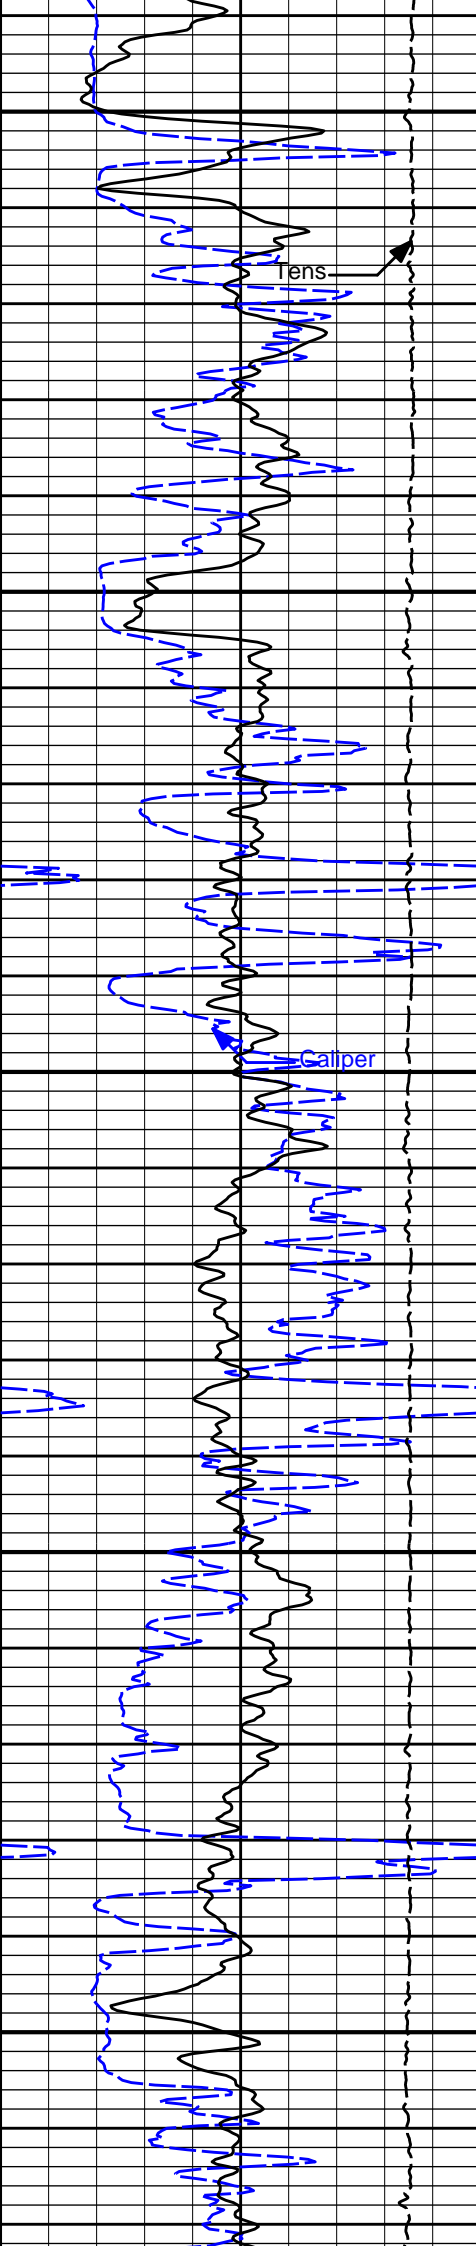

1200

1300

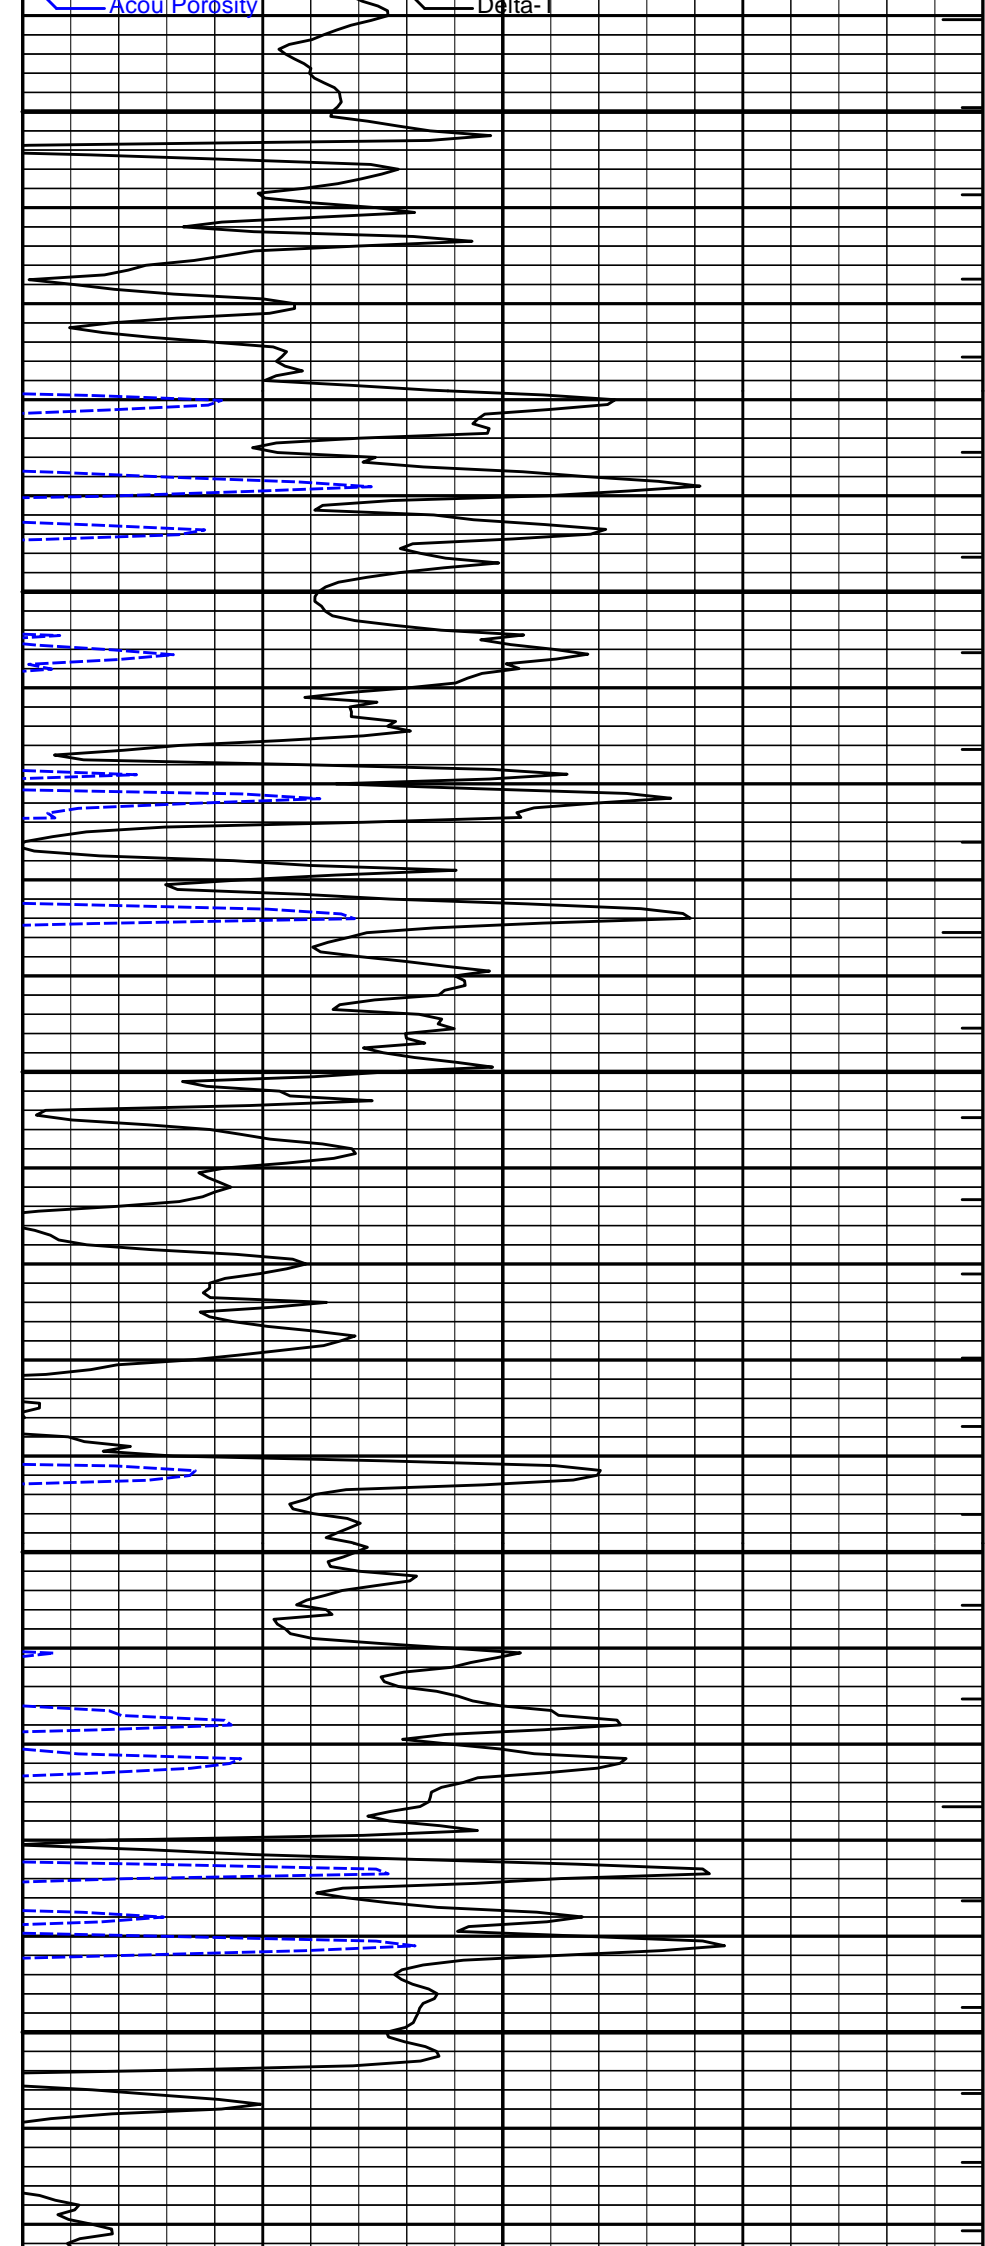

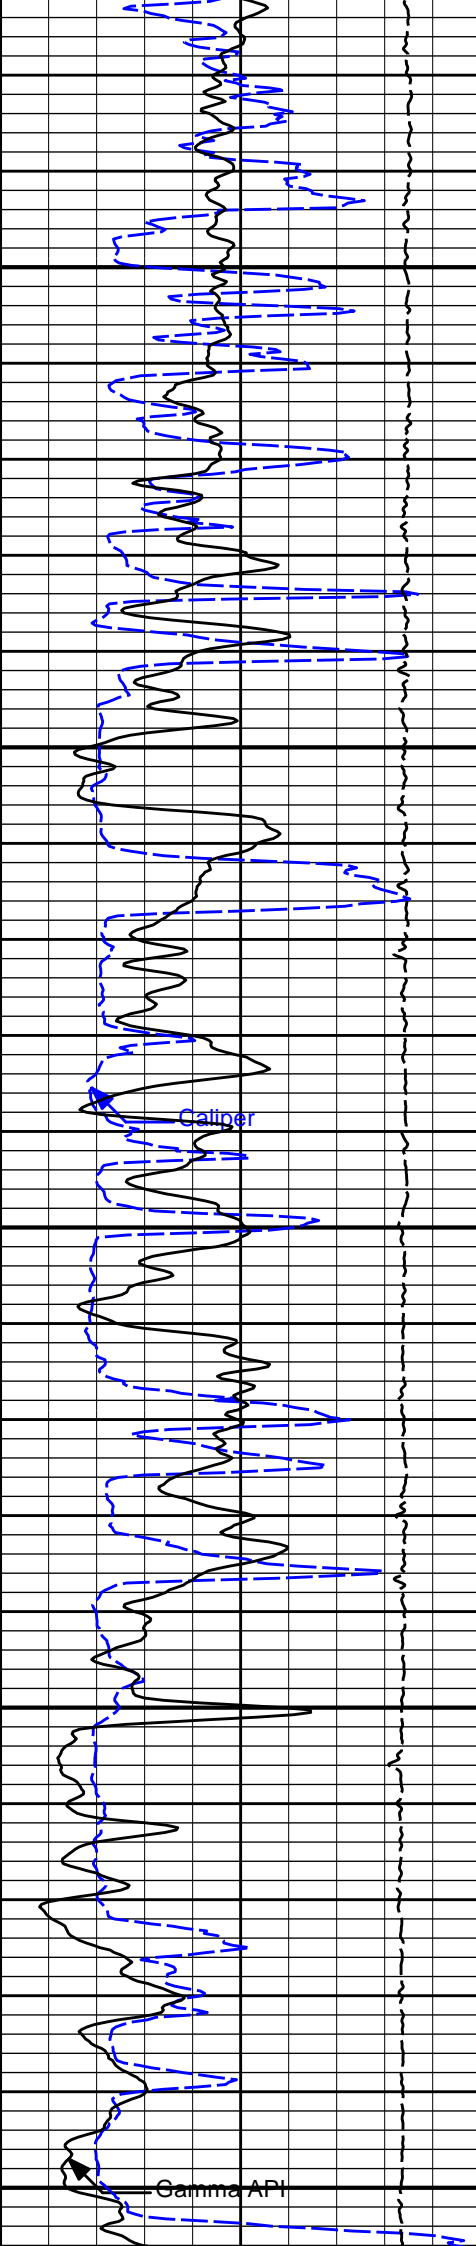


1400


1500

1600

Caliper


Gamma API

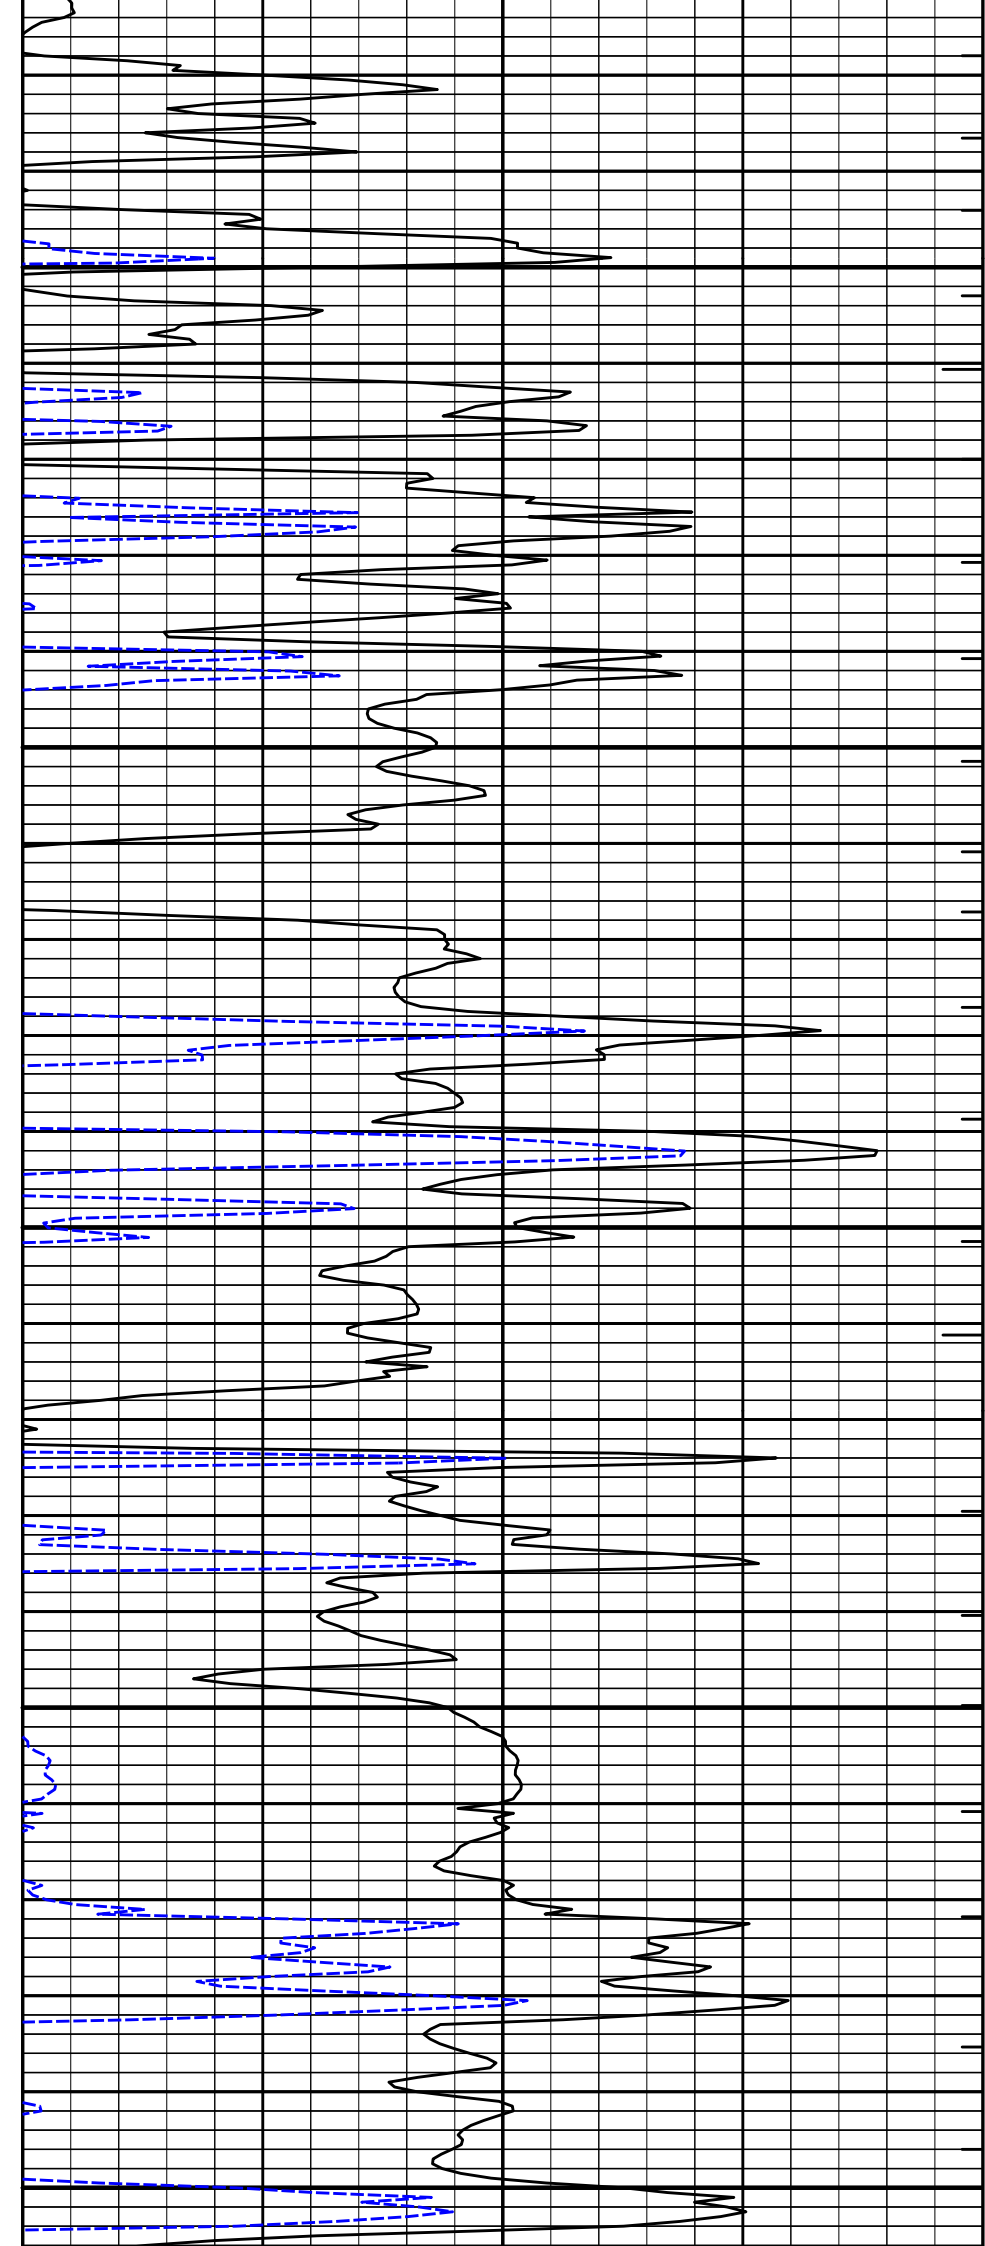


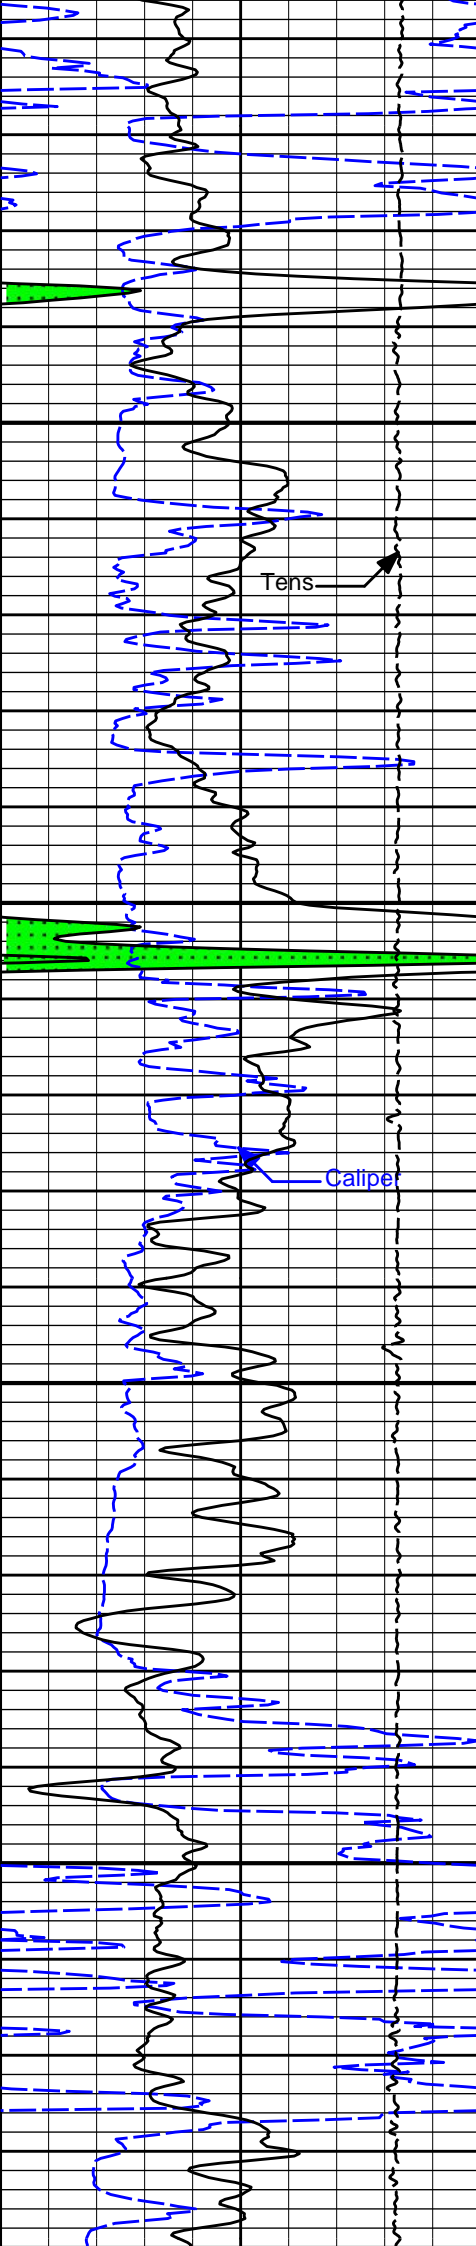

1700


1800

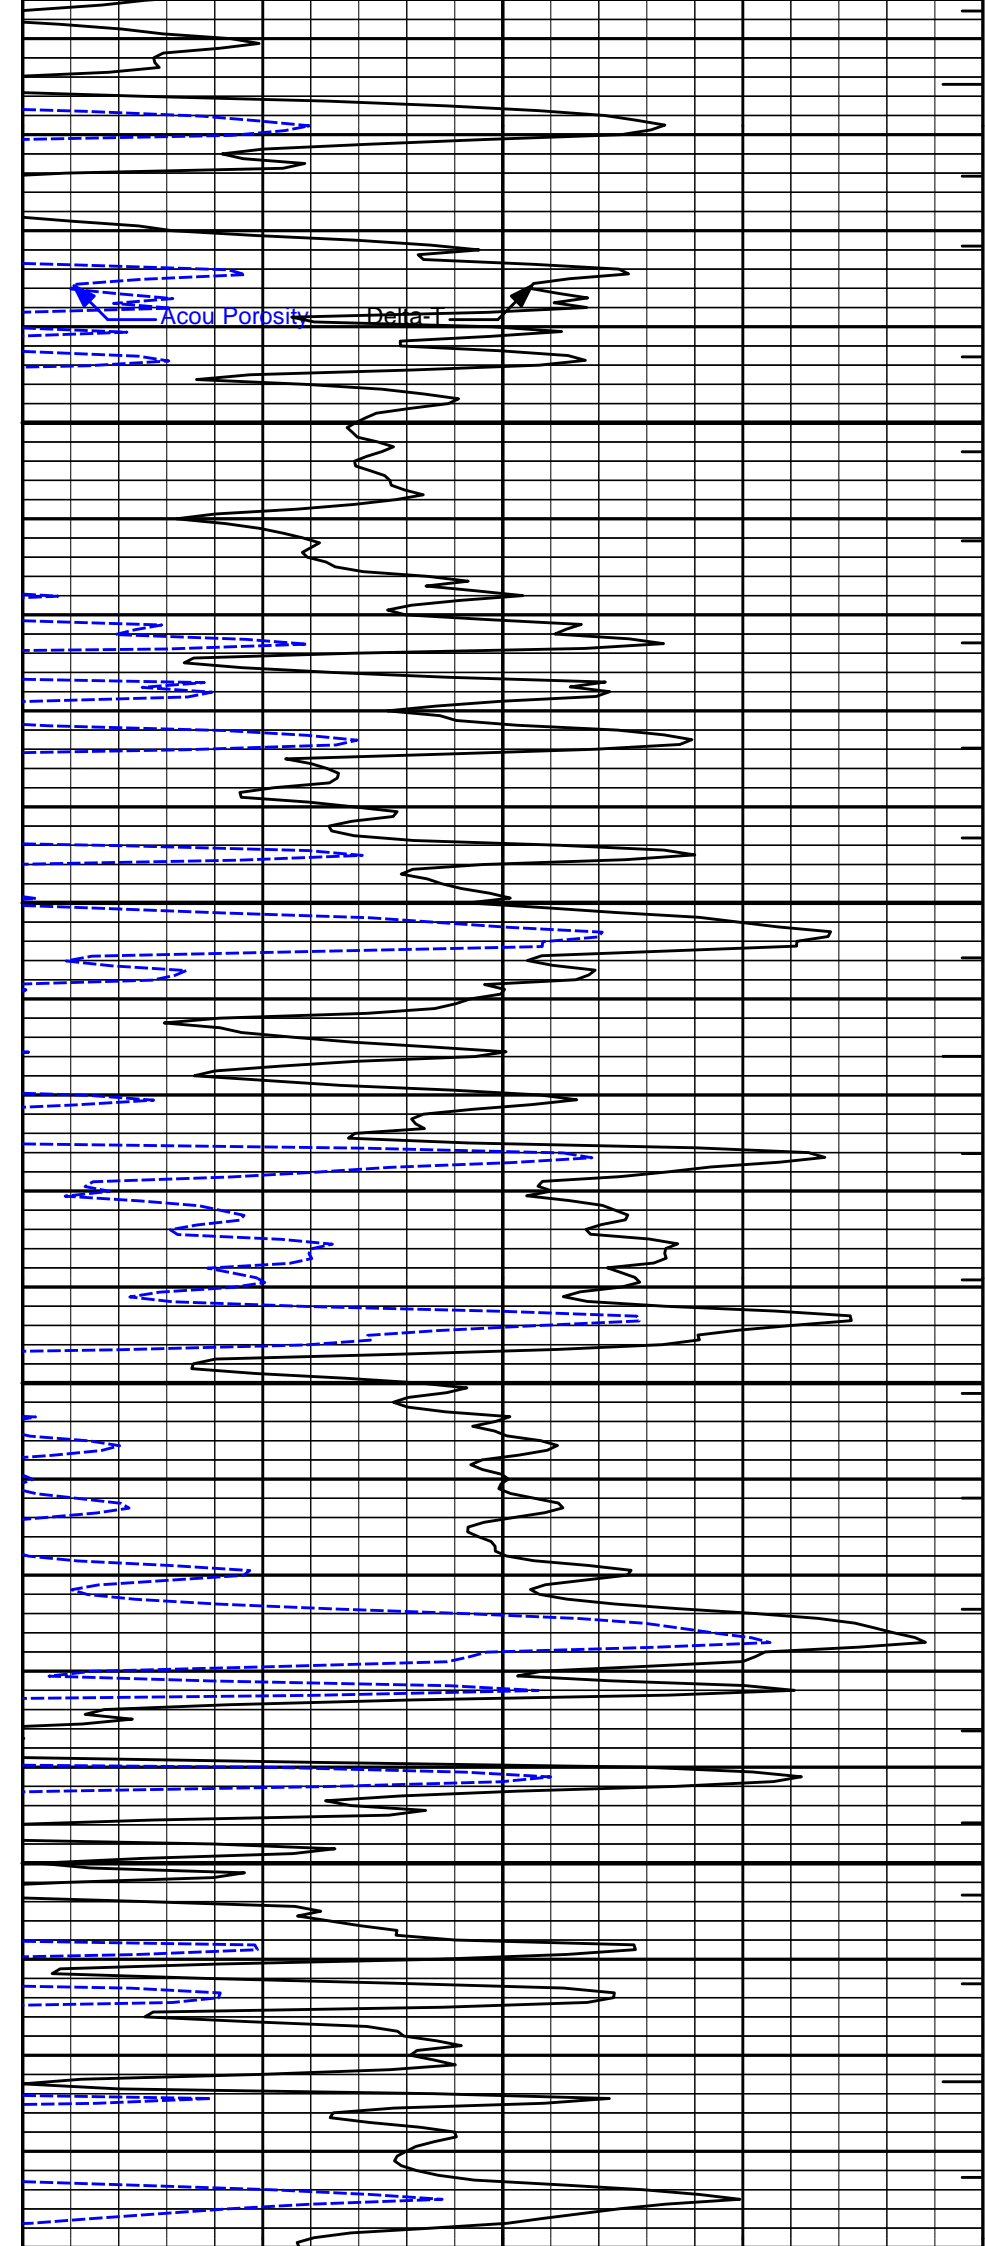


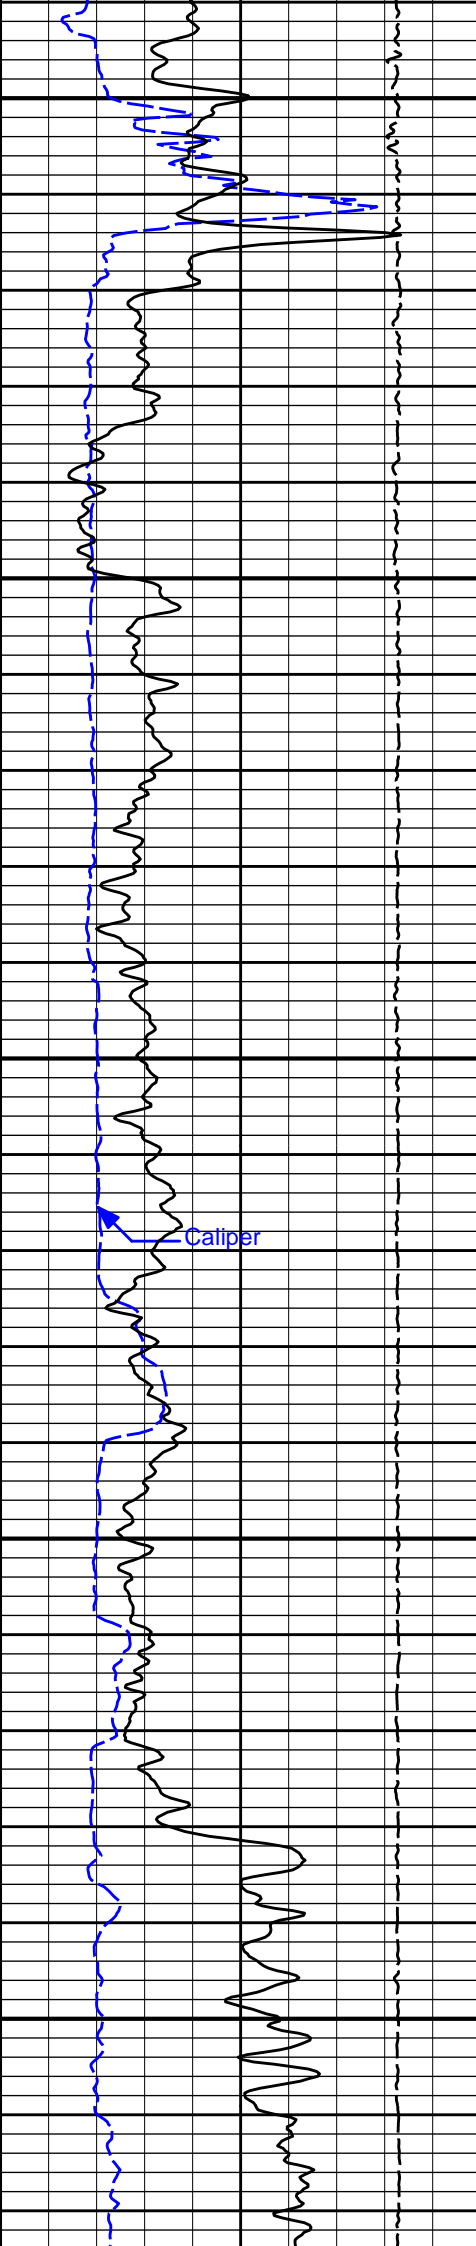

1900

2000

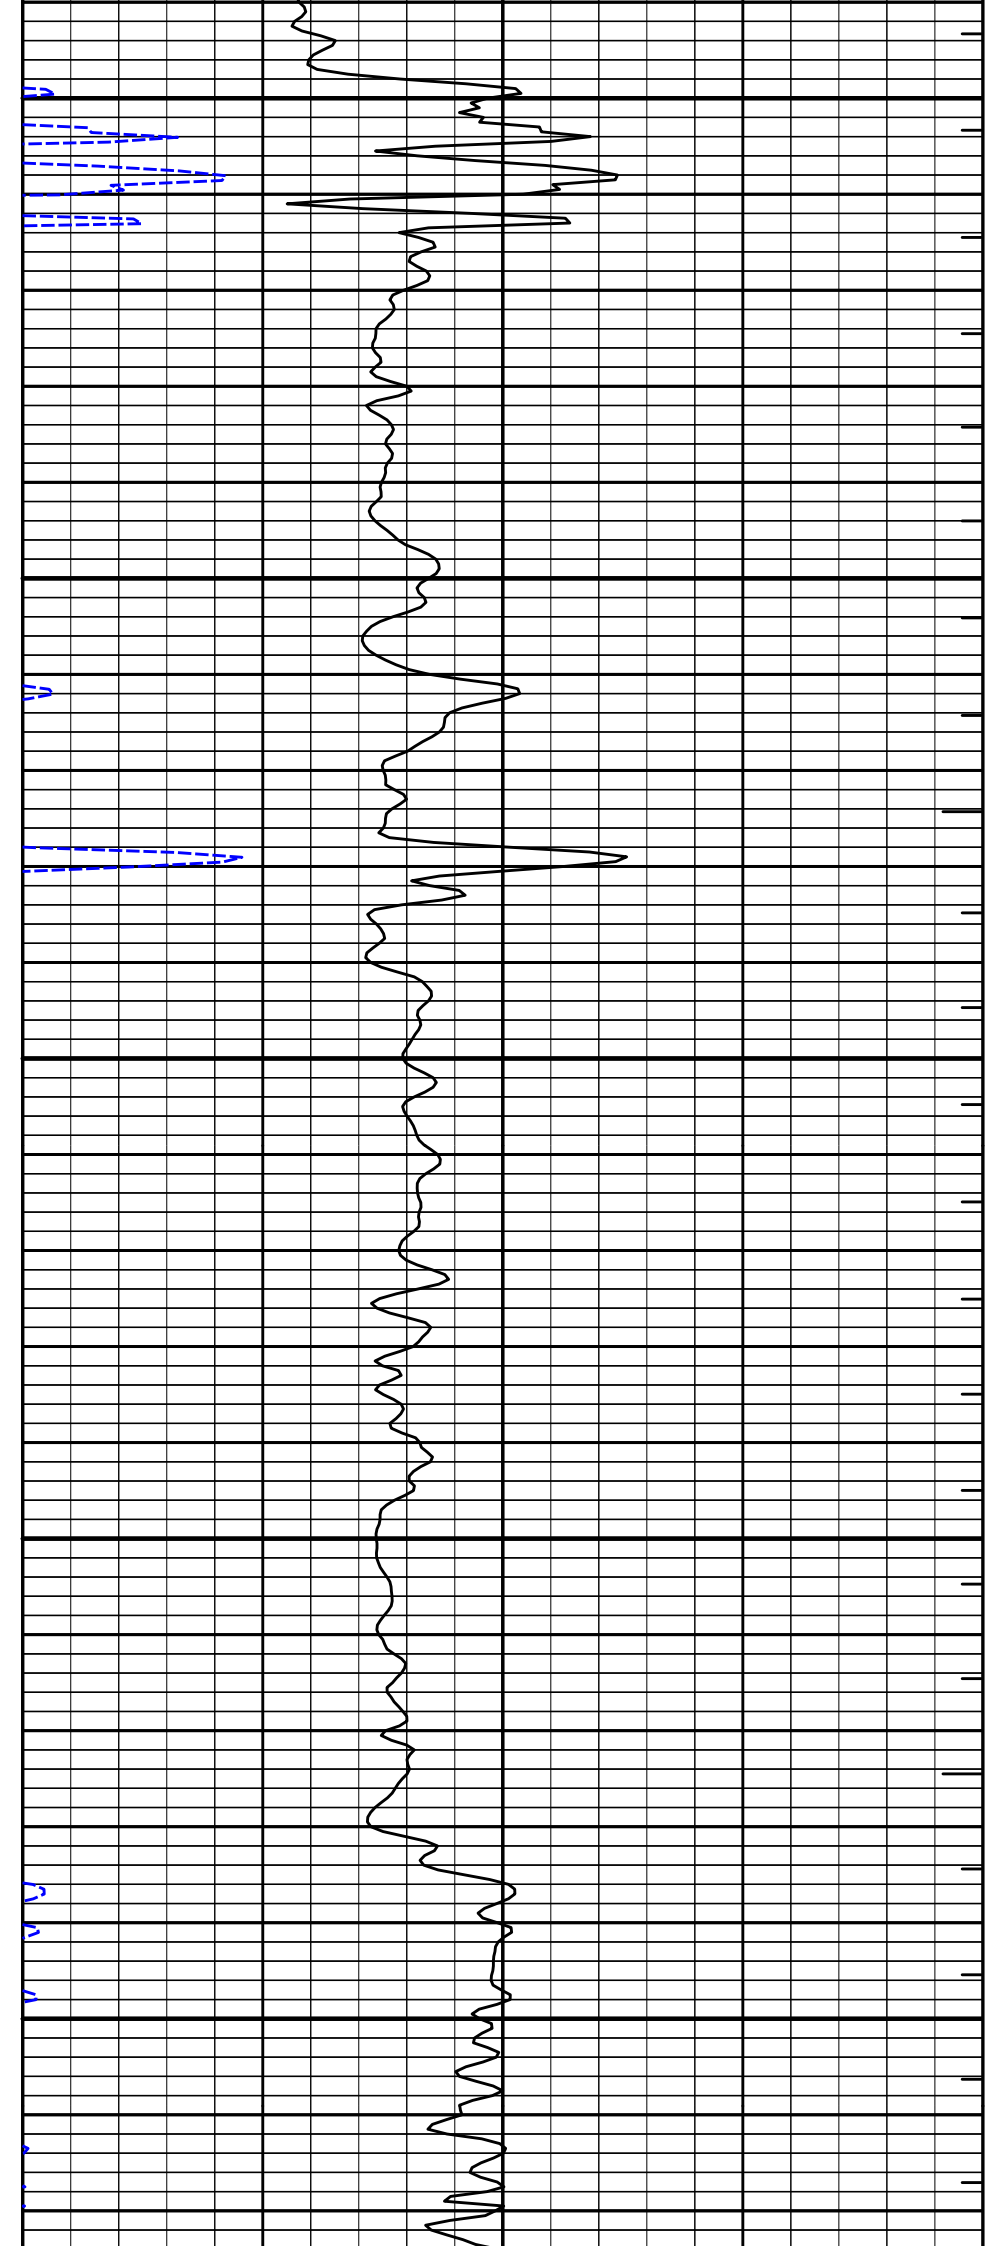


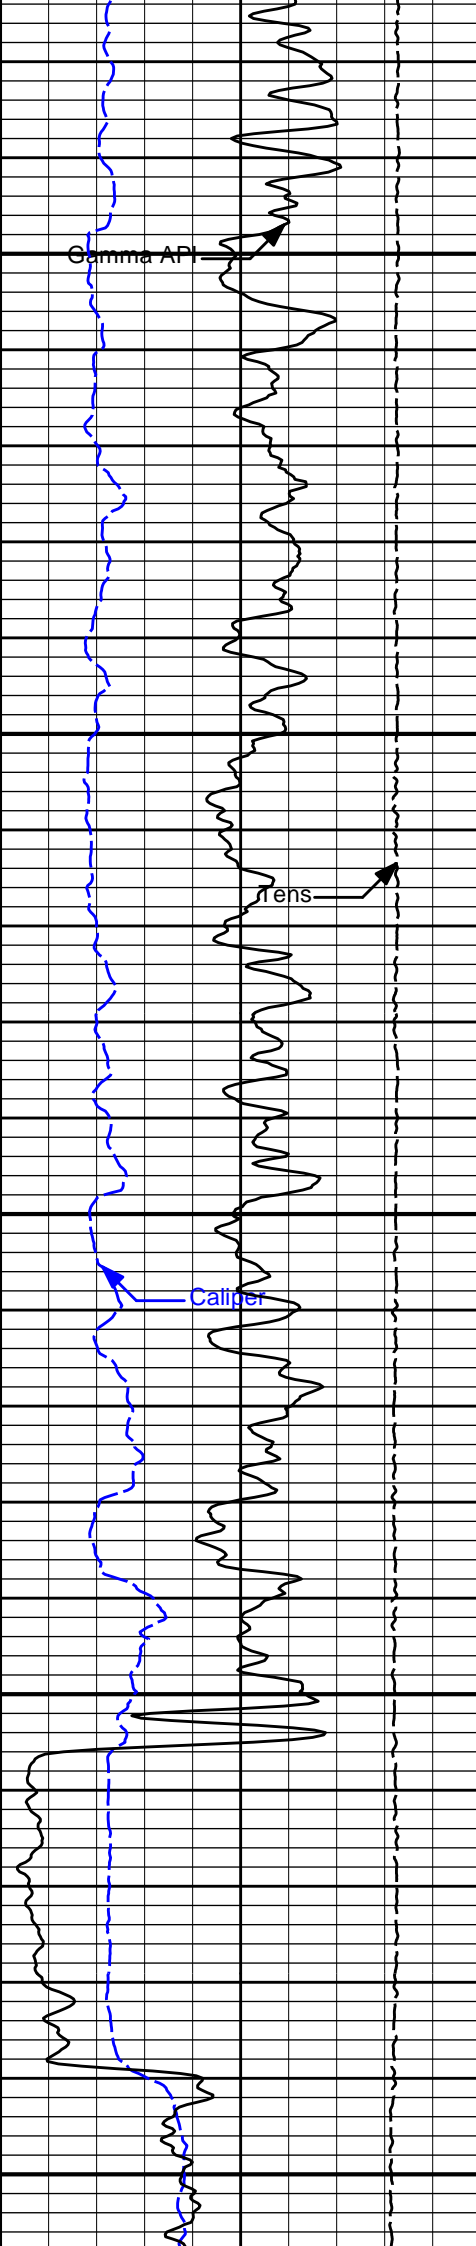

2100

2200


2300

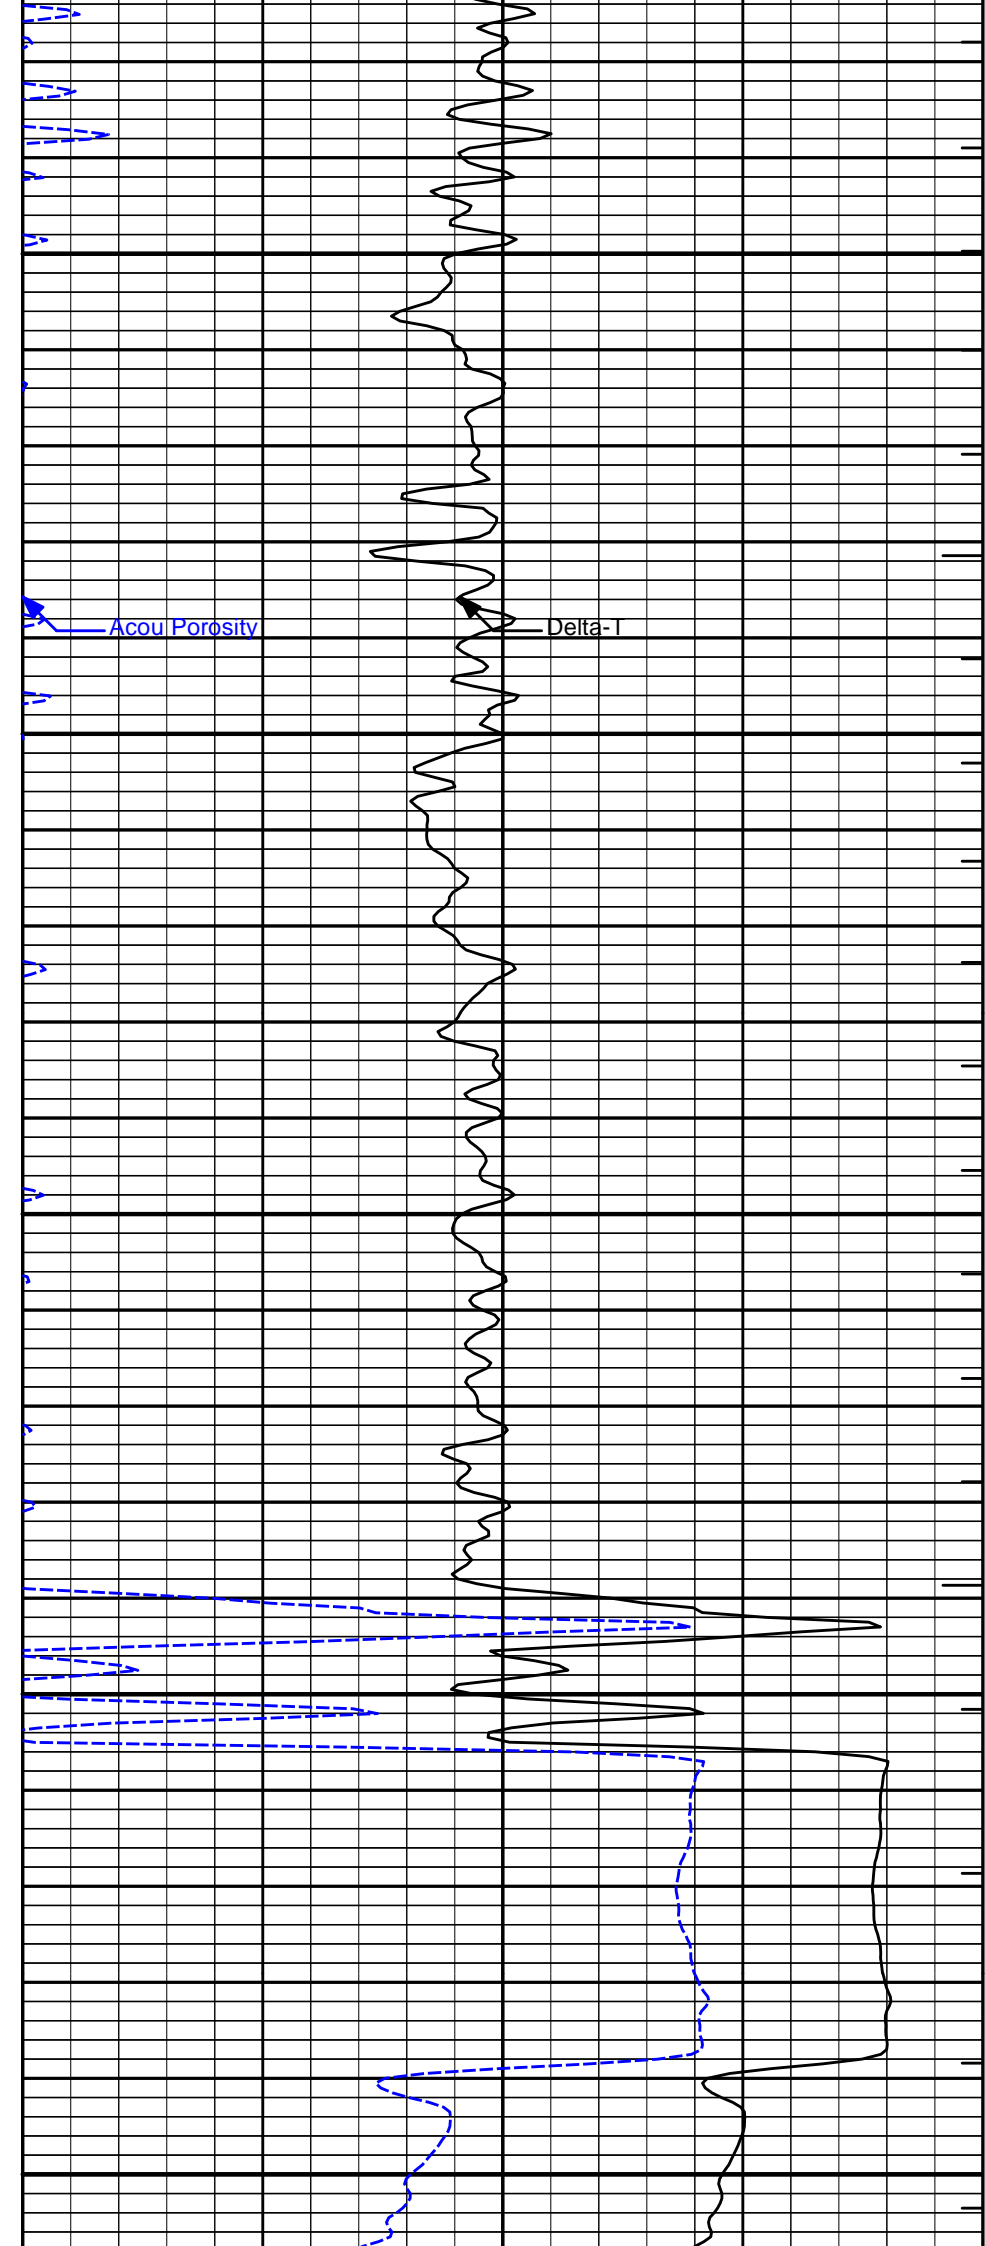

2100


2200



2300

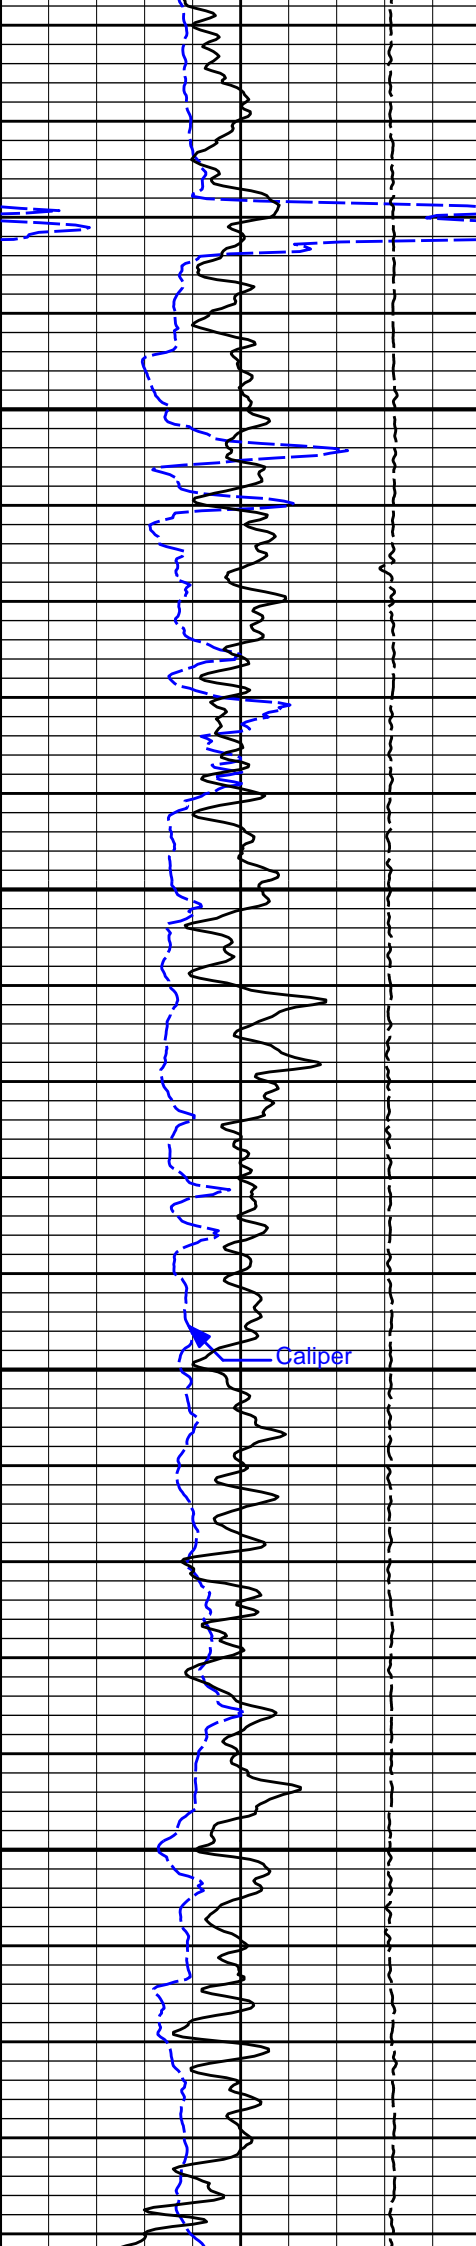


2400

2500

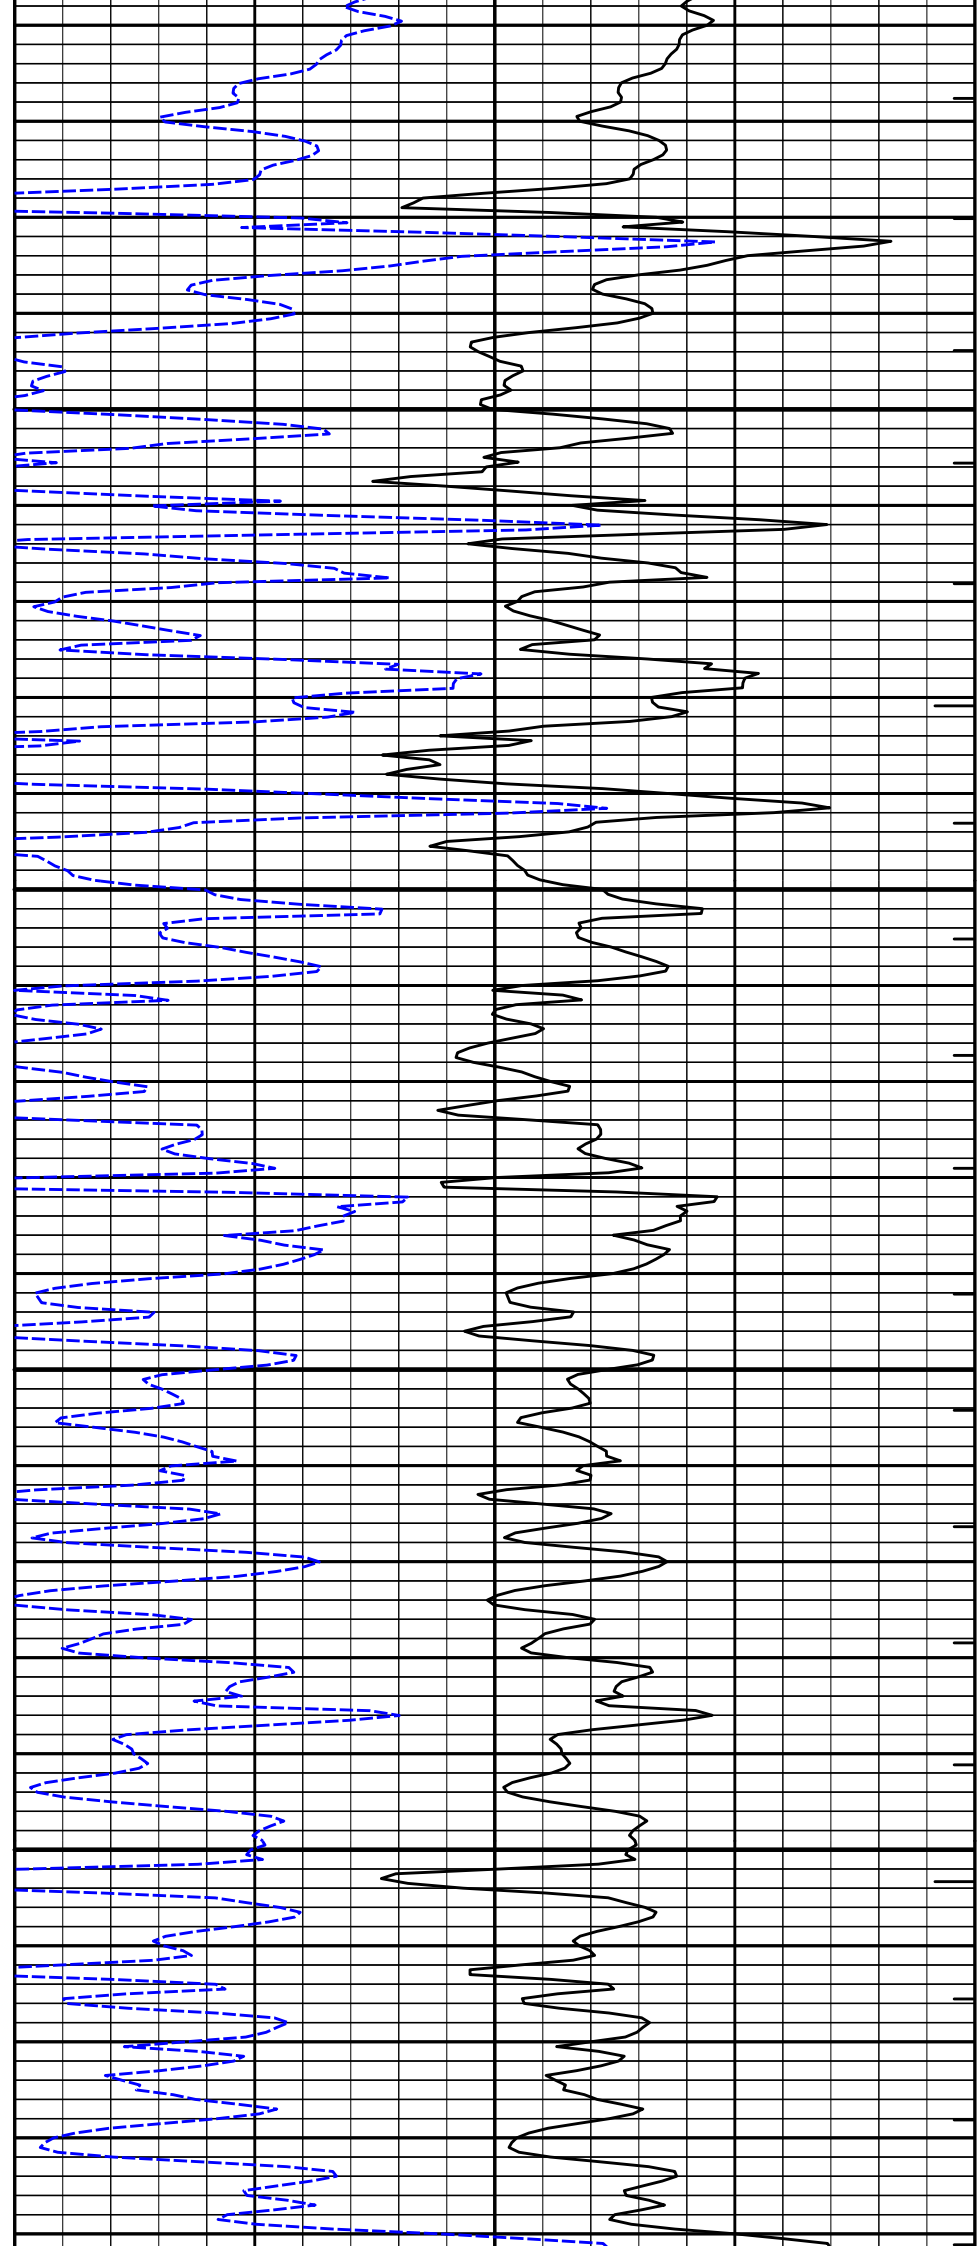

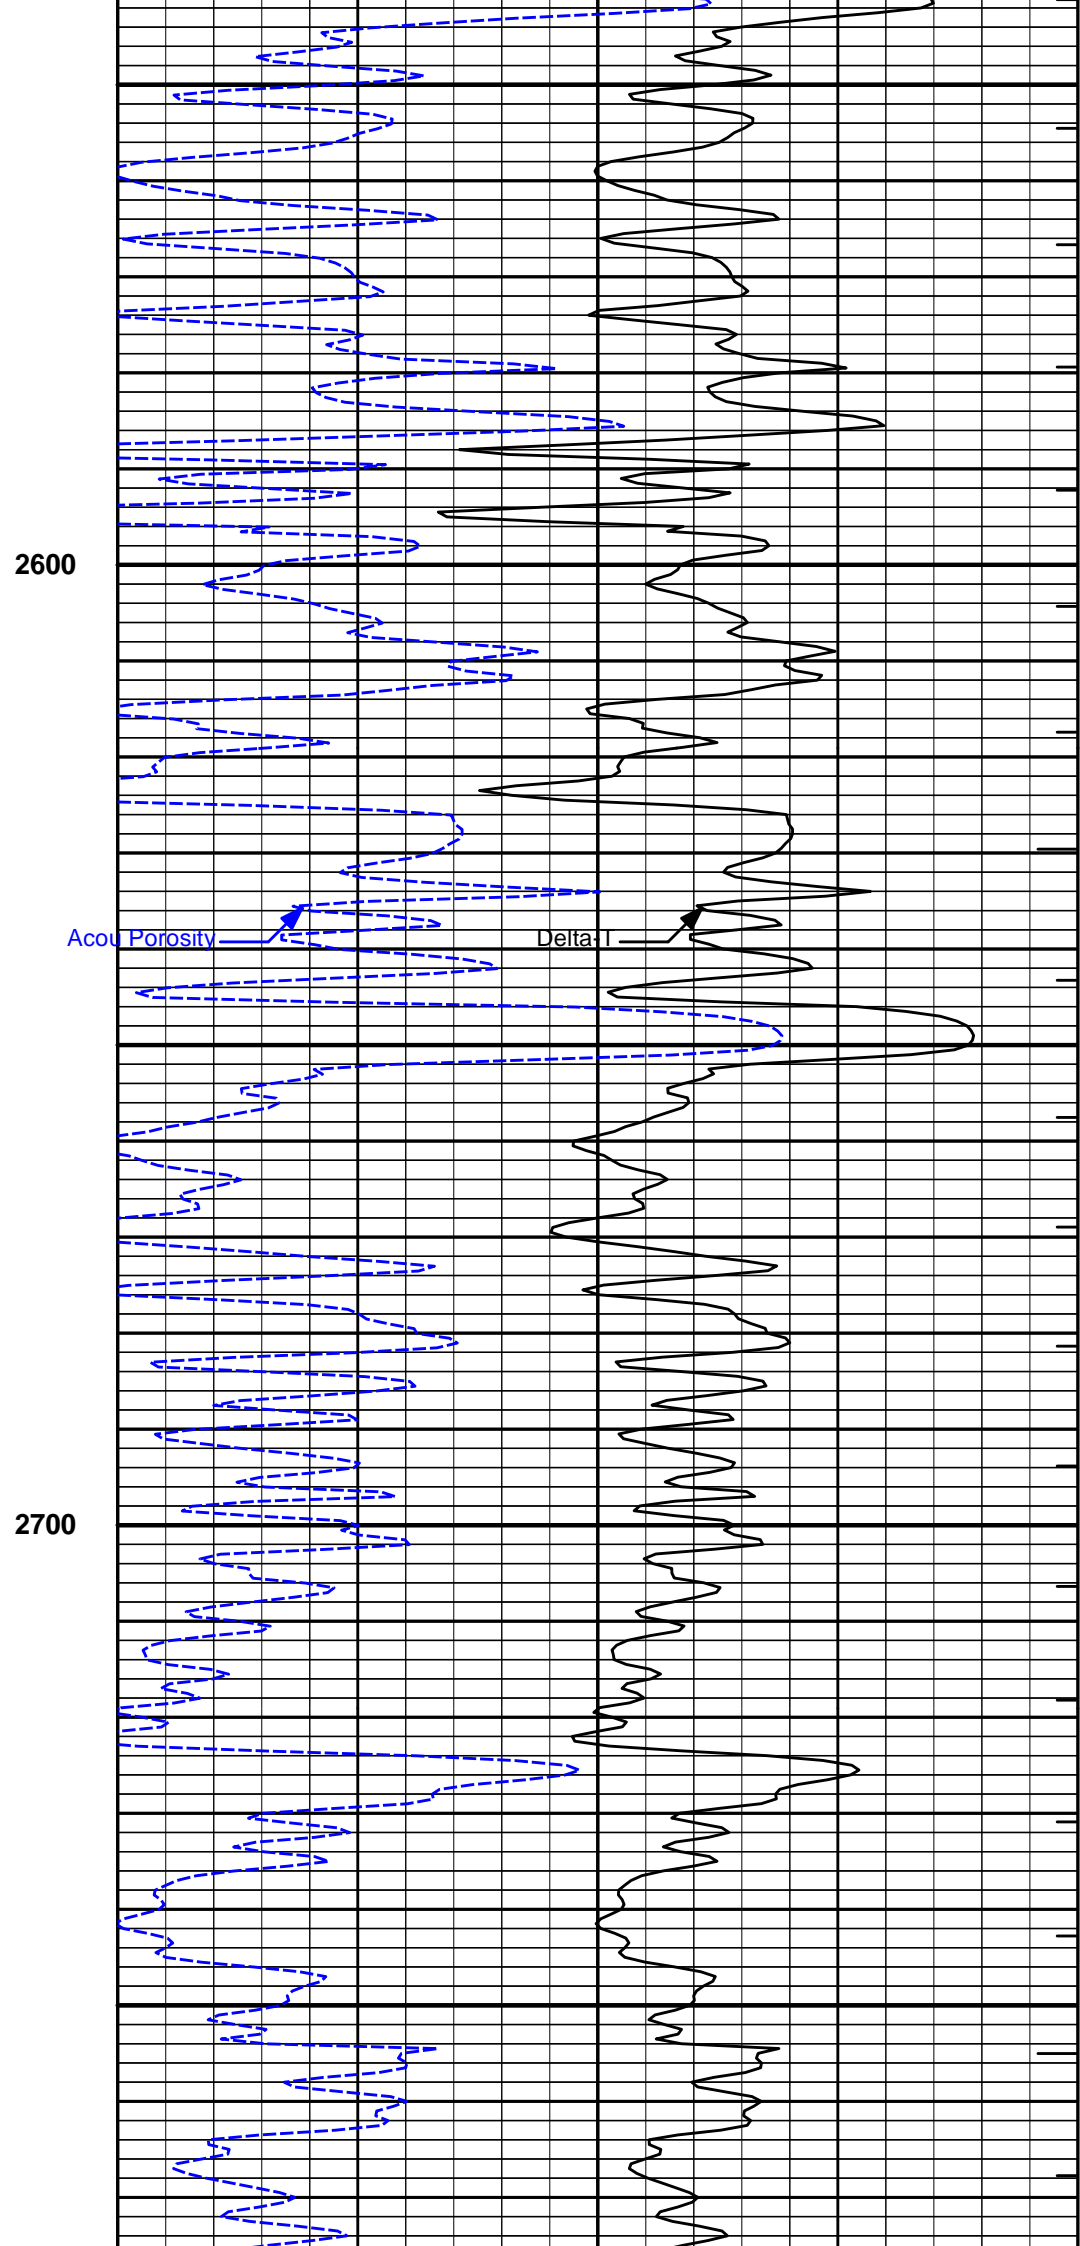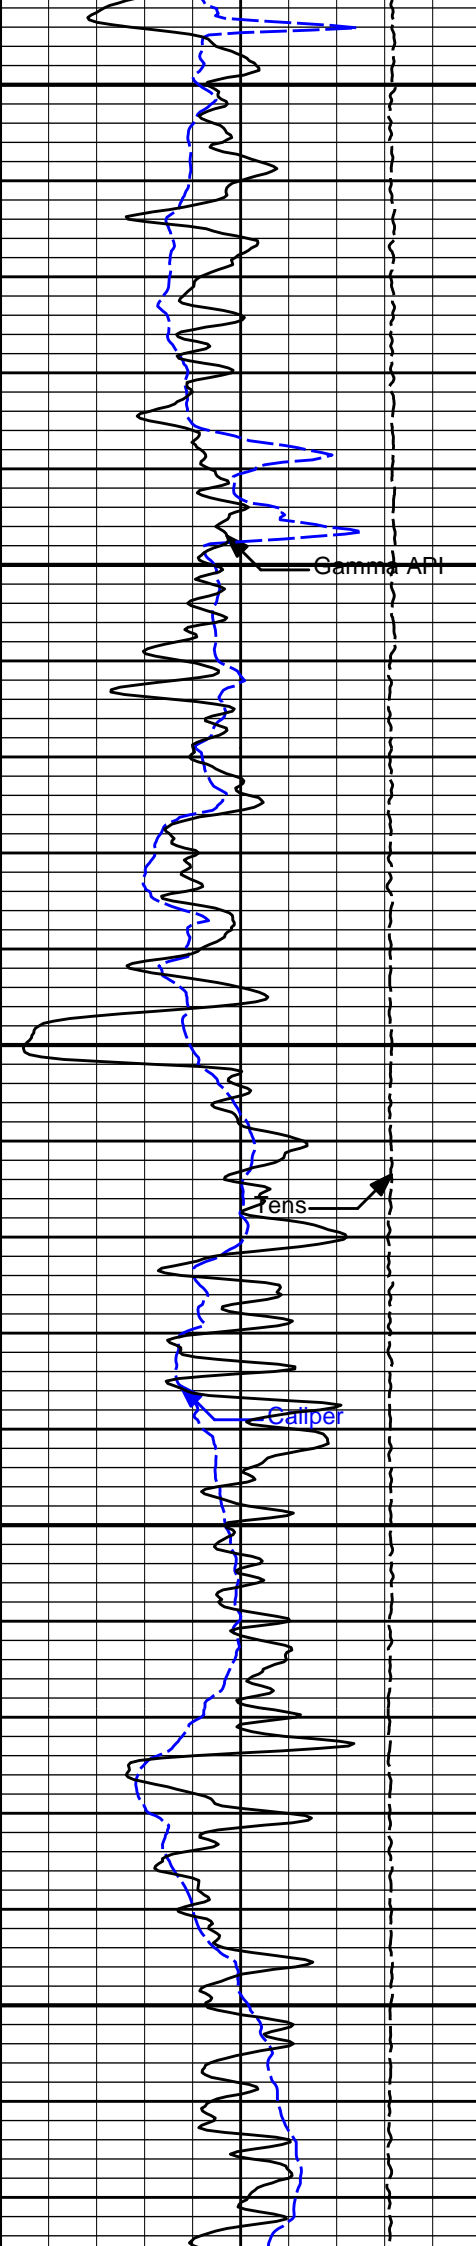


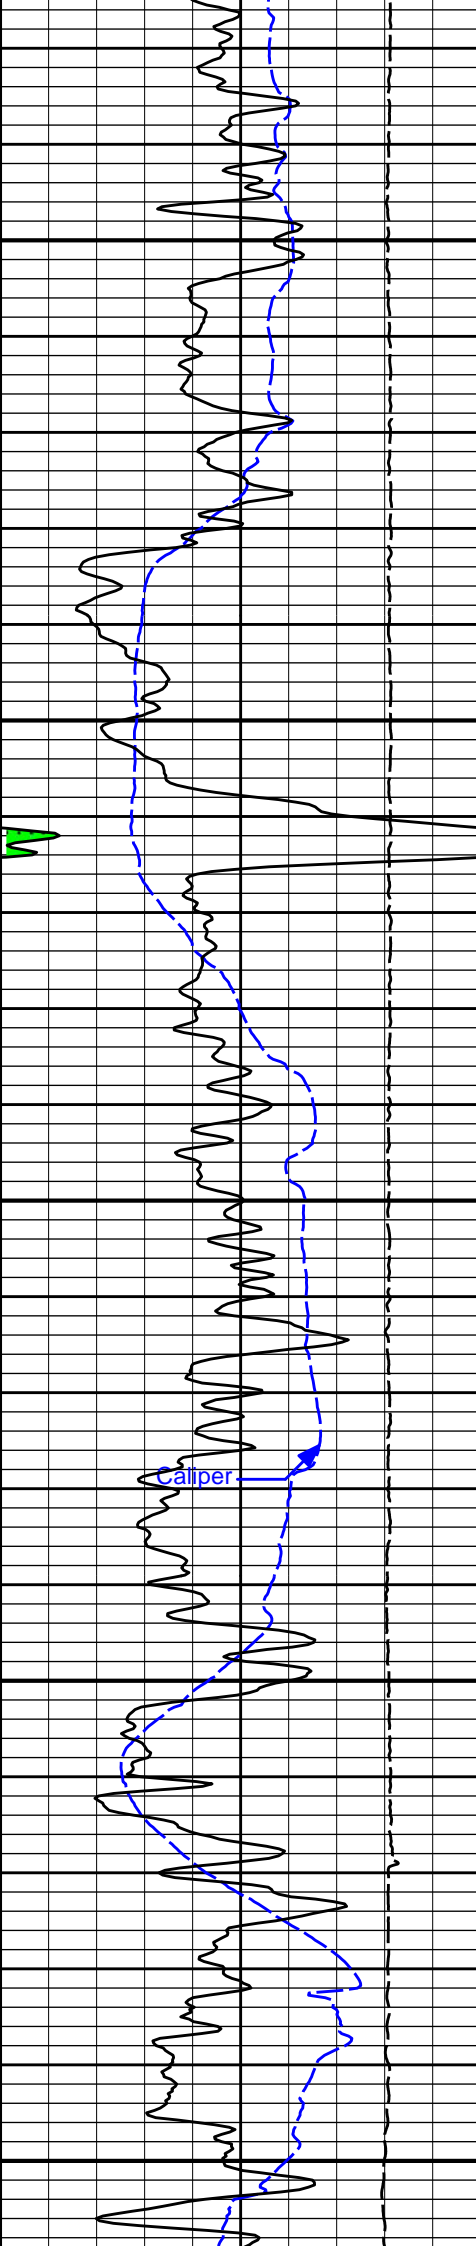


2800

2900

3000

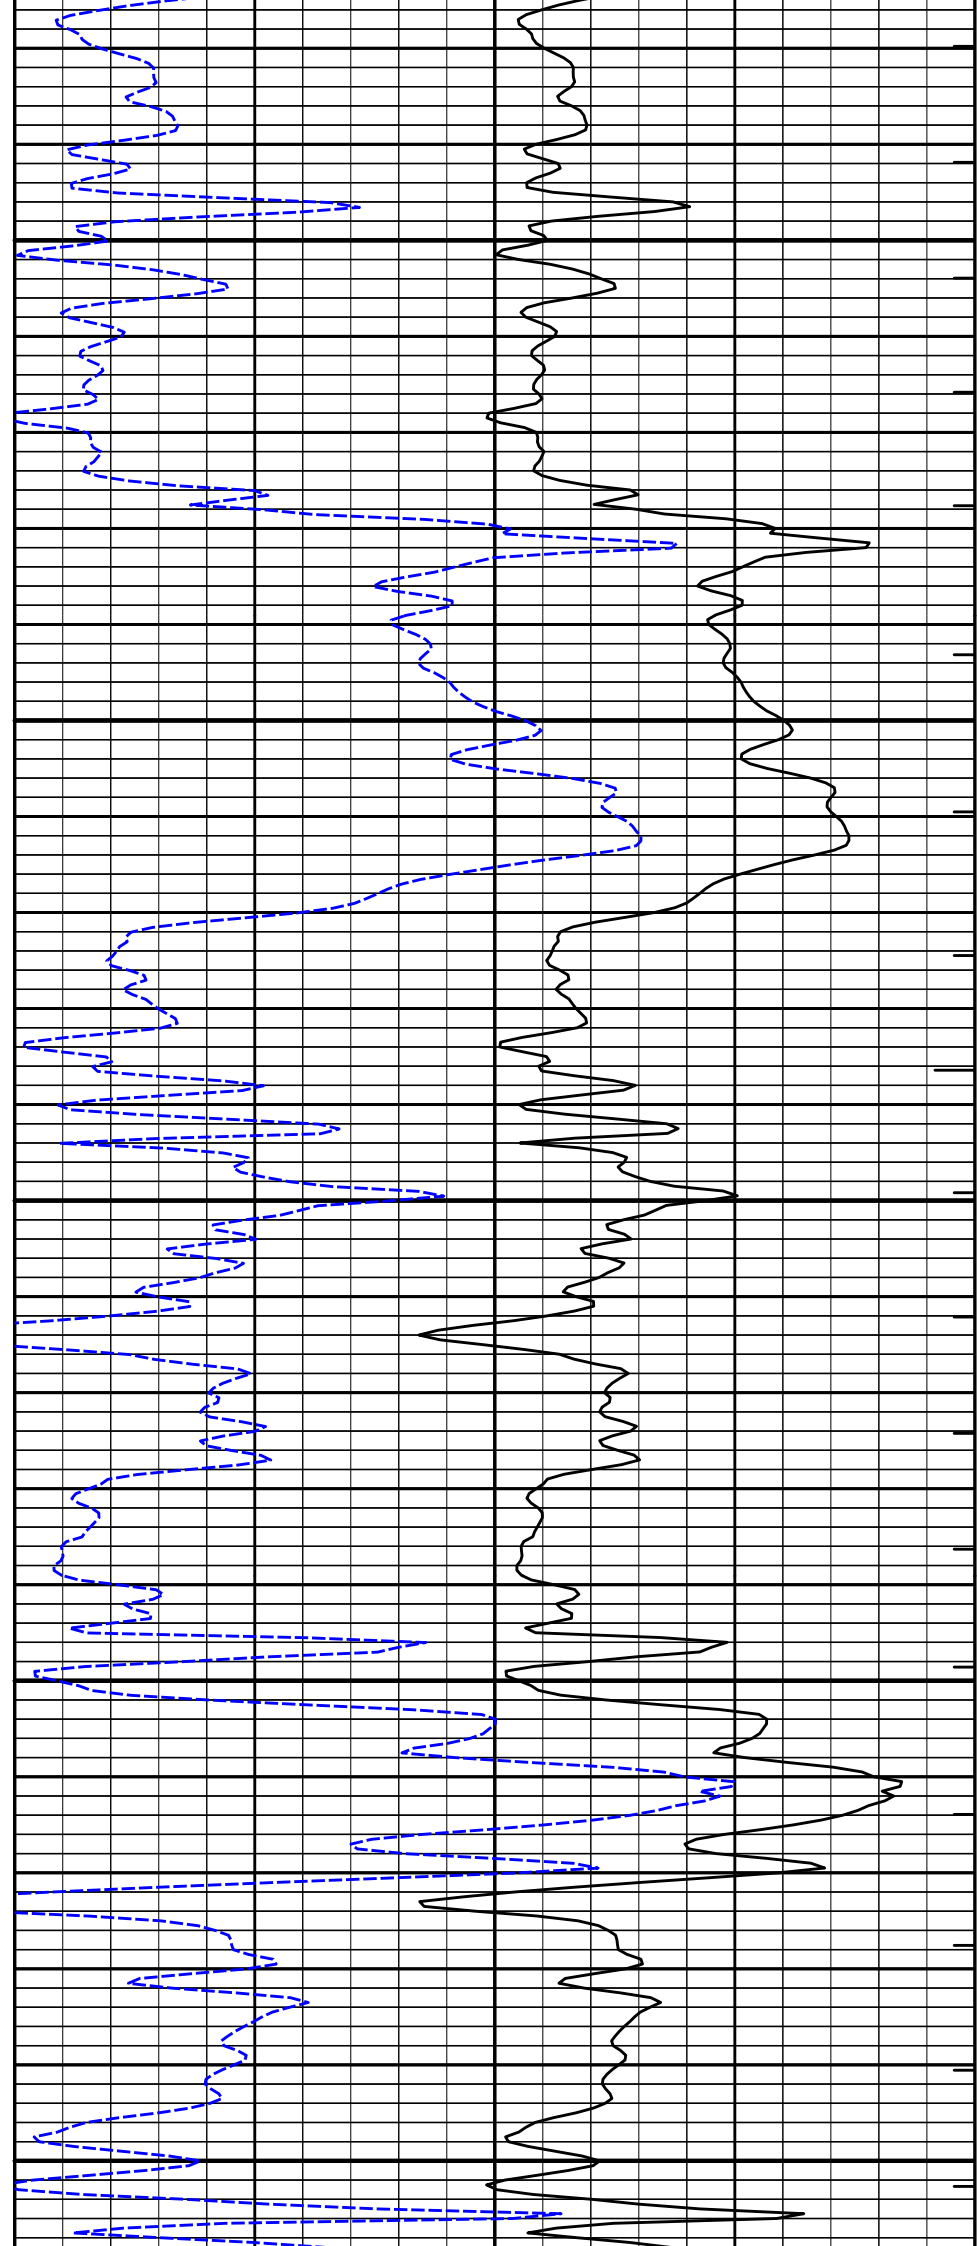

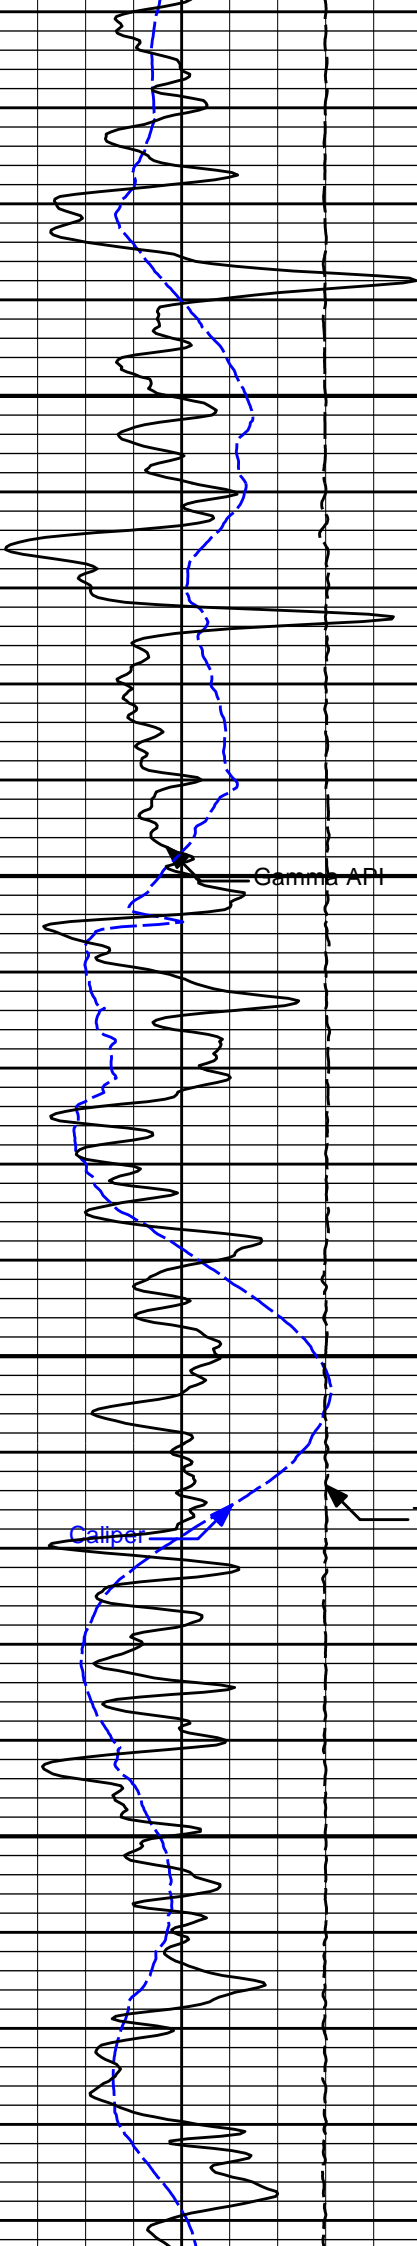


Gamma API

3100

Caliper

Density

3200

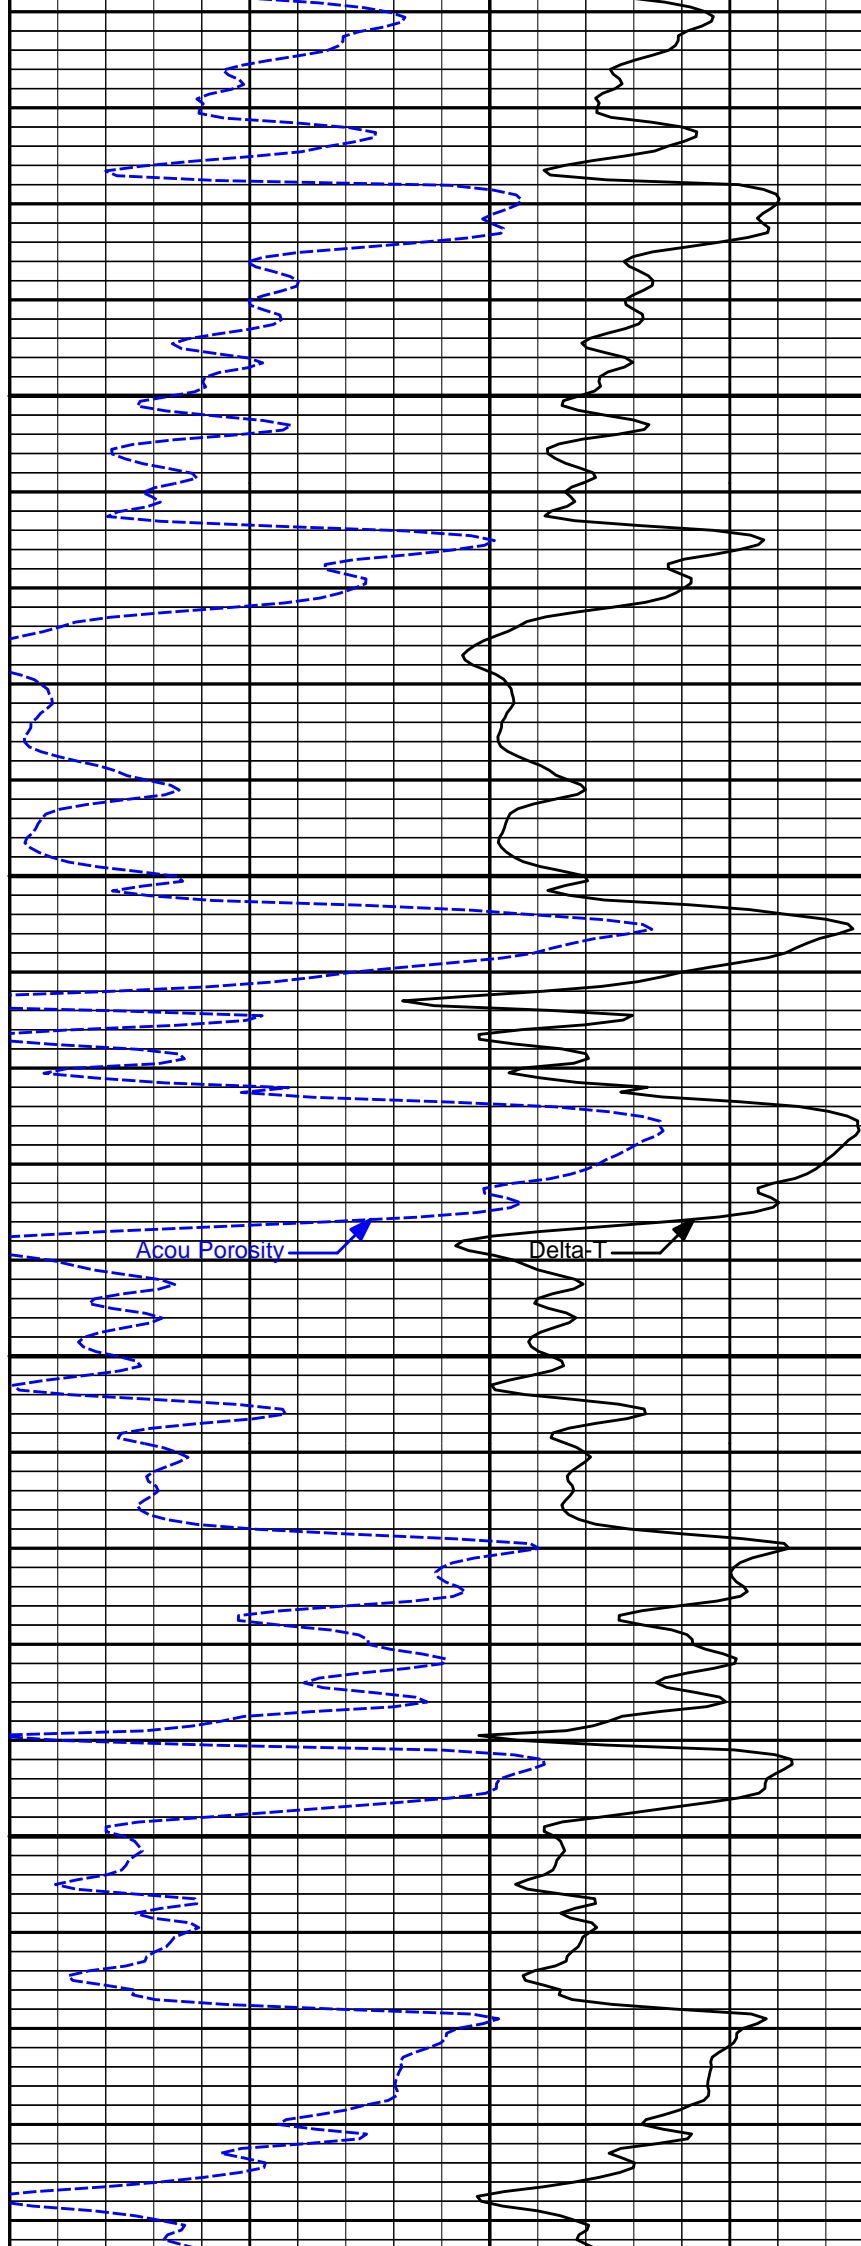


Acou Porosity


Delta-T



3300

3400

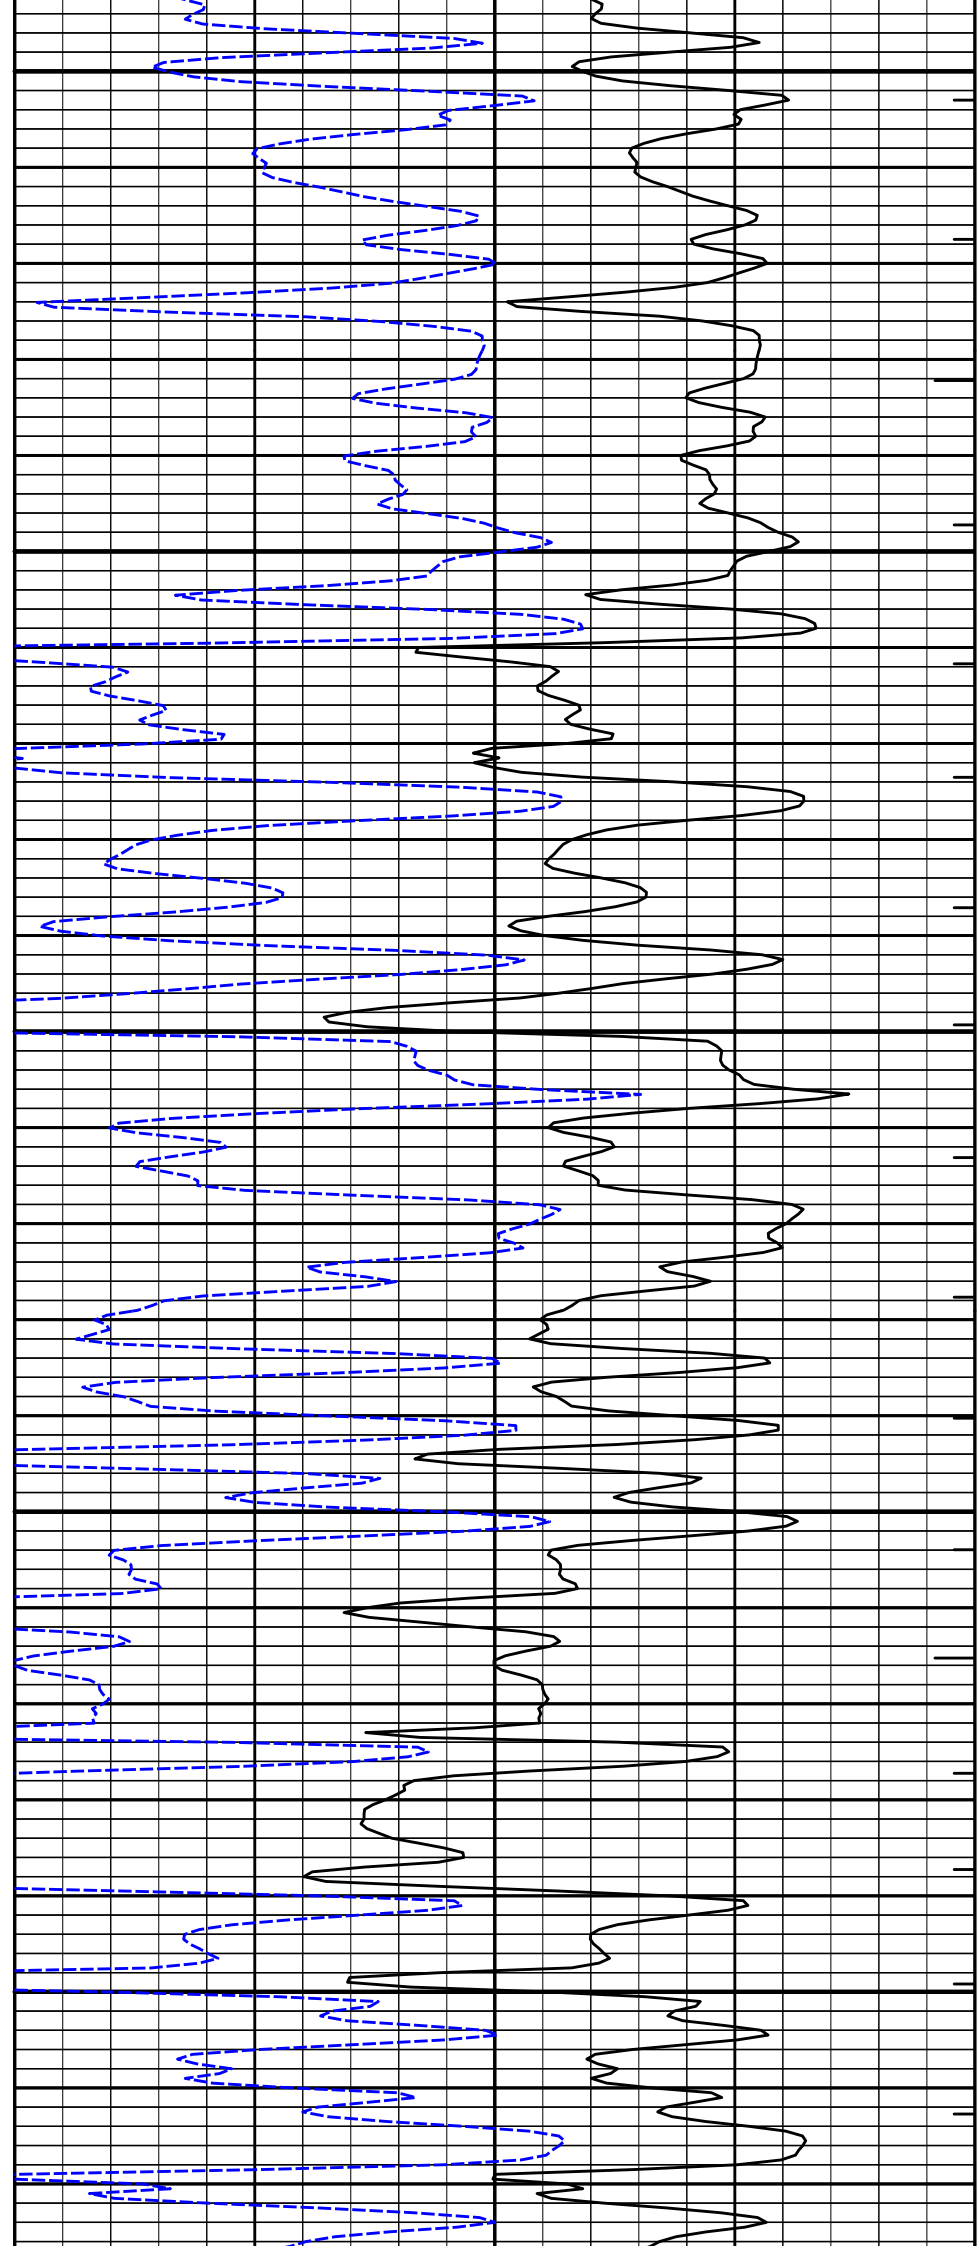


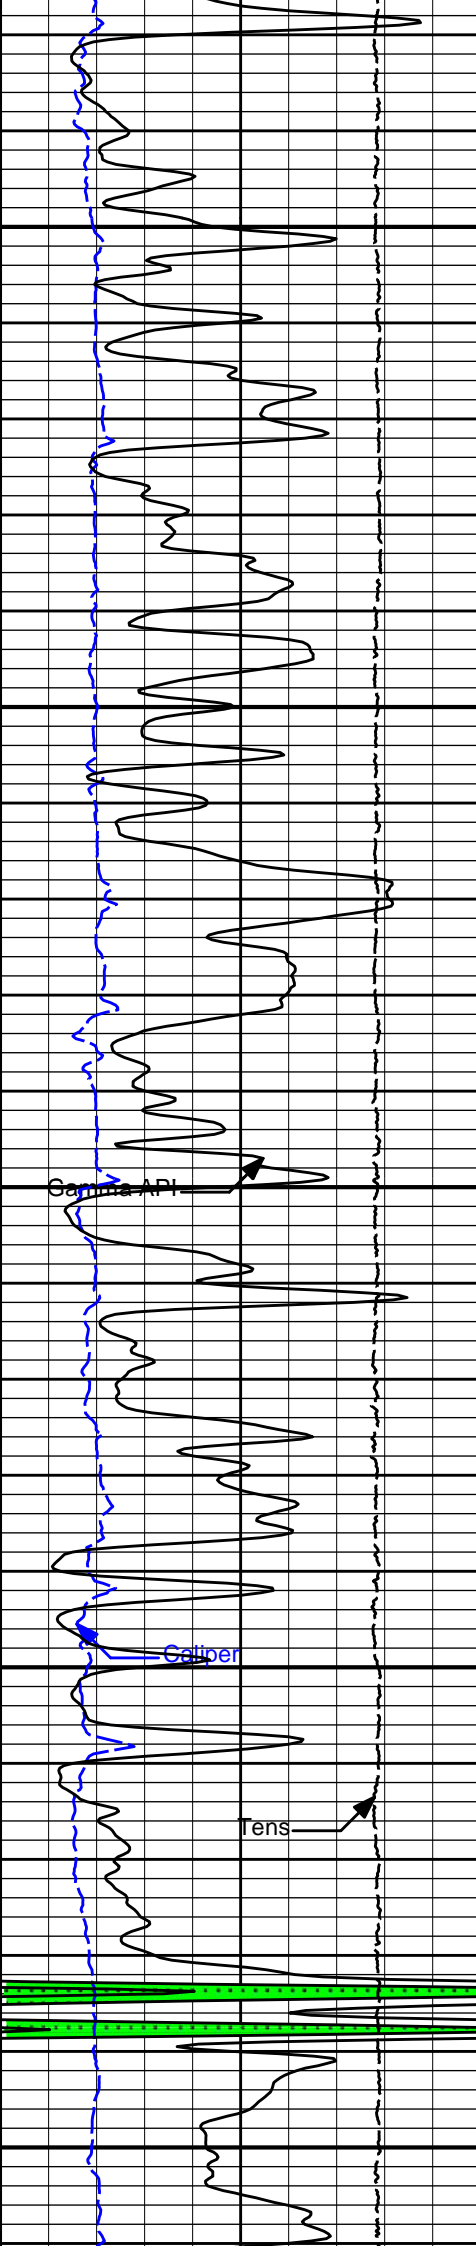

3500


3600

3700

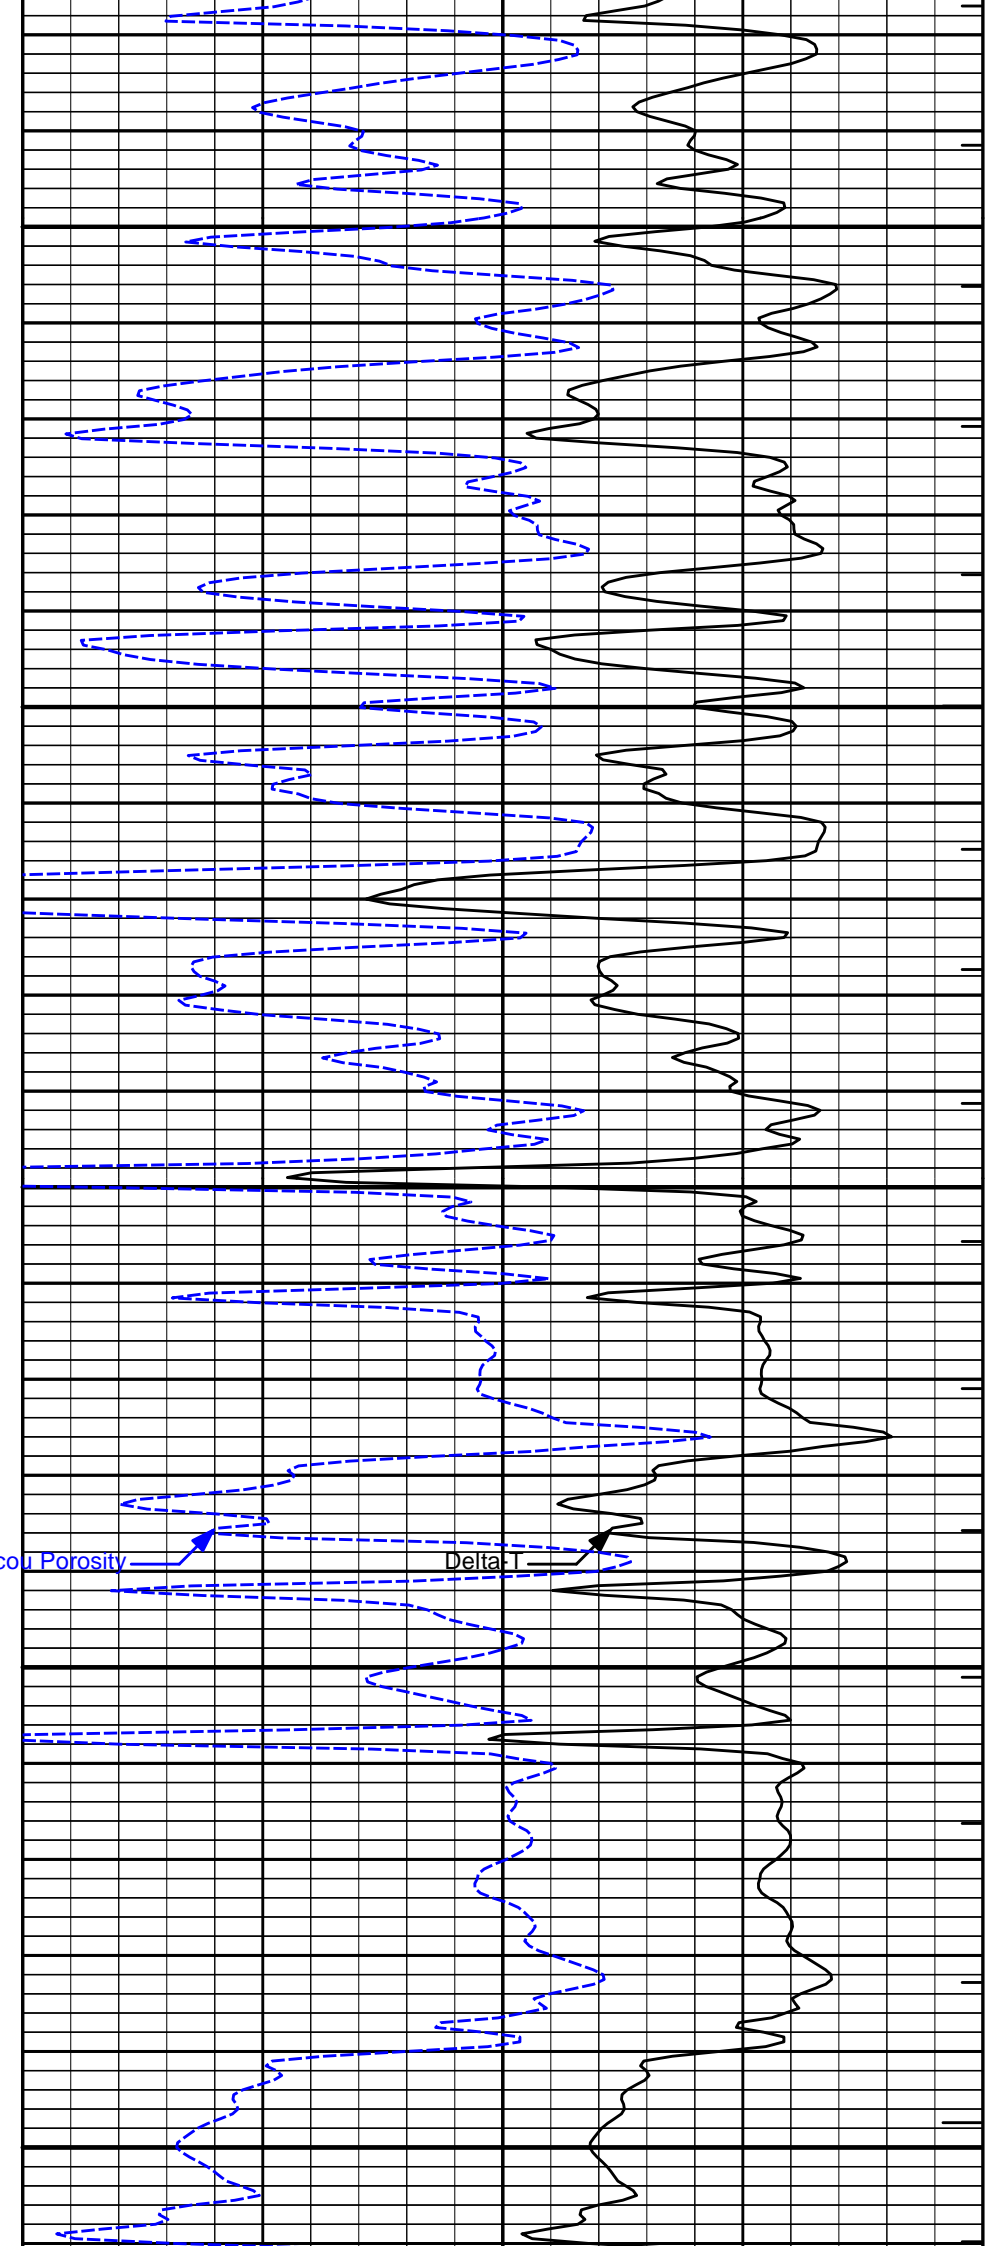


Acou Porosity


Delta T

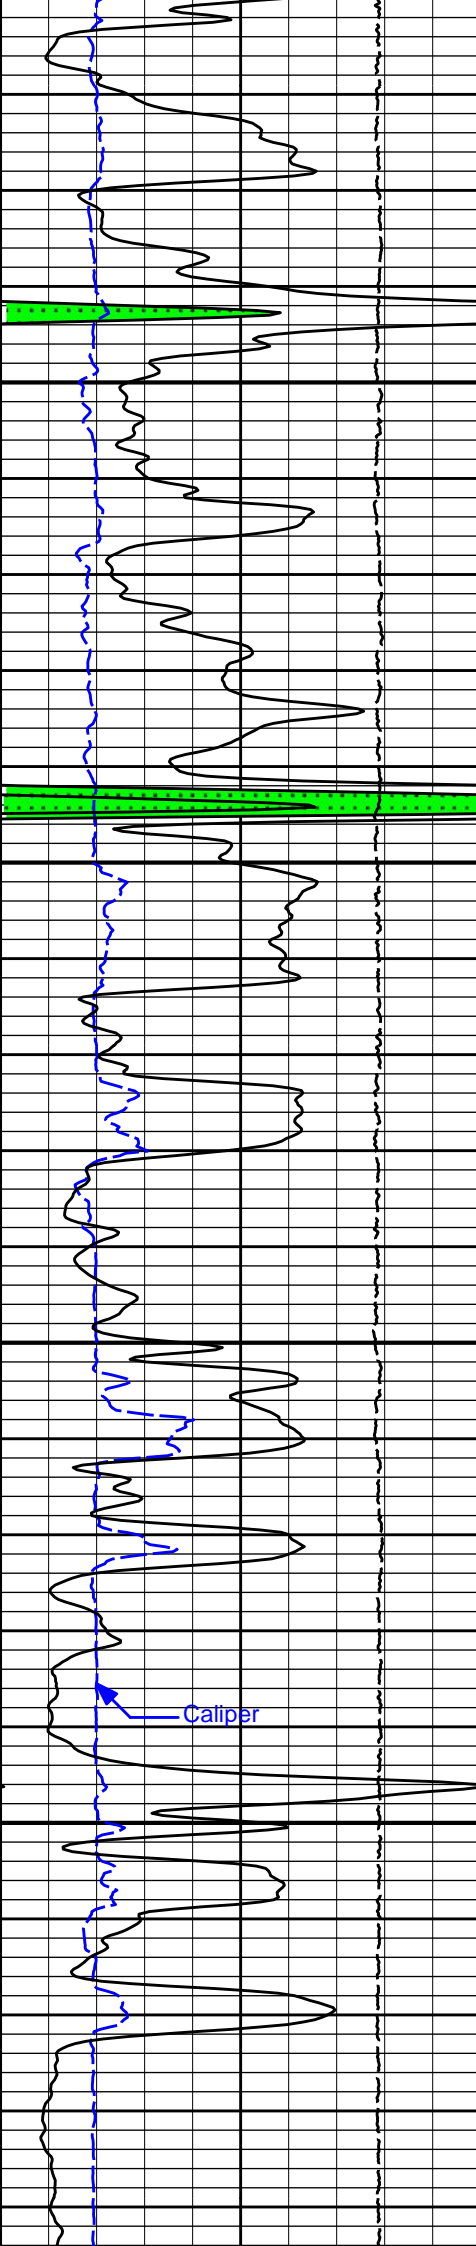

3800

3900

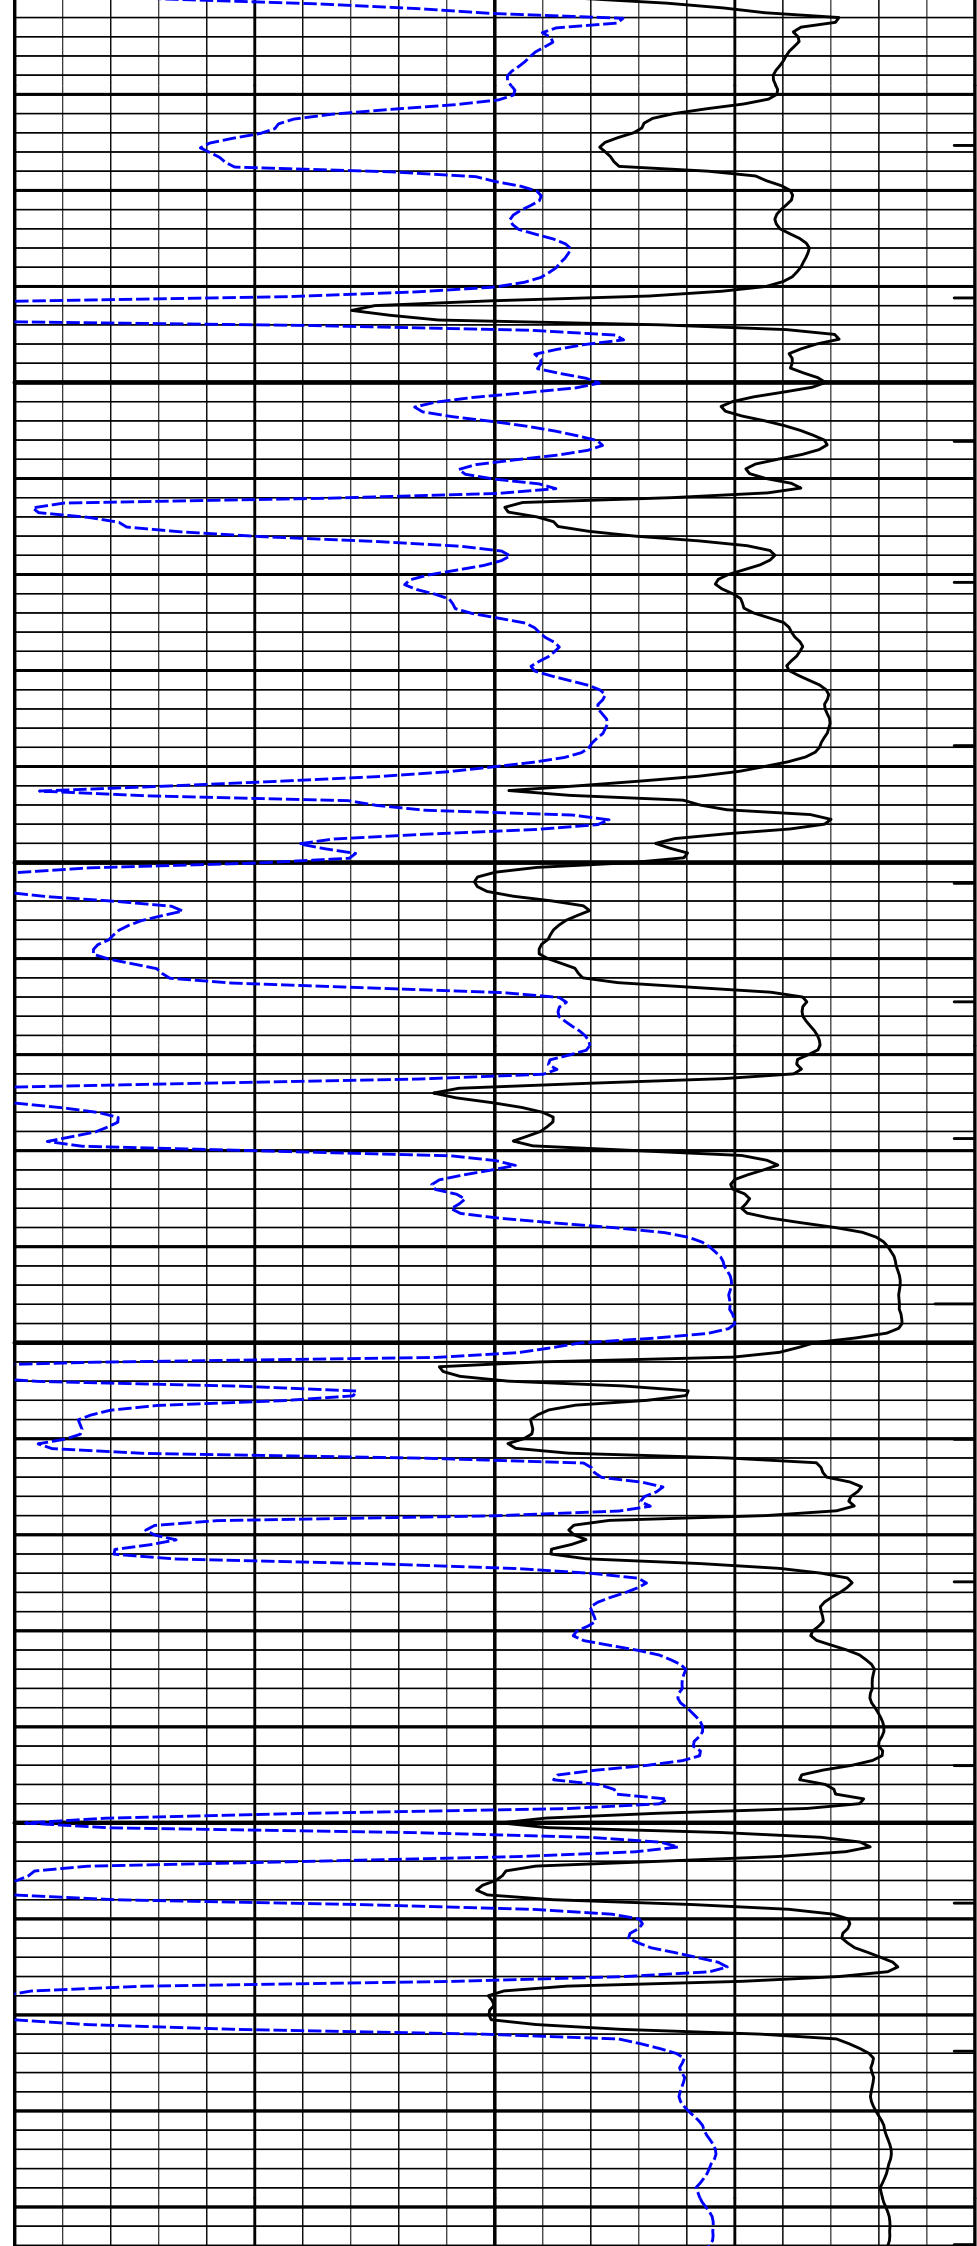

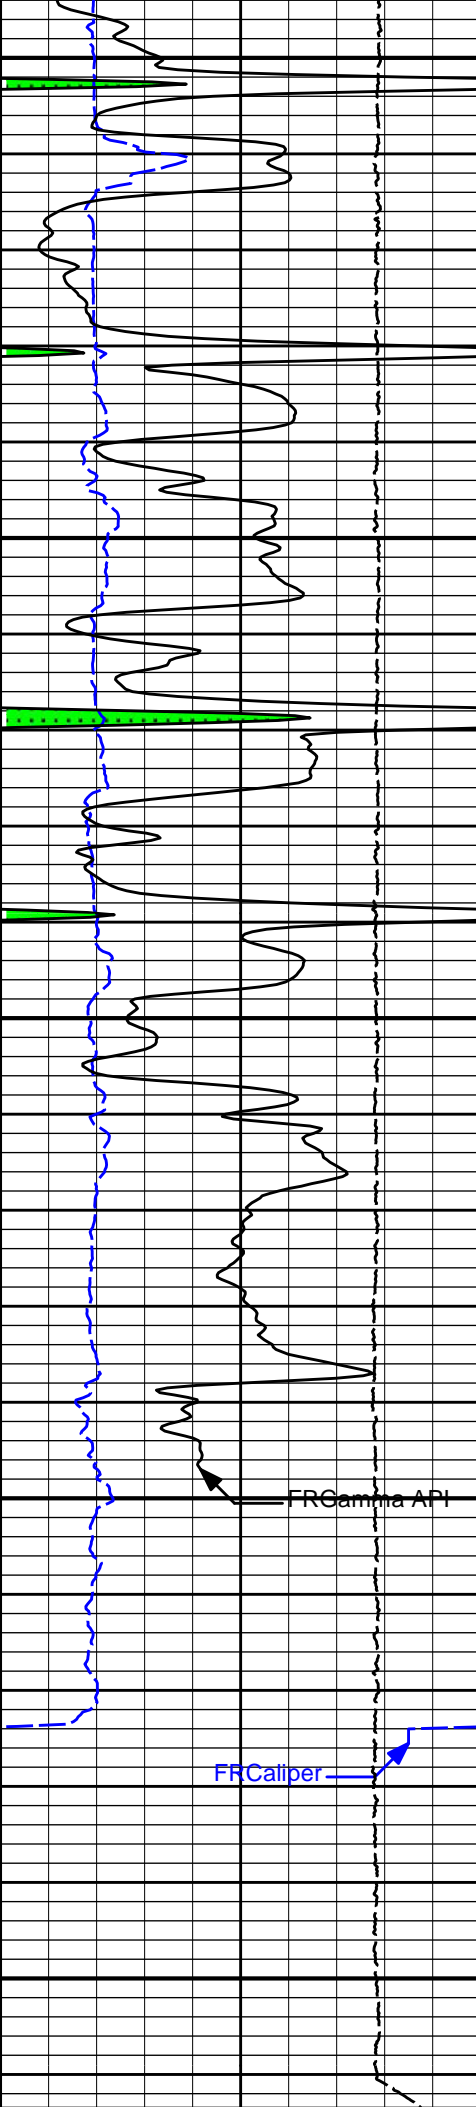


4000

4100

TD

FRGamma API

FRCaliper

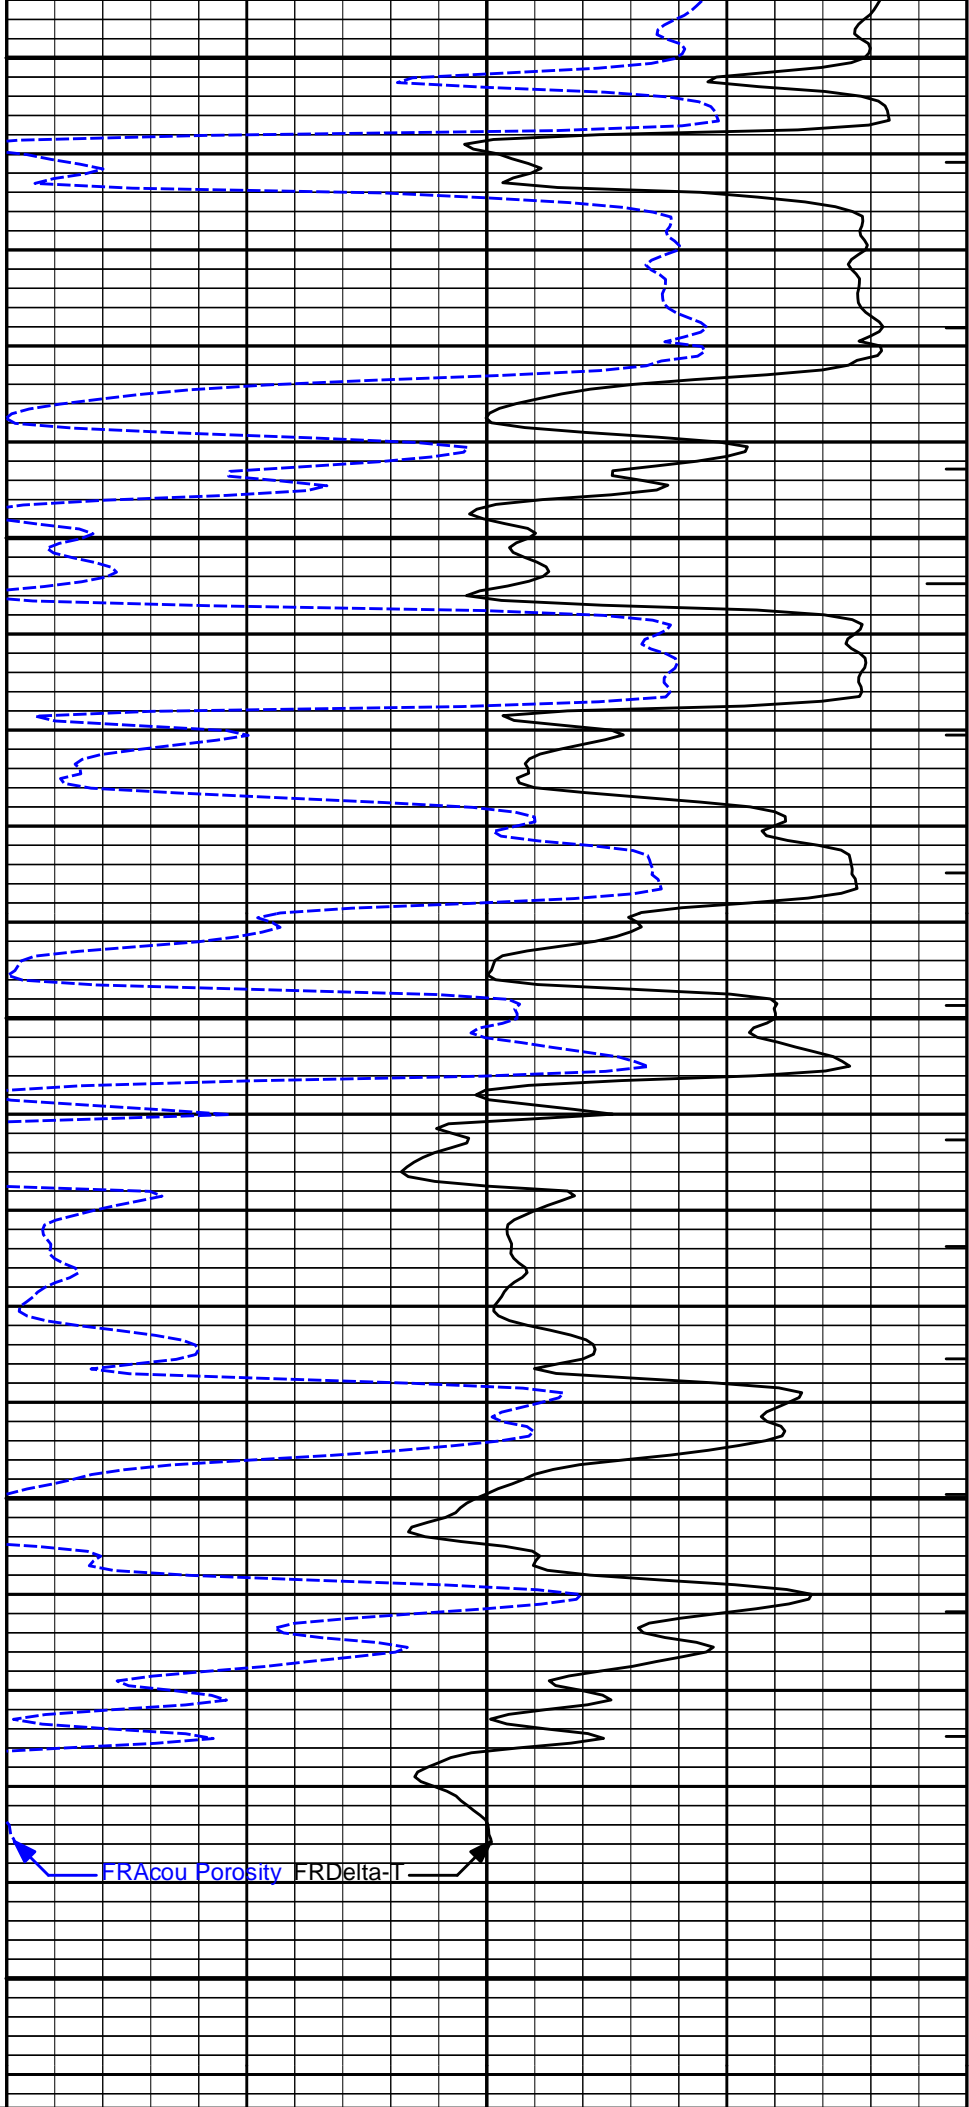

FRAcou Porosity FRDelta-T

0 Gamma API 150
api

1 : 240
ft

ITTT

15K Tens 0

140 Delta-T 40

0	pounds	0	microsec per ft	0
6	CALI	16	Acou Porosity	-10
	inches		percent	

HALLIBURTON Plot Time: 11-Aug-18 08:28:56
 Plot Range: 250 ft to 4163.5 ft
 Data: CULBRTH_BREEDENWell Based\MAIN_TD-CSG\
 Plot File: \BSAT\BSAT_5inch_MAIN

5 INCH MAIN LOG


5" MAIN LOG


HALLIBURTON Plot Time: 11-Aug-18 08:28:57
 Plot Range: 3750 ft to 4164.83 ft
 Data: CULBRTH_BREEDENWell Based\REPEAT*
 Plot File: \BSAT\BSAT_5inch_RPT

REPEAT SECTION

5" REPEAT SECTION


6	CALI	16	30	Acou Porosity	-10
	inches			percent	
15K	Tens	0	140	Delta-T	40
	pounds			microsec per ft	
0	Gamma API	150	1 : 240		
	api		ft	ITTT	

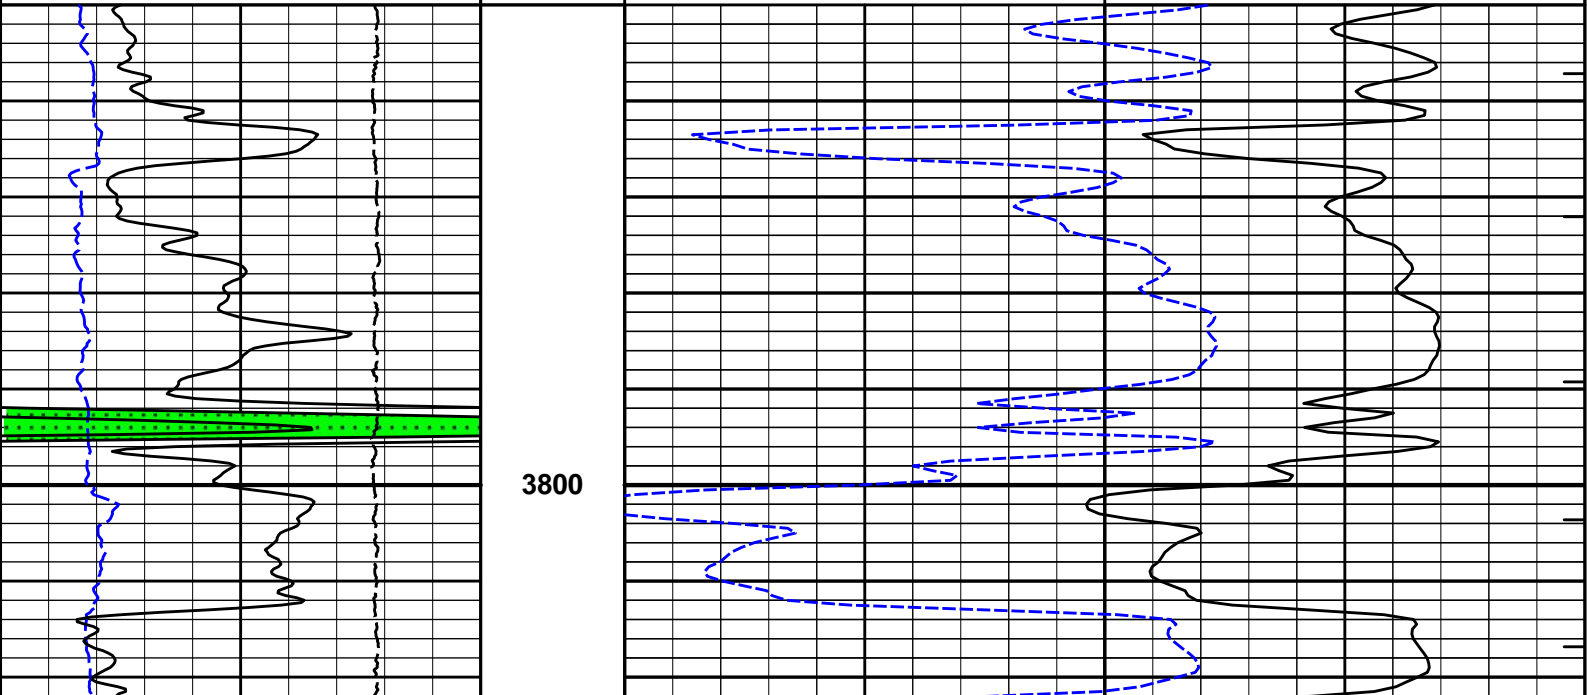


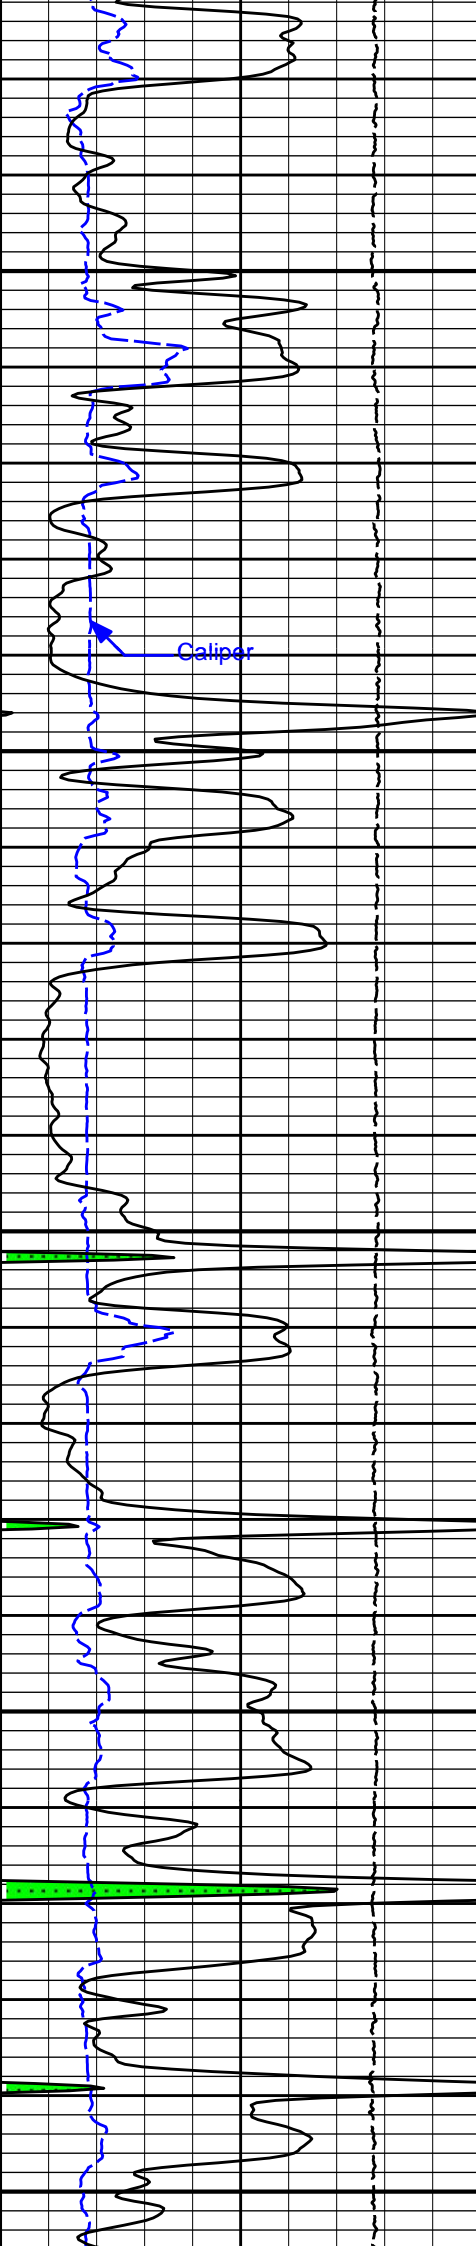

3900

4000

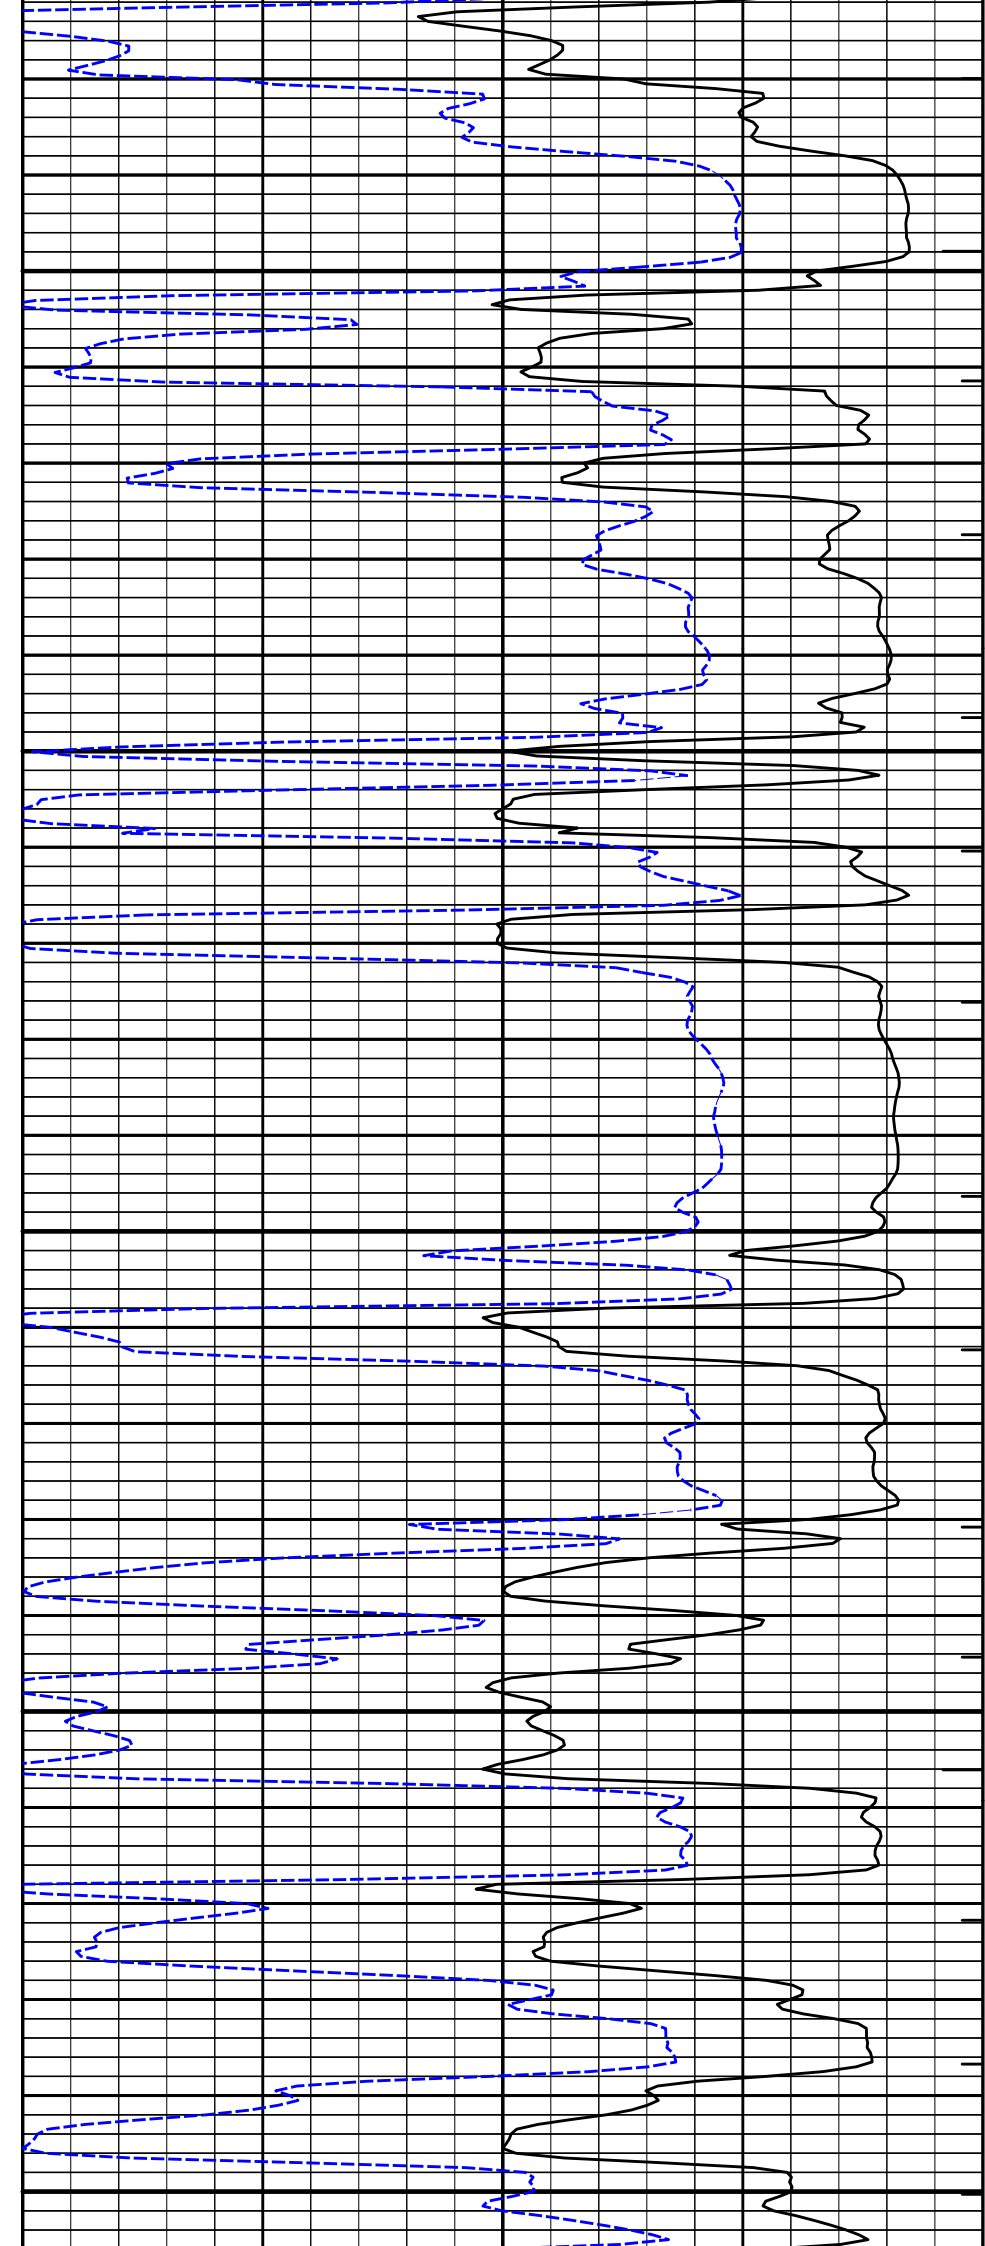

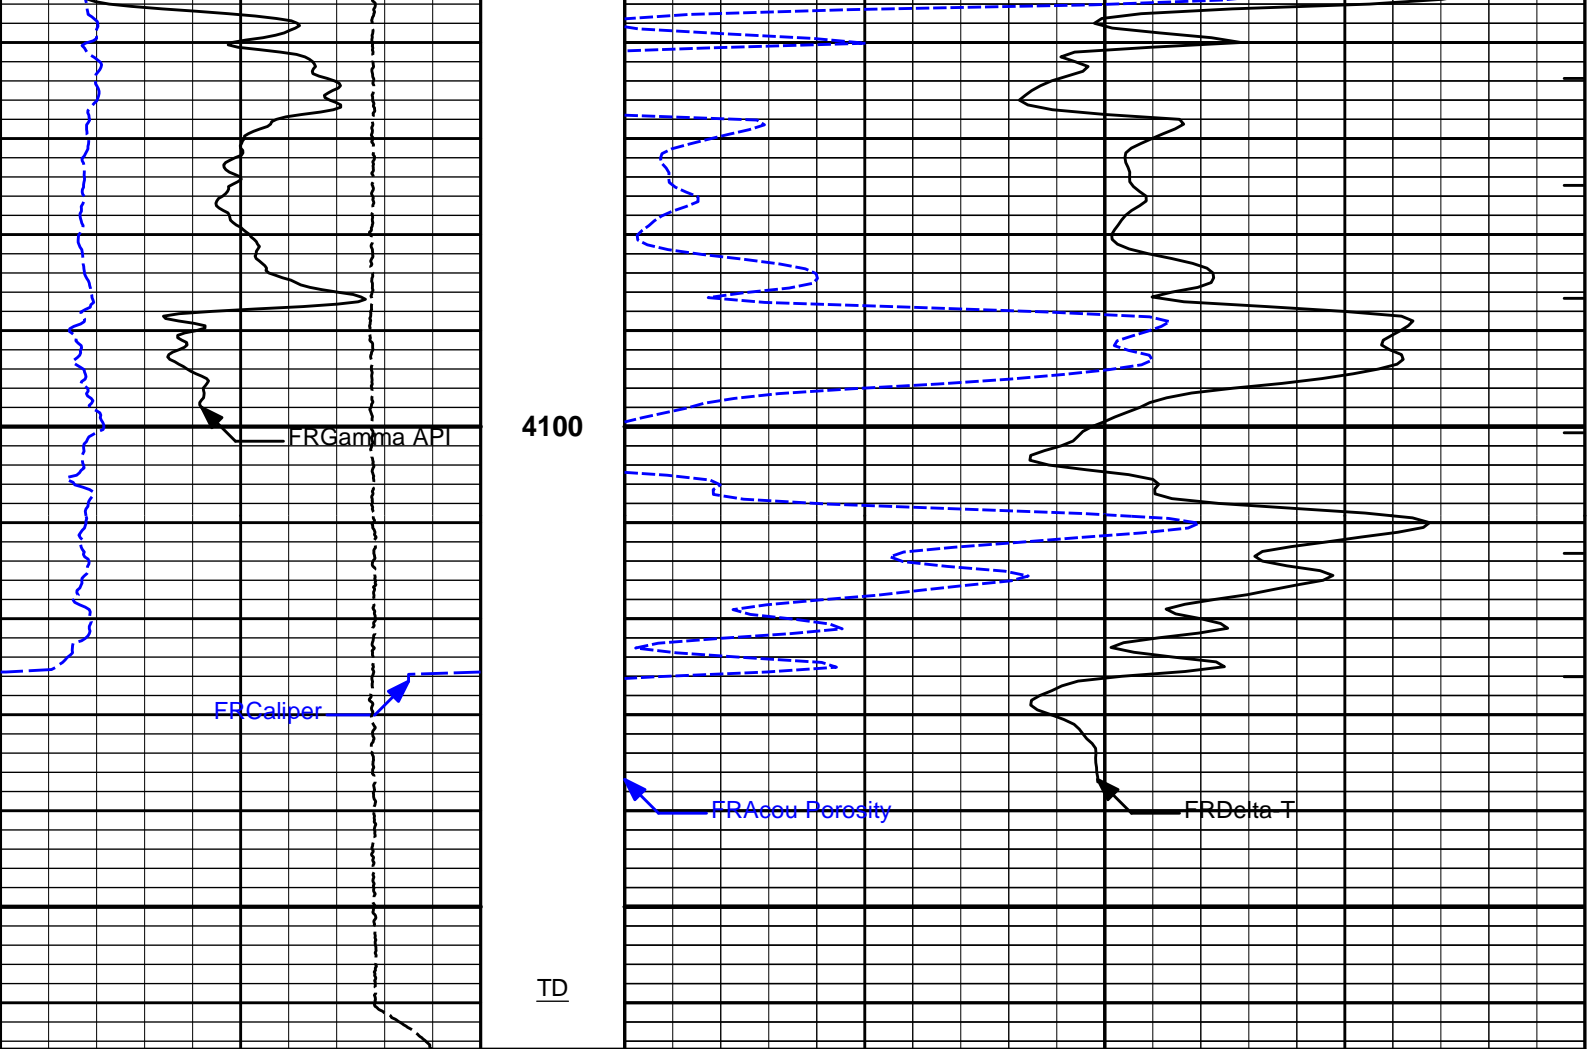

0	Gamma API	150	1 : 240 ft		ITTT	
	api					
15K	Tens	0		140	Delta-T	40
	pounds				microsec per ft	
6	CALI	16		30	Acou Porosity	-10
	inches				percent	

HALLIBURTON Plot Time: 11-Aug-18 08:28:58
 Plot Range: 3750 ft to 4164.83 ft
 Data: CULBRTH_BREEDENWell Based\REPEAT*
 Plot File: \BSAT\BSAT_5inch_RPT

REPEAT SECTION

5" REPEAT SECTION

HALLIBURTON

PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	

SHARED	MDBS	Mud Base	Water	
SHARED	MDWT	Borehole Fluid Weight	9.200	ppg
SHARED	WAGT	Weighting Agent	Natural	
SHARED	BSAL	Borehole salinity	0.00	ppm
SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
SHARED	RMUD	Mud Resistivity	2.000	ohmm
SHARED	TRM	Temperature of Mud	75.0	degF
SHARED	CSD	Logging Interval is Cased?	No	
SHARED	ICOD	AHV Casing OD	5.500	in
SHARED	CSTR	Compressive Strength	1000.00	psia
SHARED	ST	Surface Temperature	75.0	degF
SHARED	TD	Total Well Depth	4160.00	ft
SHARED	BHT	Bottom Hole Temperature	120.0	degF
SHARED	SVTM	Navigation and Survey Master Tool	IDT	
SHARED	AZTM	High Res Z Accelerometer Master Tool	IDT	
SHARED	TEMM	CBM Temperature Master Tool	GTET	
SHARED	SOCI	Source of Casing Information	Parameters	
SHARED	MSAL	Water-base mud filtrate salinity	0.00	ppm
Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	
Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
Rwa / CrossPlot	BHSM	Borehole Size Source Tool	SDLT	
Rwa / CrossPlot	ROIN	Input for RO Calculation	Rwa	
GTET	GROK	Process Gamma Ray?	Yes	
GTET	GEOK	Process Gamma Ray EVR?	Yes	
GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
GTET	BHSM	Borehole Size Source Tool	SDLT	
IDT	WRTI	Survey Writing Interval	30	ft
IDT	SOPT	Smoothing Option	None	
DSNT	DNOK	Process DSN?	Yes	
DSNT	DEOK	Process DSN EVR?	Yes	
DSNT	NLIT	Neutron Lithology	Limestone	
DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
DSNT	DNTT	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
DSNT	UCLA	Classic Neutron Parameter utilized?	No	
DSNT	BHSM	Borehole Size Source Tool	SDLT	
SDLT	CLOK	Process Caliper Outputs?	Yes	
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	Yes	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DTM	Temperature Density Master	0.710	ppm

SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
SDLT Pad	BHSM	Borehole Size Source Tool	SDLT	
BSAT	MBOK	Compute BCAS Results?	Yes	
BSAT	FLLO	Frequency Filter Low Pass Value?	5000	Hz
BSAT	FLHI	Frequency Filter High Pass Value?	27000	Hz
BSAT	DTFL	Delta -T Pore Fluid	189.00	uspf
BSAT	DTMT	Delta -T Matrix Type	Limestone 47.6	
BSAT	DTSH	Delta -T Shale	100.00	uspf
BSAT	SPEQ	Acoustic Porosity Equation	Wylie	
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Upr	
ACRt Sonde	TPOS	Tool Position	Eccentered	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMAX	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm
ACRt Sonde	BHSM	Borehole Size Source Tool	SDLT	
ACRt Sonde	MBFL	Apply Corkscrew Effect?	No	

BOTTOM

Data: CULBRTH_BREEDEN0001 GTET-IDT-DSNT-SDLT-BSAT-ACRT004 11-Aug-18 04:14 Up @4164.3f

Date: 11-Aug-18 05:22:38

HALLIBURTON

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name: GTET - 11013113

Reference Calibration Date: 02-May-18 11:20:36

Engineer: WHITLOCK

Calibration Date: 05-Aug-18 09:58:00

Software Version: WL INSITE R5.6.3 (Build 4)

Calibration Version: 1

Calibrator Source S/N: TB-79

Calibrator API Reference:222.00 api

Equivalent Calibrator API Reference:225.9 api

Measurement	Measured	Calibrated	Units
Background	26.4	26.2	api
Background + Calibrator	253.6	252.1	api
Calibrator	227.2	225.9	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION

Tool Name: GTET - 11013113

Reference Calibration Date: 05-Aug-18 09:58:00

Engineer: WHITLOCK

Calibration Date: 05-Aug-18 10:00:58

Software Version: WL INSITE R5.6.3 (Build 4)

Calibration Version: 1

Calibrator Source S/N: TB-79

Calibrator API Reference:222.00 api

Equivalent Calibrator API Reference:225.9 api

Field Verification	Shop	Field	Units
Background	26.2	26.1	api
Background + Calibrator	252.1	251.2	api
Calibrator	225.9	225.0	api

Shop	Field	Difference	Tolerance
225.9	225.0	0.9	+/- 9.00

DUAL SPACED NEUTRON SHOP CALIBRATION

DUAL SPACED NEUTRON SHOP CALIBRATION**Tool Name:** DSNT - 11019641**Reference Calibration Date:** 04-Aug-18 12:03:14**Engineer:** SCHLIEM**Calibration Date:** 04-Aug-18 12:26:27**Software Version:** WL INSITE R5.6.3 (Build 4)**Calibration Version:** 1

Logging Source S/N: DSN-436

Tank Serial Number: EL RENO HWT

Reference value assigned to Tank: 56.100

Snow Block S/N: 12156883

Calibration Tank Water Temperature: 89 degF

Min. Tool Housing Outside Diameter: 3.625 in

CALIBRATION CONSTANTS

Measurement	Prev. Value	New Value	Control Limit On New Value
Gain:	0.97922	0.97742	0.900 - 1.100

WATER TANK SUMMARY (Horizontal Water Tank)

Measurement	Current Reading (Previous Coef.)	Calibrated (New Coef.)	Change	Control Limit On Change
Porosity (decp):	0.2364	0.2358	0.0006	+/- 0.0020
Calibrated Ratio:	10.5794	10.5599	0.019	+/- 0.050

VERIFIER

Measurement	Value	Control Limit
Snow-Block Porosity (decp):	0.0667	0.02000 - 0.09000

PASS/FAIL SUMMARY

Background Check:	Passed
Gain-Range Check:	Passed
Snow-Block Check:	Passed

DUAL SPACED NEUTRON FIELD CALIBRATION**Tool Name:** DSNT - 11019641**Reference Calibration Date:** 04-Aug-18 12:26:27**Engineer:** WHITLOCK**Calibration Date:** 05-Aug-18 09:45:13**Software Version:** WL INSITE R5.6.3 (Build 4)**Calibration Version:** 1

Logging Source S/N: DSN-436

Snow Block S/N: 12156883

NEUTRON FIELD-CHECK SUMMARY

	Shop	Field	Difference	Control Limit On Change
Snow-Block Porosity (decp):	0.0667	0.0665	-0.0002	+/- 0.0150

PASS/FAIL SUMMARY

Block Change Check:	Passed
Snow Block Stat Check:	Passed
Temperature Check:	Passed

DENSITY CALIPER SHOP CALIBRATION**Tool Name:** SDLT - 10960494**Reference Calibration Date:** 01-Jan-70 00:00:00**Engineer:** WHITLOCK**Calibration Date:** 08-Jun-18 16:19:27**Software Version:** WL INSITE R5.6.3 (Build 4)**Calibration Version:** 1**Host Tool Name:** DSNT - 11019641**CALIBRATION COEFFICIENTS**

Measurement	Previous Value	New Value	Control Limit On New Value
Pad Offset	-3977.11	-3977.11	-7000.00 - -1000.00

Pad Gain	0.0003897	0.0003897	0.0002000 - 0.0006000
Arm Offset	-3073.13	-3073.13	-5000.00 - 3000.00
Arm Gain	0.0005210	0.0005210	0.000300 - 0.000700
Arm Power	-0.000005094	-0.000005094	-0.000010000 - 0.000010000

The ring diameter is computed from: $DIAMETER = PAD\ EXTENSION + ARM\ EXTENSION + TOOL\ DIAMETER$

Tool Diameter: 4.50 in

CALIBRATION RINGS				
Measurement	Current Reading (Previous Coeff.)	Calibrated (New Coeff.)	Change	Control Limit On New Value
PAD EXTENSION:				
Small Ring (in)	2.00	2.00	0.00	+/- 0.20
Medium Ring (in)	3.75	3.75	0.00	+/- 0.20
RING DIAMETER:				
Small Ring (in)	6.50	6.50	0.00	+/- 0.20
Medium Ring (in)	8.25	8.25	0.00	+/- 0.20
Large Ring (in)	15.00	15.00	0.00	+/- 0.20

PASS/FAIL SUMMARY	
Calibration-Coefficients Range Check:	Passed
Ring-Measurement Check:	Passed
PASS/FAIL SUMMARY	
Calibration-Coefficients Range Check:	Passed

SDLT CALIPER FIELD CALIBRATION

Tool Name: SDLT - 10960494	Reference Calibration Date: 08-Jun-18 16:19:27
Engineer: WHITLOCK	Calibration Date: 05-Aug-18 09:46:30
Software Version: WL INSITE R5.6.3 (Build 4)	Calibration Version: 1

MEASURED CALIPER VALUES				
Measurement	Shop	Field	Change	Control Limit On New Value
Pad Extension	3.75	3.79	0.04	+/- 0.10
Ring Diameter	8.25	8.25	-0.00	+/- 0.15

PASS/FAIL SUMMARY	
Pad Extension Check:	Passed
Diameter Check:	Passed

MICRO LOG SHOP CALIBRATION

Tool Name: Microlog Pad - 10960494	Reference Calibration Date: 01-Jan-70 00:00:00
Engineer: WHITLOCK	Calibration Date: 08-Jun-18 16:08:54
Software Version: WL INSITE R5.6.3 (Build 4)	Calibration Version: 1
Host Tool Name: DSNT - 11019641	

CALIBRATION COEFFICIENT SUMMARY					
Measurement	Micro Log Normal		Micro Log Lateral		Units
	Measured	Calibrated	Measured	Calibrated	
Tool Zero	-0.07	-0.07	-0.01	-0.01	ohmm
Calibration Point #1	0.00	0.00	0.00	0.00	ohmm
Calibration Point #2	20.00	20.00	20.00	20.00	ohmm
Internal Reference	19.92	19.92	19.98	19.98	ohmm

Measurement	Micro Log Normal Tool Value		Micro Log Lateral Tool Value		Units
	Measured	Calibrated	Measured	Calibrated	
Tool Zero		-0.11		0.18	V
Calibration Point #1		18.42		2.03	V
Calibration Point #2		5354.08		6974.83	V
Internal Reference		5331.77		6967.38	V

MICRO LOG FIELD CHECK

Tool Name: Microlog Pad - 10960494

Reference Calibration Date: 08-Jun-18 16:08:54

Engineer: WHITLOCK

Calibration Date: 05-Aug-18 09:54:07

Software Version: WL INSITE R5.6.3 (Build 4)

Calibration Version: 1

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Shop	Field	Shop	Field	
Tool Zero	-0.07	-0.07	-0.01	-0.00	ohmm
Internal Reference	19.92	19.89	19.98	19.95	ohmm
Summary					
Signal	Shop	Field	Difference	Tolerance	
Microlog Normal	19.92	19.89	0.03	+/- 0.80	
Microlog Lateral	19.98	19.95	0.03	+/- 0.80	

SPECTRAL DENSITY SHOP CALIBRATION

Tool Name: SDLT Pad - 11213308

Reference Calibration Date: 08-Jun-18 10:39:59

Engineer: WHITLOCK

Calibration Date: 08-Jun-18 11:01:29

Software Version: WL INSITE R5.6.3 (Build 4)

Calibration Version: 1

Logging Source S/N: 5475GW

Aluminum Block S/N: EL RENO

Density: 2.581g/cc

Pe: 3.170

Magnesium Block S/N: EL RENO

Density: 1.687g/cc

Pe: 2.594

DENSITY CALIBRATION SUMMARY				
Measurement	Previous Value	New Value	Control Limit	
Near Bar Gain	1.0041	1.0112	0.90 - 1.10	
Near Dens Gain	0.9869	0.9898	0.90 - 1.10	
Near Peak Gain	0.9943	0.9998	0.90 - 1.10	
Near Lith Gain	1.0181	1.0093	0.90 - 1.10	
Far Bar Gain	1.0040	1.0066	0.90 - 1.10	
Far Dens Gain	0.9932	0.9944	0.90 - 1.10	
Far Peak Gain	0.9916	0.9923	0.90 - 1.10	
Far Lith Gain	0.9744	0.9710	0.90 - 1.10	
<hr/>				
Near Bar Offset	0.0934	0.0300	NONE	
Near Dens Offset	0.2485	0.2218	NONE	
Near Peak Offset	0.1593	0.1112	NONE	
Near Lith Offset	-0.0690	0.0007	NONE	
Far Bar Offset	0.0165	-0.0022	NONE	
Far Dens Offset	0.1281	0.1192	NONE	
Far Peak Offset	0.1238	0.1182	NONE	
Far Lith Offset	0.2190	0.2467	NONE	
<hr/>				
Near Bar Background	955.07	955.02	700 - 1450	
Near Dens Background	316.53	316.75	230 - 480	
Near Peak Background	138.87	138.74	100 - 210	
Near Lith Background	168.67	169.41	125 - 260	
Far Bar Background	482.41	482.24	450 - 900	
Far Dens Background	194.46	191.91	175 - 345	
Far Peak Background	77.48	77.25	70 - 140	
Far Lith Background	79.35	80.04	75 - 145	

CALIBRATION BLOCK SUMMARY				
Measurement	Current Reading (Previous Coef)	Calibrated (New Coef)	Change	Control Limit On Change
MAGNESIUM				
Density (g/cc)	1.688	1.687	0.001	+/- 0.015

Density (g/cc)	1.688	1.687	-0.001	+/- 0.013
Pe	2.517	2.559	0.042	+/- 0.150
ALUMINUM				
Density (g/cc)	2.582	2.581	-0.001	+/- 0.01500
Pe	3.106	3.132	0.026	+/- 0.150

TOOL SUMMARY				
Measurement	Near Detector		Far Detector	
	Value	Control Limits	Value	Control Limits
QUALITY				
Background	0.0017	+/- 0.0110	0.0006	+/- 0.0140
Magnesium Block	-0.0008	+/- 0.0110	-0.0008	+/- 0.0140
Aluminum Block	-0.0005	+/- 0.0110	-0.0001	+/- 0.0140
Resolution	9.21	6.00 - 11.50	9.21	6.00 - 11.50
Internal Verifier(B+D+P+L)	1580	1200 - 2700	831	800 - 1700

PASS/FAIL SUMMARY	
Background Quality Check:	Passed
Background Range Check:	Passed
Background Resolution Check:	Passed
Background Verification Check:	Passed
Magnesium Quality Check:	Passed
Aluminum Quality Check:	Passed
Gains Check:	Passed
Changes in Calibration Blocks:	Passed

SPECTRAL DENSITY FIELD CHECK

Tool Name: SDLT Pad - 11213308	Reference Calibration Date: 08-Jun-18 11:01:29
Engineer: WHITLOCK	Calibration Date: 05-Aug-18 09:57:45
Software Version: WL INSITE R5.6.3 (Build 4)	Calibration Version: 1

Pad Temperature: 89.3 degF

DENSITY FIELD CALIBRATION SUMMARY				
Measurement	Shop	Field	Change	Control Limit +/-
Near (B+D+P+L) cps	1579.927	1575.636	-4.291	15.990
Far (B+D+P+L) cps	831.441	827.695	-3.746	15.874
Near Resolution	9.21	9.13	-0.080	0.50
Far Resolution	9.21	9.31	0.100	1.00

PASS/FAIL SUMMARY	
Bkg Quality Check:	Passed
Bkg Resolution Check:	Passed
Bkg Verification Check:	Passed

ARRAY COMPENSATED TRUE RESISTIVITY SHOP CALIBRATION

Tool Name: ACRt Sonde - 11830728	Reference Calibration Date: 23-Feb-18 10:15:37
Engineer: WHITLOCK	Calibration Date: 06-Jun-18 13:24:46
Software Version: WL INSITE R5.6.3 (Build 4)	Calibration Version: 1
Host Tool Name: ACRt Instrument - 11830684	

TYPICAL GAIN RANGE									
Subarray	R12KHz			R36KHz			R72KHz		
	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper
A1 (80")	0.95	1.0279	1.05	0.95	1.0076	1.05	0.95	0.9997	1.05
A2 (50")	0.95	1.0334	1.05	0.95	1.0139	1.05	0.95	1.0097	1.05
A3 (29")	0.95	1.0346	1.05	0.95	1.0146	1.05	0.95	1.0081	1.05

A4 (17")	0.95	1.0279	1.05	0.95	1.0063	1.05	0.95	1.0018	1.05
A5 (10")	N/A	N/A	N/A	0.95	1.0001	1.05	0.95	0.9950	1.05
A6 (6")	N/A	N/A	N/A	0.95	0.9869	1.05	0.95	0.9818	1.05

SONDE OFFSET

Subarray	R12KHz (mmho/m)	R36KHz (mmho/m)	R72KHz (mmho/m)
A1 (80")	0.315	-4.964	-5.711
A2 (50")	0.409	-3.450	-5.485
A3 (29")	-11.648	-3.720	-3.783
A4 (17")	-90.980	-28.724	-23.707
A5 (10")	N/A	-76.200	-37.537
A6 (6")	N/A	280.488	149.005

TRANSMITTER CURRENT GAIN

Signal	Lower	R	Upper
12K	0.6	0.82	1.3
36K	1.0	1.80	2.0
72K	1.0	1.05	2.0

R-MUD VERIFICATION

Signal	Lower (ohm-m)	Measured (ohm-m)	Upper (ohm-m)
Mud Cell	0.95	0.99	1.05

PASS/FAIL SUMMARY

GAIN RANGE CHK	PASS
SONDE OFFSET CHK	PASS

TOOL OK TO LOG

CALIBRATION SUMMARY

Sensor	Shop	Field	Post	Difference	Tolerance	Units
GTET-11013113						
Gamma Ray Calibrator	225.9	225.0	-----	0.9	+/- 9.00	api
DSNT-11019641						
Snow-Block Porosity	0.0667	0.0665	-----	0.0002	+/- 0.0150	decp
SDLT-10960494						
Pad Extension	3.75	3.79	-----	-0.04	+/-0.10	in
Ring Diameter	8.25	8.25	-----	0.00	+/-0.15	in
Microlog Pad-10960494						
MicroLog Normal	19.92	19.89	-----	0.03	+/-0.80	ohmm
MicroLog Lateral	19.98	19.95	-----	0.03	+/-0.80	ohmm
SDLT Pad-11213308						
Near(B+D+P+L)	1579.927	1575.636	-----	4.291	+/-15.990	cps
Far(B+D+P+L)	831.441	827.695	-----	3.746	+/-15.874	cps
ACRt Sonde-11830728						
Mud Cell	0.99	-----	-----	0	-----	ohm-m


Data: CULBRTH_BREEDEN\0001 GTET-IDT-DSNT-SDLT-BSAT-ACRT\IDLE

Date: 11-Aug-18 05:25:57



TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
-------------	----------------------	------	---------	------------------	--------	--------------------

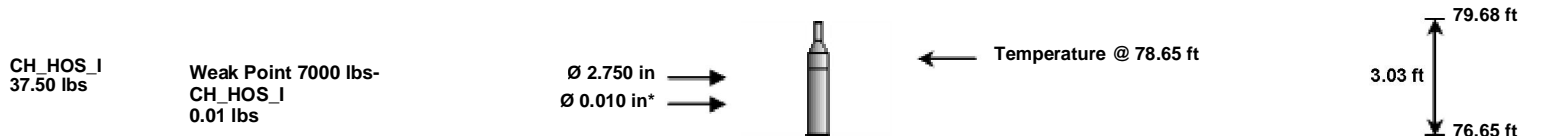

XOHD-12345678
20.00 lbs

Ø 2.750 in
Ø 3.625 in

19.58 ft
0.95 ft
75.70 ft

SP Sub-11812437
60.00 lbs

Ø 3.625 in

← SP @ 73.92 ft

3.74 ft
71.96 ft

GTET-11013113
165.00 lbs

Ø 3.625 in

← GammaRay @ 65.90 ft

8.52 ft
63.44 ft

IDT-10886210
150.00 lbs

Ø 3.625 in

7.58 ft
55.86 ft

DSN Decentralizer-
11019641
6.60 lbs
DSNT-11019641
174.00 lbs

Ø 5.000 in*
Ø 3.625 in

← DSN Far @ 48.92 ft
← DSN Near @ 48.17 ft

9.69 ft
46.17 ft

SDLT Pad-11213308
65.00 lbs
Microlog Pad-10960494
8.00 lbs
RAM-Cs137-00005475
1.00 lbs

Ø 4.500 in
Ø 4.500 in*
Ø 4.750 in*
Ø 0.800 in*

← Microlog @ 38.36 ft
← SDL Caliper @ 38.17 ft
← SDL @ 38.16 ft

10.81 ft
35.36 ft

BSAT-12173982
300.00 lbs

Ø 3.625 in

← Receiver Array @ 26.84 ft
← Sonic Receivers @ 26.84 ft

15.77 ft
19.58 ft



ACRt Instrument-
11830684
50.00 lbs

Ø 3.625 in →

5.03 ft

14.55 ft

← Mud Resistivity @ 13.19 ft

← ACRt @ 9.21 ft

ACRt Sonde-
11830728
200.00 lbs

Ø 3.625 in →

14.22 ft

Bull Nose-12345678
5.00 lbs

Ø 2.750 in →

0.33 ft

0.33 ft

0.00 ft



Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)
CH_HOS	Hostile Cable Head with Load Cell	CH_HOS_I	37.50	3.03	76.65	300.00
WP7K	Weak Point 7000 lbs	CH_HOS_I	0.01	0.01	* 77.45	300.00
XOHD	Hostile to Dits Cross Over	12345678	20.00	0.95	75.70	300.00
SP	SP Sub	11812437	60.00	3.74	71.96	300.00
GTET	Gamma Telemetry Tool	11013113	165.00	8.52	63.44	60.00
IDT	Insite Directional Tool	10886210	150.00	7.58	55.86	60.00
DSNT	Dual Spaced Neutron	11019641	174.00	9.69	46.17	60.00
DCNT	DSN Decentralizer	11019641	6.60	5.13	* 49.50	300.00
SDLT	Spectral Density Tool	10960494	360.00	10.81	35.36	60.00
SDLP	Density Insite Pad	11213308	65.00	2.55	* 37.57	60.00
Cs137	Logging Source, SDLT-I, 1.78 Ci - Cs137	00005475	1.00	0.80	* 37.80	300.00
MICP	Microlog Pad	10960494	8.00	1.00	* 37.86	60.00
BSAT	Borehole Sonic Array Tool	12173982	300.00	15.77	19.58	60.00
ACRt	Array Compensated True Resistivity Instrument Section	11830684	50.00	5.03	14.55	120.00
ACRt	Array Compensated True Resistivity Sonde Section	11830728	200.00	14.22	0.33	120.00
BLNS	Bull Nose	12345678	5.00	0.33	0.00	300.00
Total			1,602.11	79.68		

* Not included in Total Length and Length Accumulation.

Data: CULBRTH_BREEDEN0001 GTET-IDT-DSNT-SDLT-BSAT-ACRT\004 11-Aug-18 04:14 Up @4164.3f Date: 11-Aug-18 05:13:28

COMPANY	CULBREATH OIL & GAS COMPANY INC		
WELL	BREEDEN 1-30		
FIELD	MORLAND-KANACO		
COUNTY	SHERIDAN	STATE	KANSAS
HALLIBURTON		BOREHOLE COMPENSATED SONIC ARRAY LOG	