

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-22872-00-00
Spot: SENESE Sec/Twnshp/Rge: 2-22S-12W
1650 feet from S Section Line, 330 feet from E Section Line
Lease Name: HELMERS B 3 Well #: 2
County: STAFFORD Total Vertical Depth: 3625 feet

Operator License No.: 8045
Op Name: C & B OPERATING INC.
Address: PO BOX 65
ST. JOHN, KS 67576

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	3624	2000	
SURF	8.625	240		

117.81

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 06/23/2006 1:30 PM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND BACK TO 3350' & 5 SX CMT. PLUG AT 650' WITH 50 SX CMT. PLUG AT 270' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 06/23/2006 2:30 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:
SANDED TO 3350' & 5 SX CMT WITH BAILER. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 650' WITH 10 SX GEL - 50 SX CMT. 2ND PLUG AT 270' WITH 50 SX CMT. 3RD PLUG AT 40 WITH 20 SX CMT.


Perfs:

Top	Bot	Thru	Comments
3400	3420		

INVOICE
DATE 7-10-06
2007060033

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND.
Plugged through: CSG

District: 01

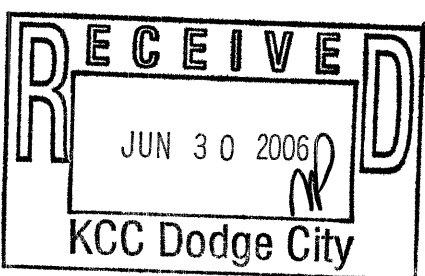

Signed Richard M. Lacey
(TECHNICIAN)

RECEIVED
JUL 07 2006
KCC WICHITA

Form CP-278

PEA