



DUAL INDUCTION LOG


Company		DIXON OPERATING COMPANY, LLC.	
Well		#3-34 POUND	
Field		MIKES METEOR	
County		STAFFORD	
State		KANSAS	
Location:		APL # : 15-185-24026-0000 330' FSL & 2310' FEL SW - SW - SE	
Permanent Datum		GROUND LEVEL	
Log Measured From		KELLY BUSHING 11' A.G.L.	
Drilling Measured From		KELLY BUSHING	
SEC 34 TWP 22S RGE 12W		Elevation K.B. 1843 D.F. 1841 G.L. 1832	
Date	8/14/18		
Run Number	ONE		
Depth Driller	4027		
Depth Logger	4026		
Bottom Logged Interval	4024		
Top Log Interval	00		
Casing Driller	8 5/8"@310'		
Casing Logger	306		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 9,100 PPM	
Density / Viscosity	9.4/76		
pH / Fluid Loss	10.5/10.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.400@90F		
Rmf @ Meas. Temp	.300@90F		
Rmc @ Meas. Temp	.480@90F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.310@116F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	9:30 P.M.		
Maximum Recorded Temperature	116F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	CHUCK SCHMALTZ		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
HUDSON, KS., 2E. TO "NE 70TH", 3/4S., W. INTO AT LEASE RD.

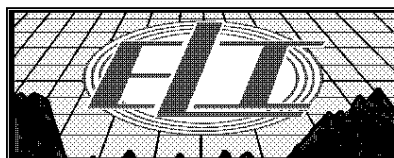

MAIN SECTION

Database File: 2674pe.db
Dataset Pathname: pass3.6
Presentation Format: dil2
Dataset Creation: Tue Aug 14 22:57:25 2018 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1


0	RLL3 (Ohm-m)	50
---	--------------	----

0	RILD (Ohm-m)	50
---	--------------	----



1000	CILD (mmho/m)	0
------	---------------	---



50	RILD X10 (Ohm-m)	500
----	------------------	-----


50	RLL3 X10 (Ohm-m)	500
----	------------------	-----

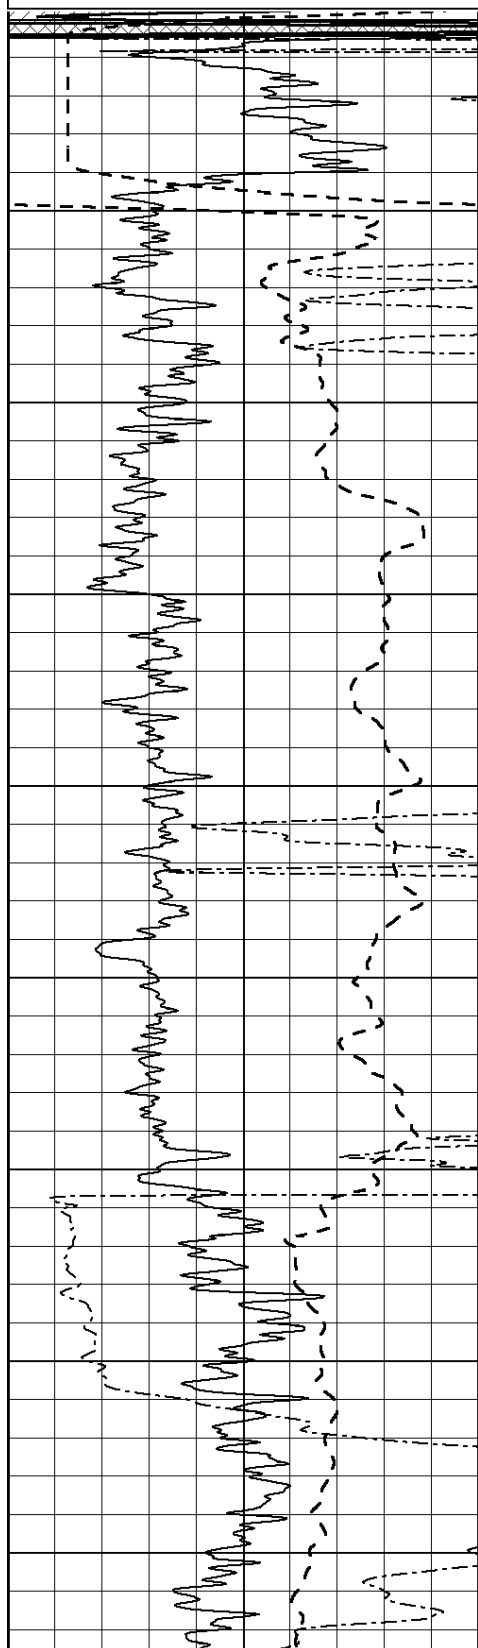


0
50
100
150
200
250
300
350
400

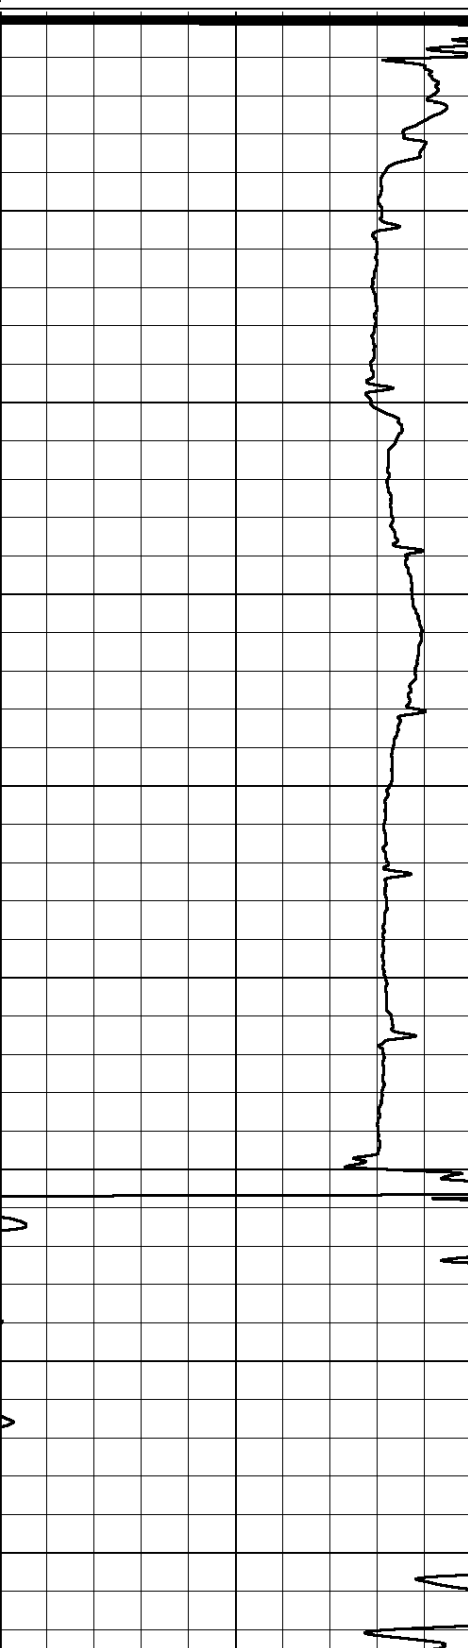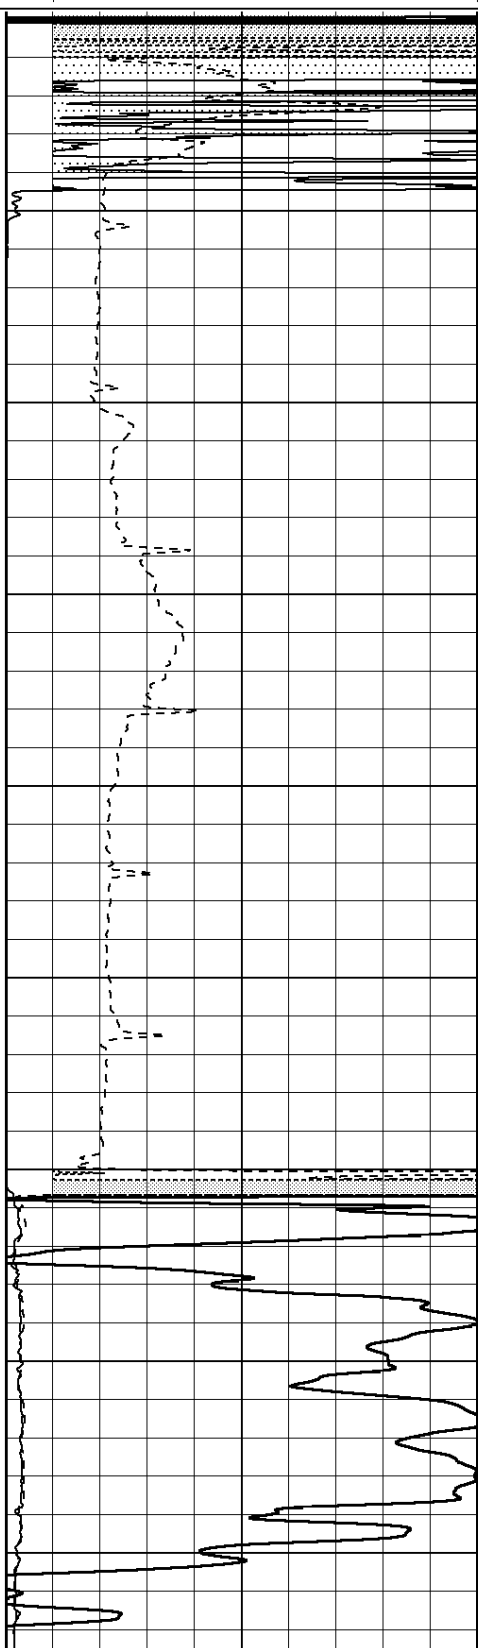


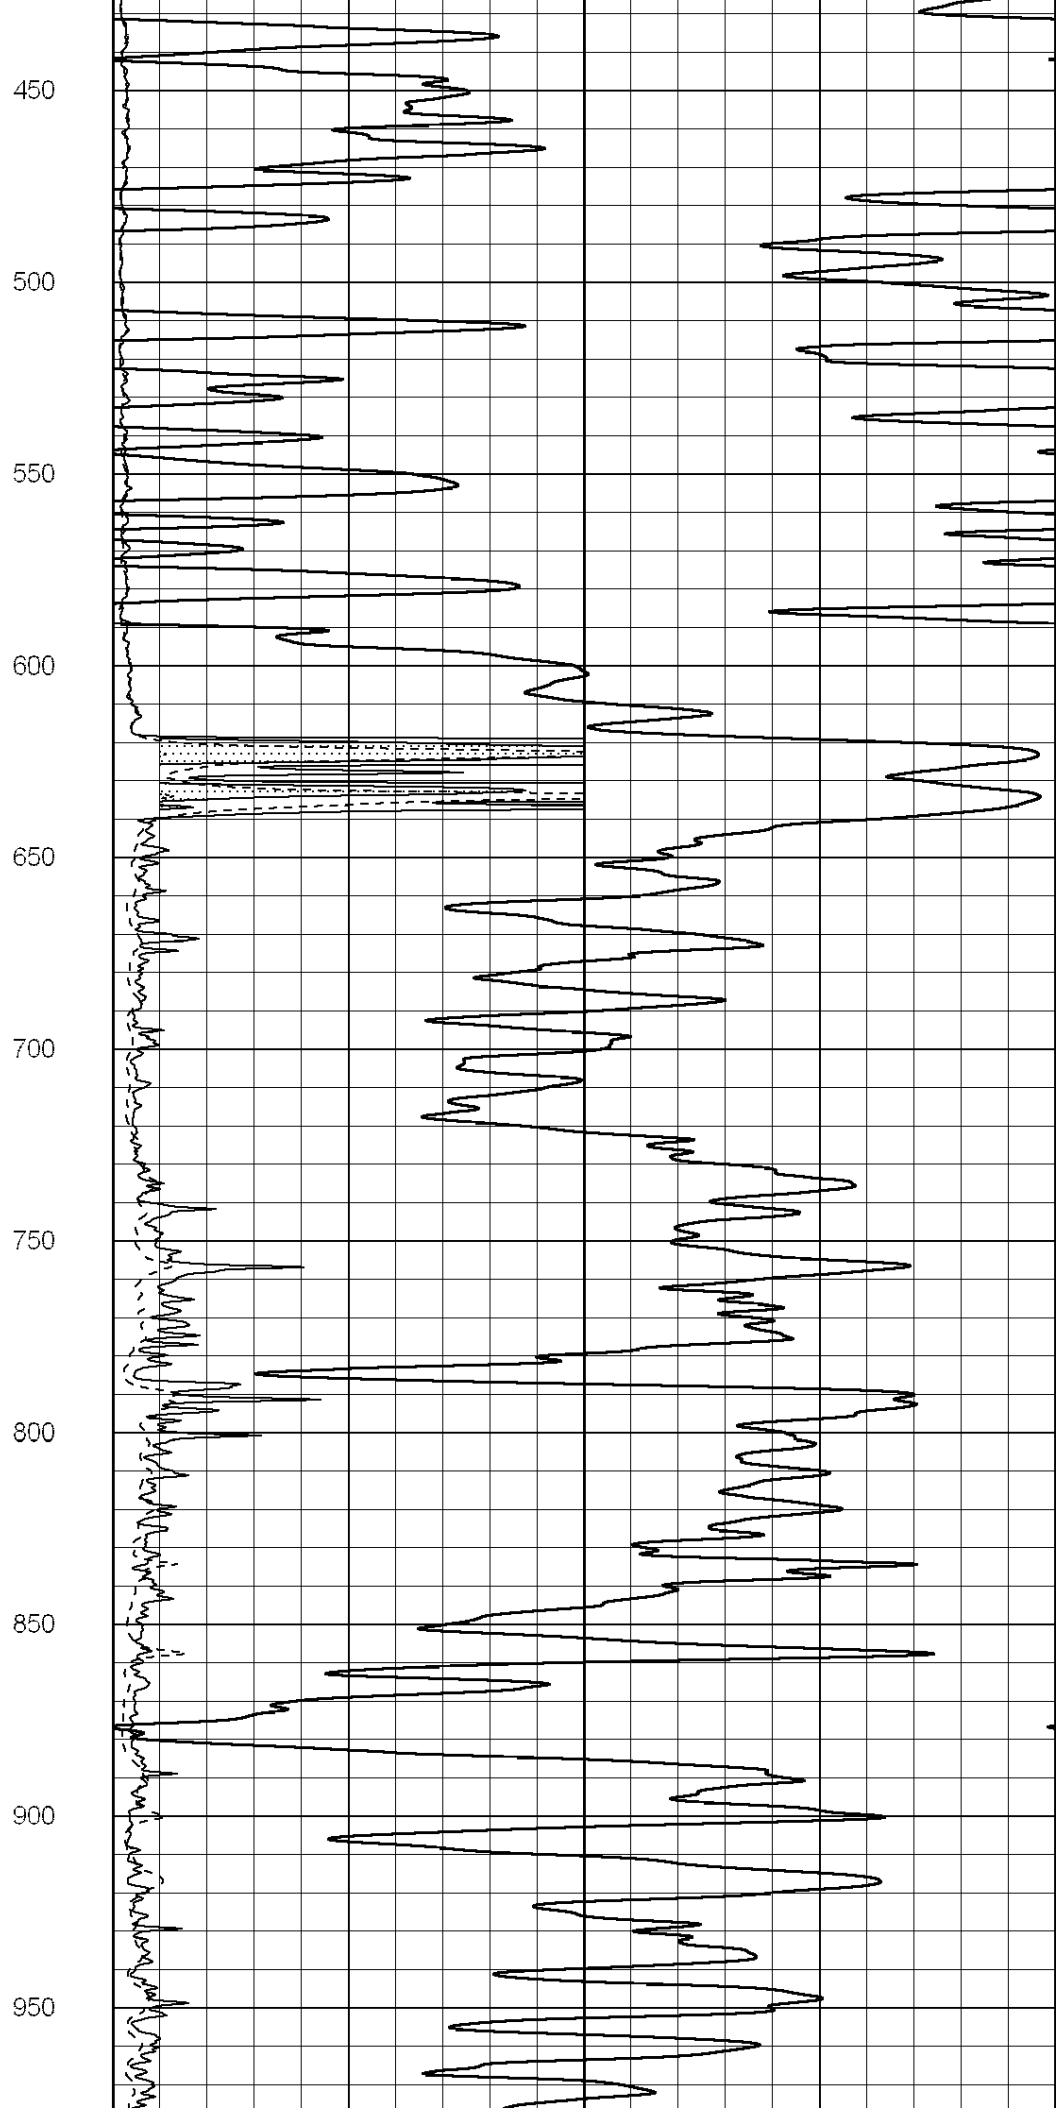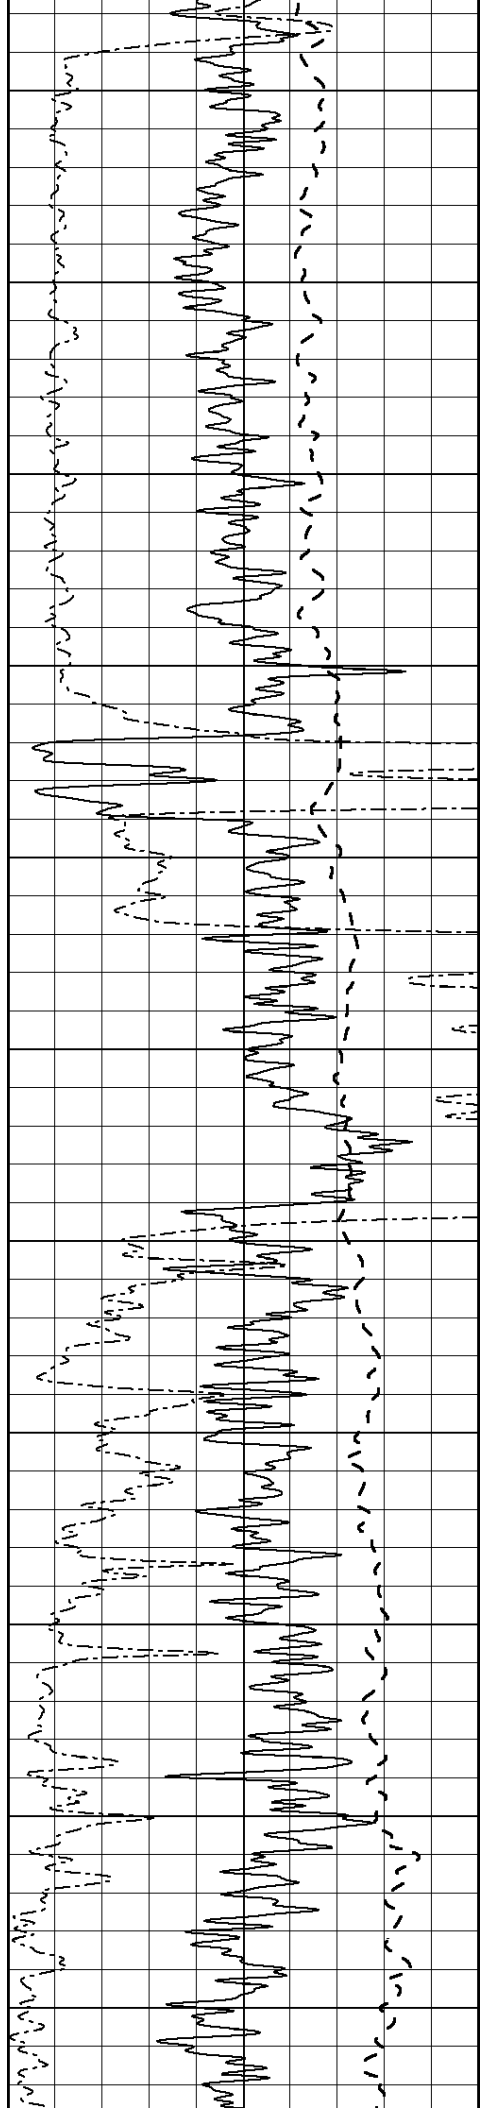

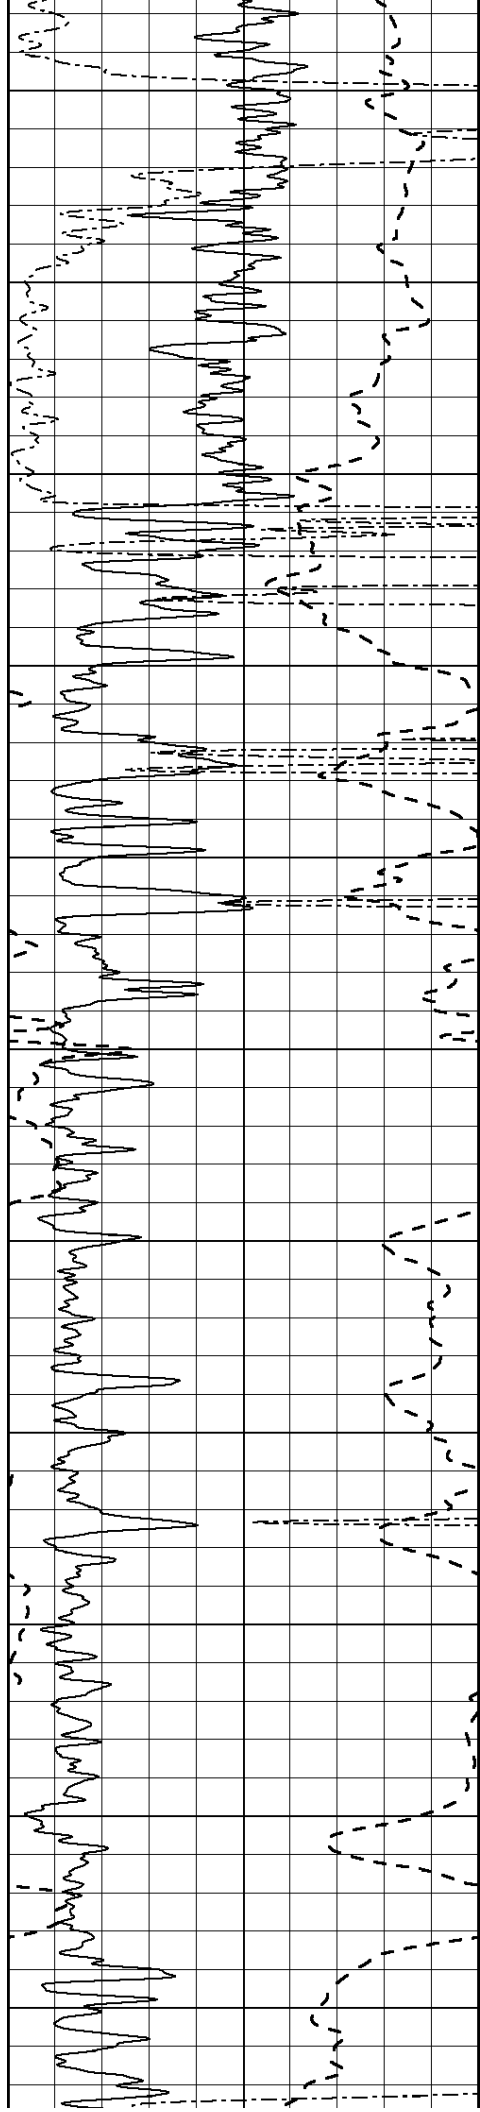

1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500

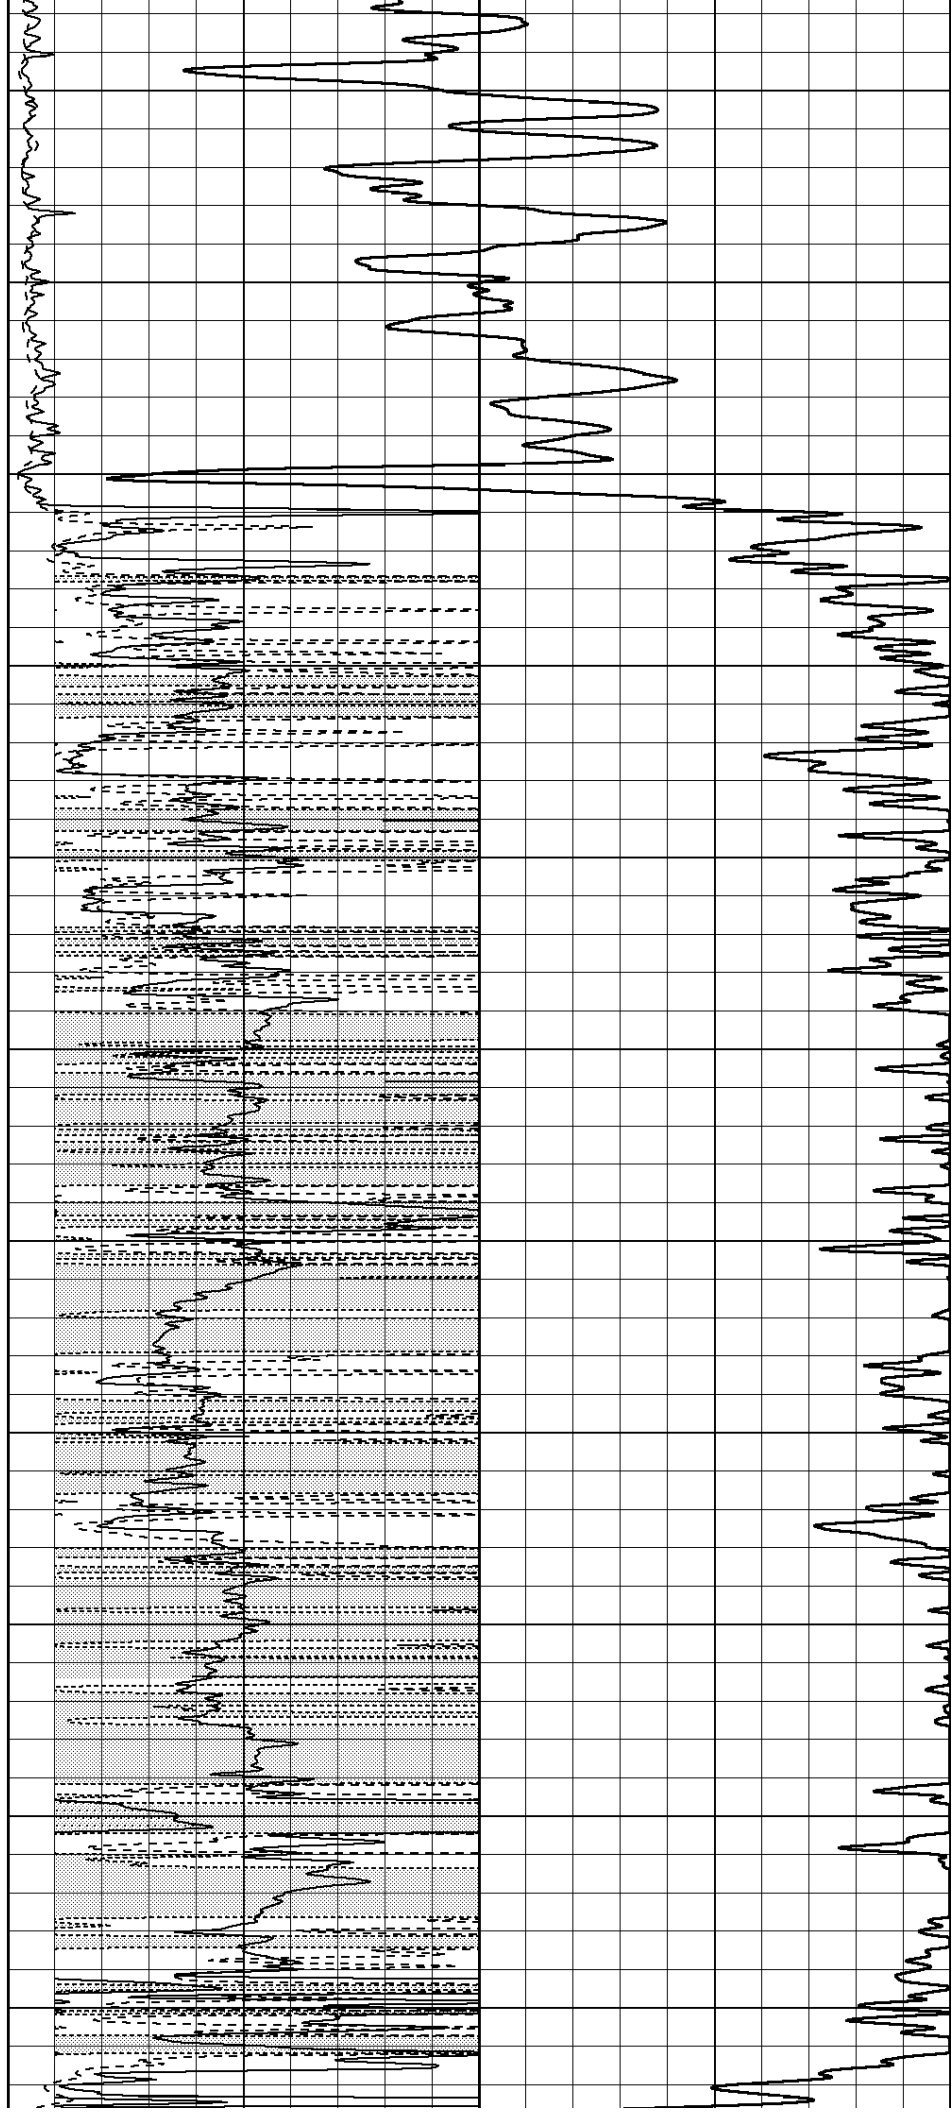

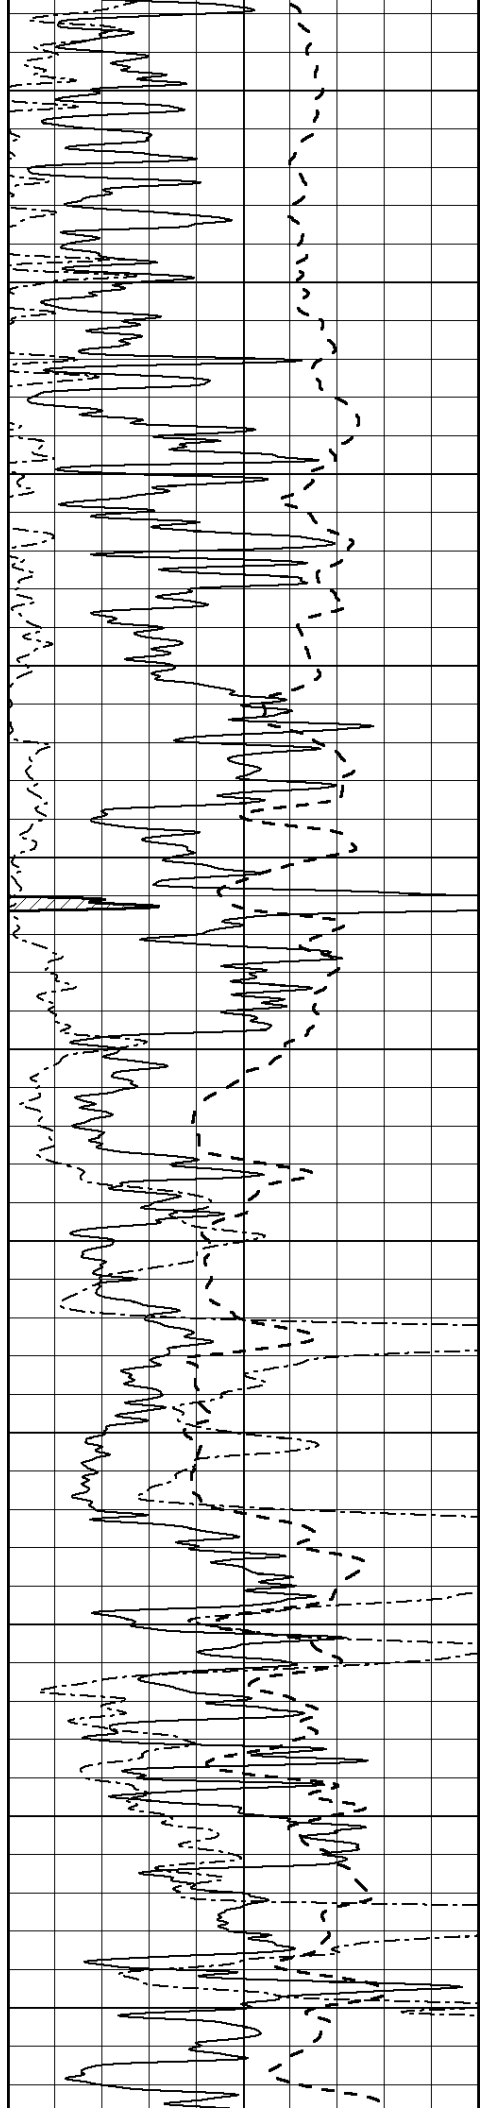

1550

1600

1650

1700

1750

1800


1850


1900

1950

2000

2050

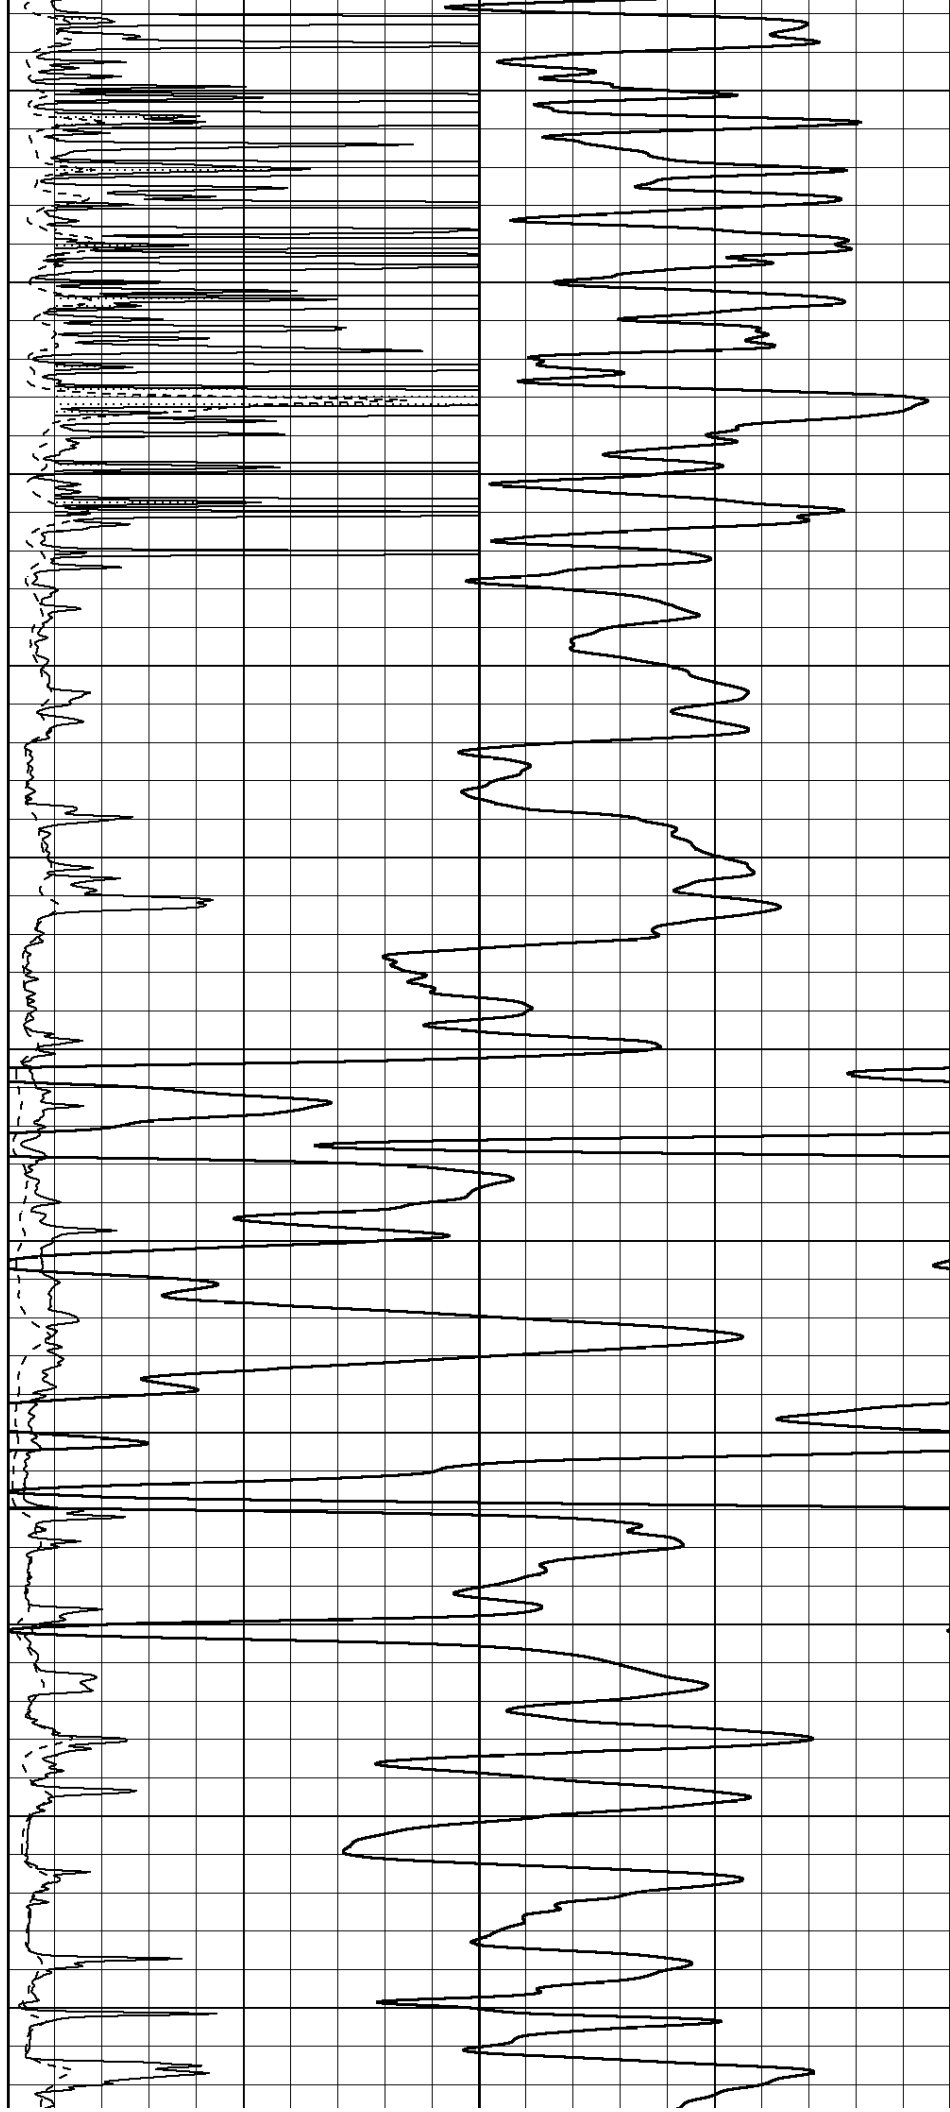

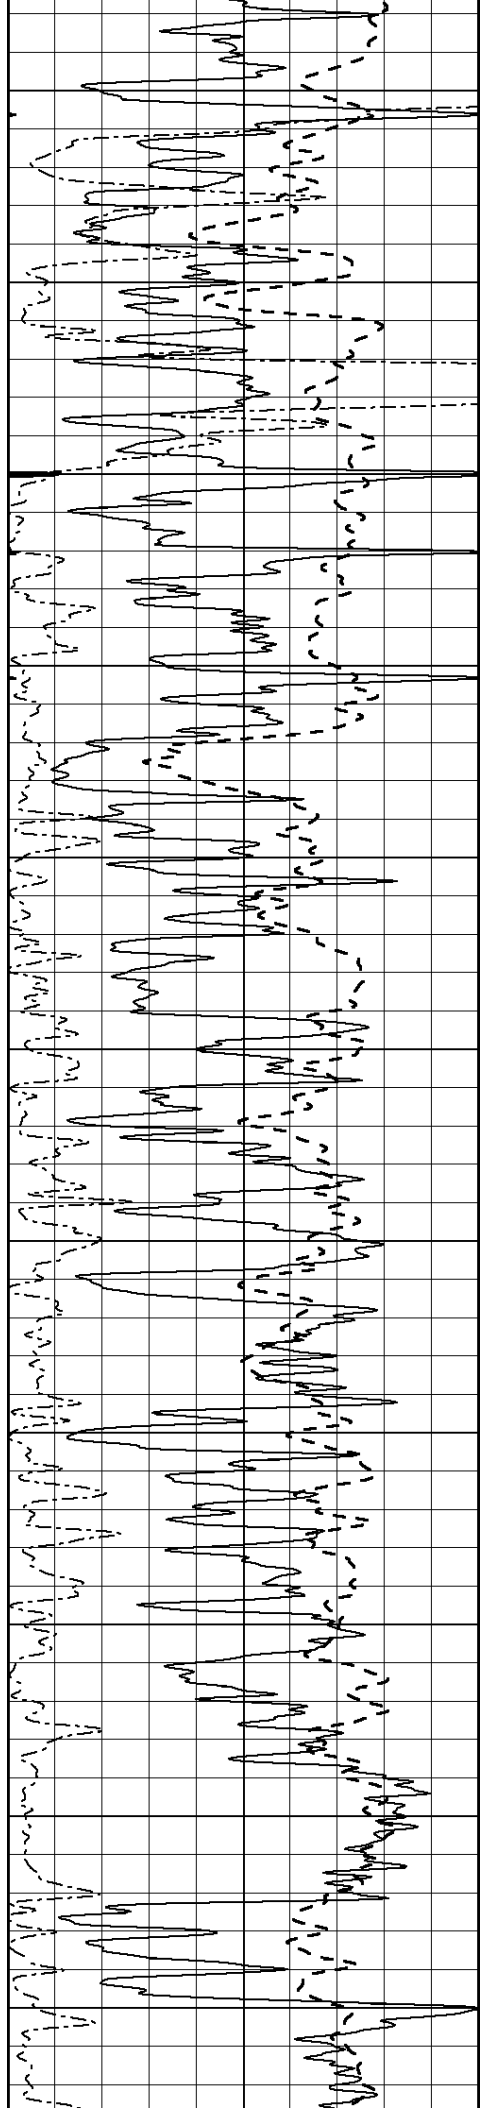

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

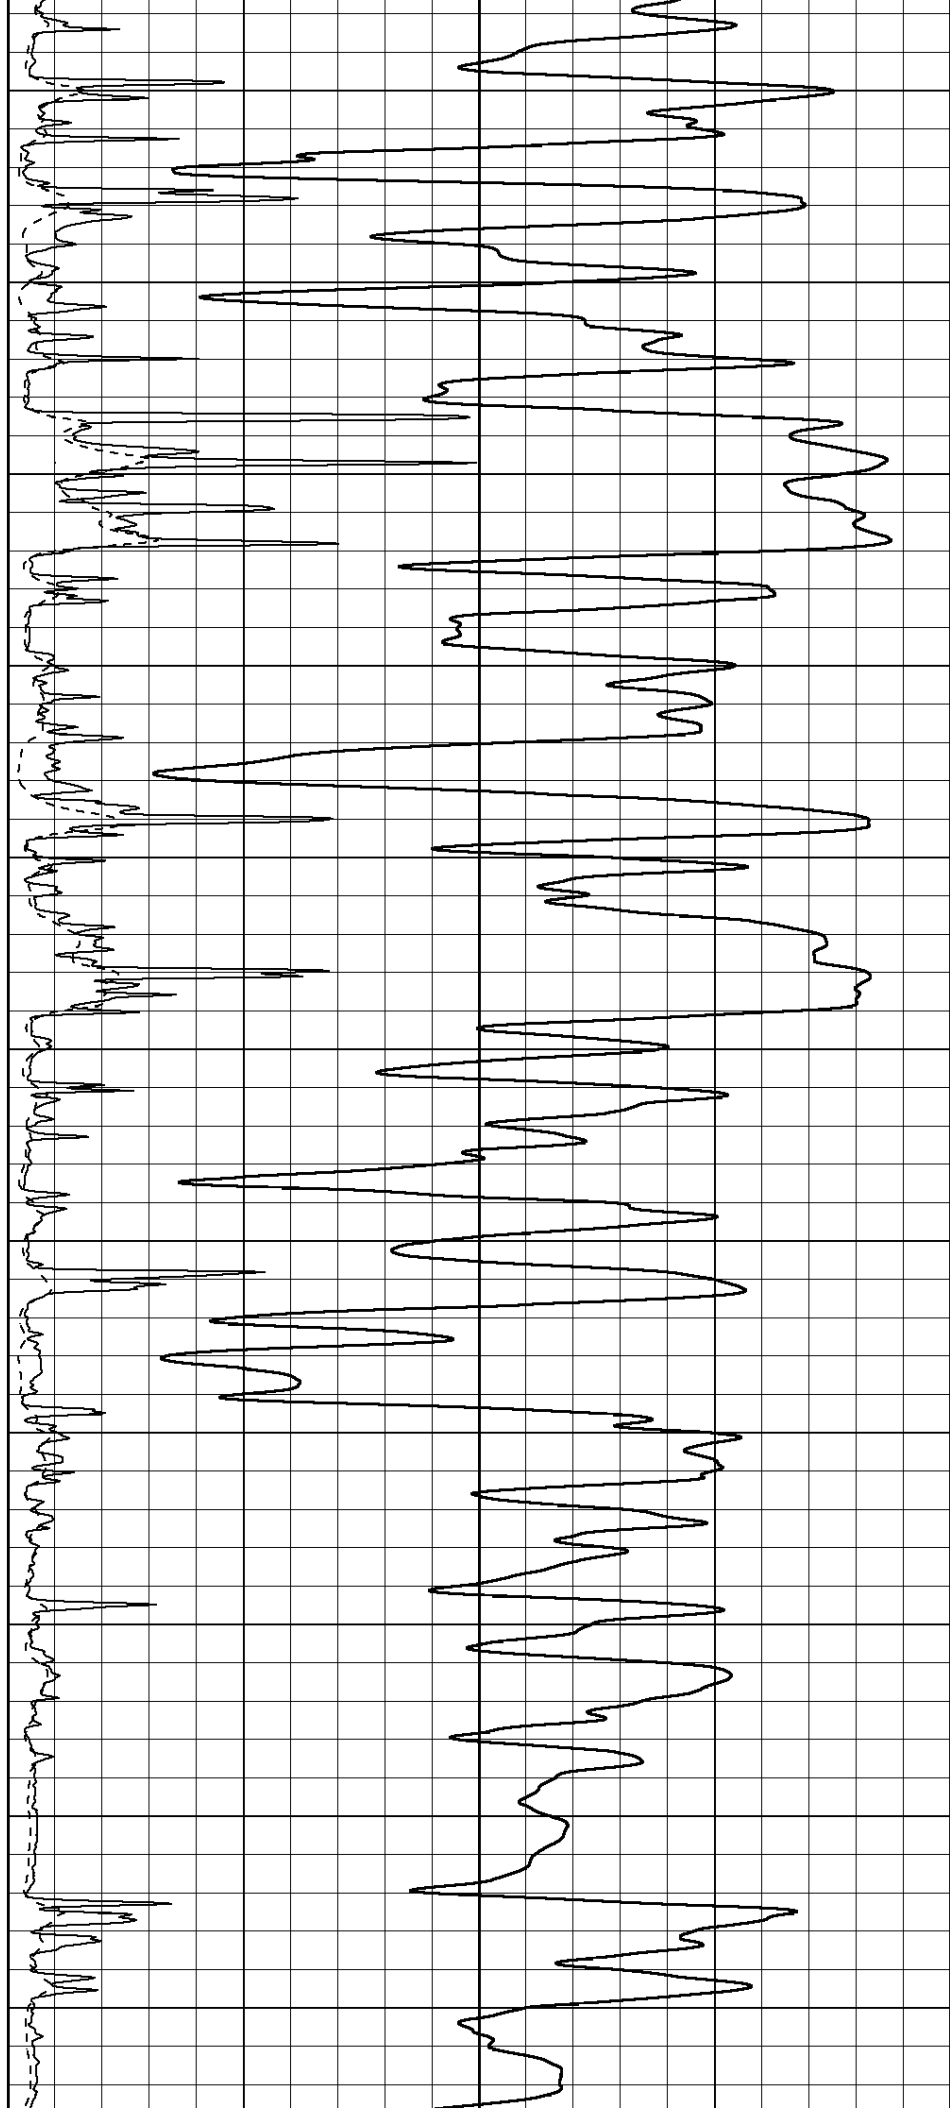

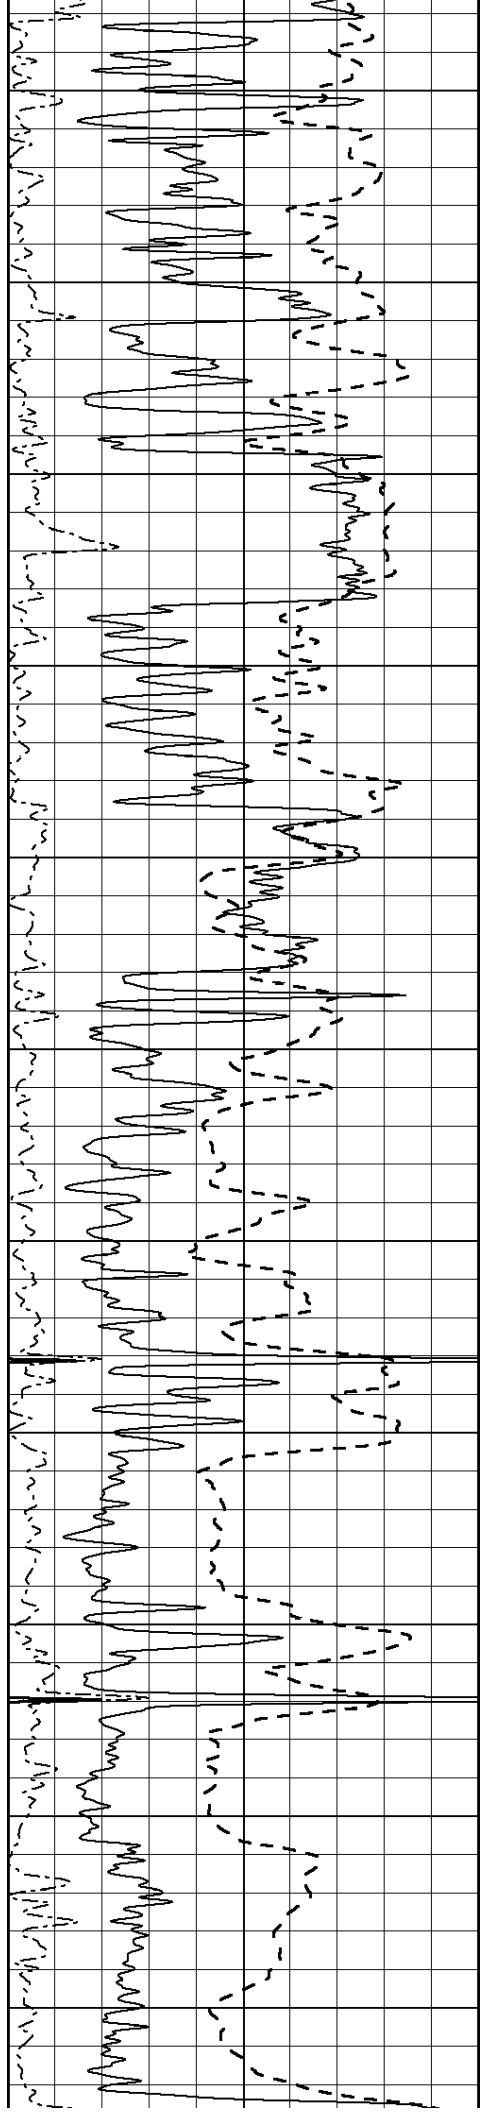

2650

2700

2750

2800

2850

2900


2950


3000

3050



3100


3150

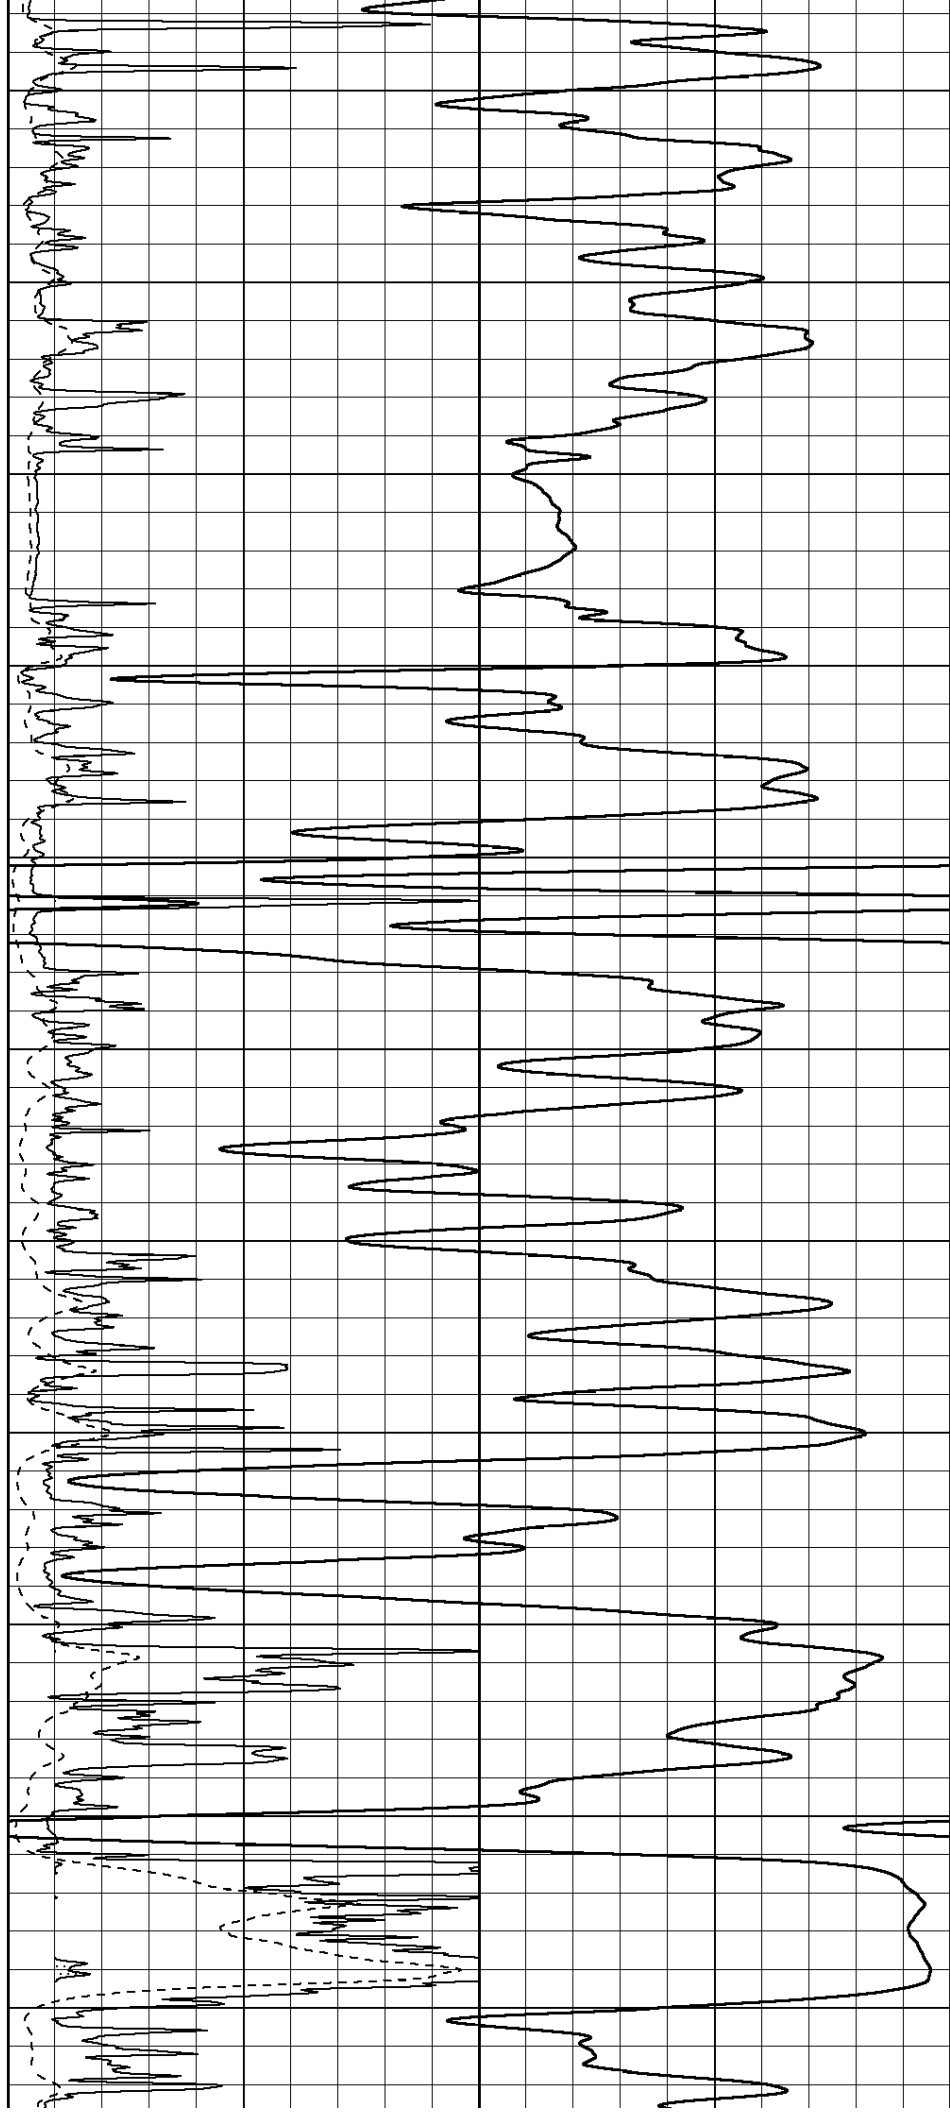

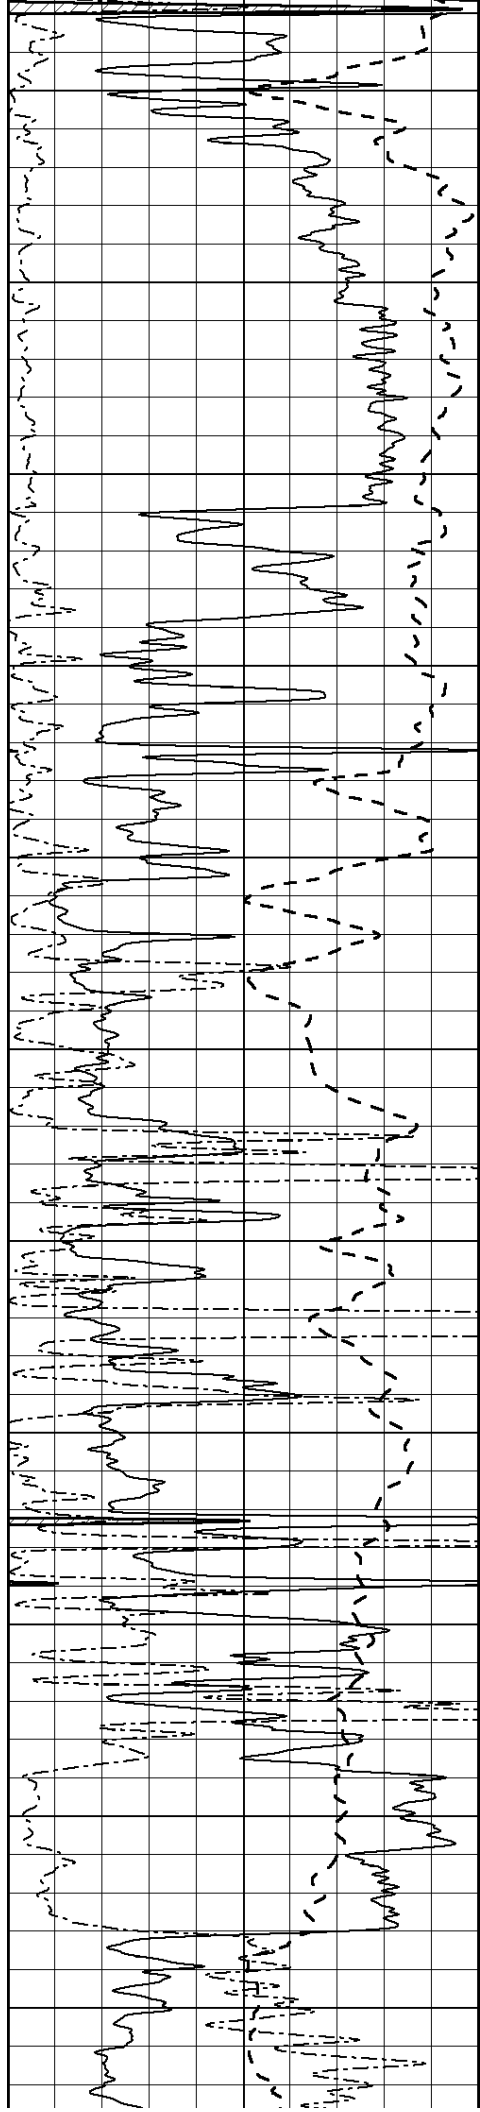


3200
3250
3300
3350
3400
3450
3500
3550
3600
3650
3700

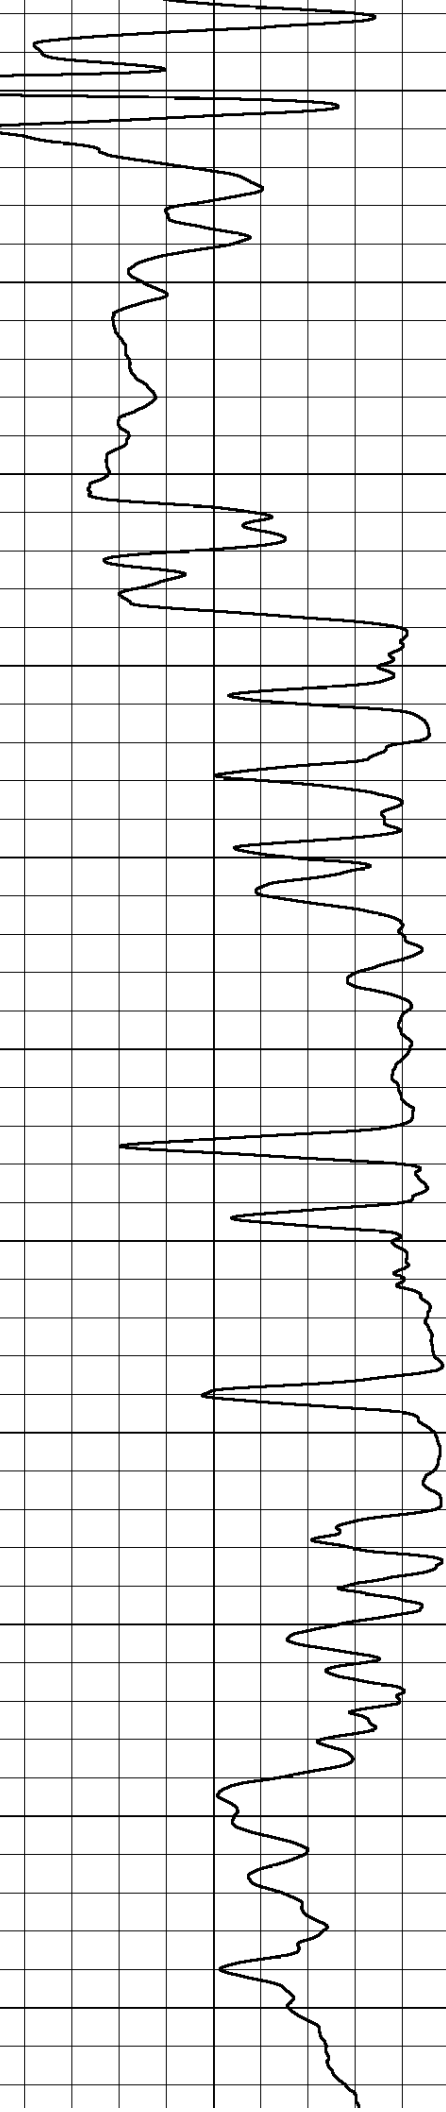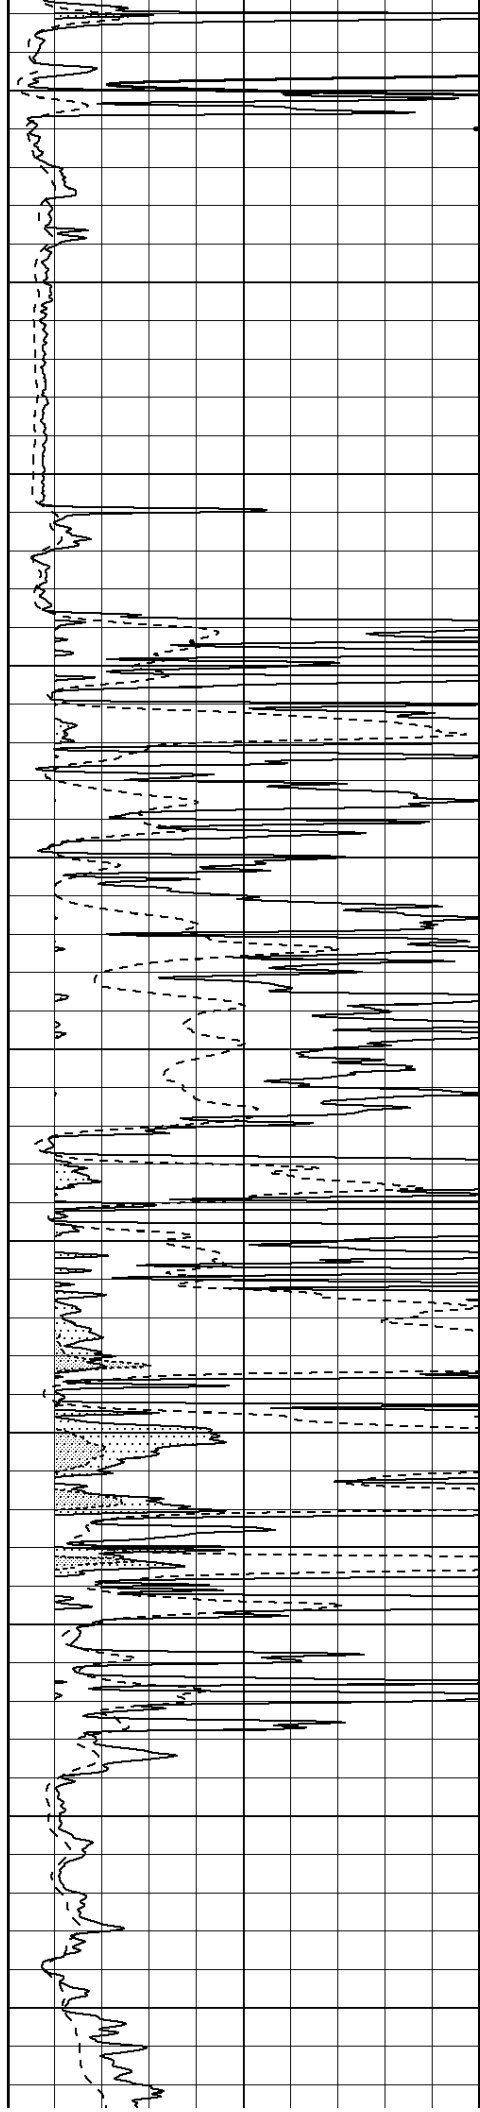

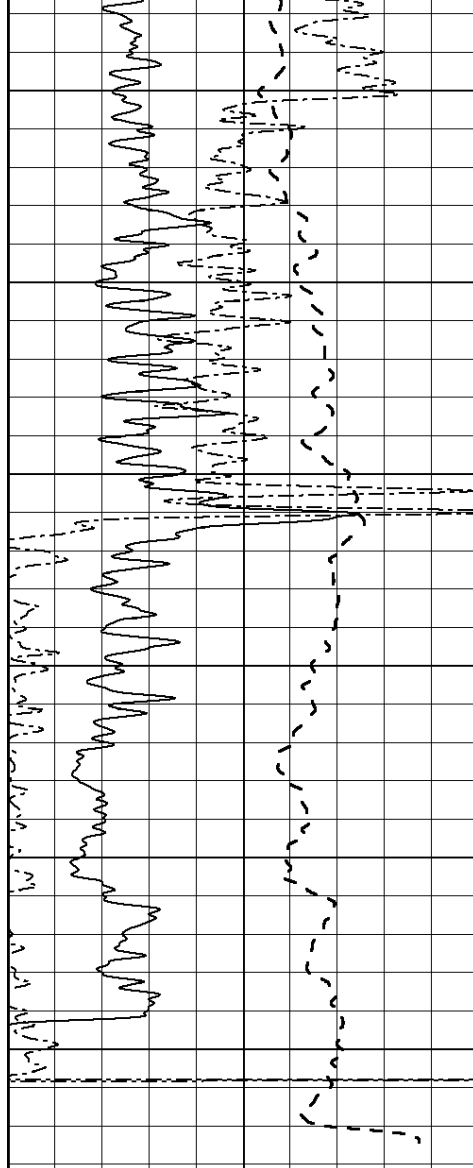


0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1

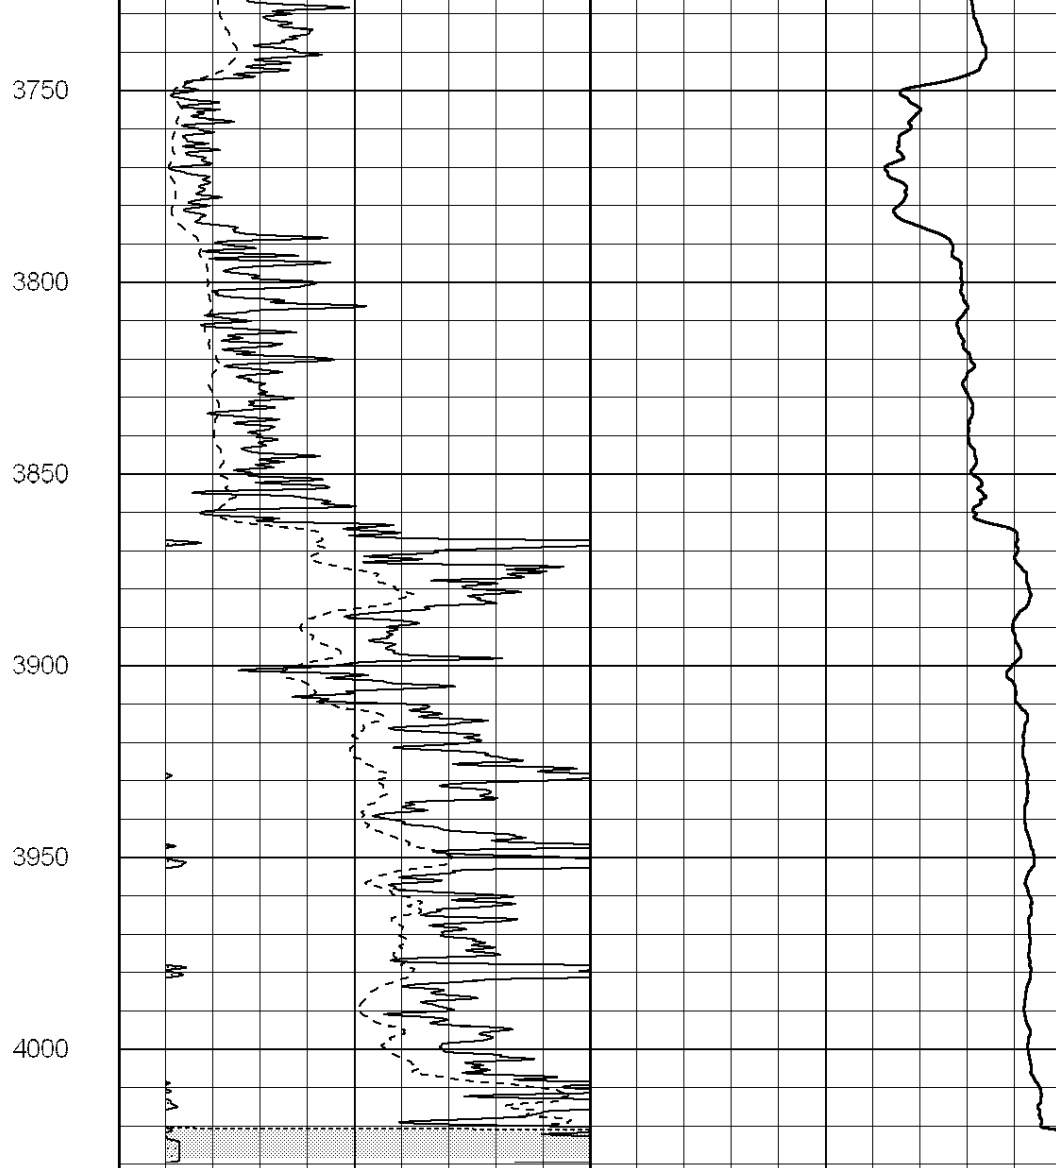

0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50
1000	CILD (mmho/m)	0

50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

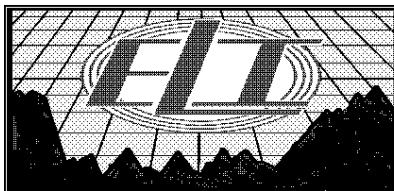


ANHYDRITE

Database File: 2674pe.db
 Dataset Pathname: pass3.7
 Presentation Format: _dil
 Dataset Creation: Tue Aug 14 22:58:18 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

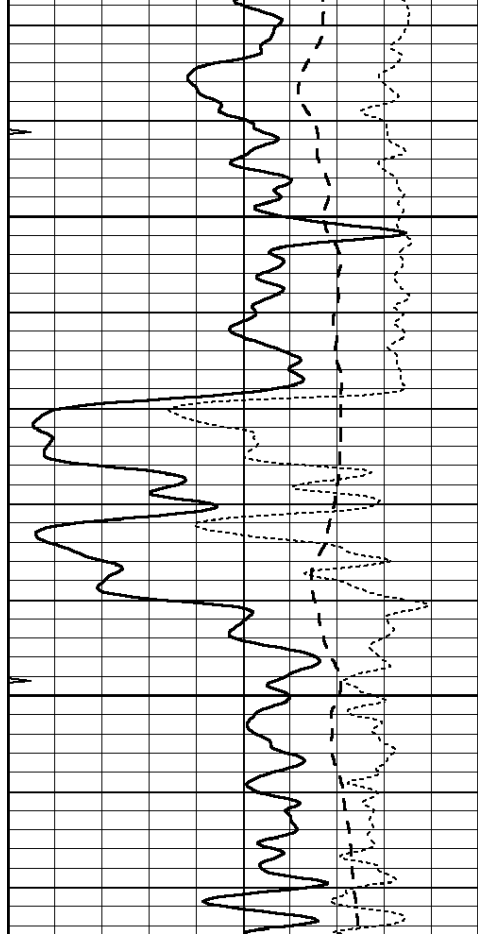


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

600

650

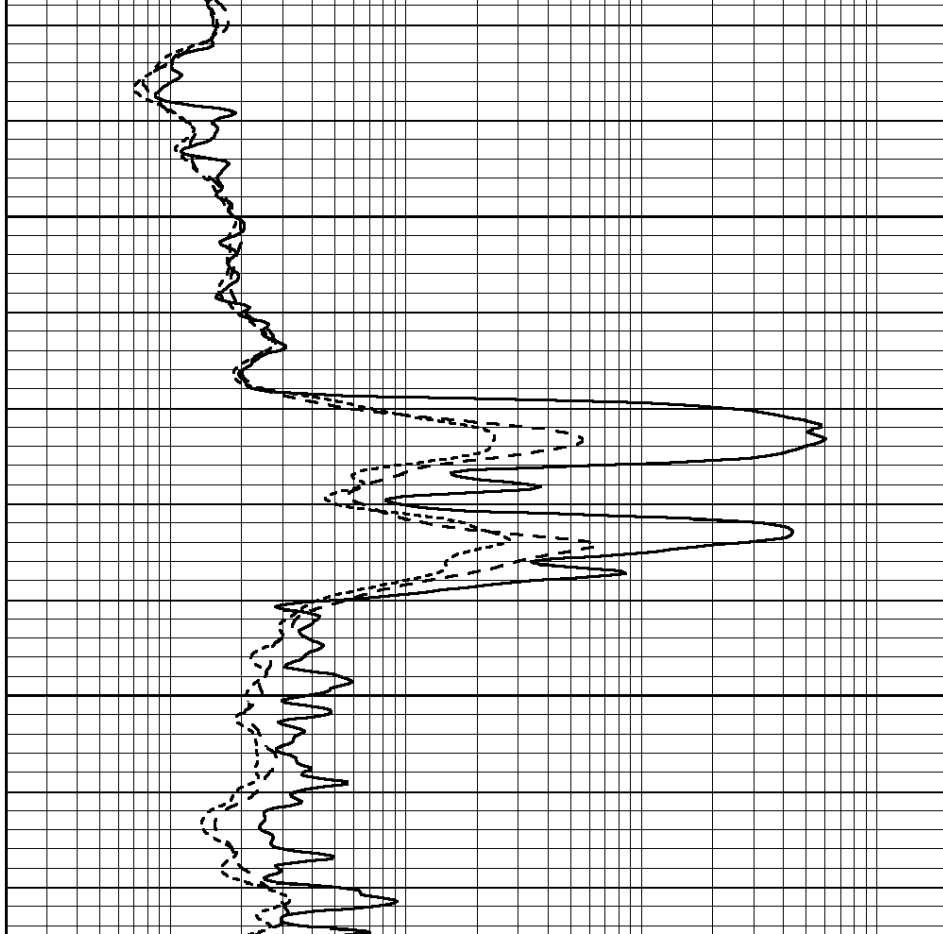

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

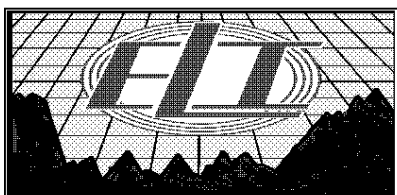



MAIN SECTION


Database File: 2674pe.db
 Dataset Pathname: pass3.6
 Presentation Format: _dil
 Dataset Creation: Tue Aug 14 22:57:25 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

2800

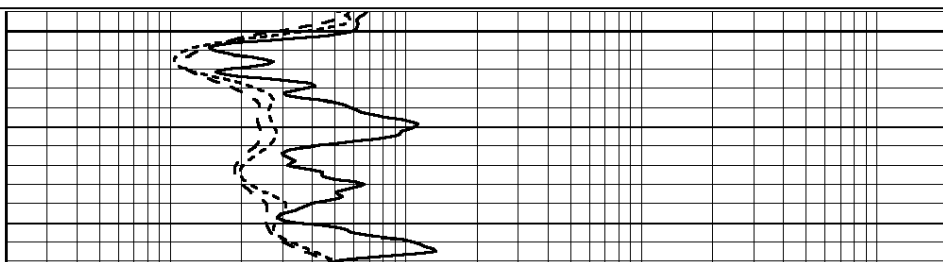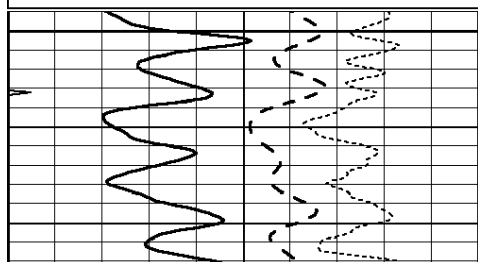

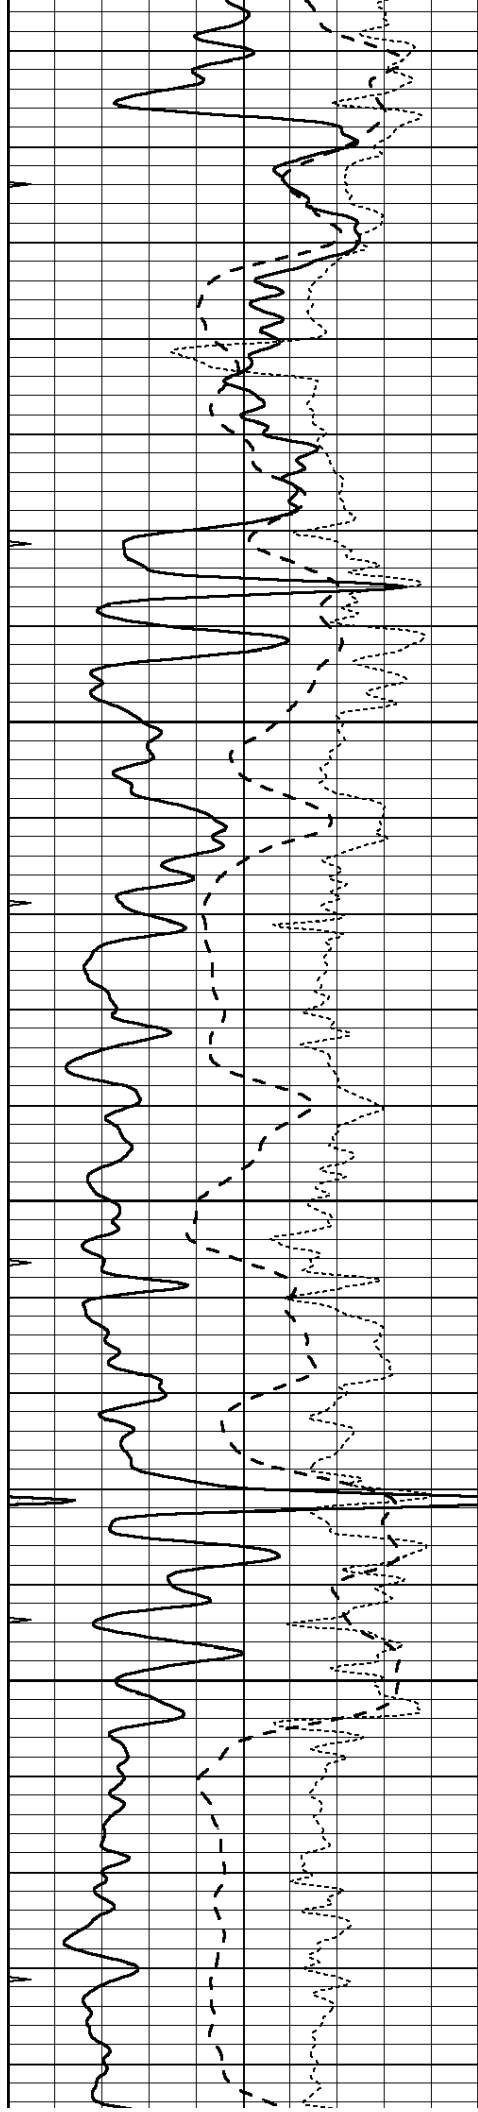



2850

2900

2950

3000

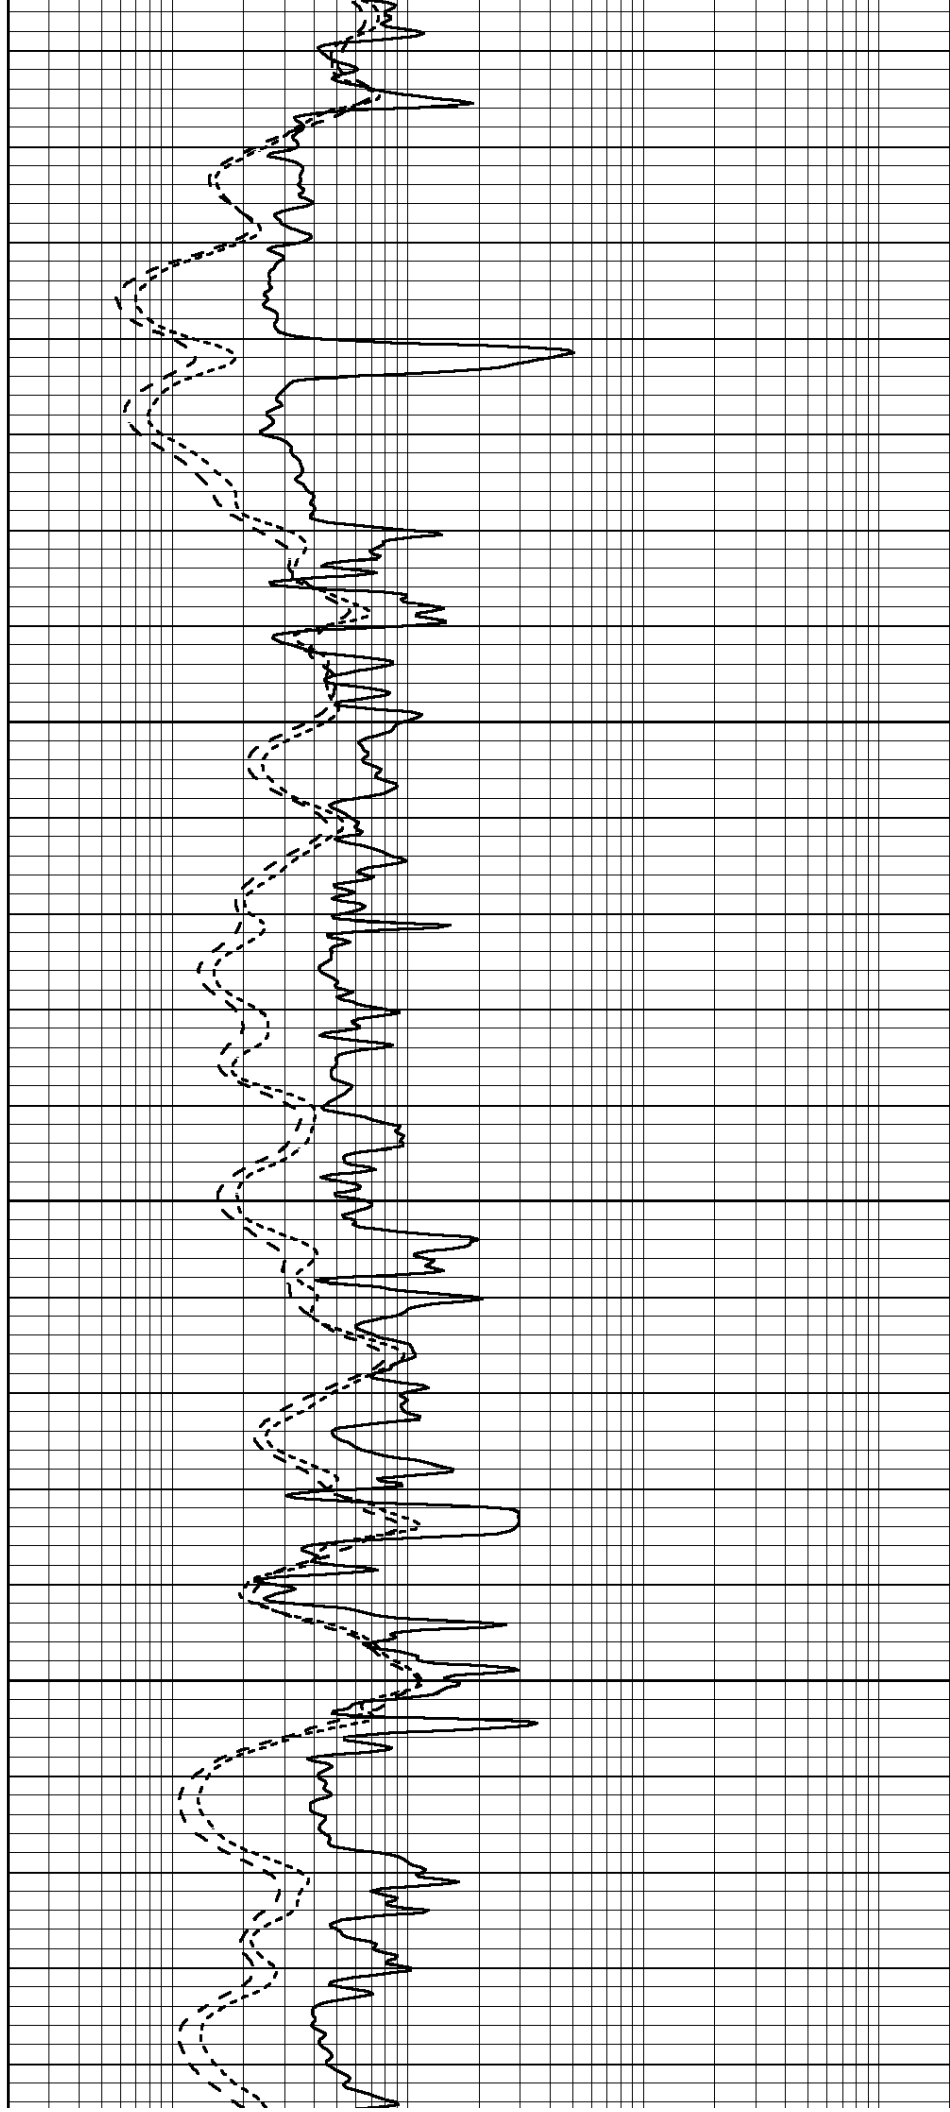

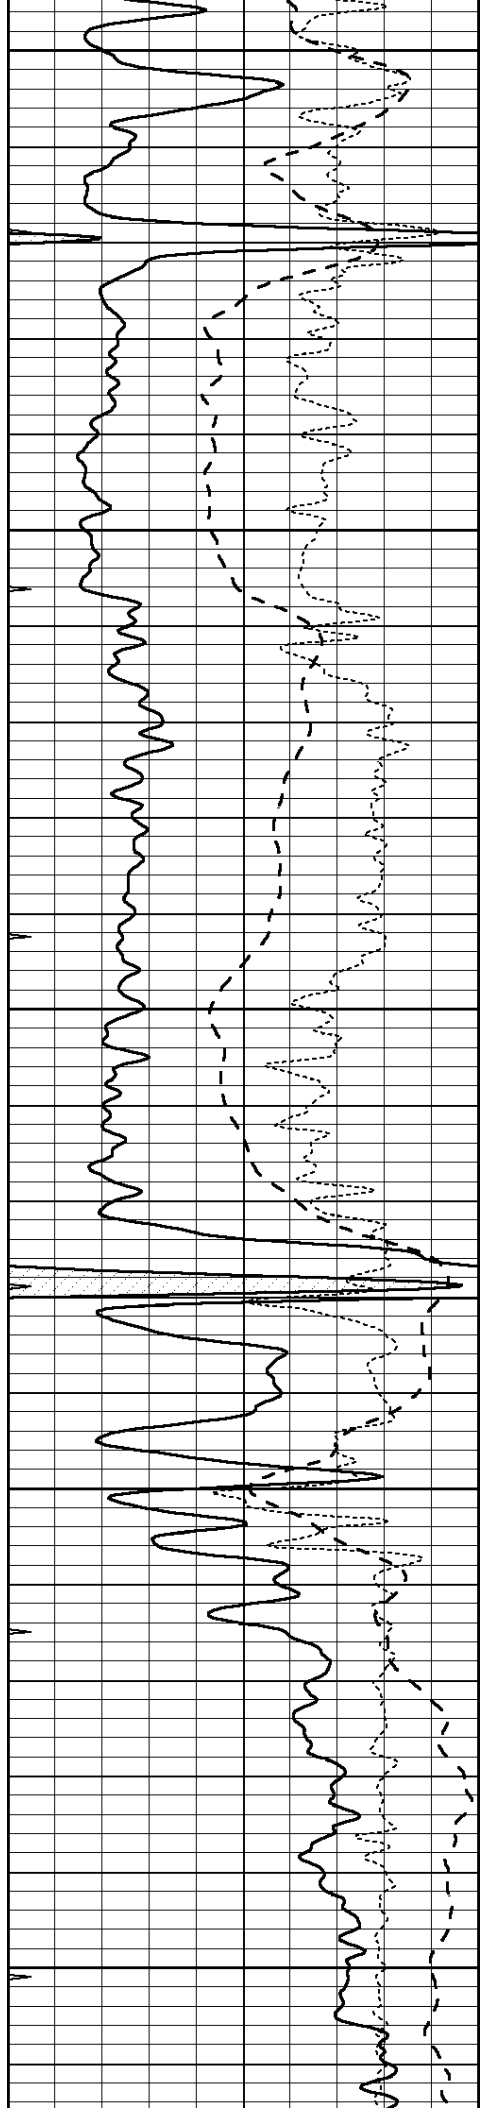


3050


3100

3150

3200

3250

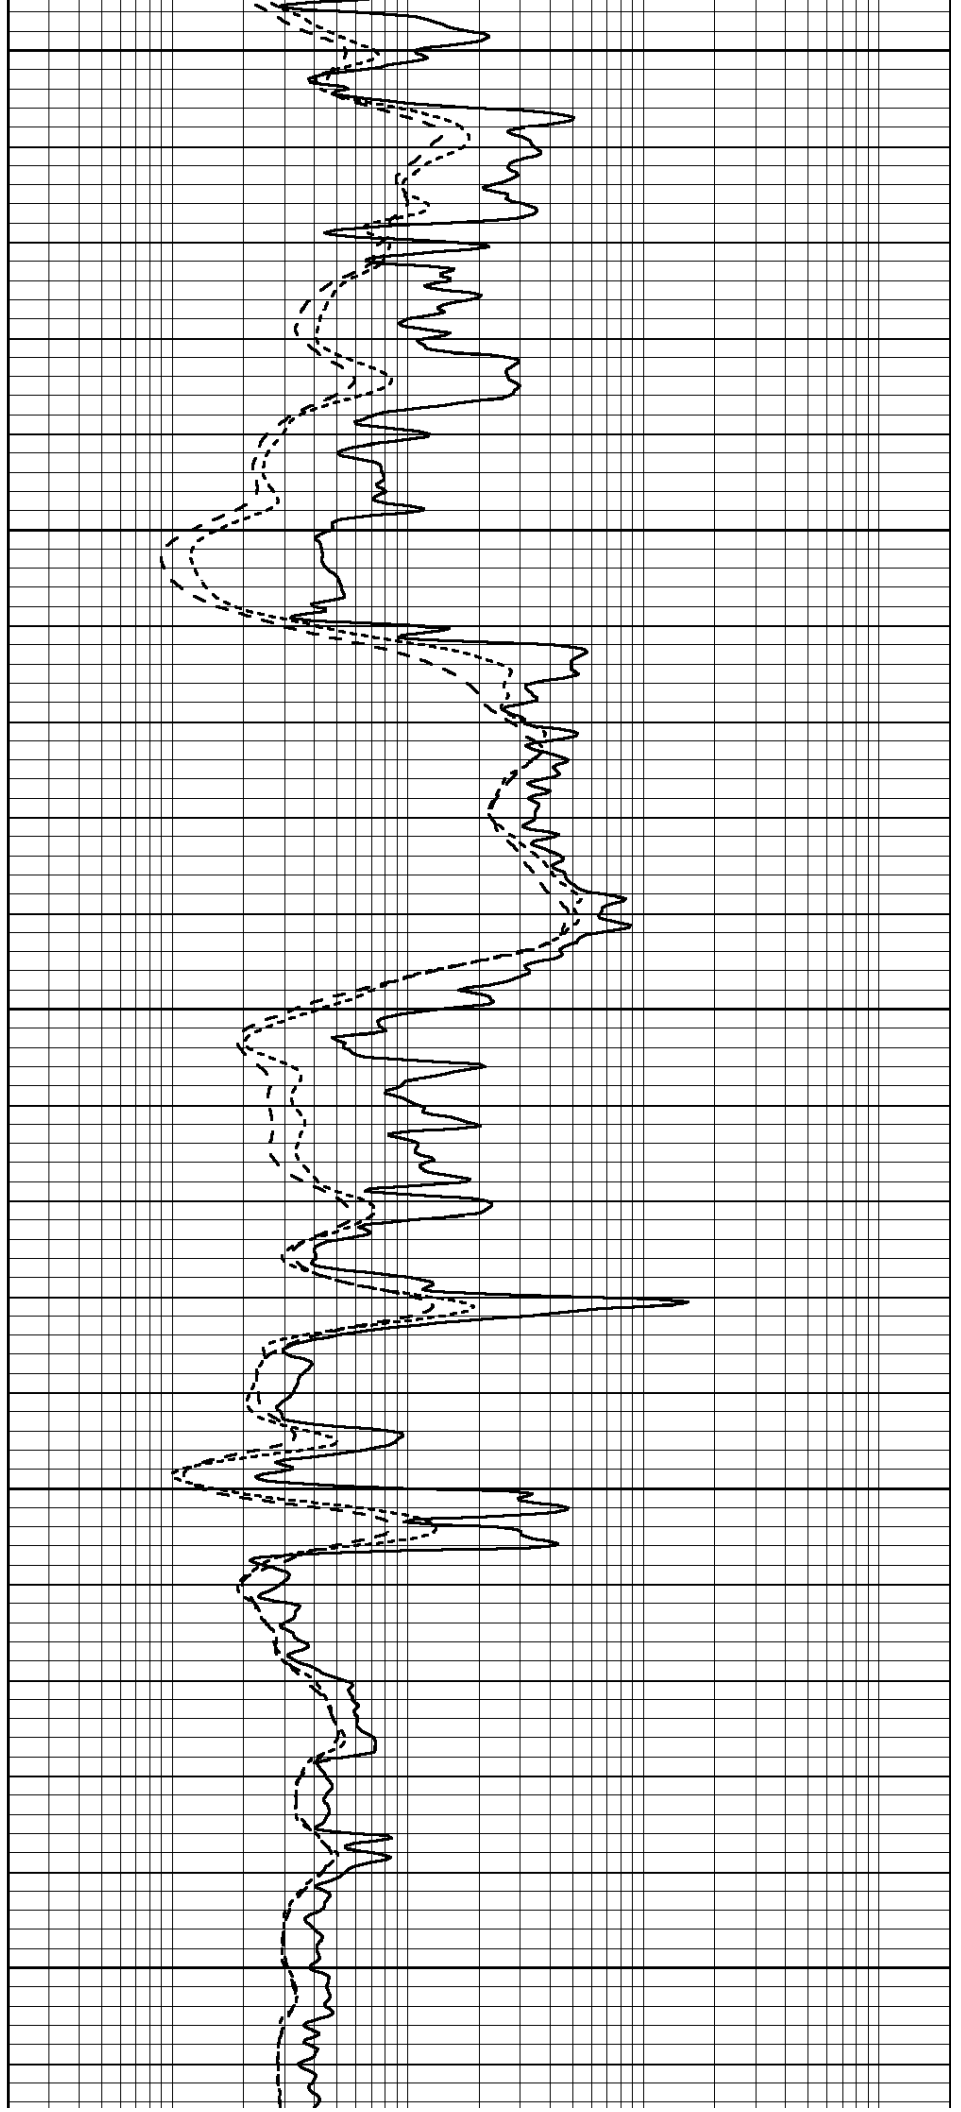

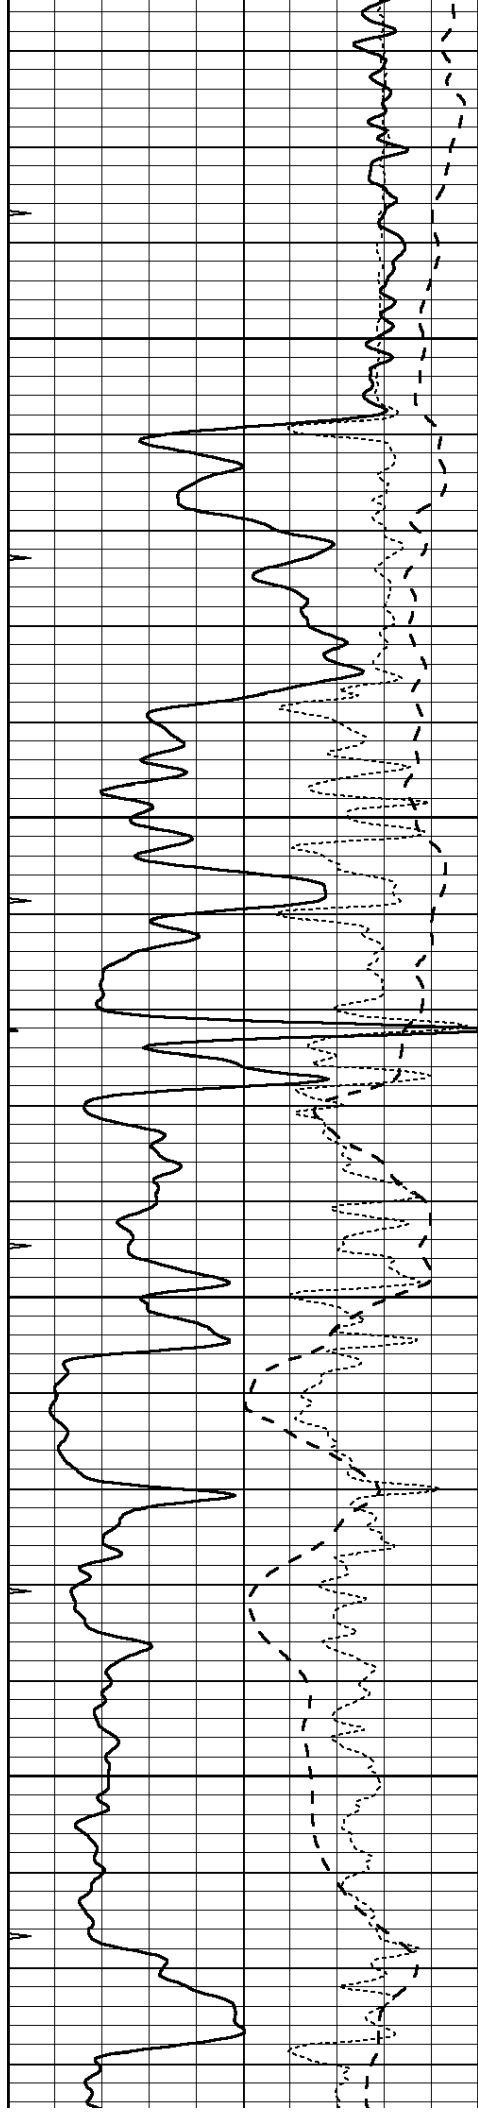



3300

3350

3400

3450

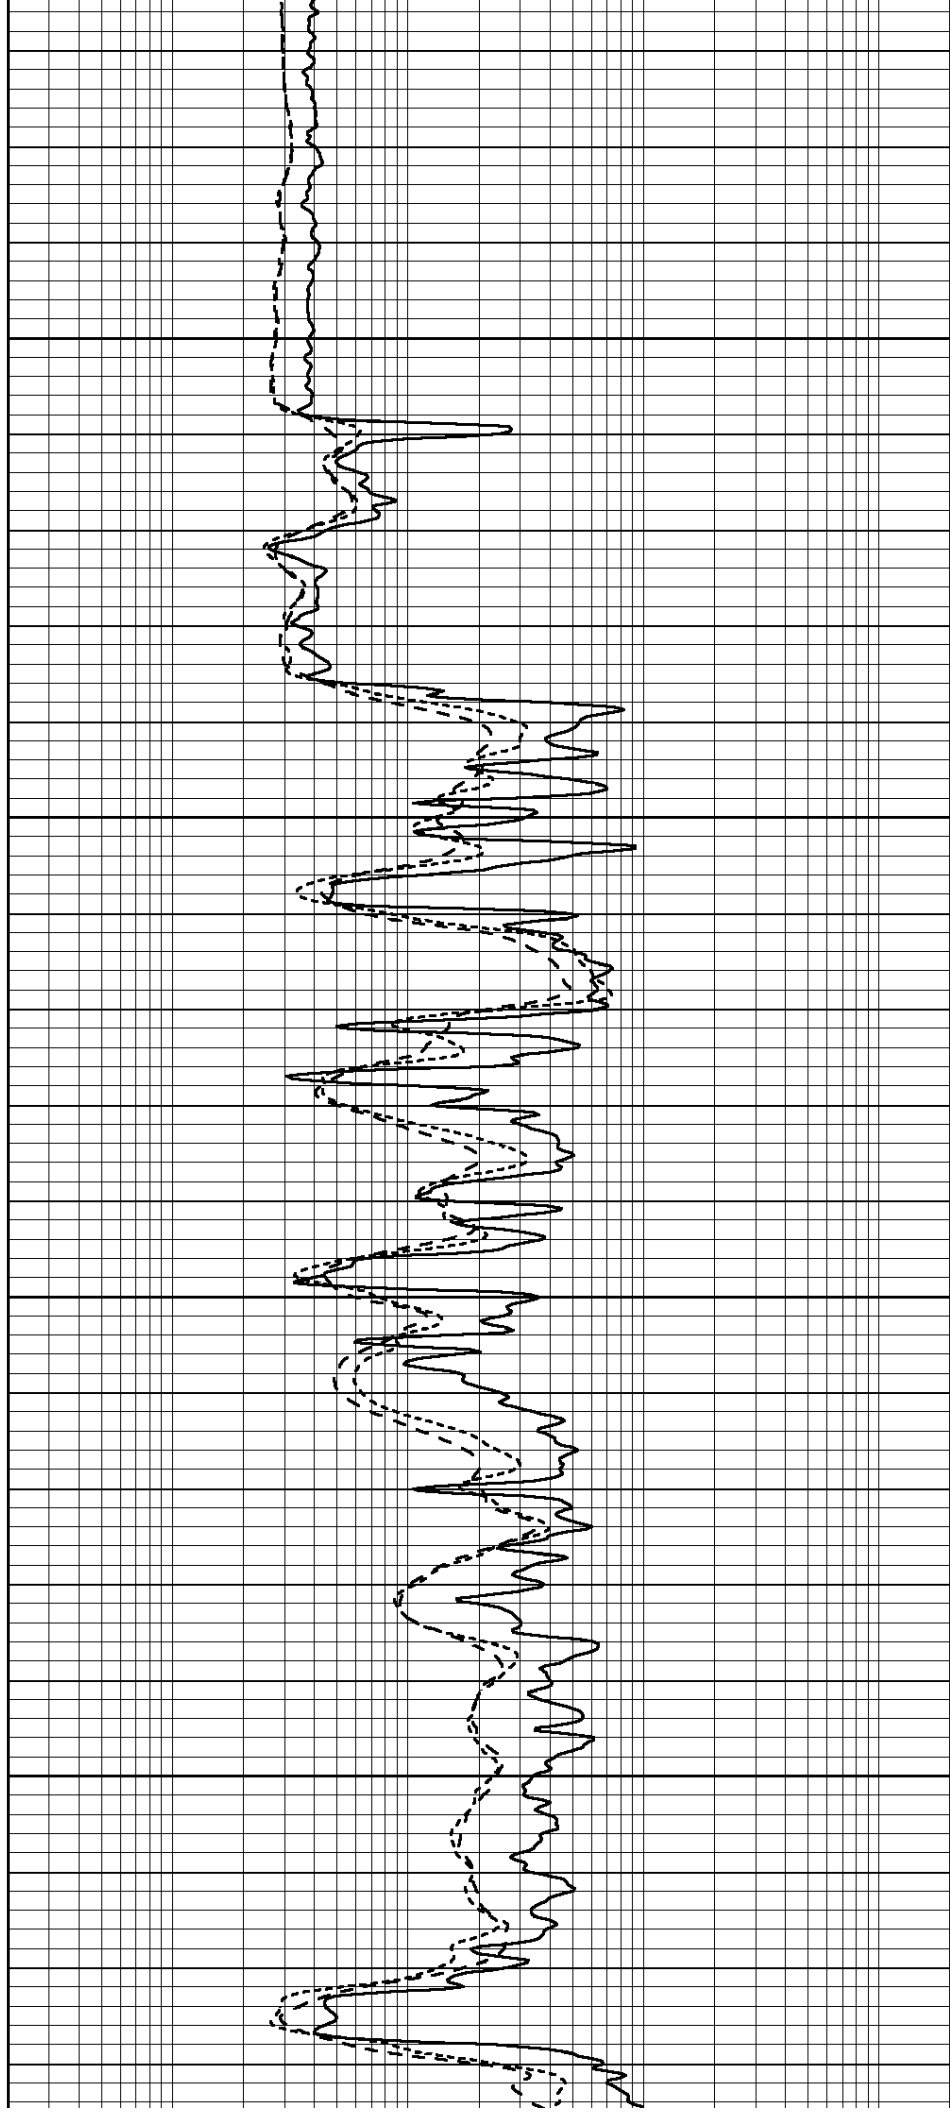

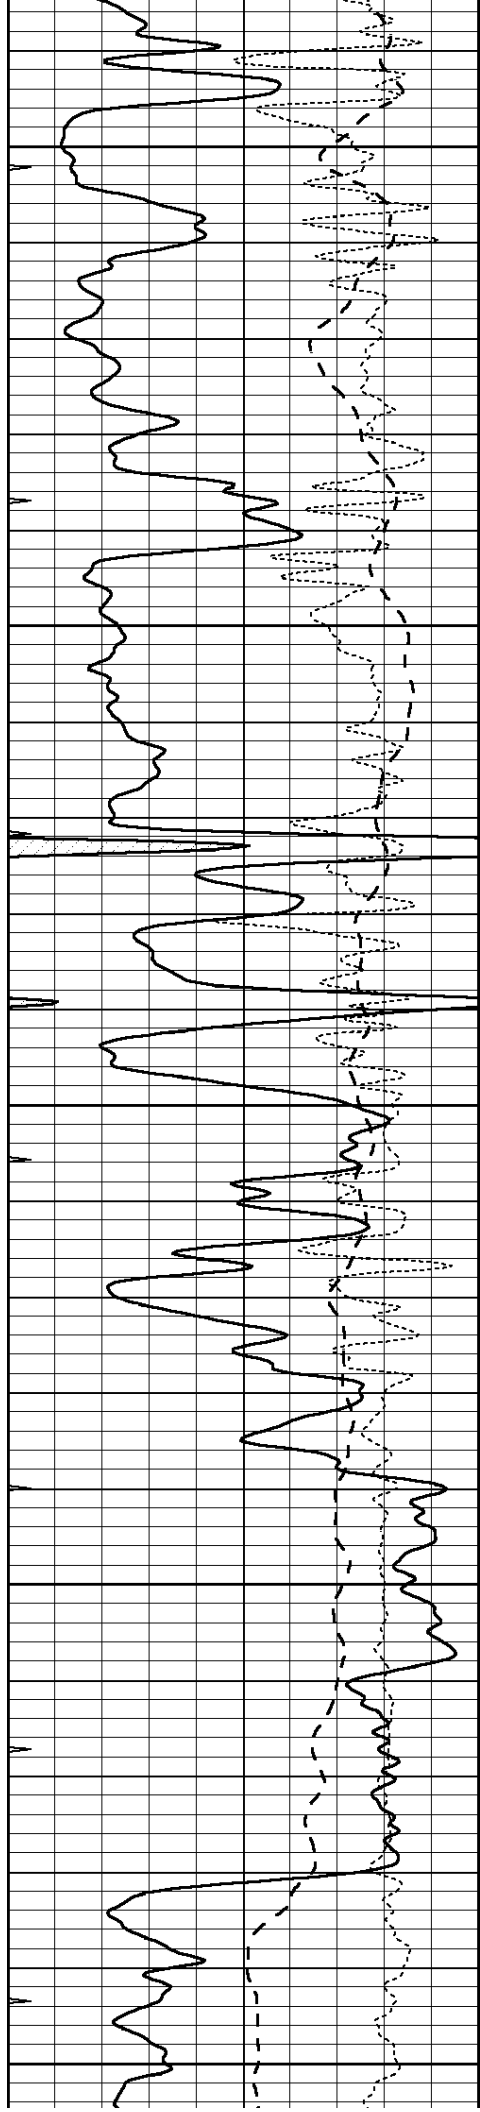


3500


3550

3600

3650

3700

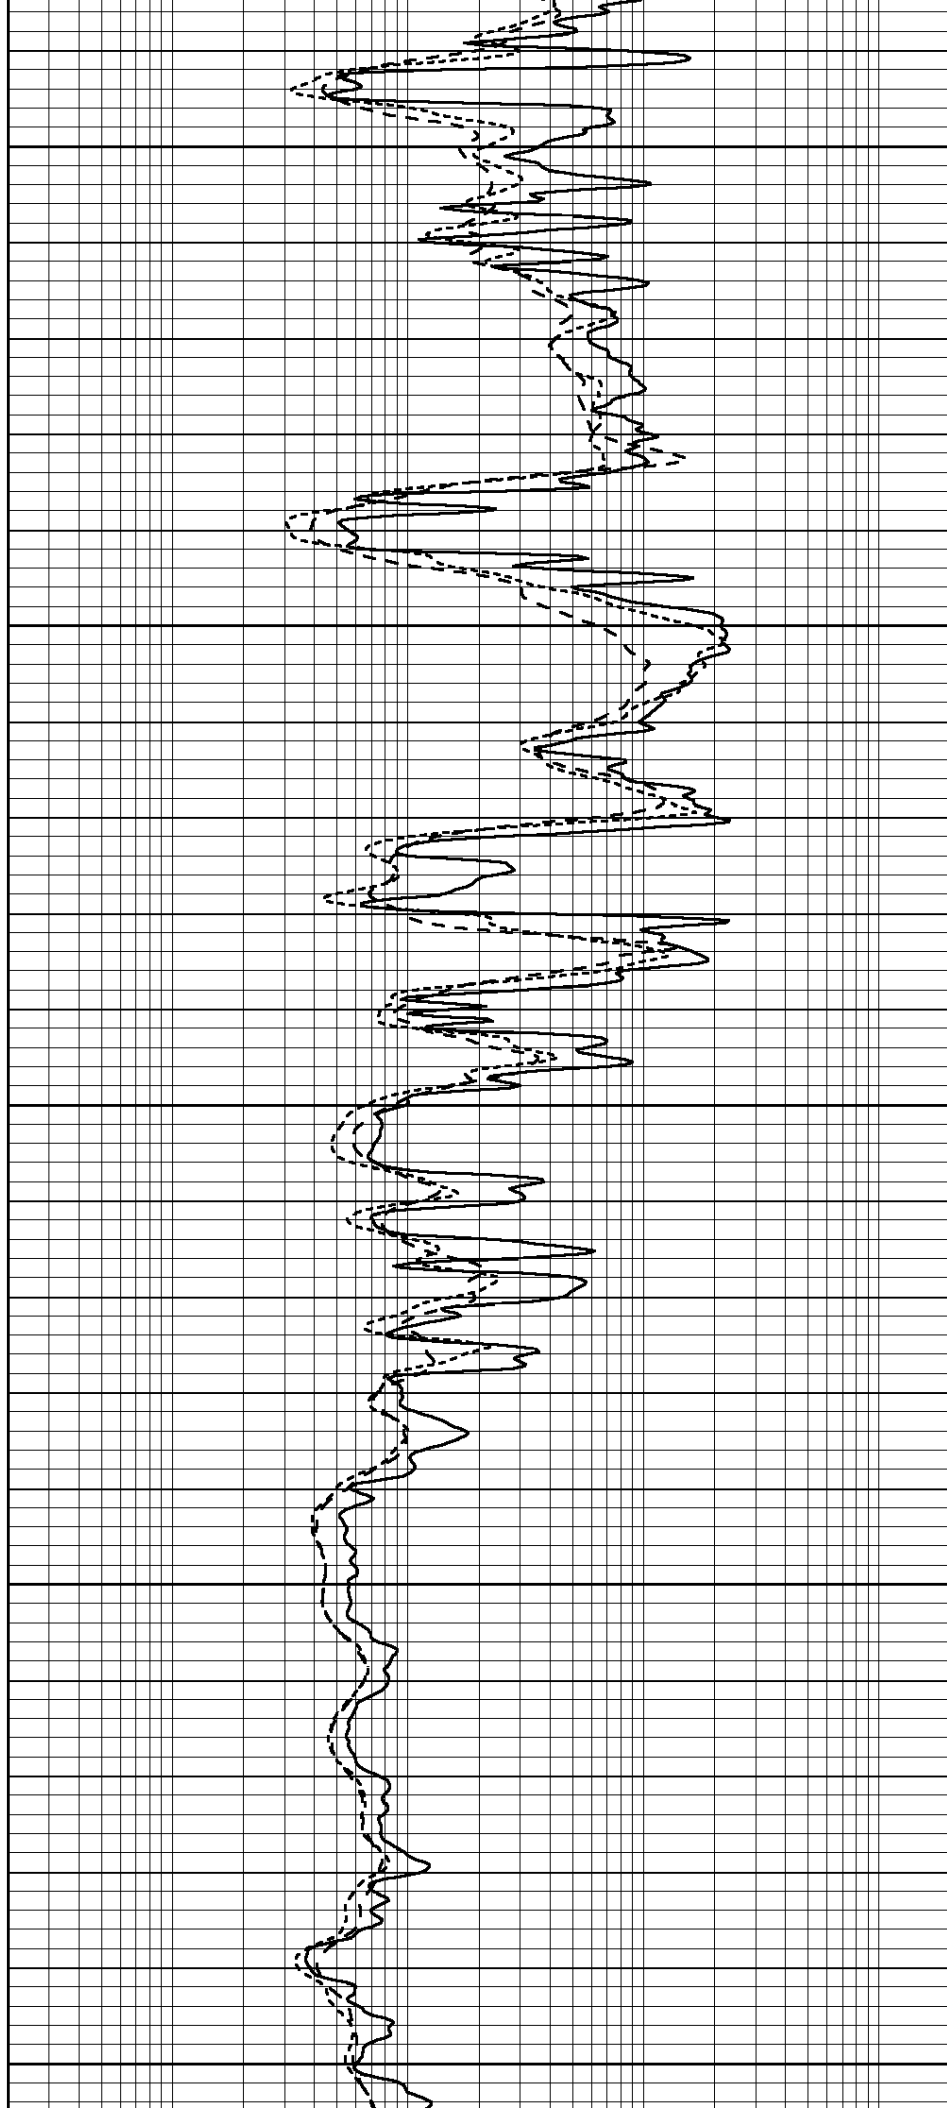

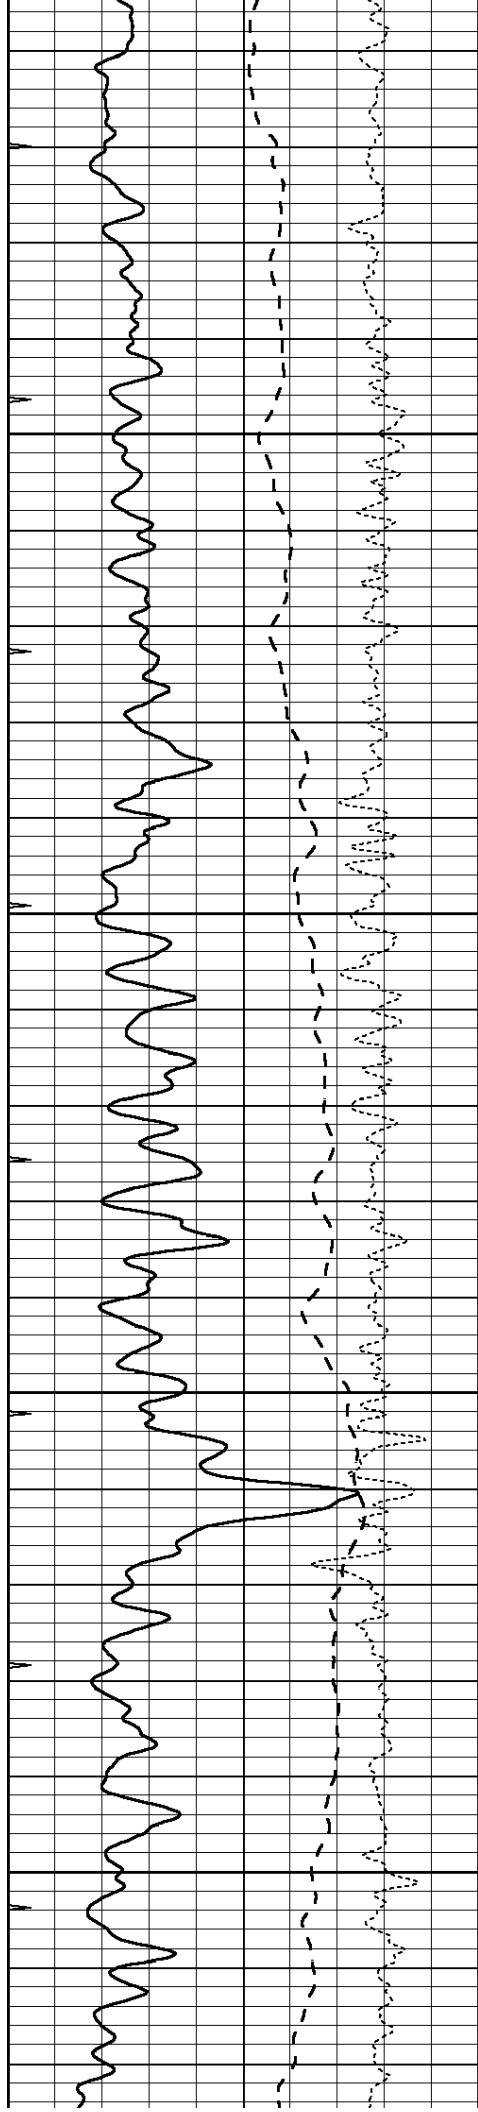



3750

3800

3850

3900

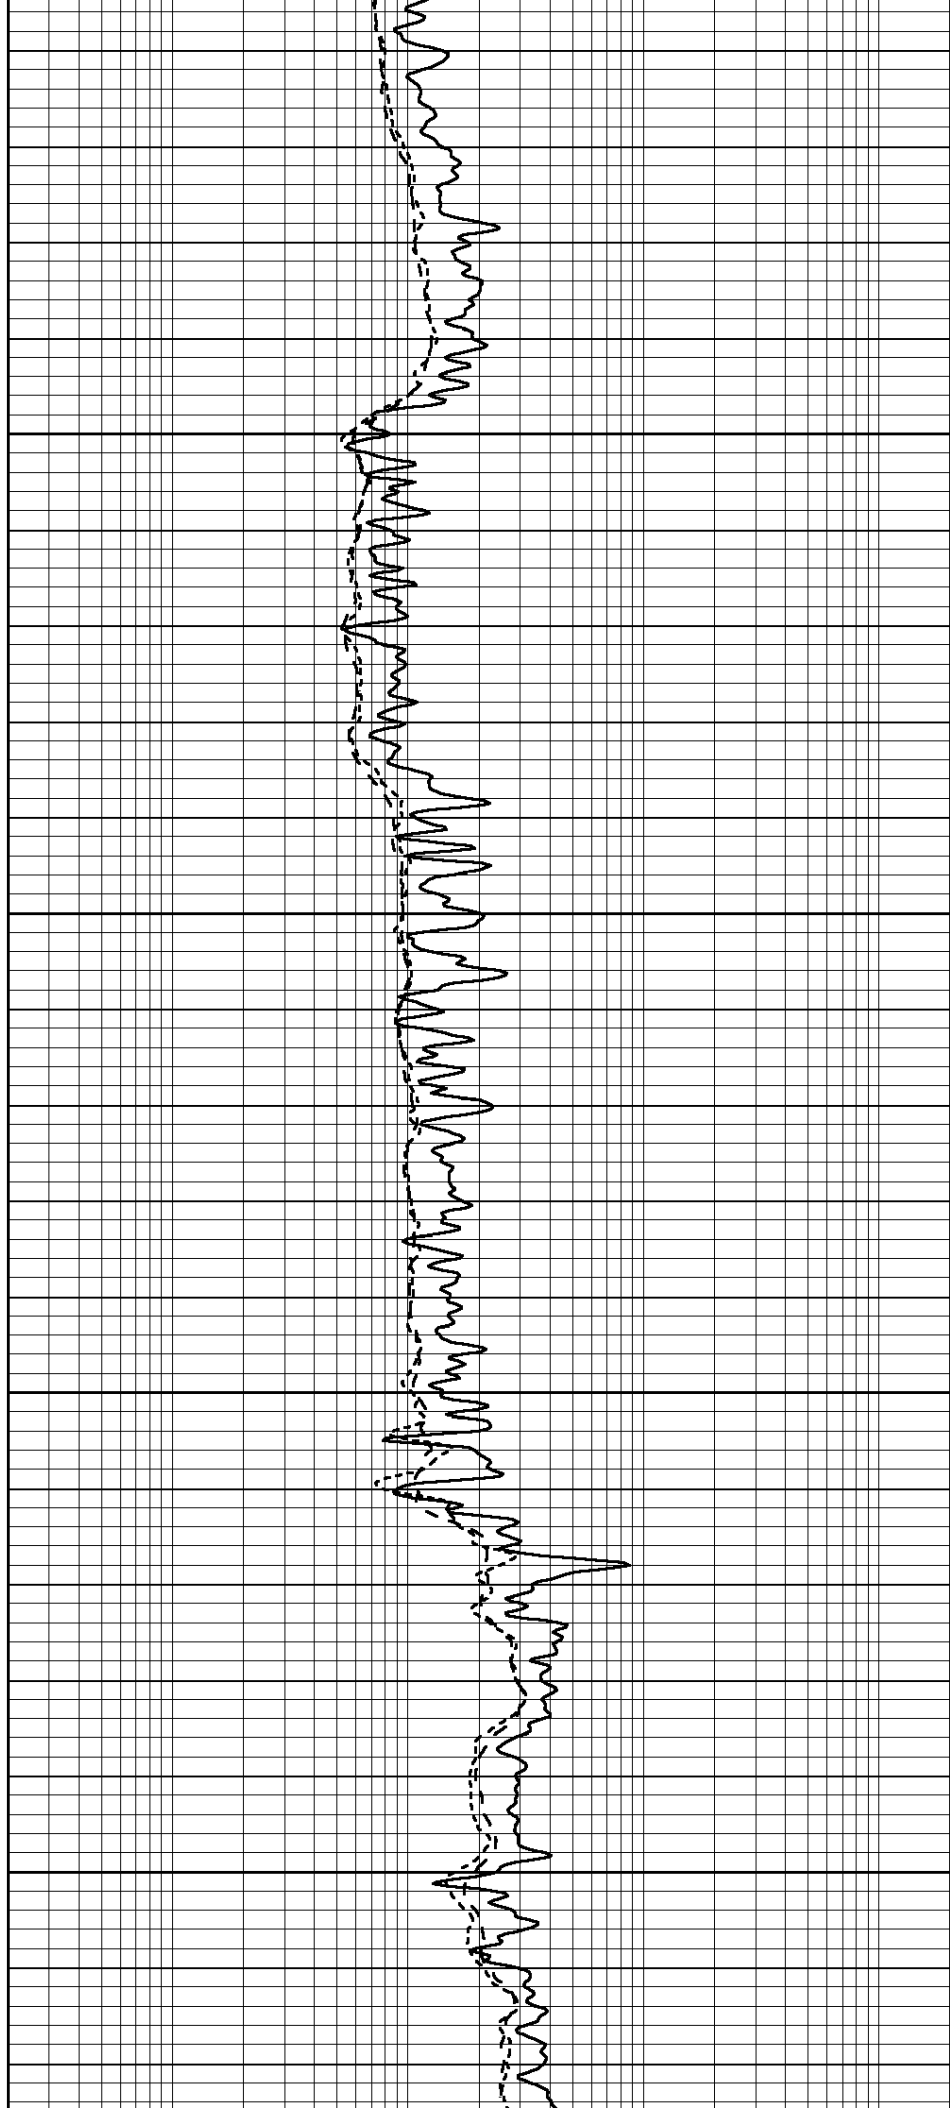

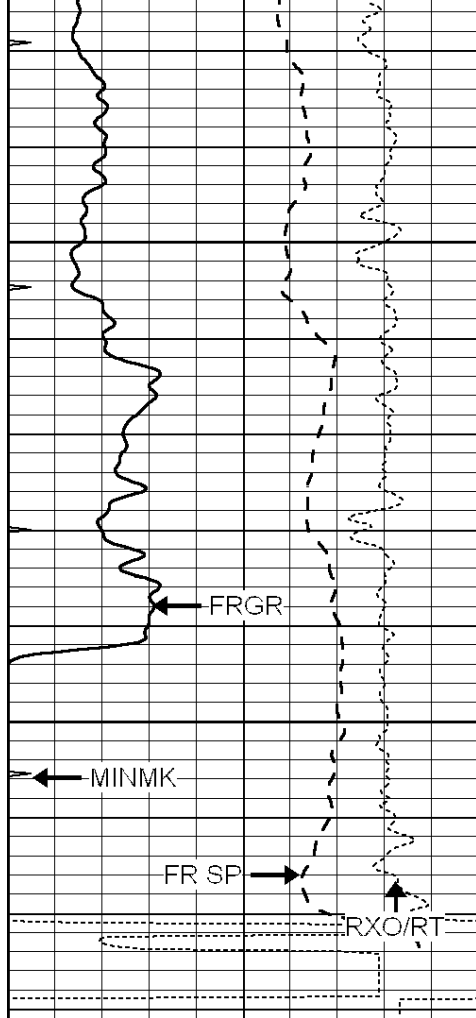


3950


4000

LTD 4026

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

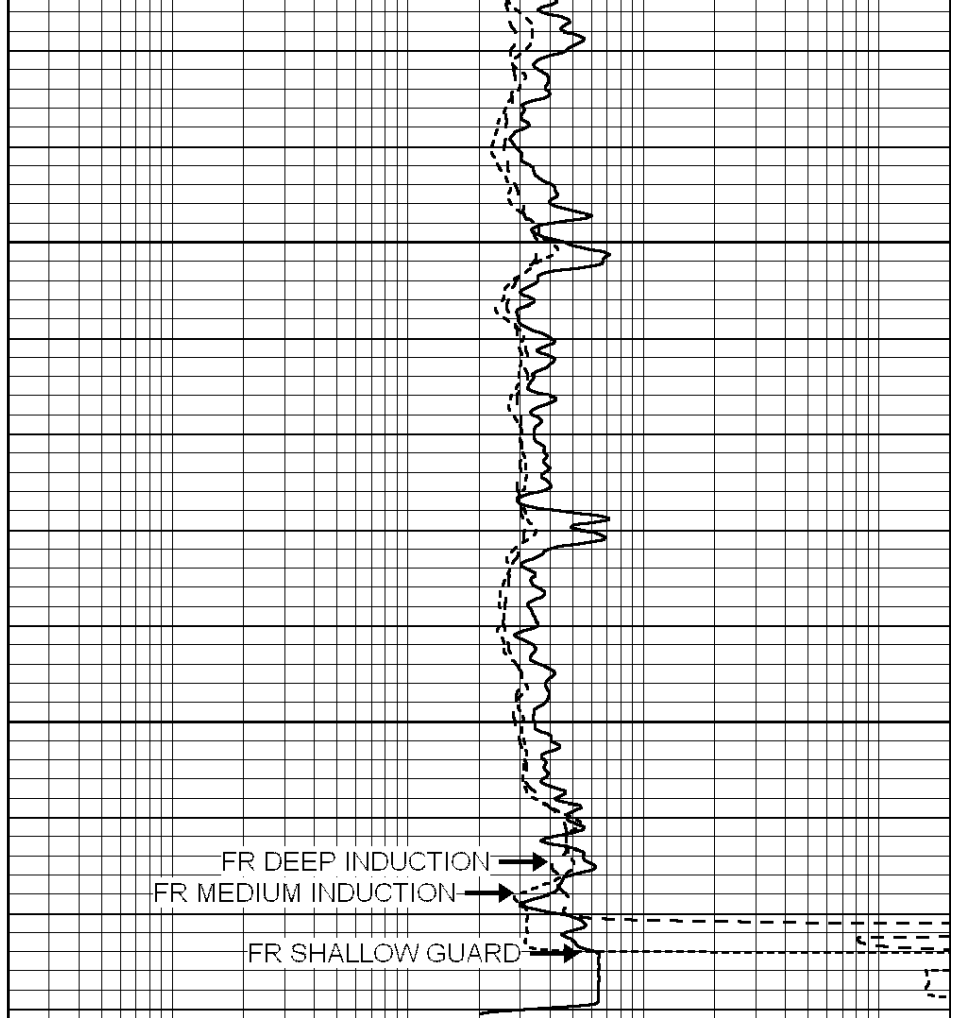

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

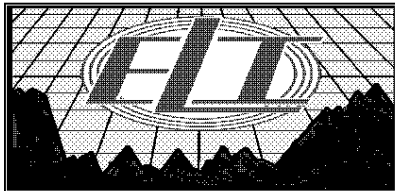


REPEAT SECTION


Database File: 2674pe.db
 Dataset Pathname: pass2.5
 Presentation Format: _dil
 Dataset Creation: Tue Aug 14 23:20:30 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

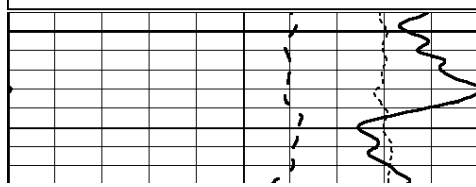

3650

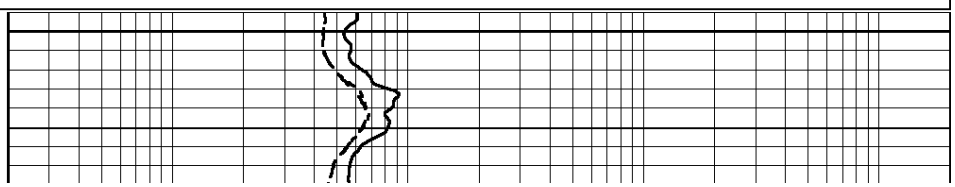

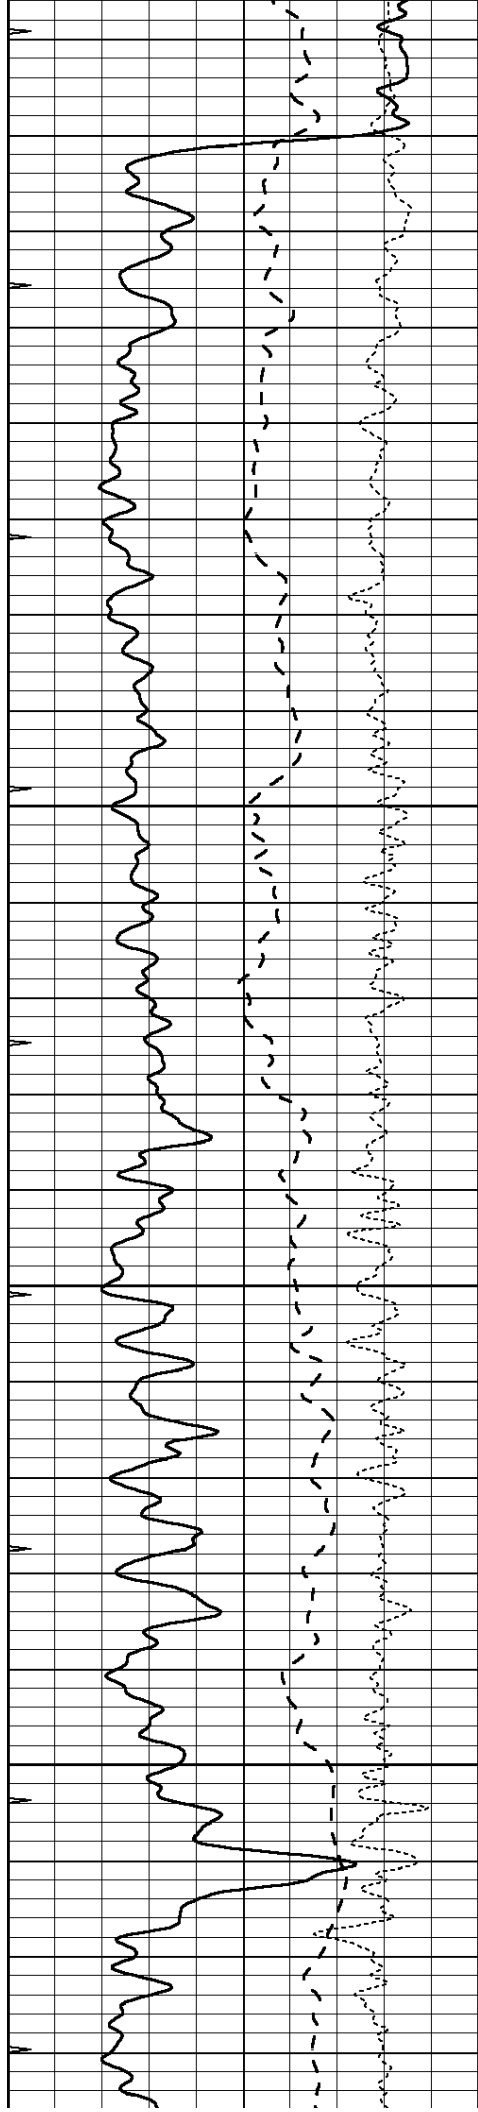



3700

3750

3800

3850

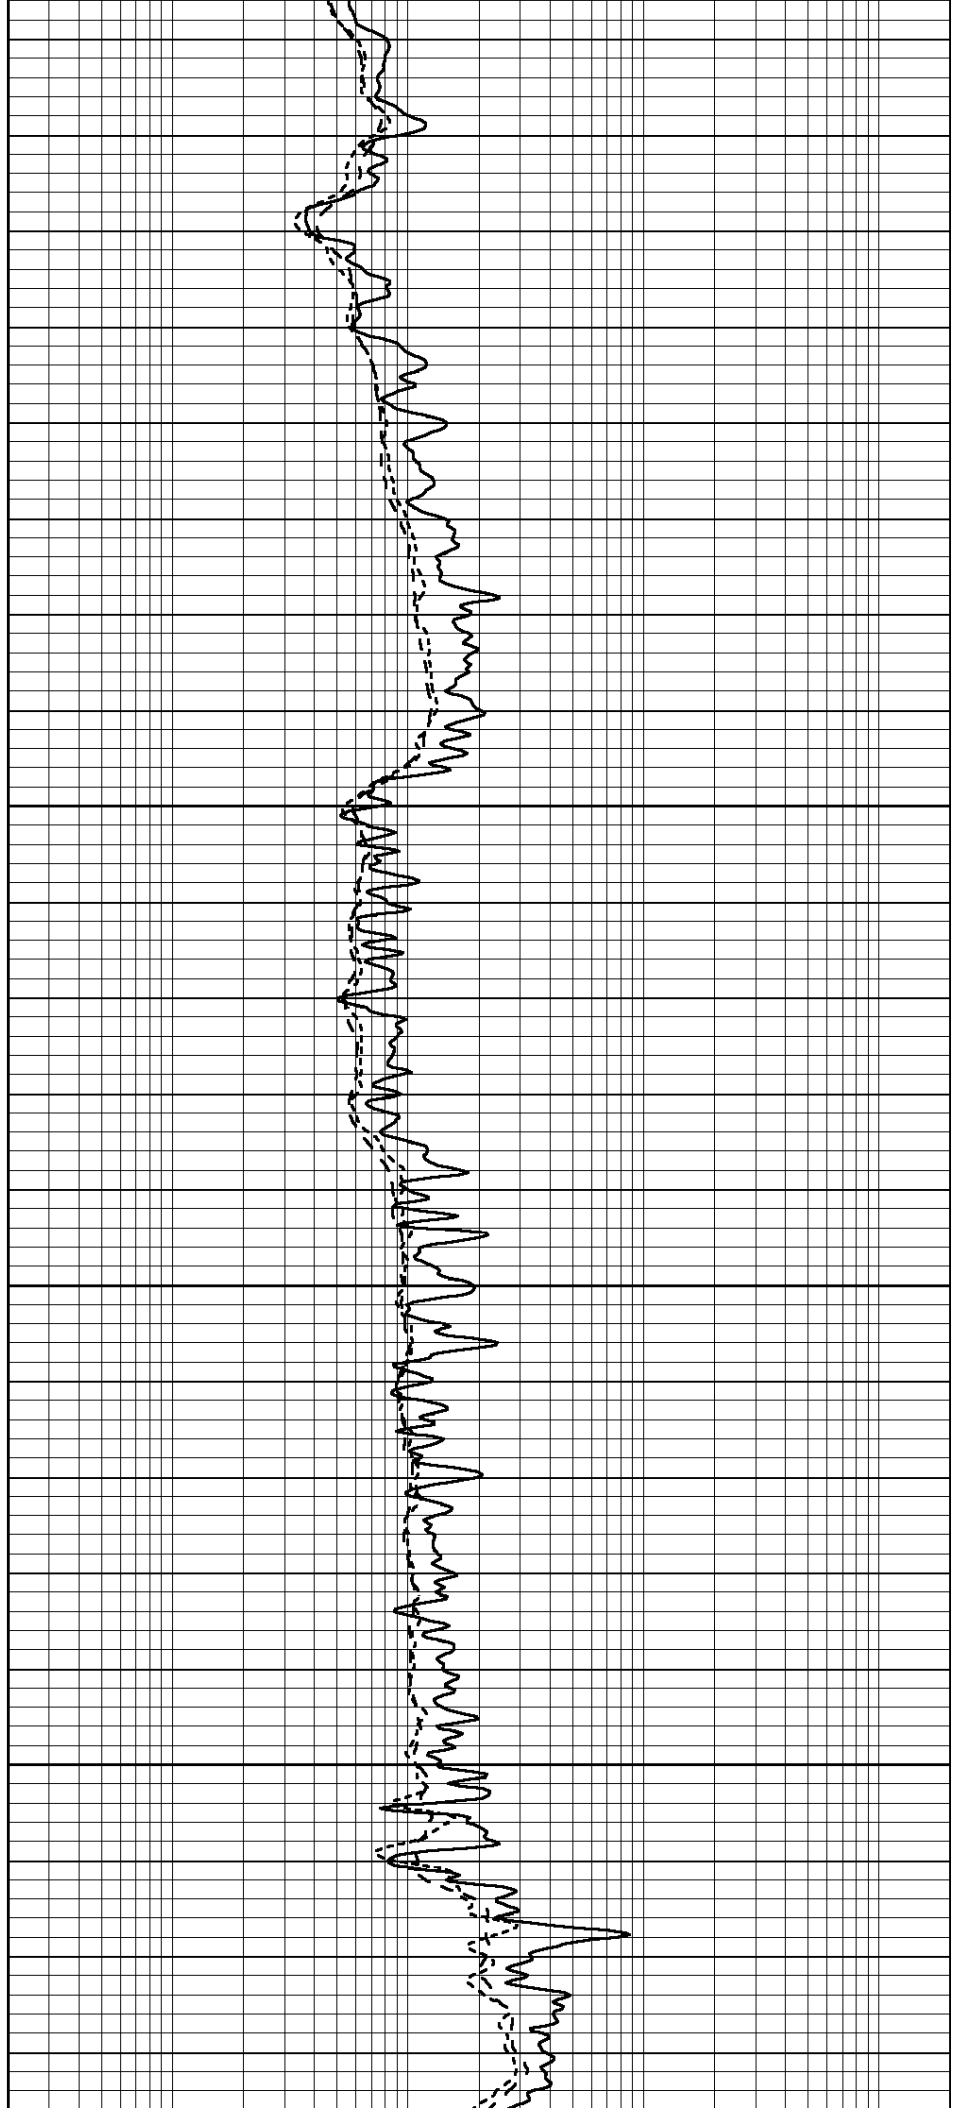


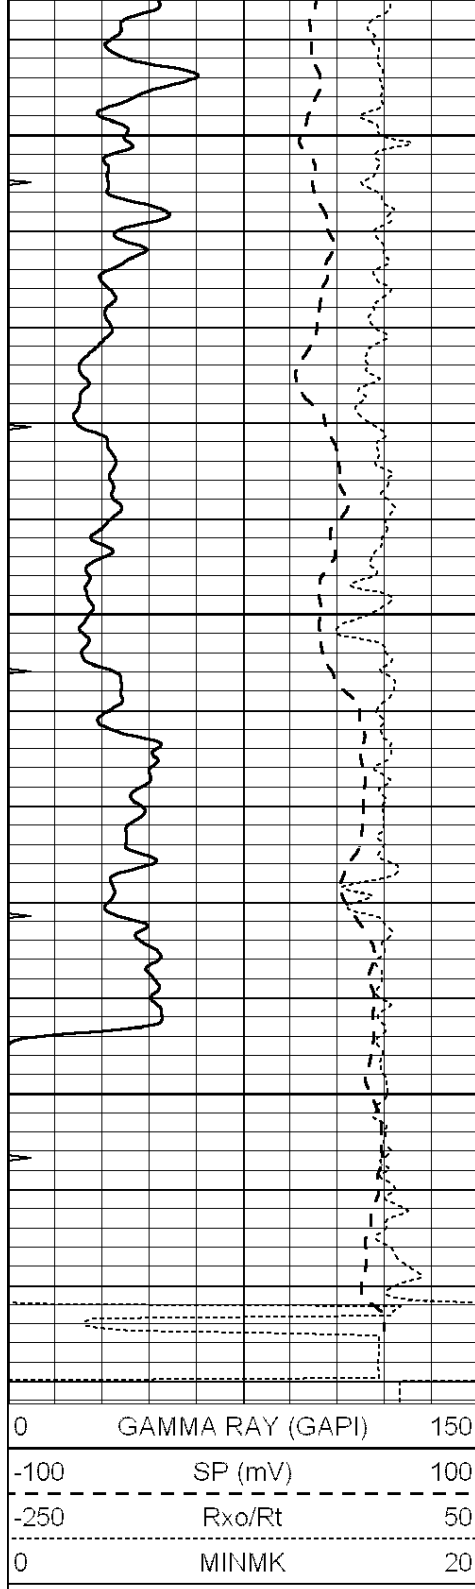

3900

3950

4000

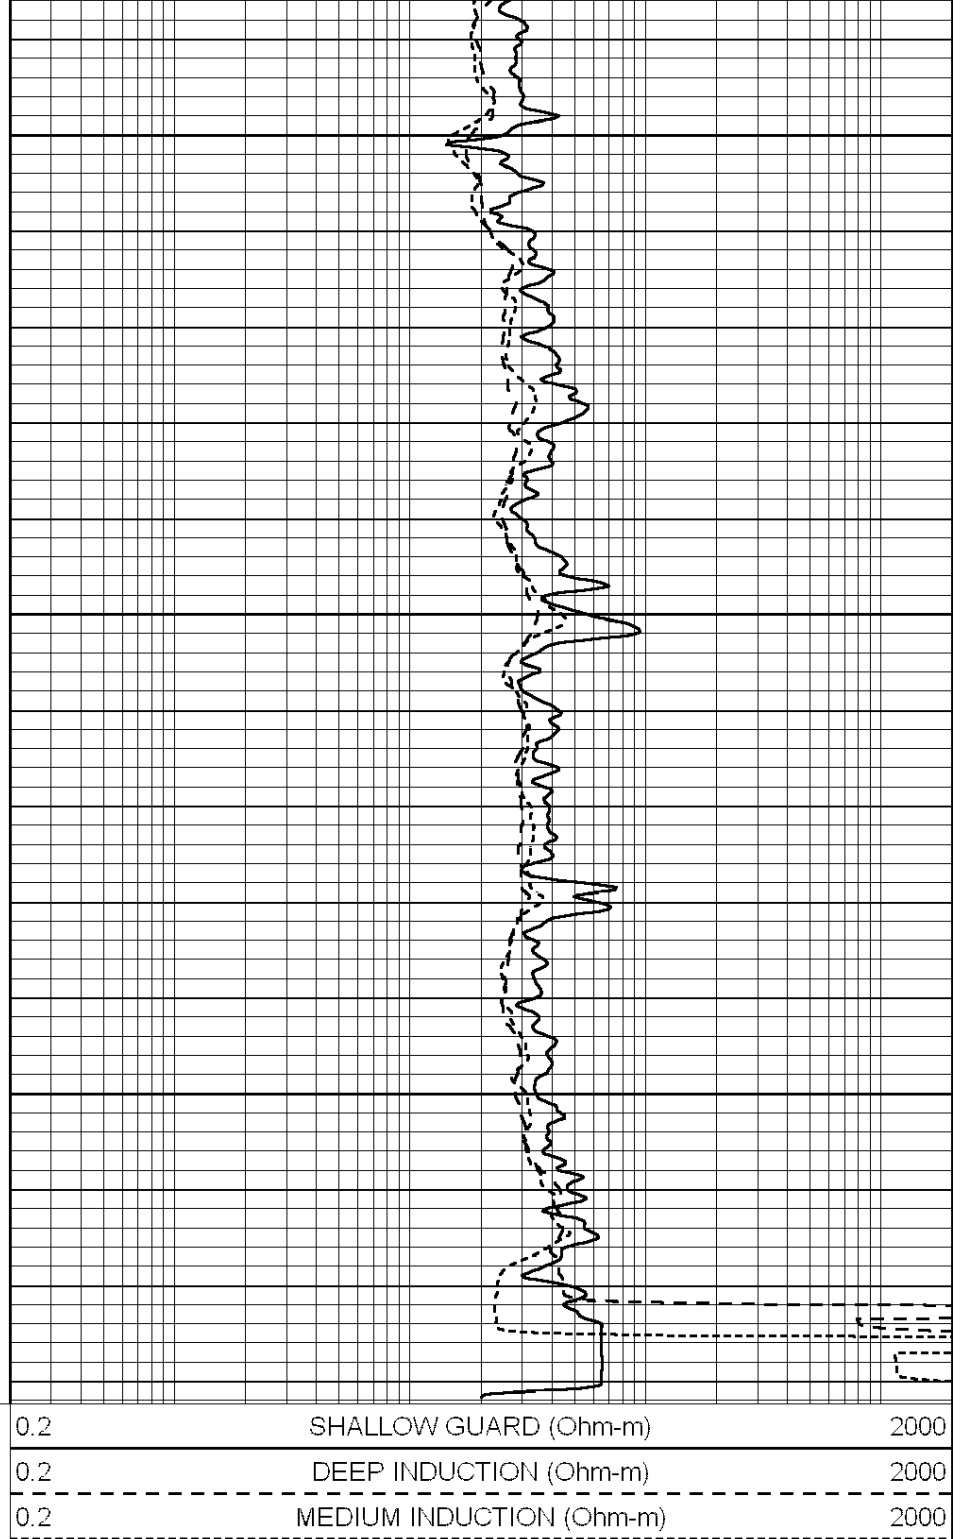

Calibration Report

Database File: 1598ddn.db
Dataset Pathname: pass4
Dataset Creation: Wed Aug 30 02:13:00 2017 by Log SOC 120430

Dual Induction Calibration Report

Serial-Model: PROBE7-DILG
Surface Cal Performed: Wed Aug 30 00:06:33 2017
Downhole Cal Performed: Mon Jul 28 12:02:56 2008
After Survey Verification Performed: Mon Jul 28 12:02:56 2008

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-44.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration								
Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification								
Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report								
Serial: 002			Model: PRB					

Master Calibration				Performed Mon Aug 21 11:27:42 2017				
	Background	Magnesium		Aluminum		Sandstone		
Window 1	837.1	10632.5		2945.1		12110.1		cps
Window 2	772.0	9117.4		2570.1		10197.3		cps
Window 3	631.7	4669.0		1481.9		5042.9		cps
Window 4	187.0	187.5		185.9		189.9		cps
Long Space	0.0	8345.4		1798.1		9425.3		cps
Short Space	1.1	1927.9		1285.9		2050.2		cps
Rho		1.7100		2.5960		1.3800		g/cc
Pe		0.0000		2.5700		1.5500		
Rib Angle	: 45.2	Rib Slope	: 1.008	Density/Spine Ratio			: 0.558	
Spine Angle	: 75.2	Spine Slope	: 3.790	Spine Intercept			: -19.6	

Before Survey Verification				Performed Wed Dec 31 18:00:00 1969				
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps
Measured Rho		0.0000		0.0000		0.0000		g/cc
Measured Correction		0.0000		0.0000		0.0000		g/cc
Measured Pe				0.0000		0.0000		

After Survey Verification				Performed Wed Dec 31 18:00:00 1969				
---------------------------	--	--	--	------------------------------------	--	--	--	--

Window 1					
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	
Compensated Neutron Calibration Report					
Serial Number:		070808			
Tool Model:		Probe			
PRE-SURVEY VERIFICATION					
Detector	Readings	Measured		Target	
Short Space	cps				
Long Space	cps	pu		pu	
POST-SURVEY VERIFICATION					
Detector	Readings	Measured		Target	
Short Space	cps				
Long Space	cps	pu		pu	
Gamma Ray Calibration Report					
Serial Number:		070558			
Tool Model:		OPEN_GR			
Performed:		Wed May 31 00:09:32 2017			
Calibrator Value:		1.0	GAPI		
Background Reading:		0.0	cps		
Calibrator Reading:		1.0	cps		
Sensitivity:		0.2800	GAPI/cps		