



COMPENSATED
DENSITY / NEUTRON
PE LOG


Company		DIXON OPERATING COMPANY, LLC.	
Well		#3-34 POUND	
Field		MIKES METEOR	
County		STAFFORD	
State		KANSAS	
Location:		APL # : 15-185-24026-0000 330' FSL & 2310' FEL SW - SW - SE	
Permanent Datum		GROUND LEVEL	
Log Measured From		KELLY BUSHING 11' A.G.L.	
Drilling Measured From		KELLY BUSHING	
SEC 34 TWP 22S RGE 12W		Elevation K.B. 1843 D.F. 1841 G.L. 1832	
Date	8/14/18		
Run Number	ONE		
Depth Driller	4027		
Depth Logger	4026		
Bottom Logged Interval	4002		
Top Log Interval	2800		
Casing Driller	8 5/8"@310'		
Casing Logger	306		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 9,100 PPM	
Density / Viscosity	9.4/76		
pH / Fluid Loss	10.5/10.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.400@90F		
Rmf @ Meas. Temp	.300@90F		
Rmc @ Meas. Temp	.480@90F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.310@116F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	9:30 P.M.		
Maximum Recorded Temperature	116F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	CHUCK SCHMALTZ		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
HUDSON, KS., 2E. TO "NE 70TH", 3/4S., W. INTO AT LEASE RD.

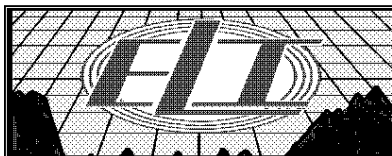


MAIN SECTION

Database File: 2674pe.db
Dataset Pathname: pass3.6
Presentation Format: ldt_neu
Dataset Creation: Tue Aug 14 22:57:25 2018 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)				-10	
6	CALIPER (in)	16	10 (ft3)	0	30	COMPENSATED NEUTRON (pu)				-10
0	MINMK	20	TBHV	0	PE	10	-0.25	CORRECTION (g/cc)	0.25	
			0 (ft3)	10						

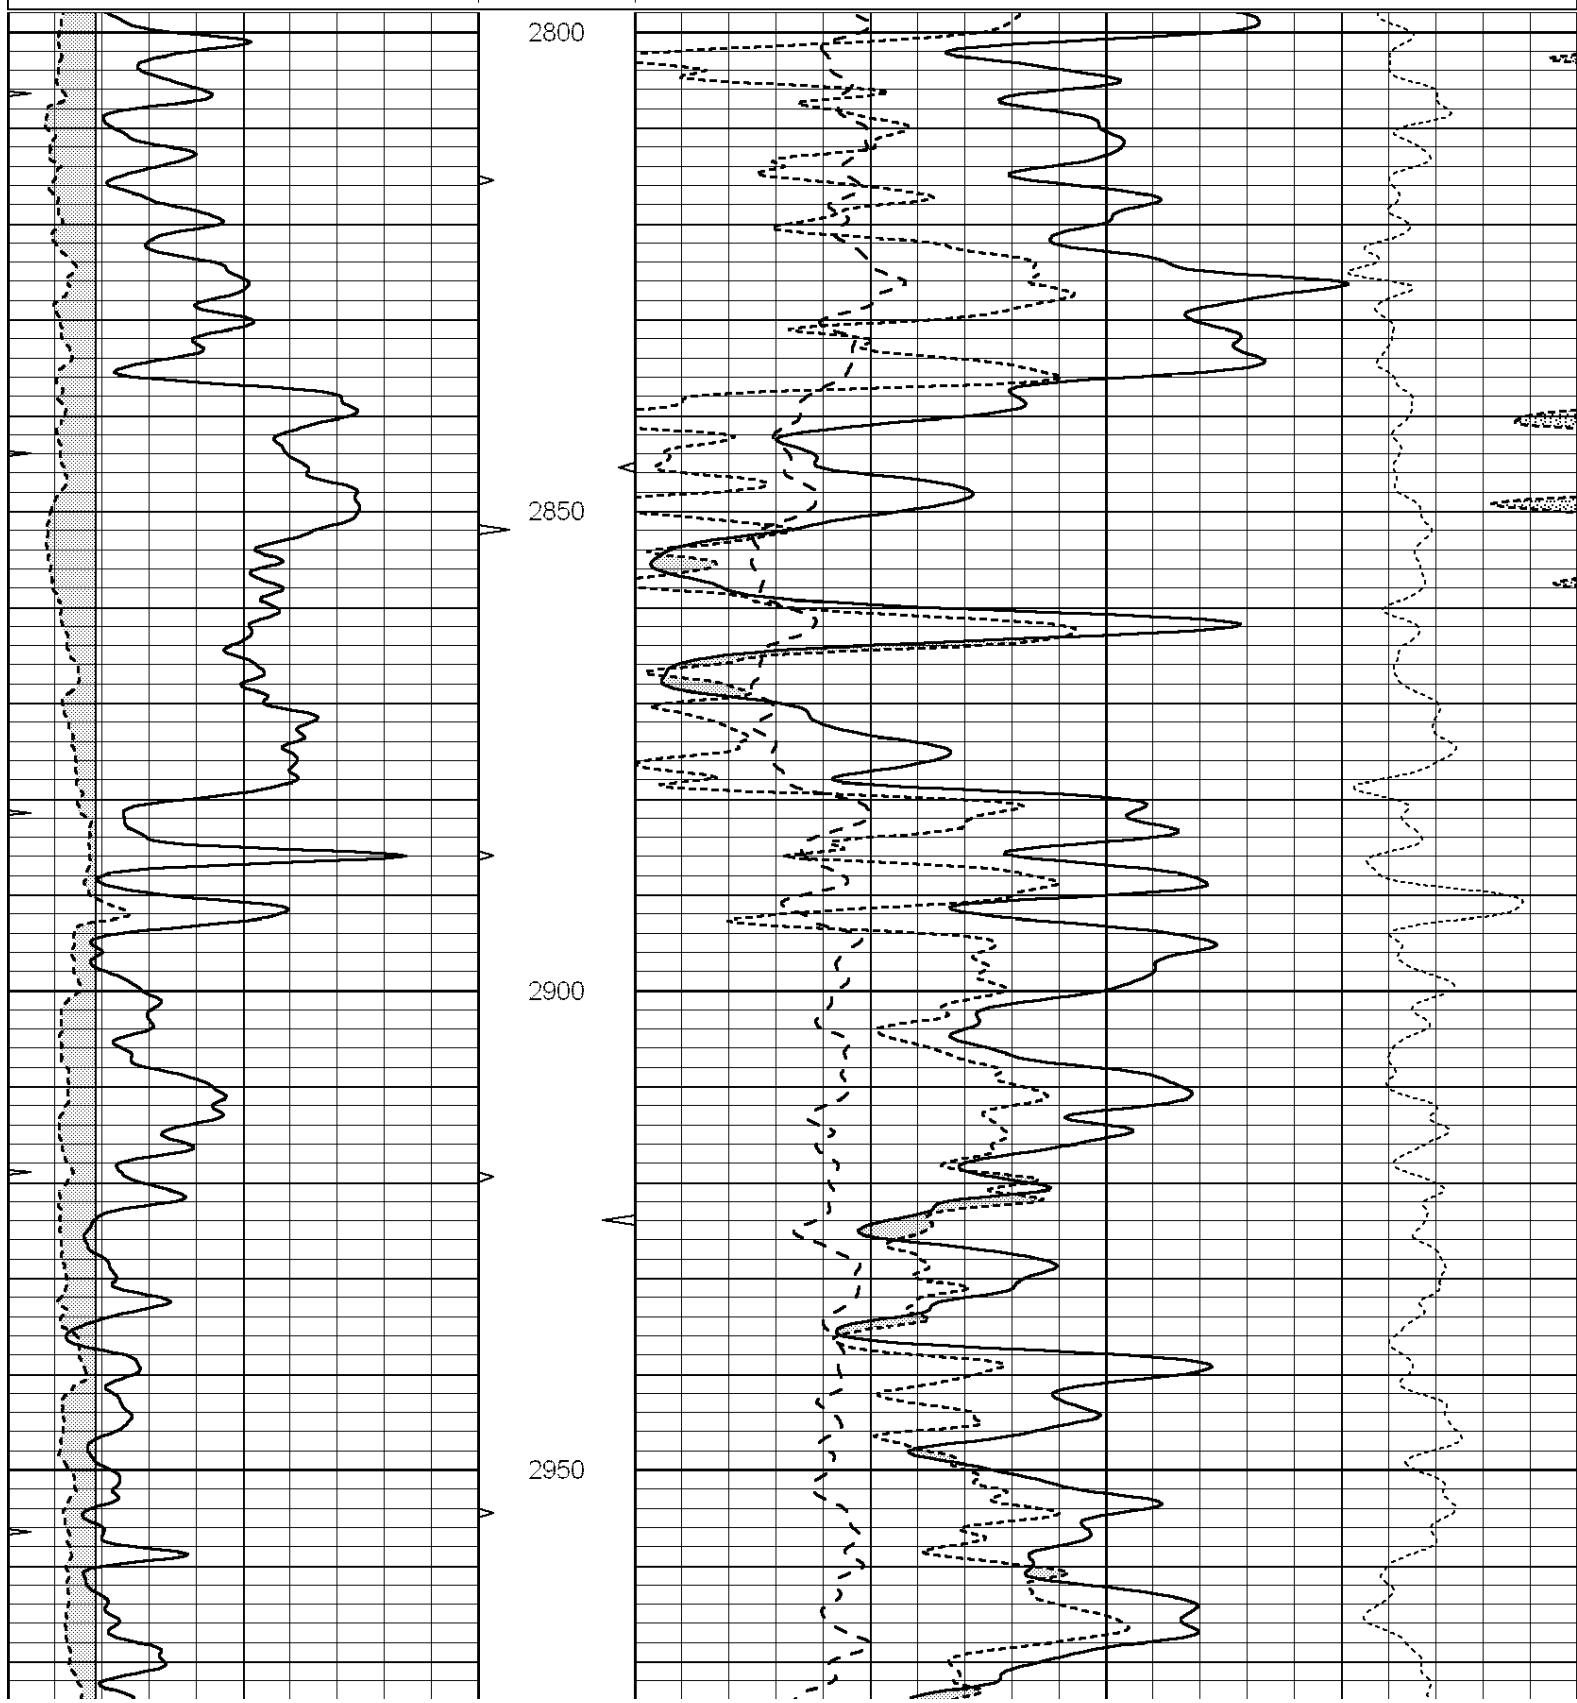

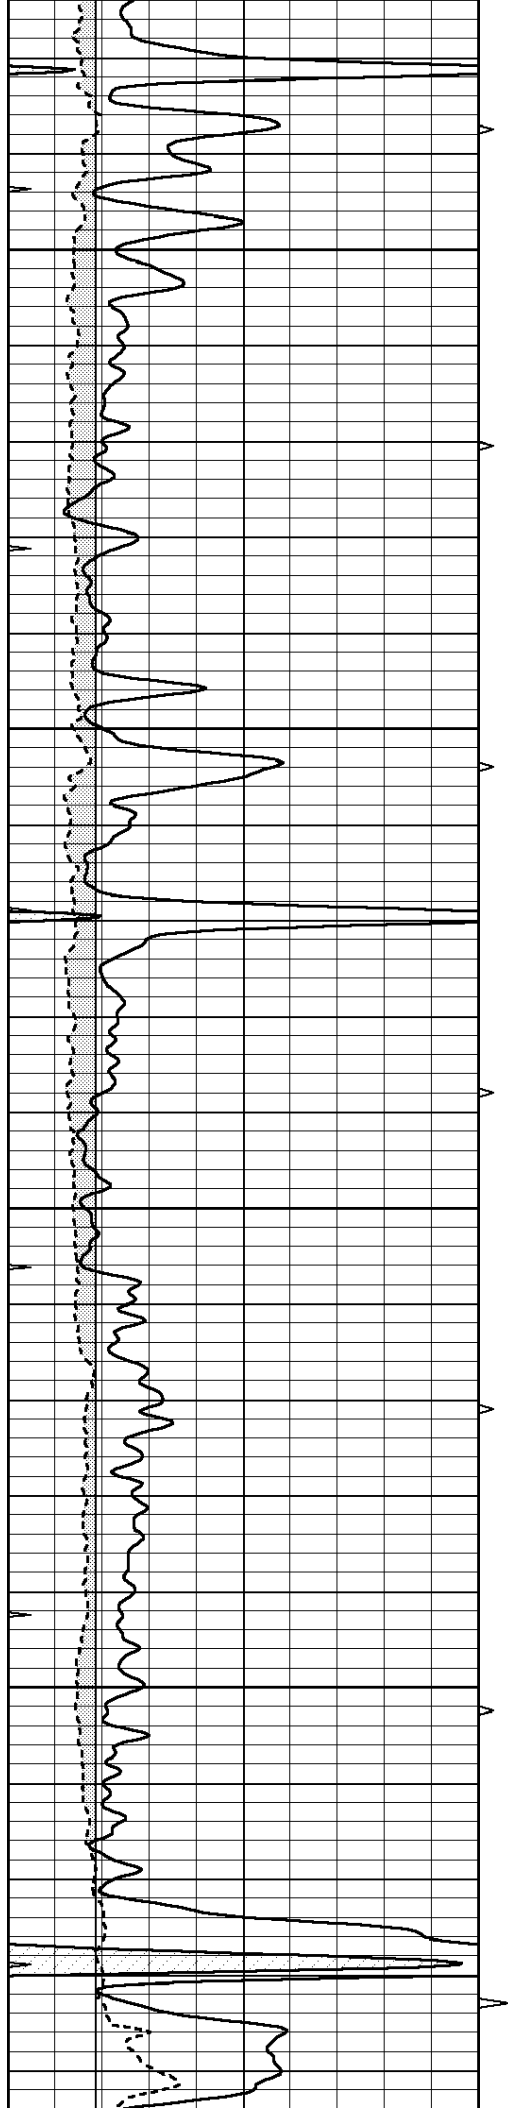



3000

3050

3100

3150

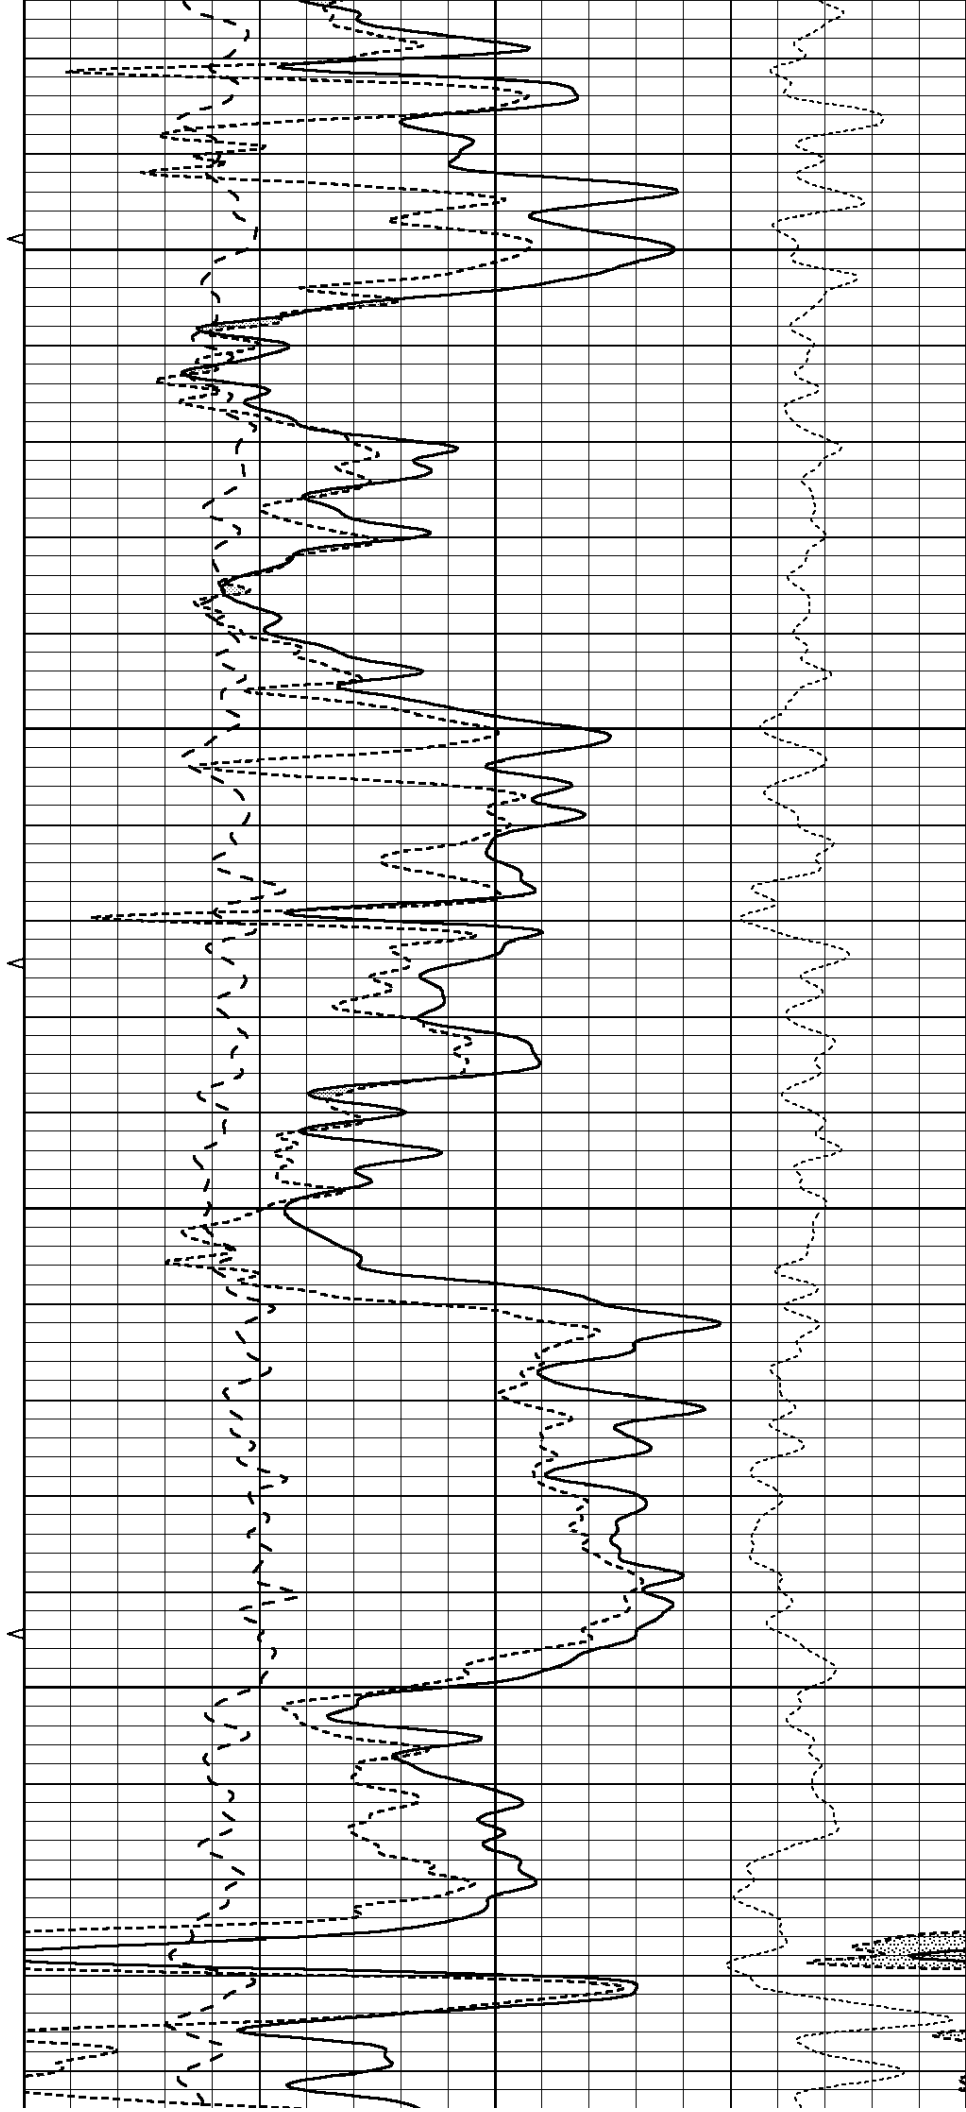

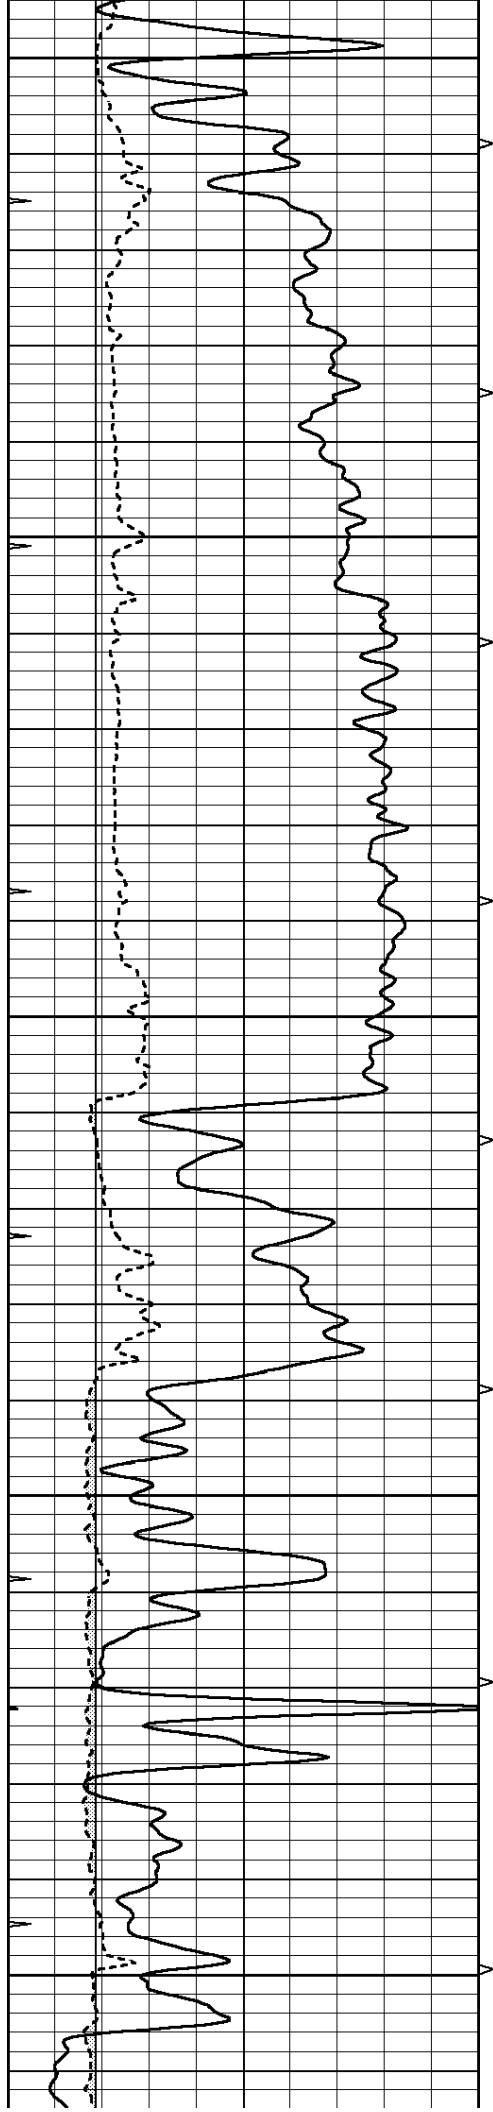


3200


3250


3300


3350

3400

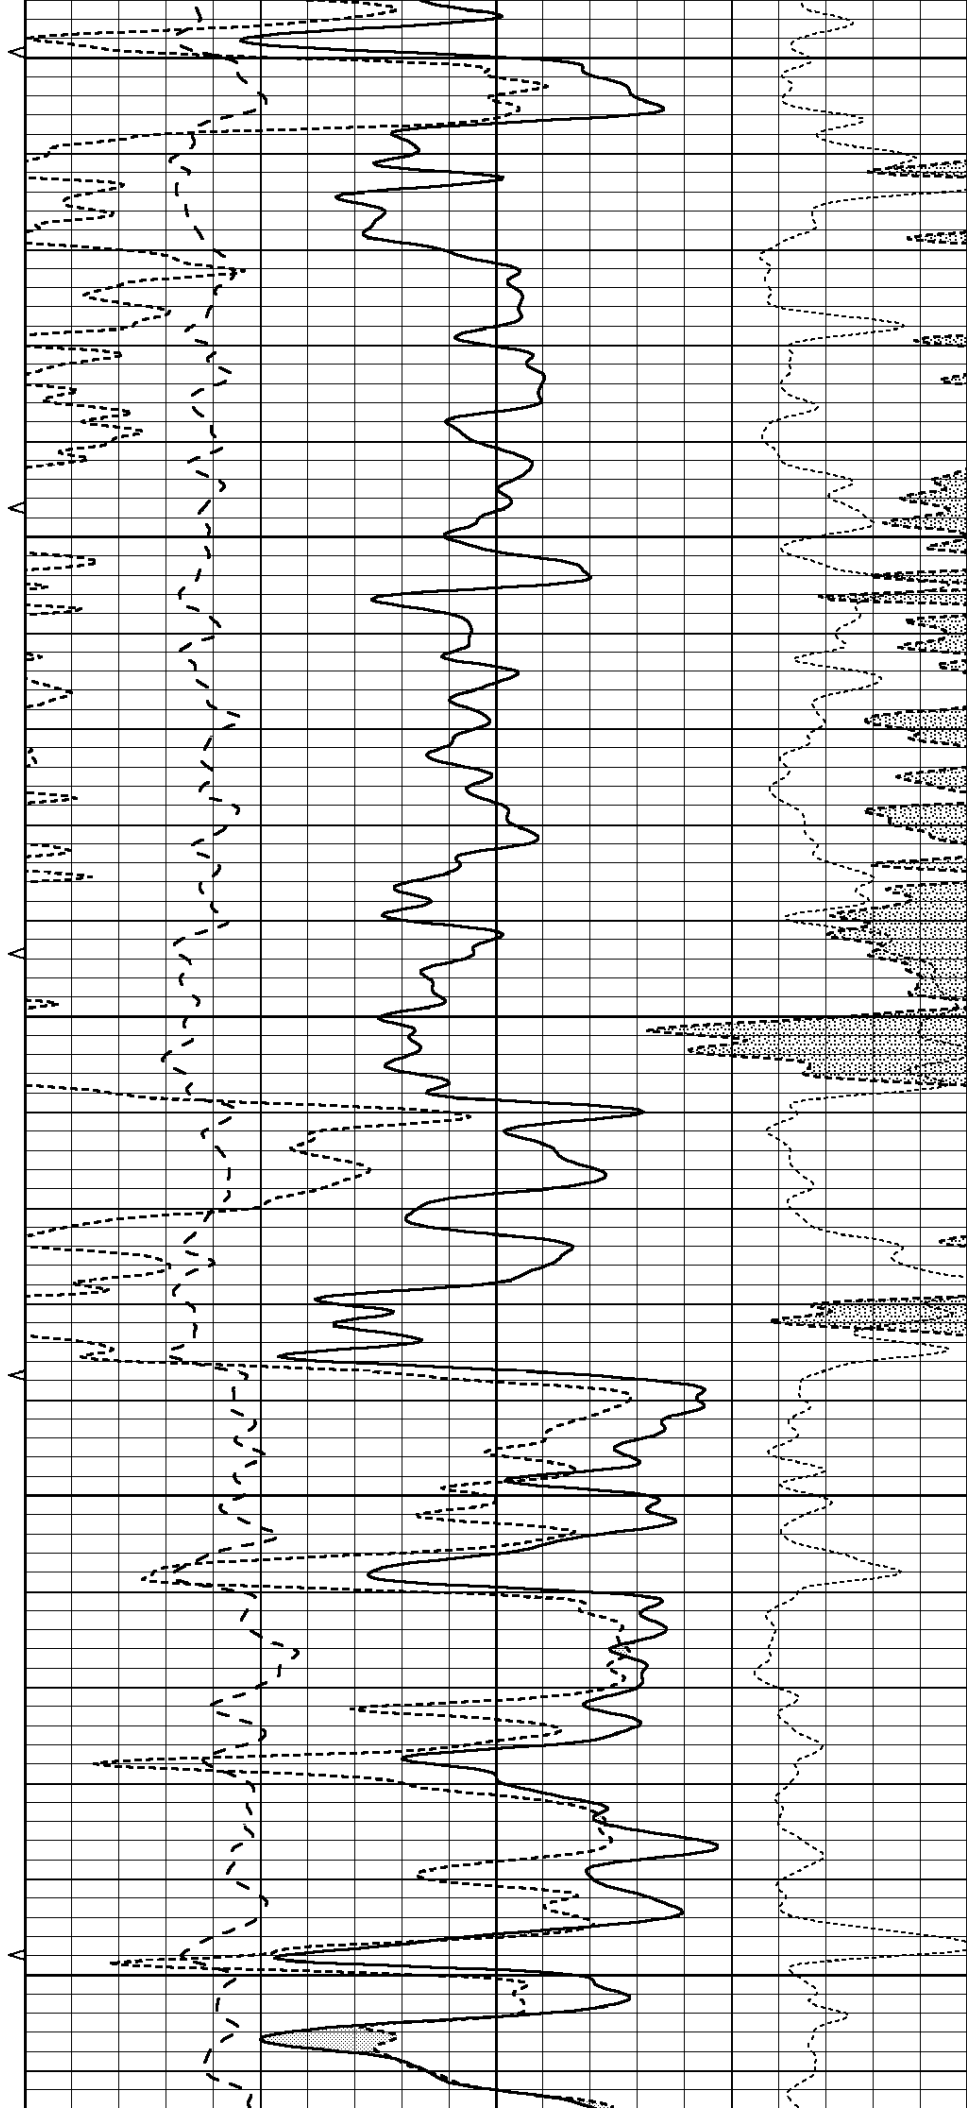

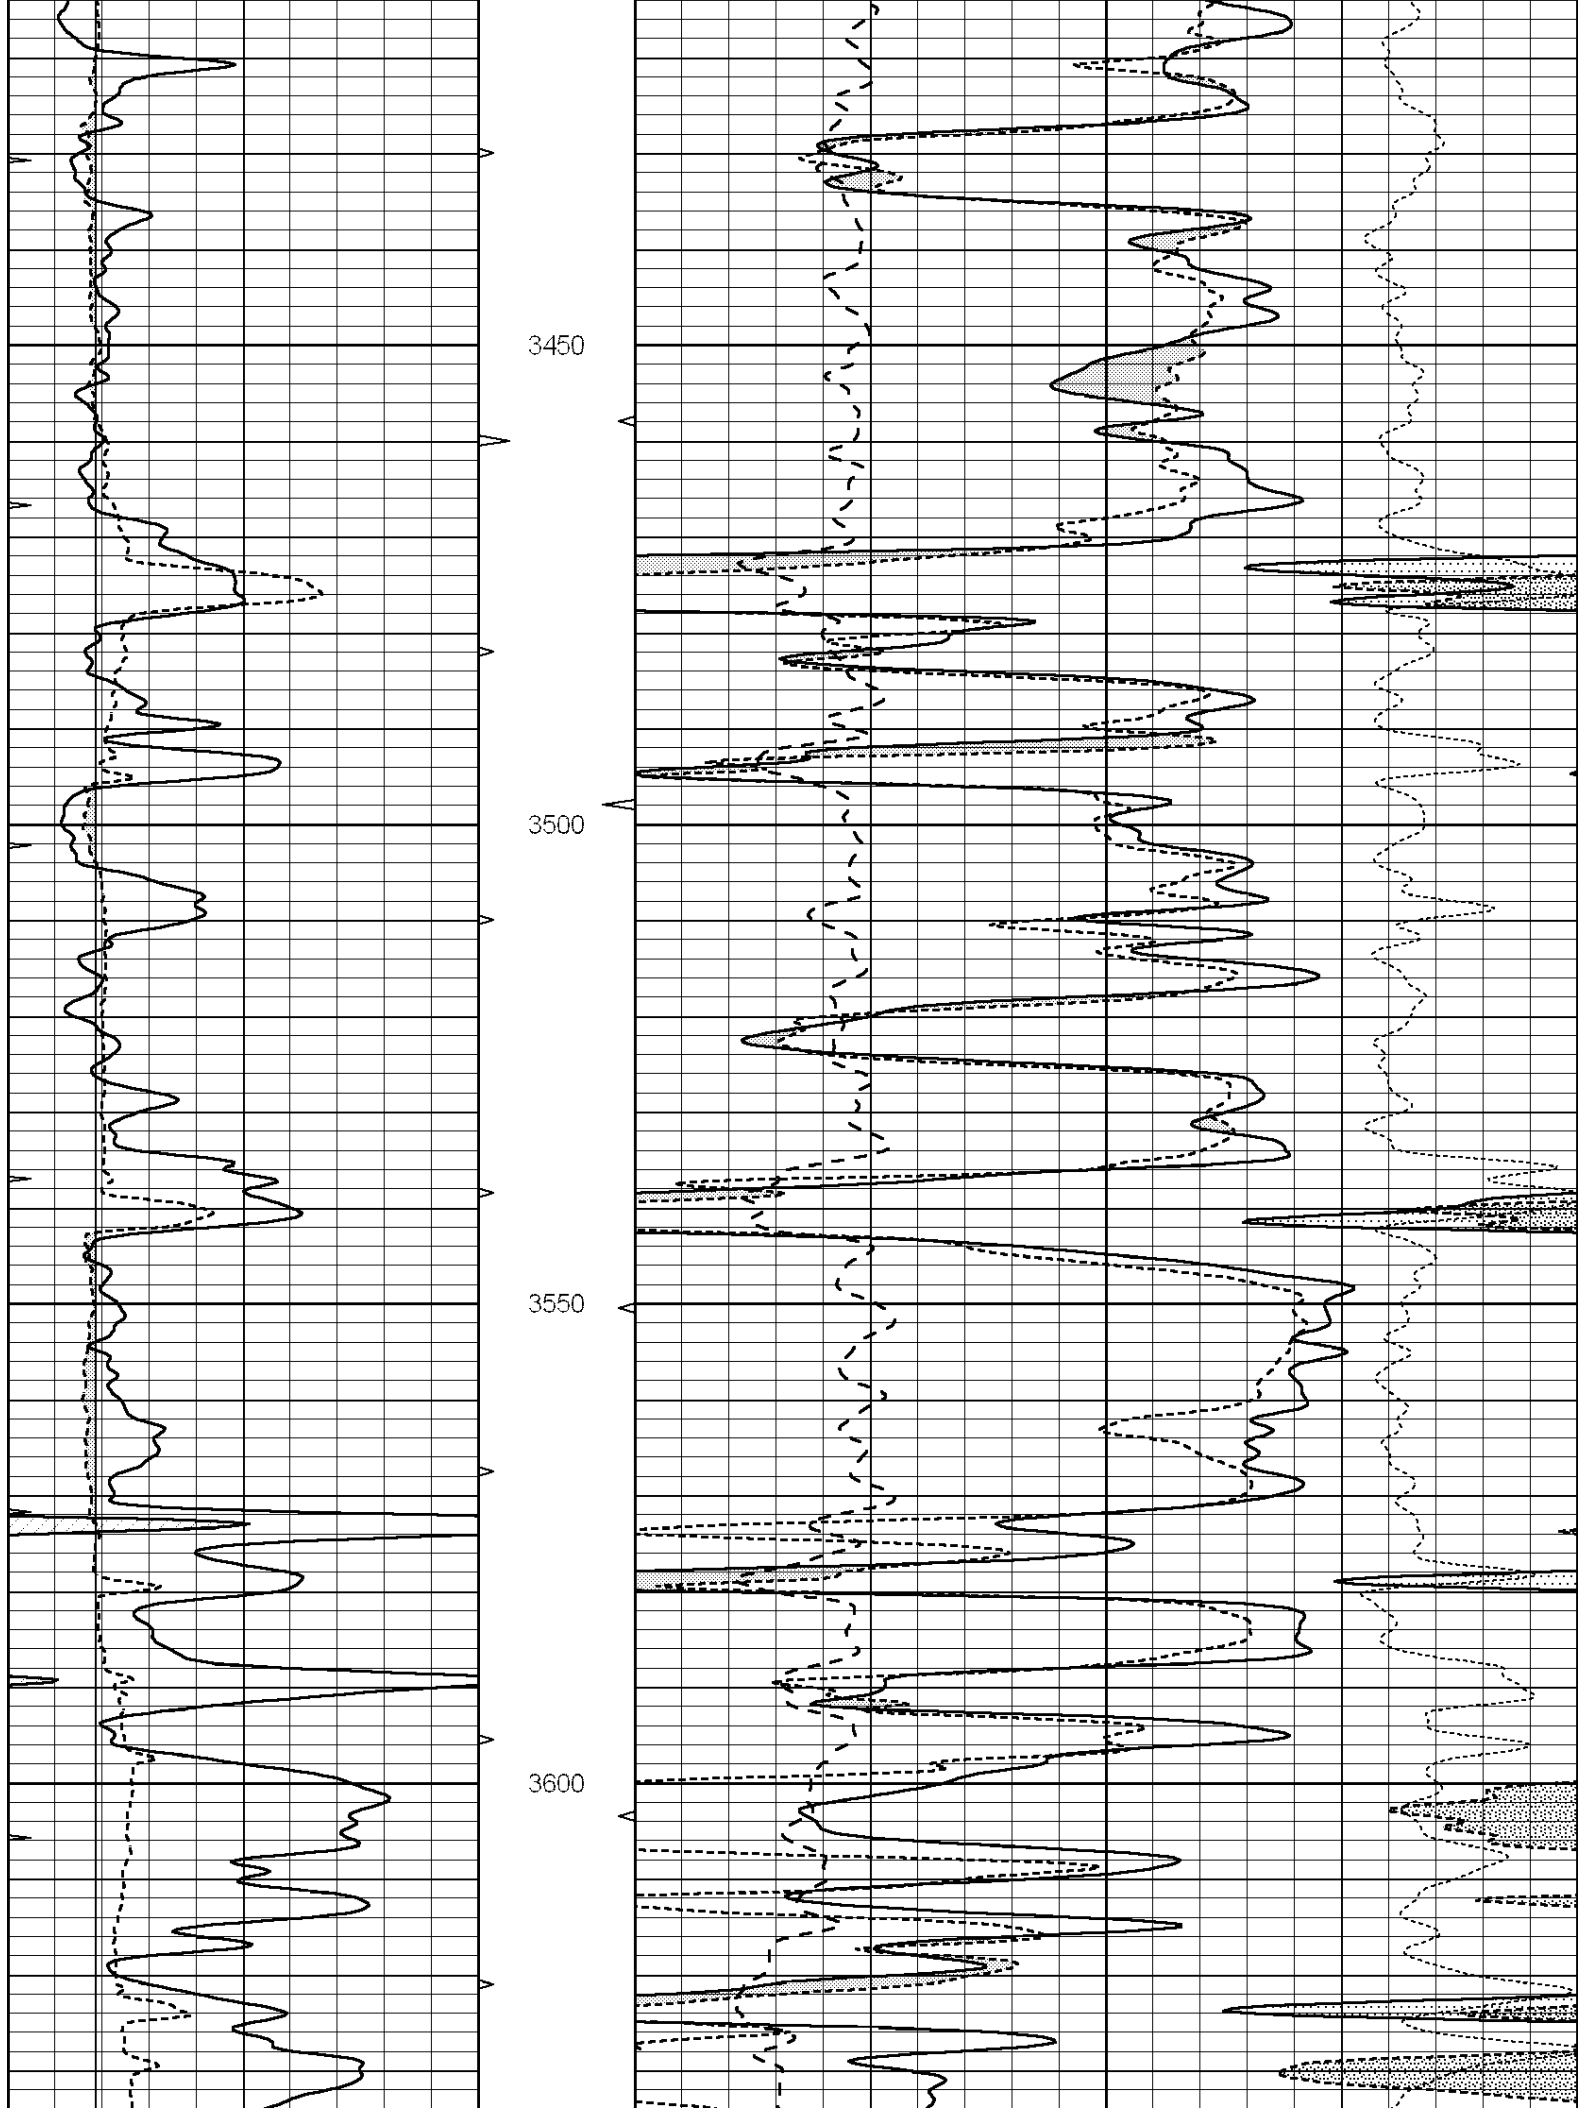

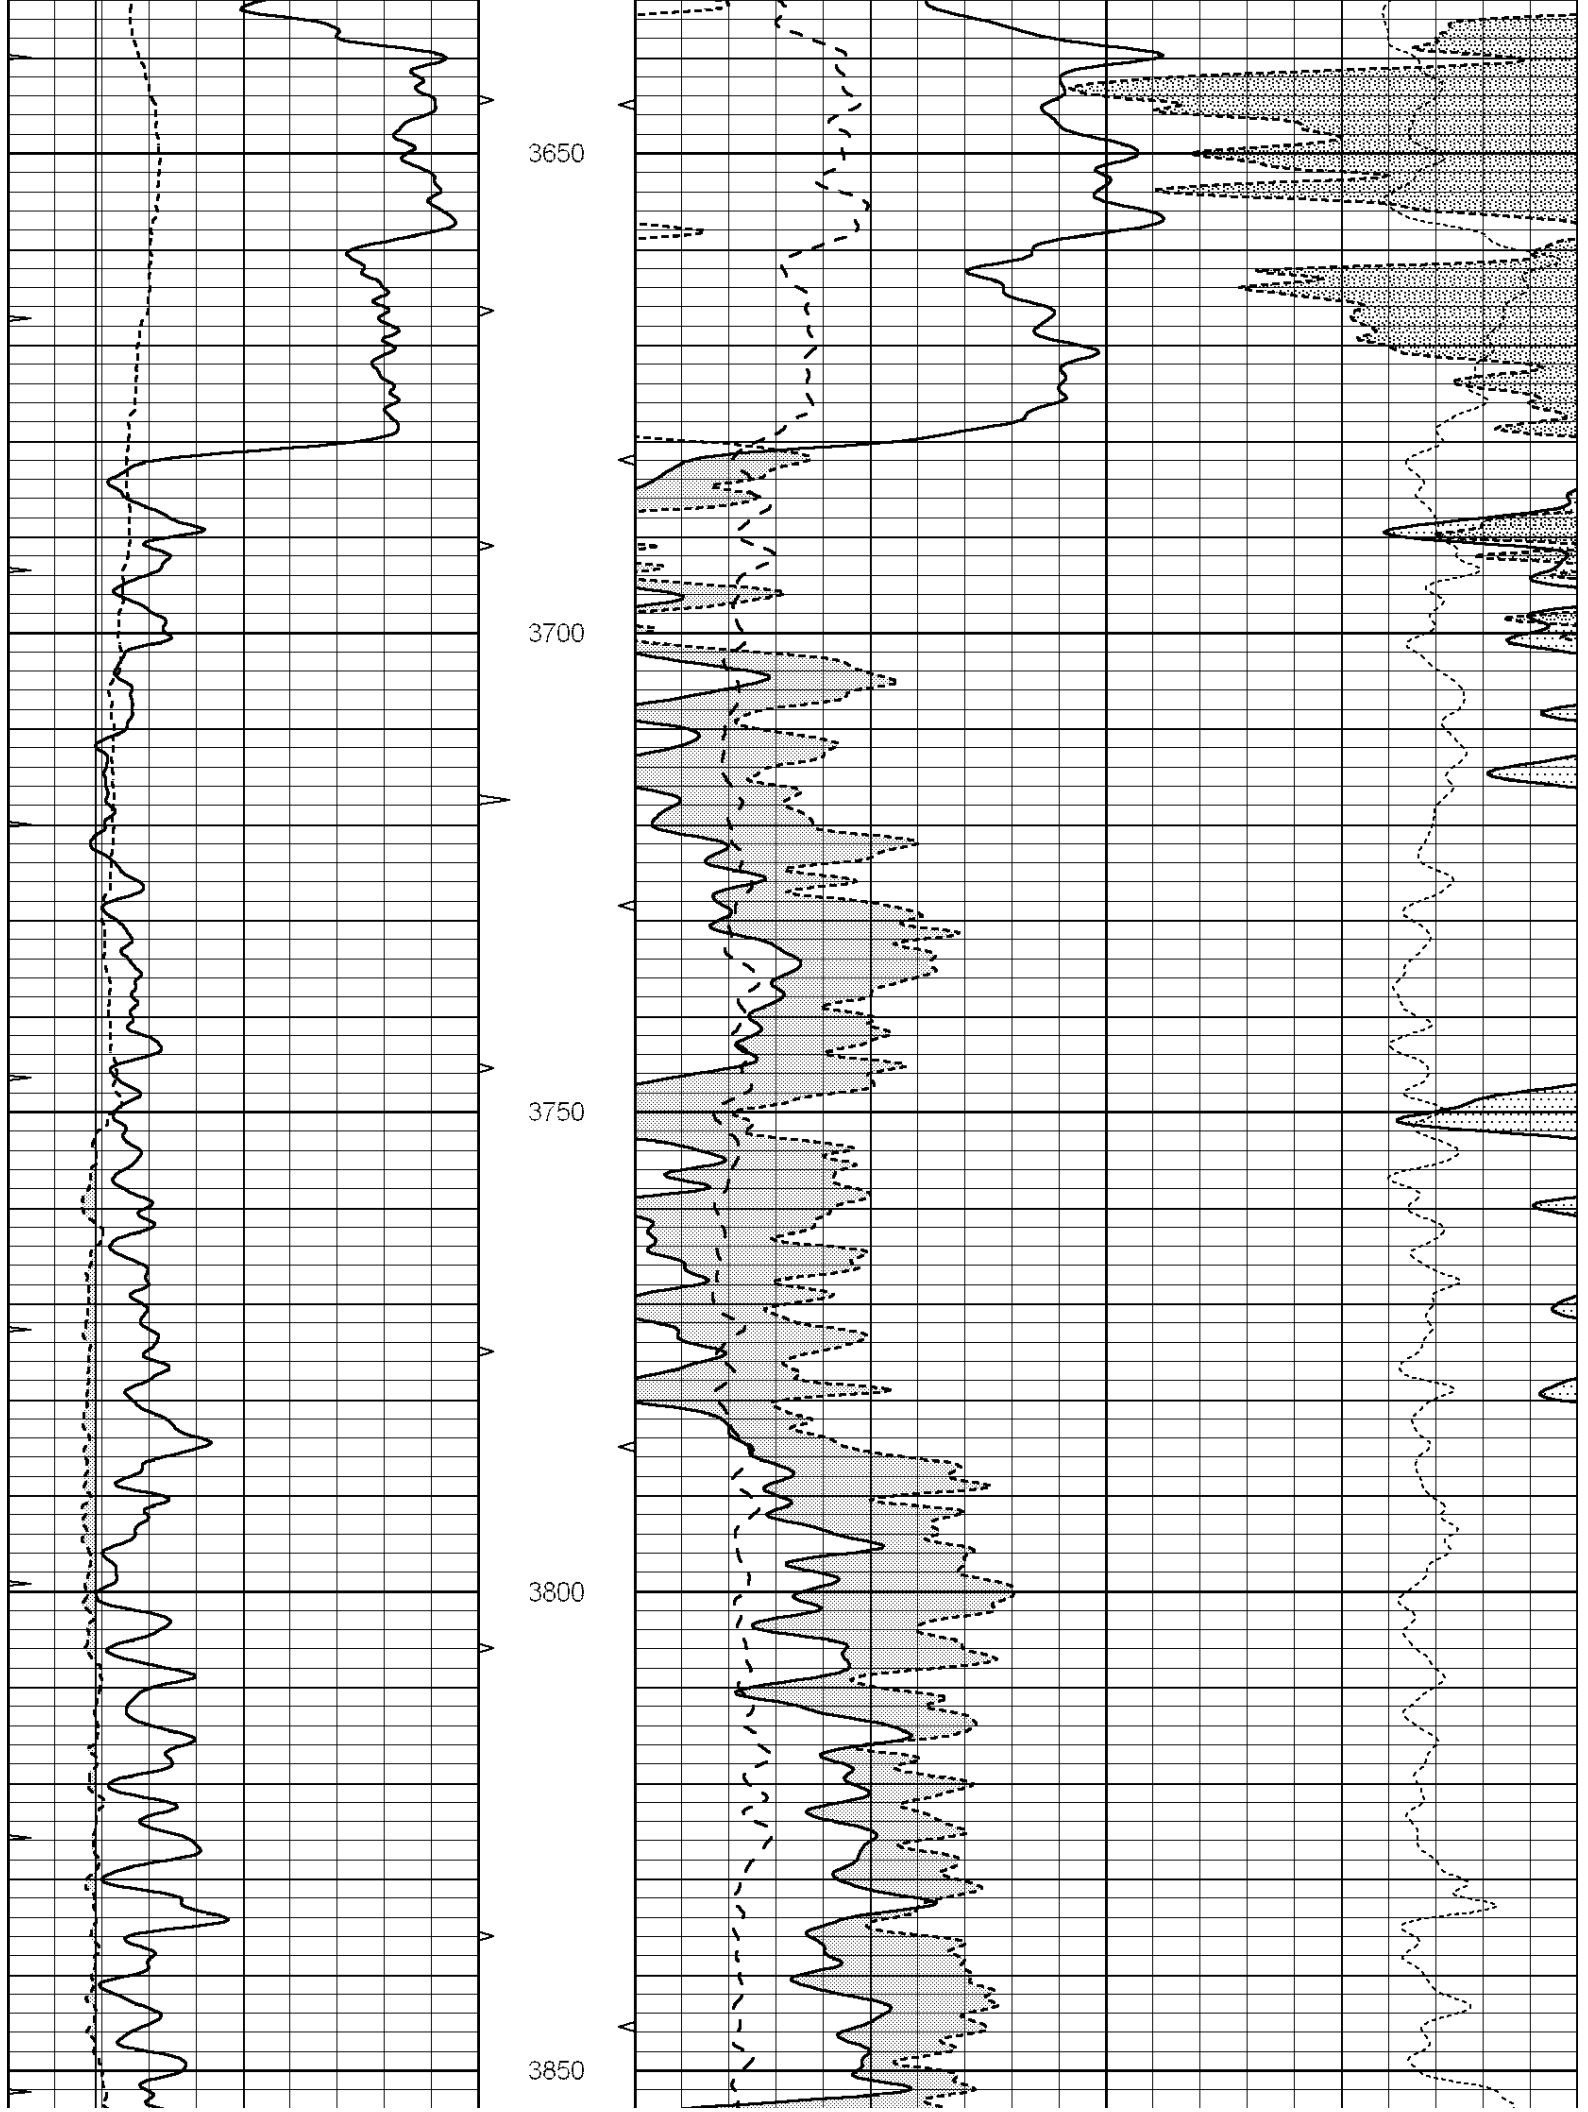


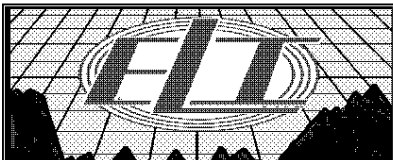


REPEAT SECTION

Database File: 2674pe.db
Dataset Pathname: pass2.5
Presentation Format: ldt_neu
Dataset Creation: Tue Aug 14 23:20:30 2018 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV	0	PE	10 -0.25 CORRECTION (g/cc) 0.25
			0 (ft3)	10		

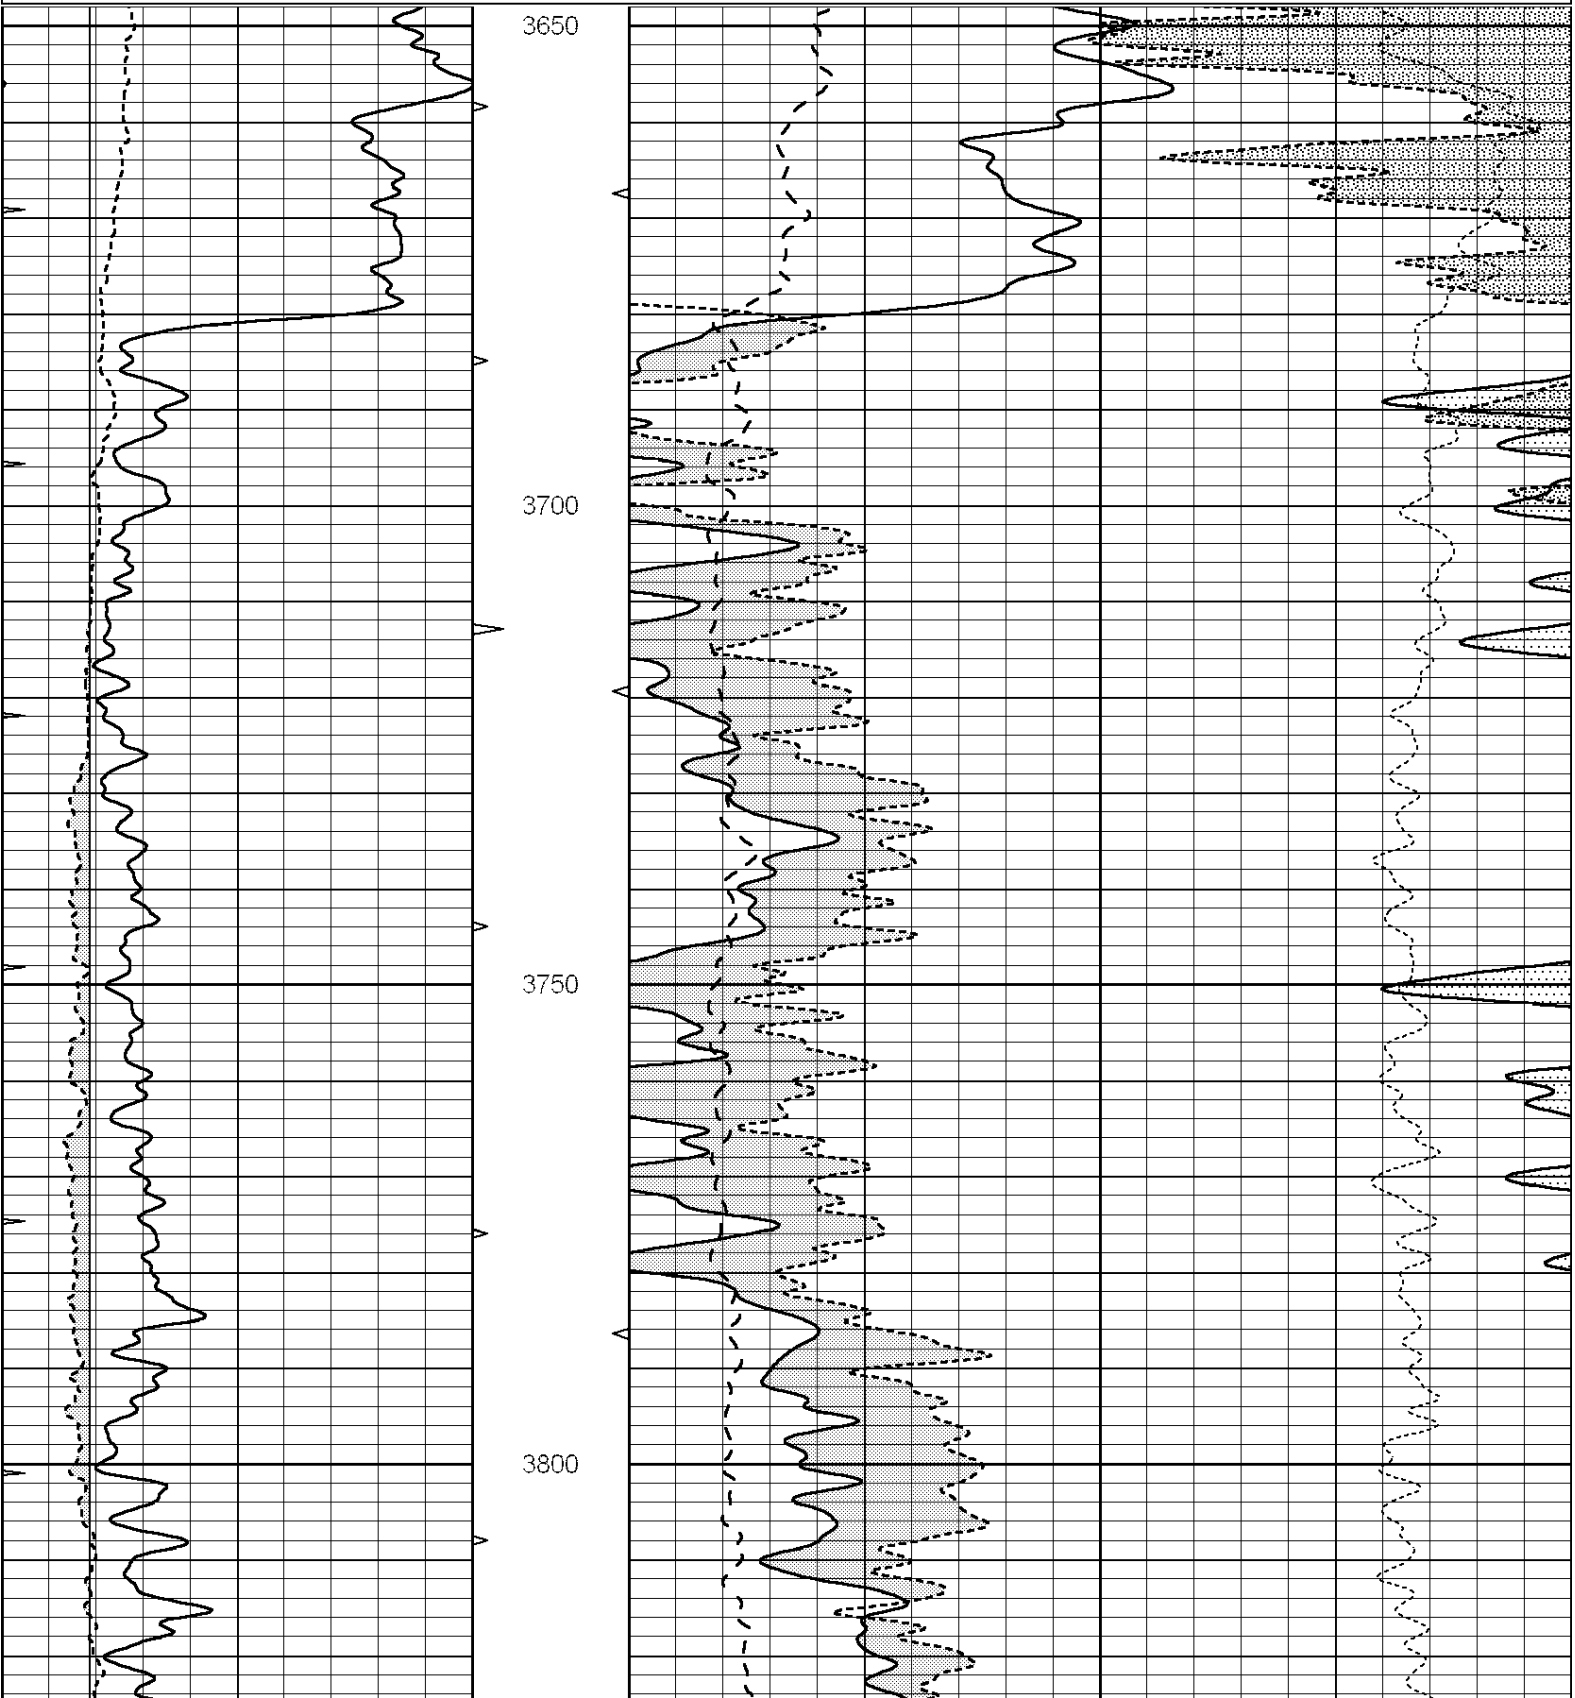

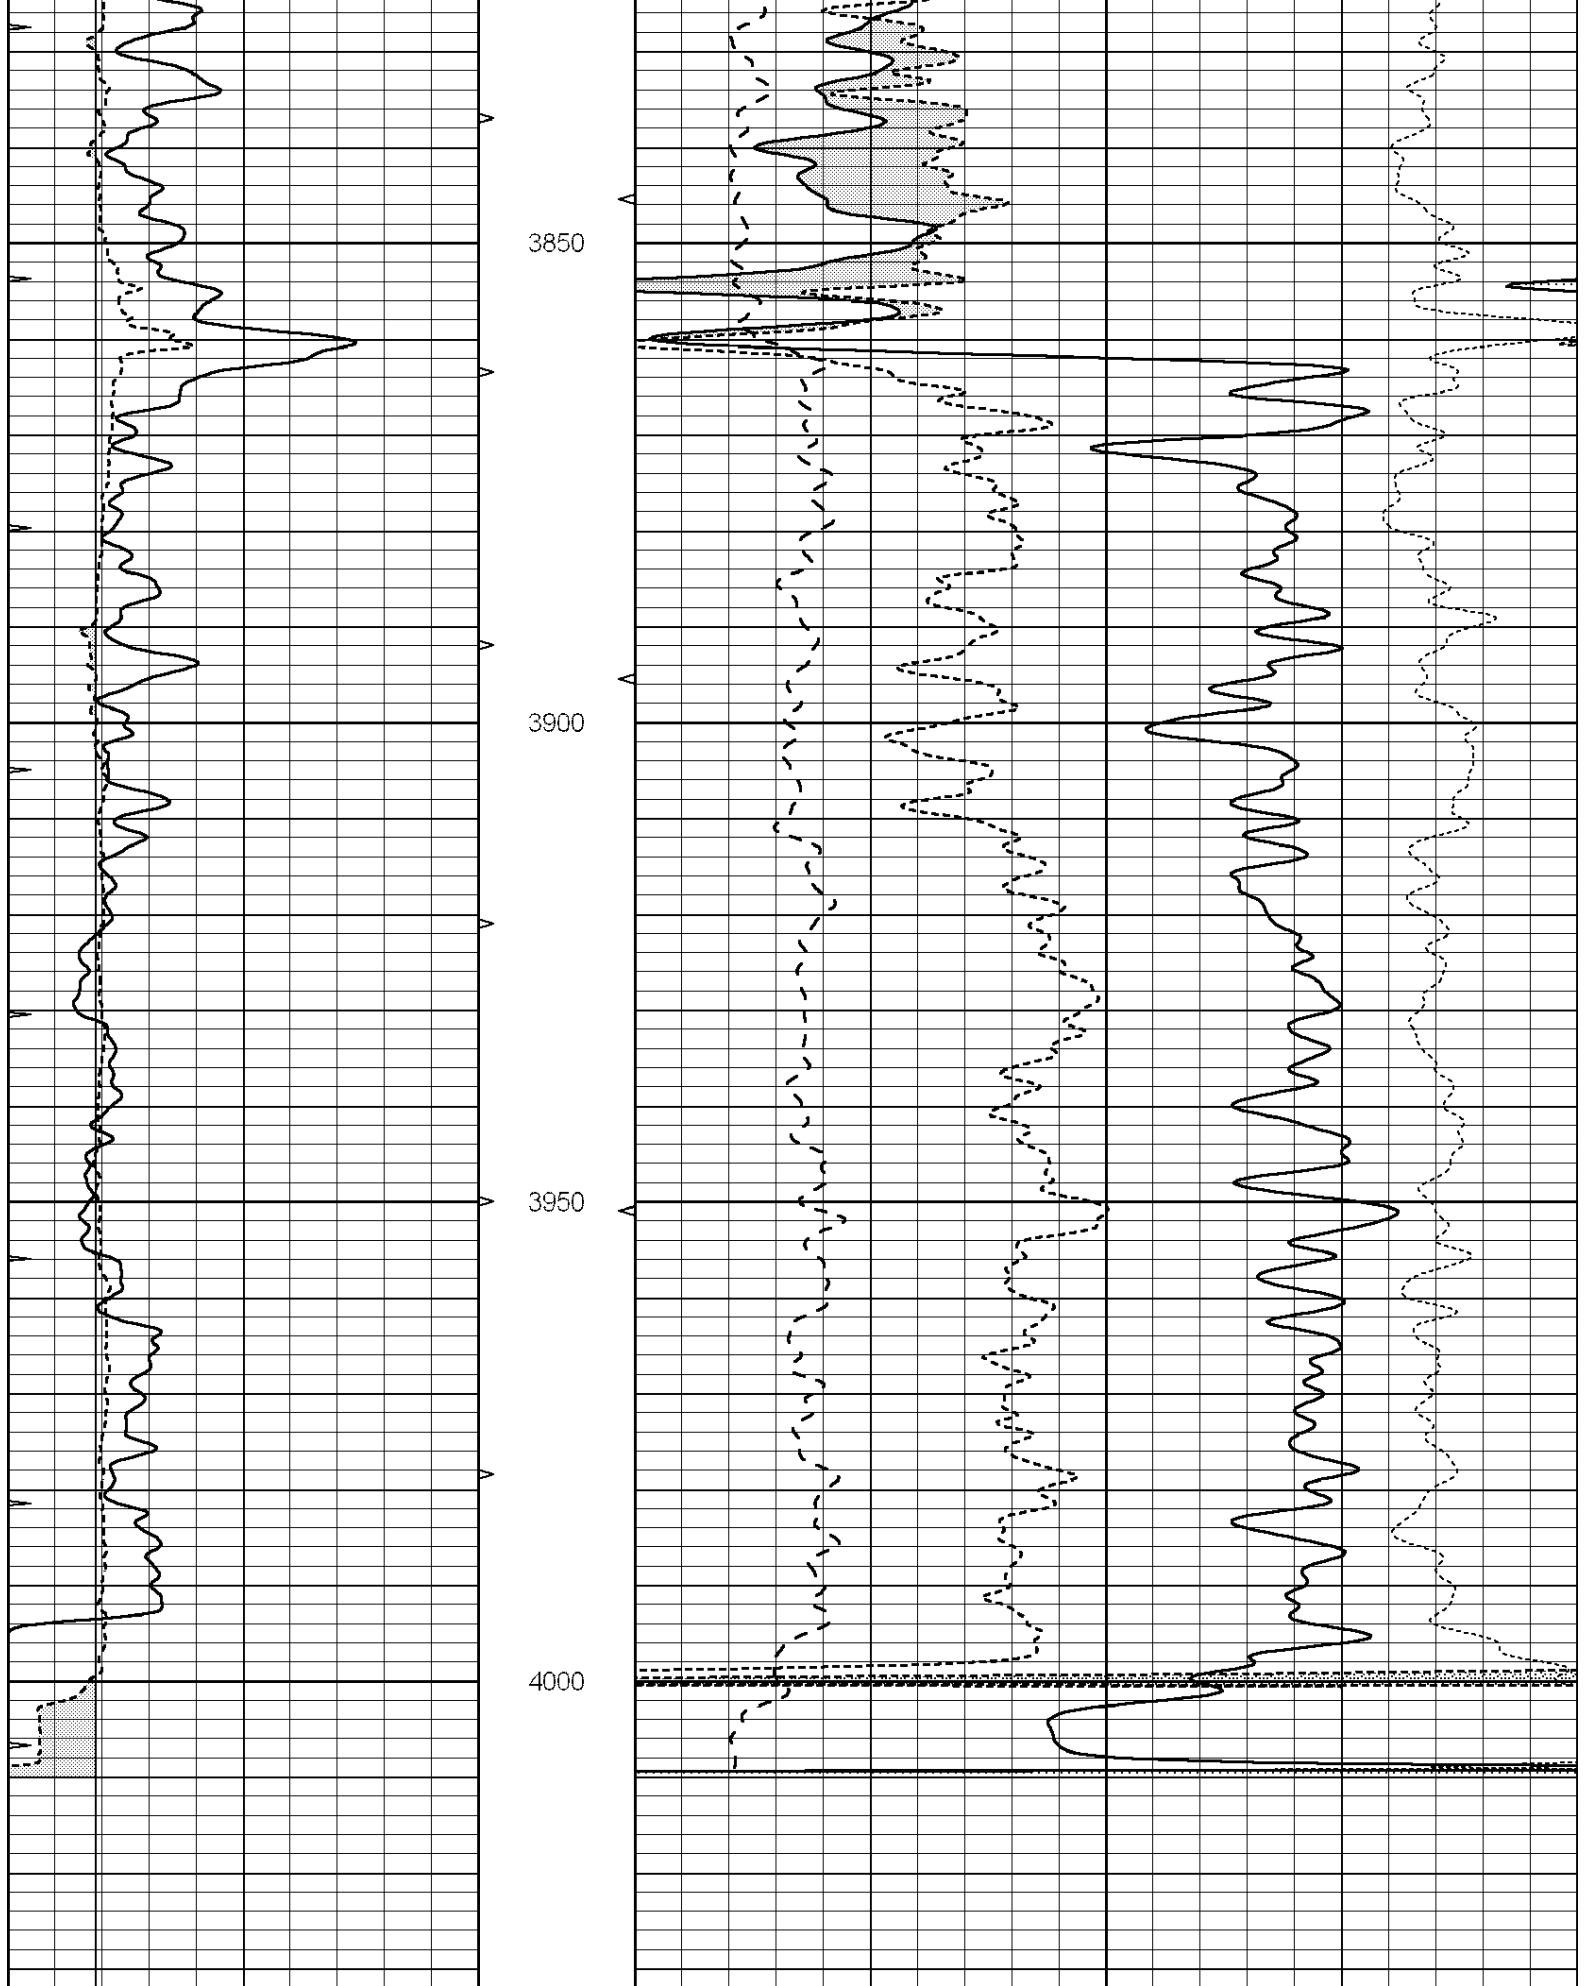

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TRHV	0	PE	10 0 25
					CORRECTION (also)	0 25

MIN/MAX	20	DEPTH	0	FE	10	0.20	CORRECTION (g/cc)	0.20
			0 (ft3)	10				

Calibration Report	
Database File:	1598ddn.db
Dataset Pathname:	pass4
Dataset Creation:	Wed Aug 30 02:13:00 2017 by Log SOC 120430

Dual Induction Calibration Report

Serial-Model:	PROBE7-DILG
Surface Cal Performed:	Wed Aug 30 00:06:33 2017
Downhole Cal Performed:	Mon Jul 28 12:02:56 2008
After Survey Verification Performed:	Mon Jul 28 12:02:56 2008

Surface Calibration								
Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-44.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration								
Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification								
Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report
Serial: 002 Model: PRB

Master Calibration					Performed Mon Aug 21 11:27:42 2017			
	Background	Magnesium	Aluminum	Sandstone				
Window 1	837.1	10632.5	2945.1	12110.1				cps
Window 2	772.0	9117.4	2570.1	10197.3				cps
Window 3	631.7	4669.0	1481.9	5042.9				cps
Window 4	187.0	187.5	185.9	189.9				cps
Long Space	0.0	8345.4	1798.1	9425.3				cps
Short Space	1.1	1927.9	1285.9	2050.2				cps
Rho		1.7100	2.5960	1.3800				g/cc
Pe		0.0000	2.5700	1.5500				
Rib Angle	: 45.2	Rib Slope	: 1.008	Density/Spine Ratio			: 0.558	
Spine Angle	: 75.2	Spine Slope	: 3.790	Spine Intercept			: -19.6	

Before Survey Verification		Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification		Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report
--

Serial Number:	070808
Tool Model:	Probe

PRE-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number:	070558	
Tool Model:	OPEN_GR	
Performed:	Wed May 31 00:09:32 2017	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2800	GAPI/cps