



MICRO LOG


Company		DIXON OPERATING COMPANY, LLC.	
Well		#3-34 POUND	
Field		MIKES METEOR	
County		STAFFORD	
State		KANSAS	
Location:		APL # : 15-185-24026-0000	
Permanent Datum		GROUND LEVEL	
Log Measured From		KELLY BUSHING 11' A.G.L.	
Drilling Measured From		KELLY BUSHING	
SEC 34 TWP 22S RGE 12W		Elevation	
		K.B. 1843	
		D.F. 1841	
		G.L. 1832	
Other Services		CDL/CNL/PE	
		DIL/SONIC	
Date	8/14/18		
Run Number	TWO		
Depth Driller	4027		
Depth Logger	4026		
Bottom Logged Interval	4010		
Top Log Interval	2800		
Casing Driller	8 5/8"@310'		
Casing Logger	306		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 9,100 PPM	
Density / Viscosity	9.4/76		
pH / Fluid Loss	10.5/10.0		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.400@90F		
Rmf @ Meas. Temp	.300@90F		
Rmc @ Meas. Temp	.480@90F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.310@116F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	11:45 P.M.		
Maximum Recorded Temperature	116F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	CHUCK SCHMALTZ		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
HUDSON, KS., 2E. TO "NE 70TH", 3/4S., W. INTO AT LEASE RD.


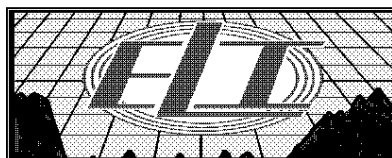




MAIN SECTION


Database File: 2674pe.db
 Dataset Pathname: pass6.1
 Presentation Format: micro
 Dataset Creation: Wed Aug 15 00:46:29 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

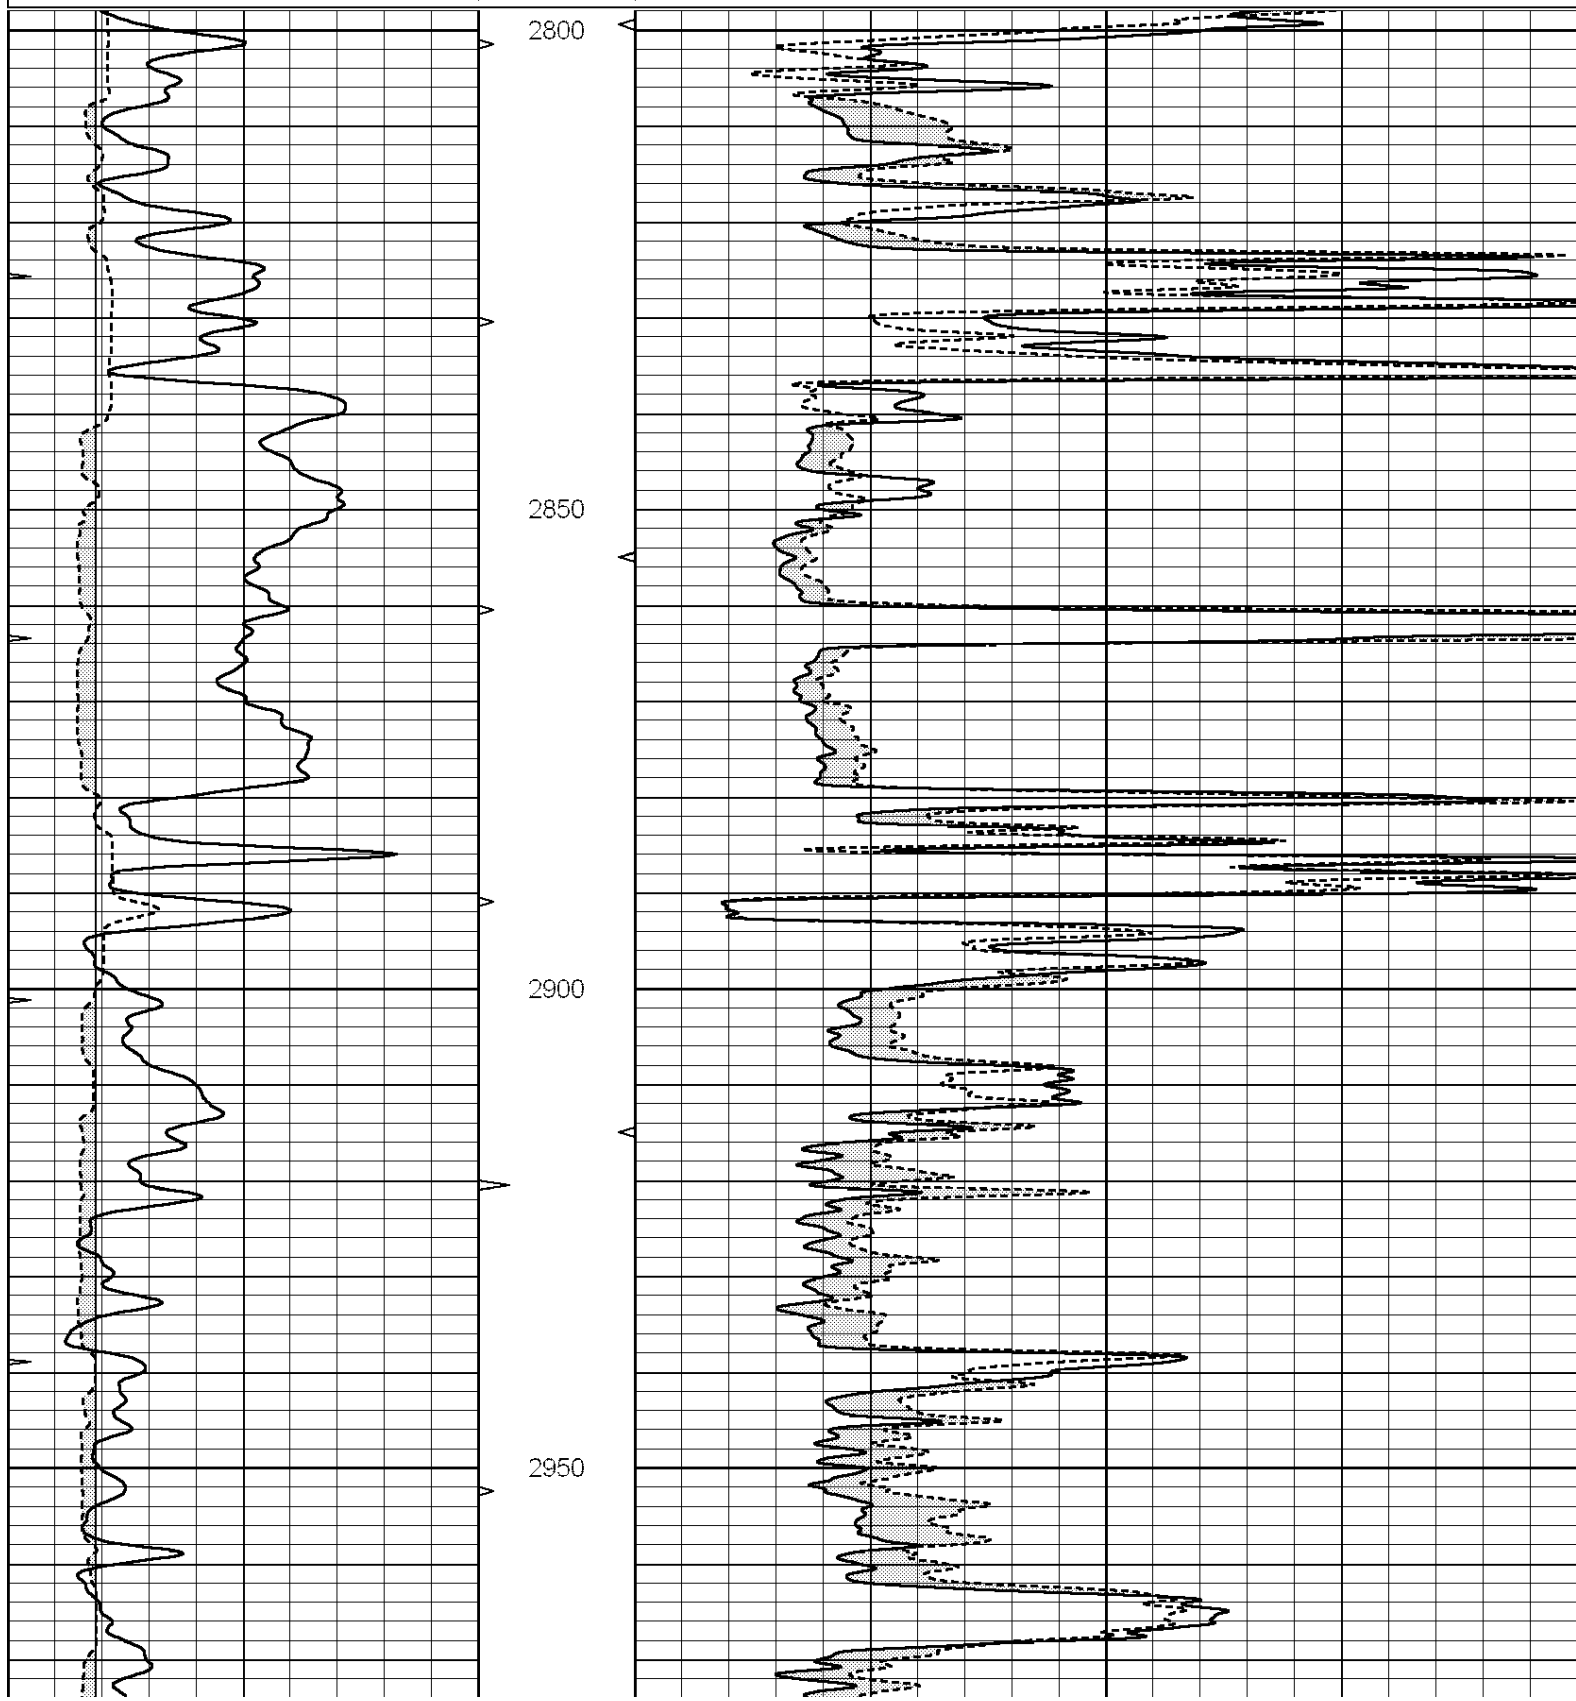

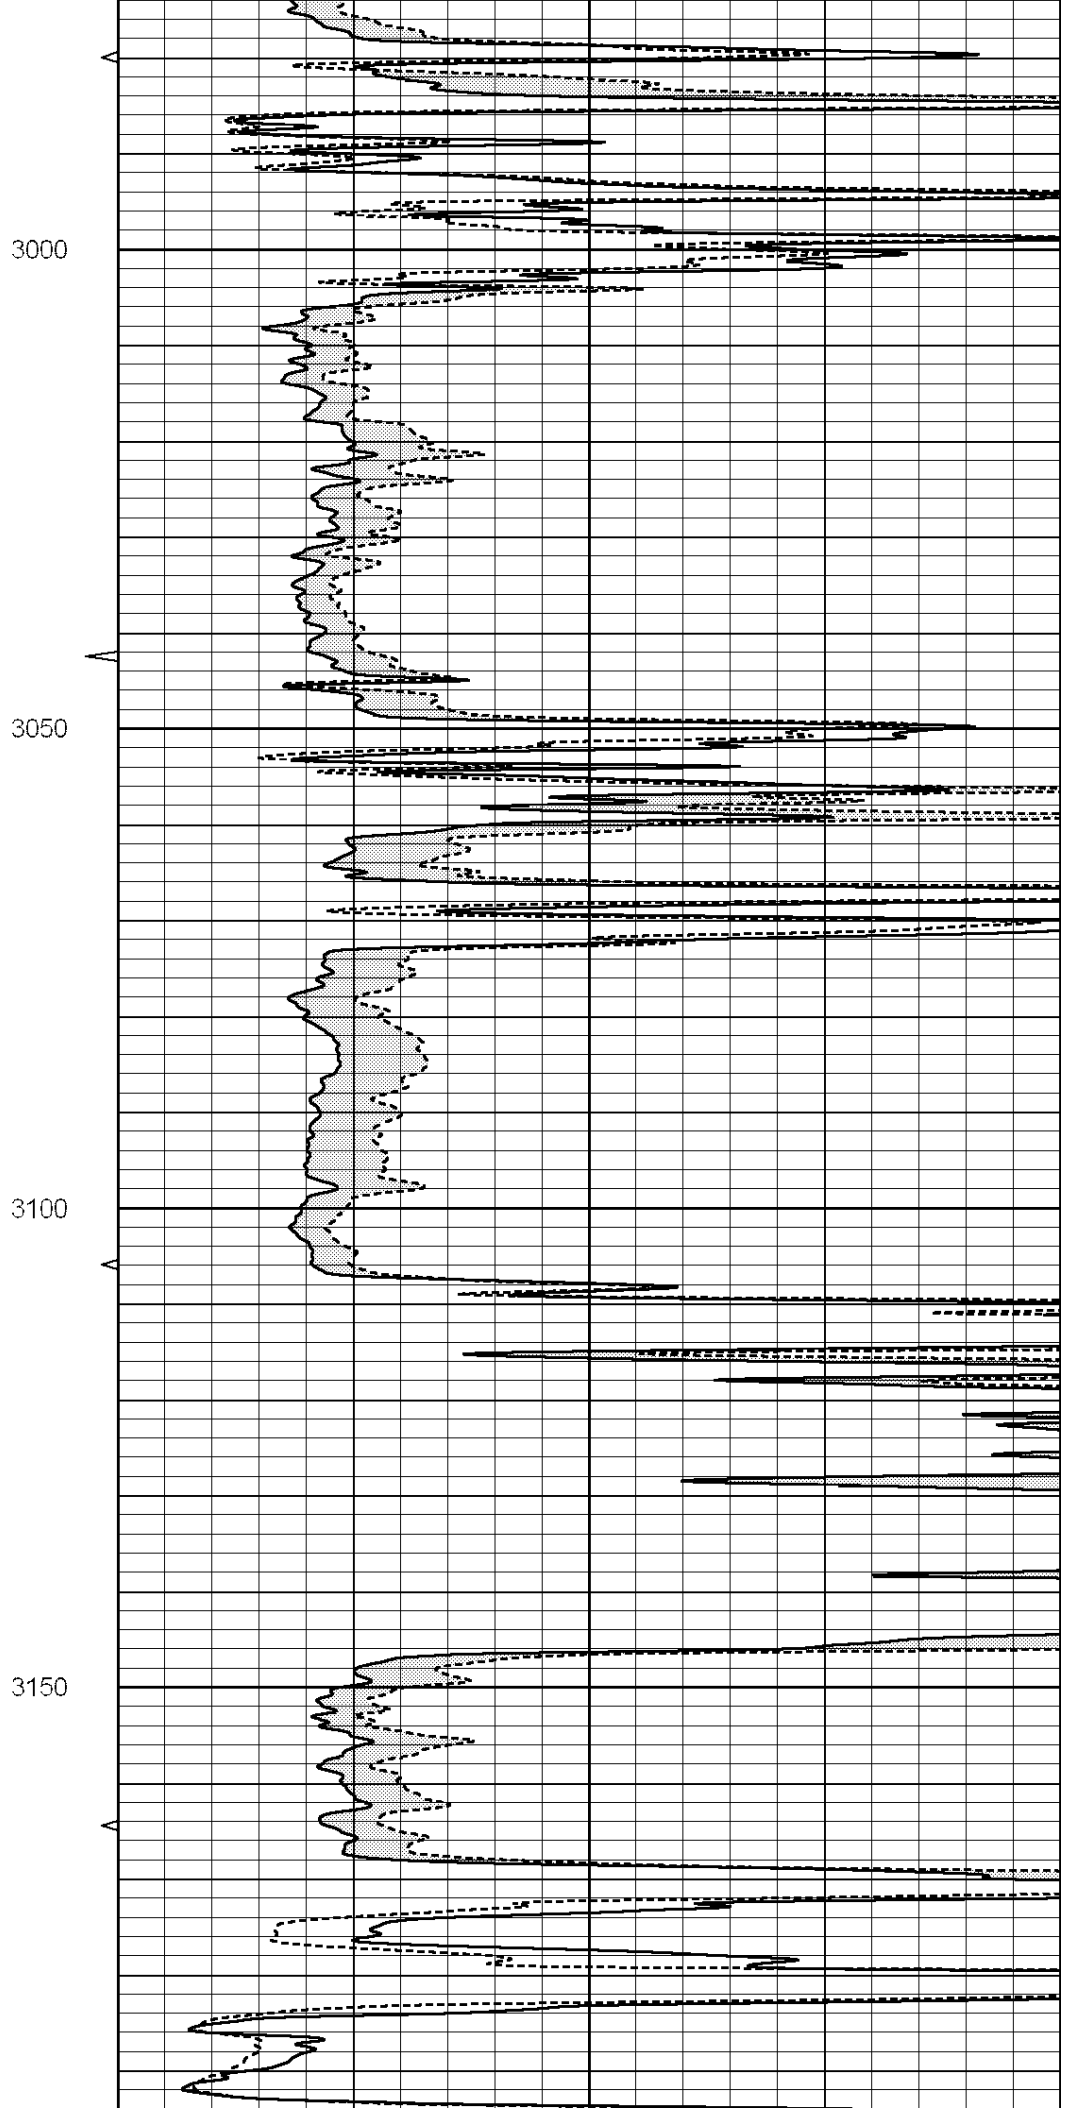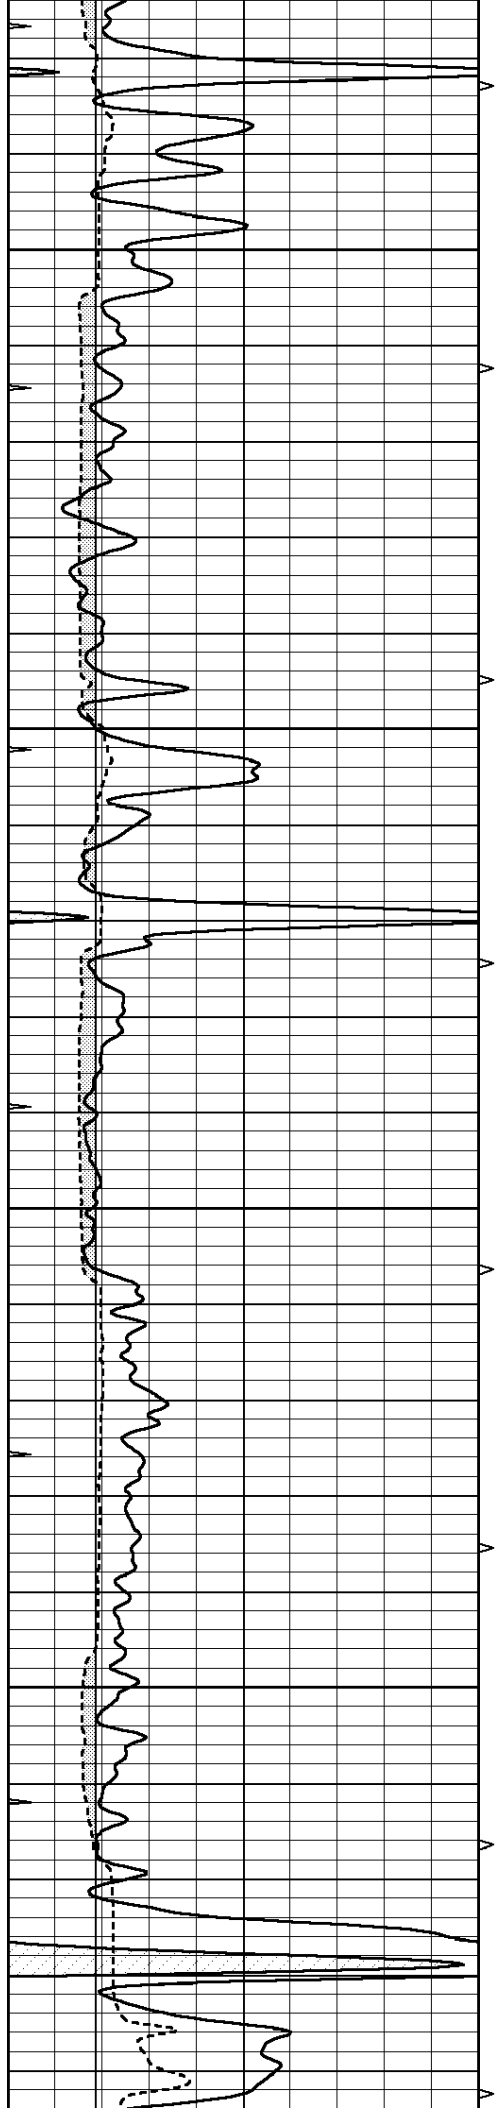

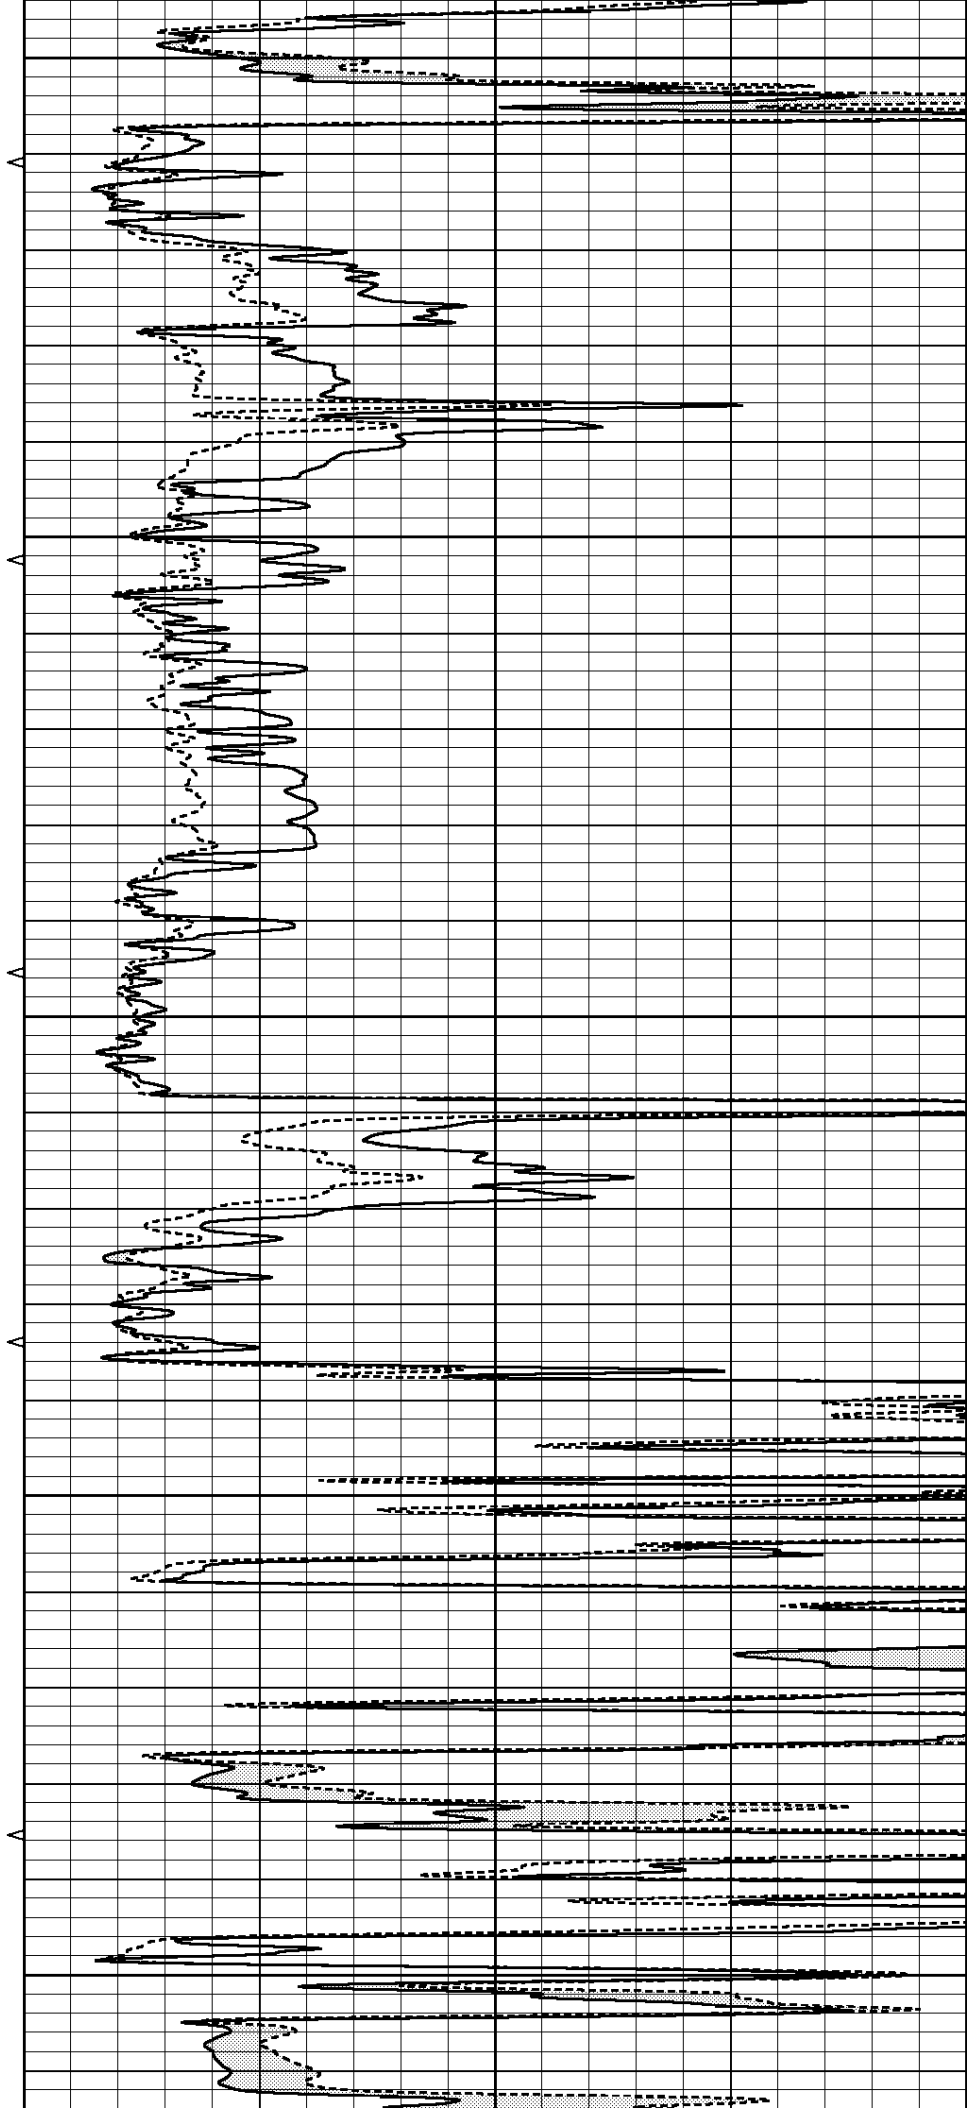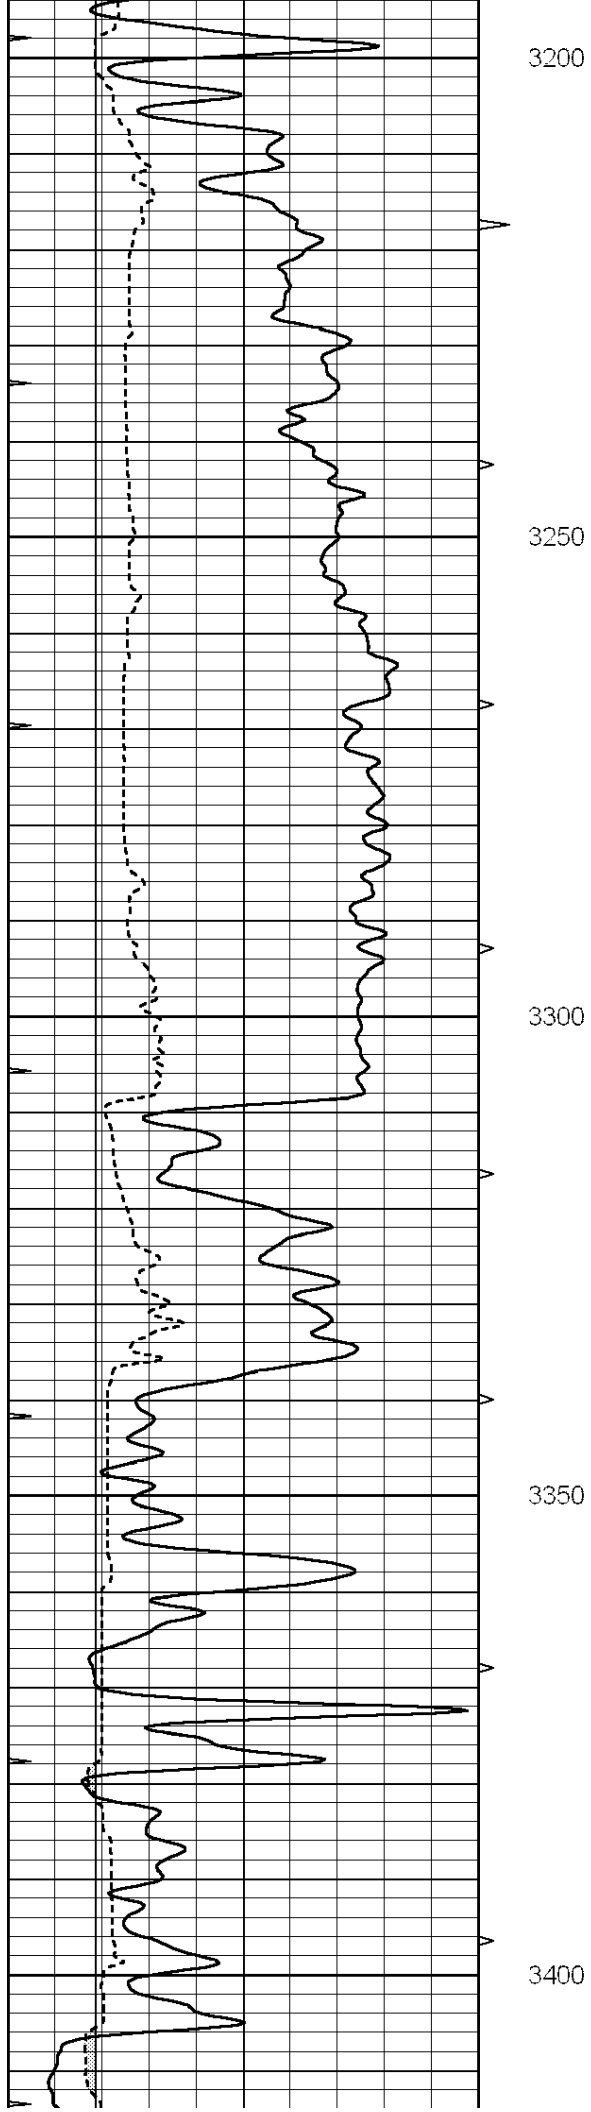

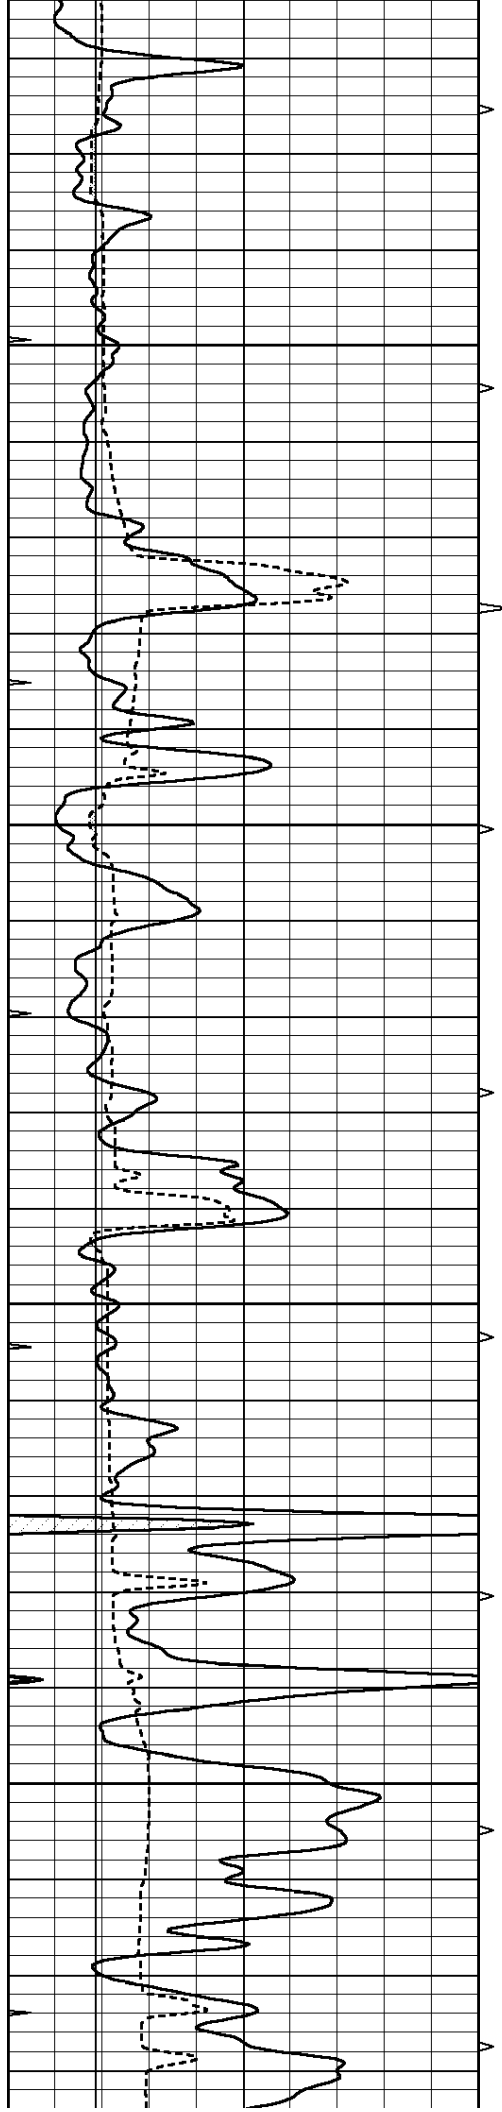




3450



3500

3550

3600

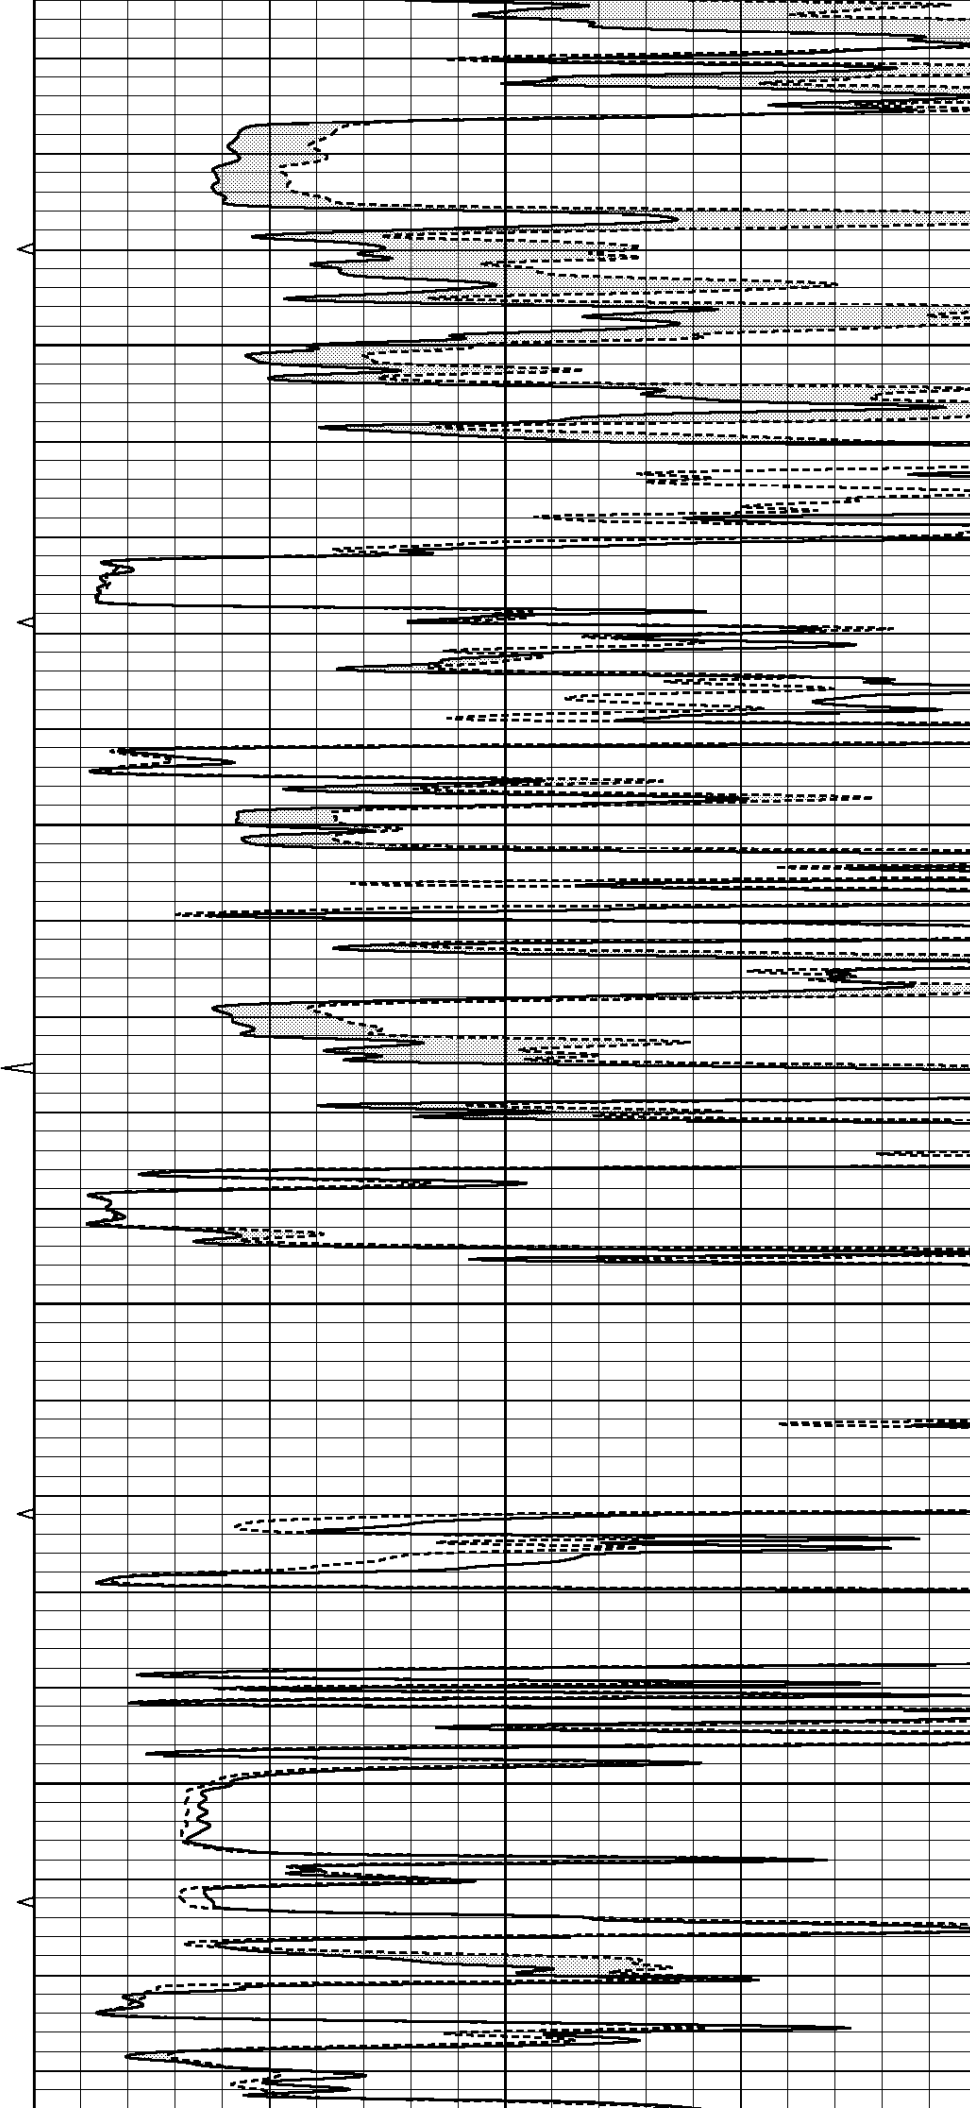

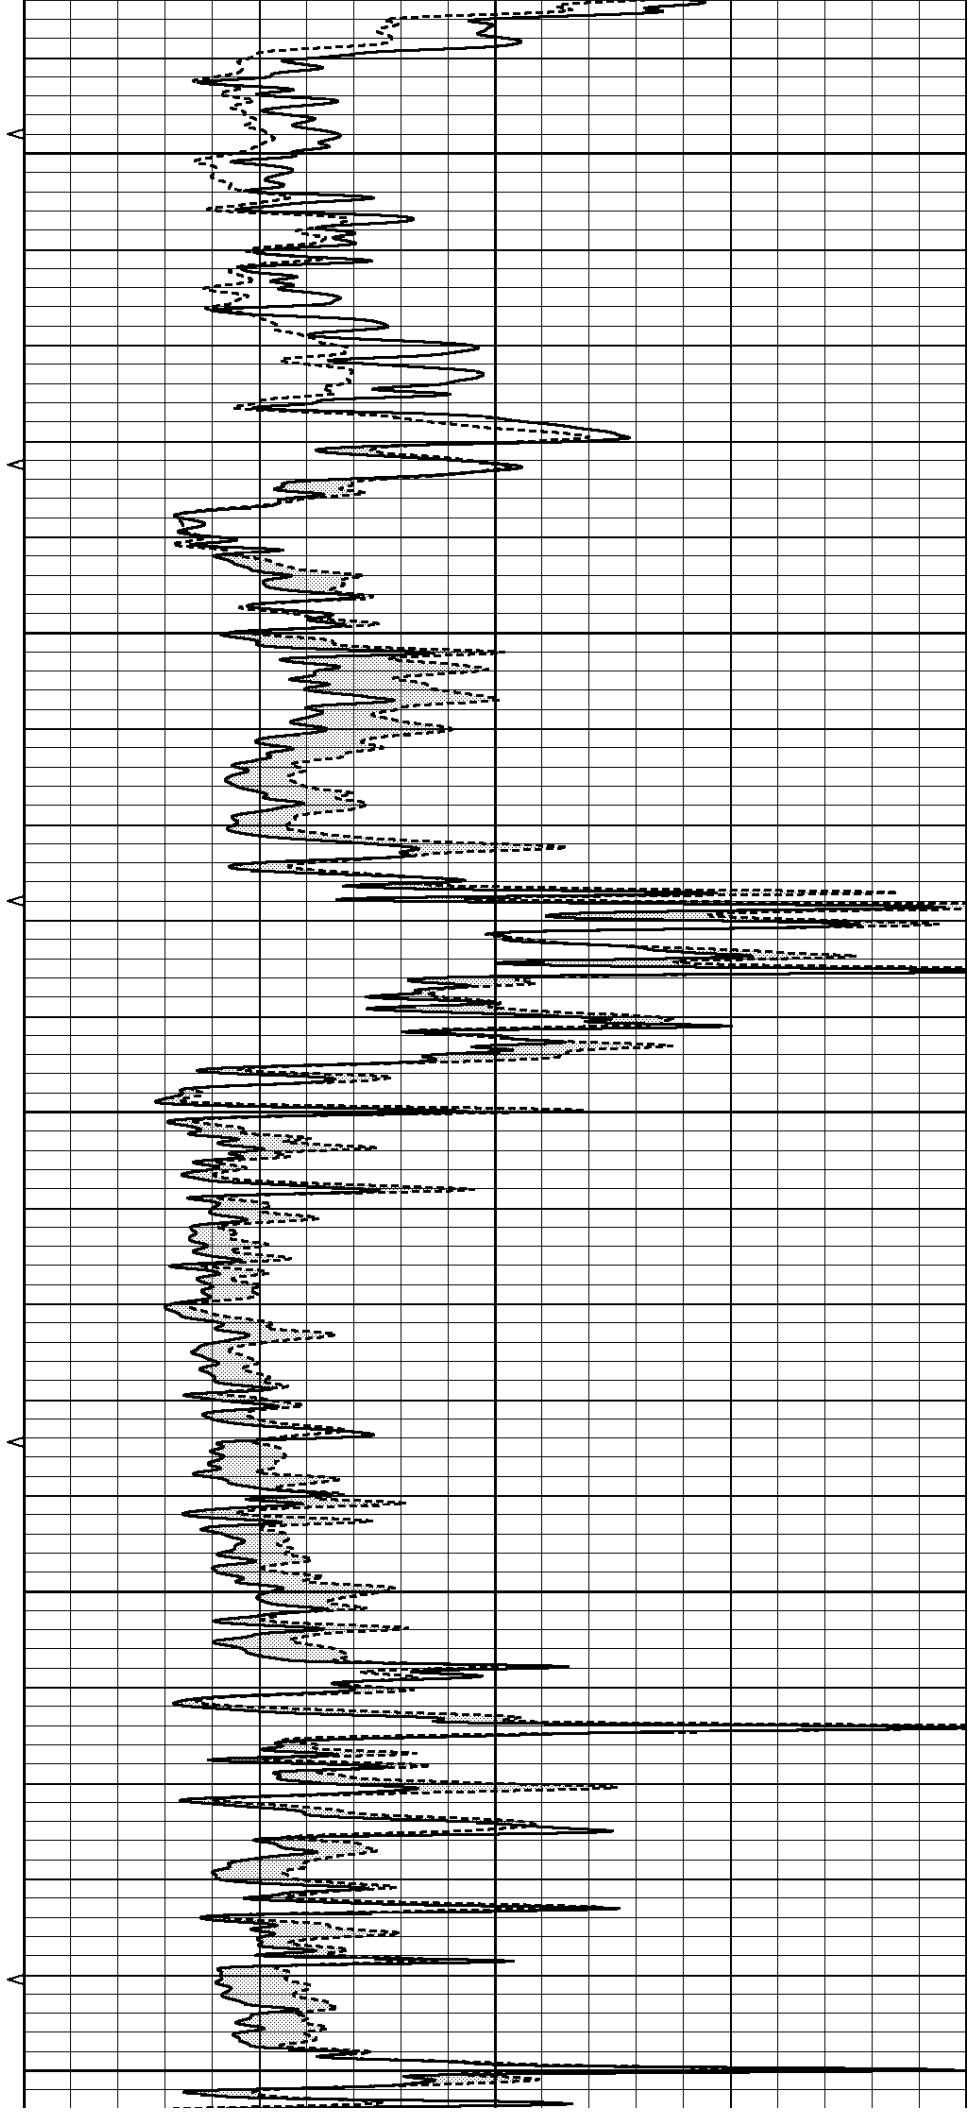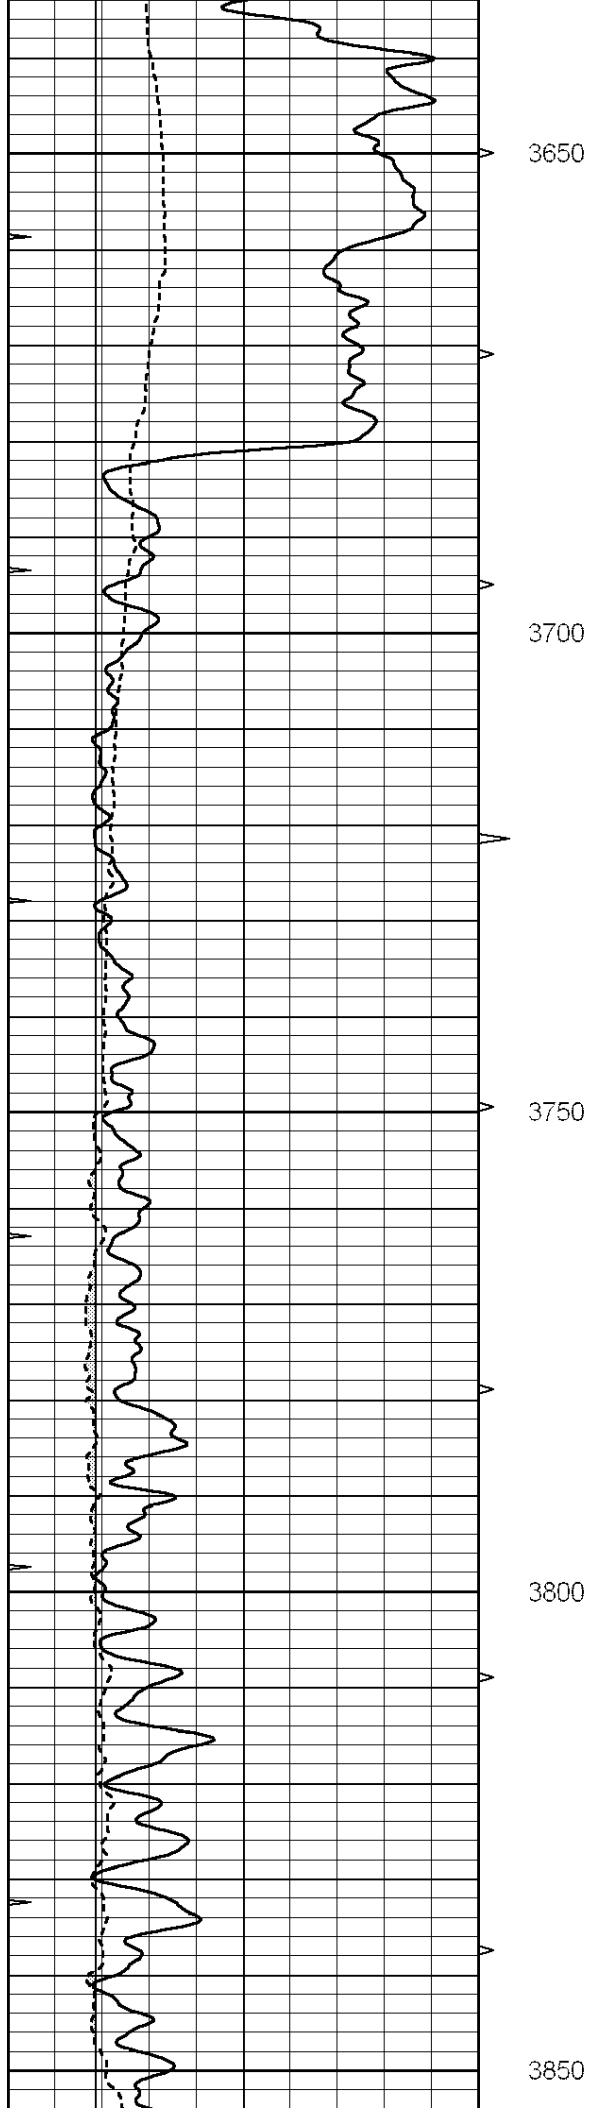


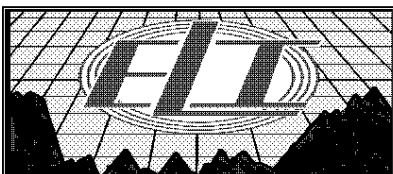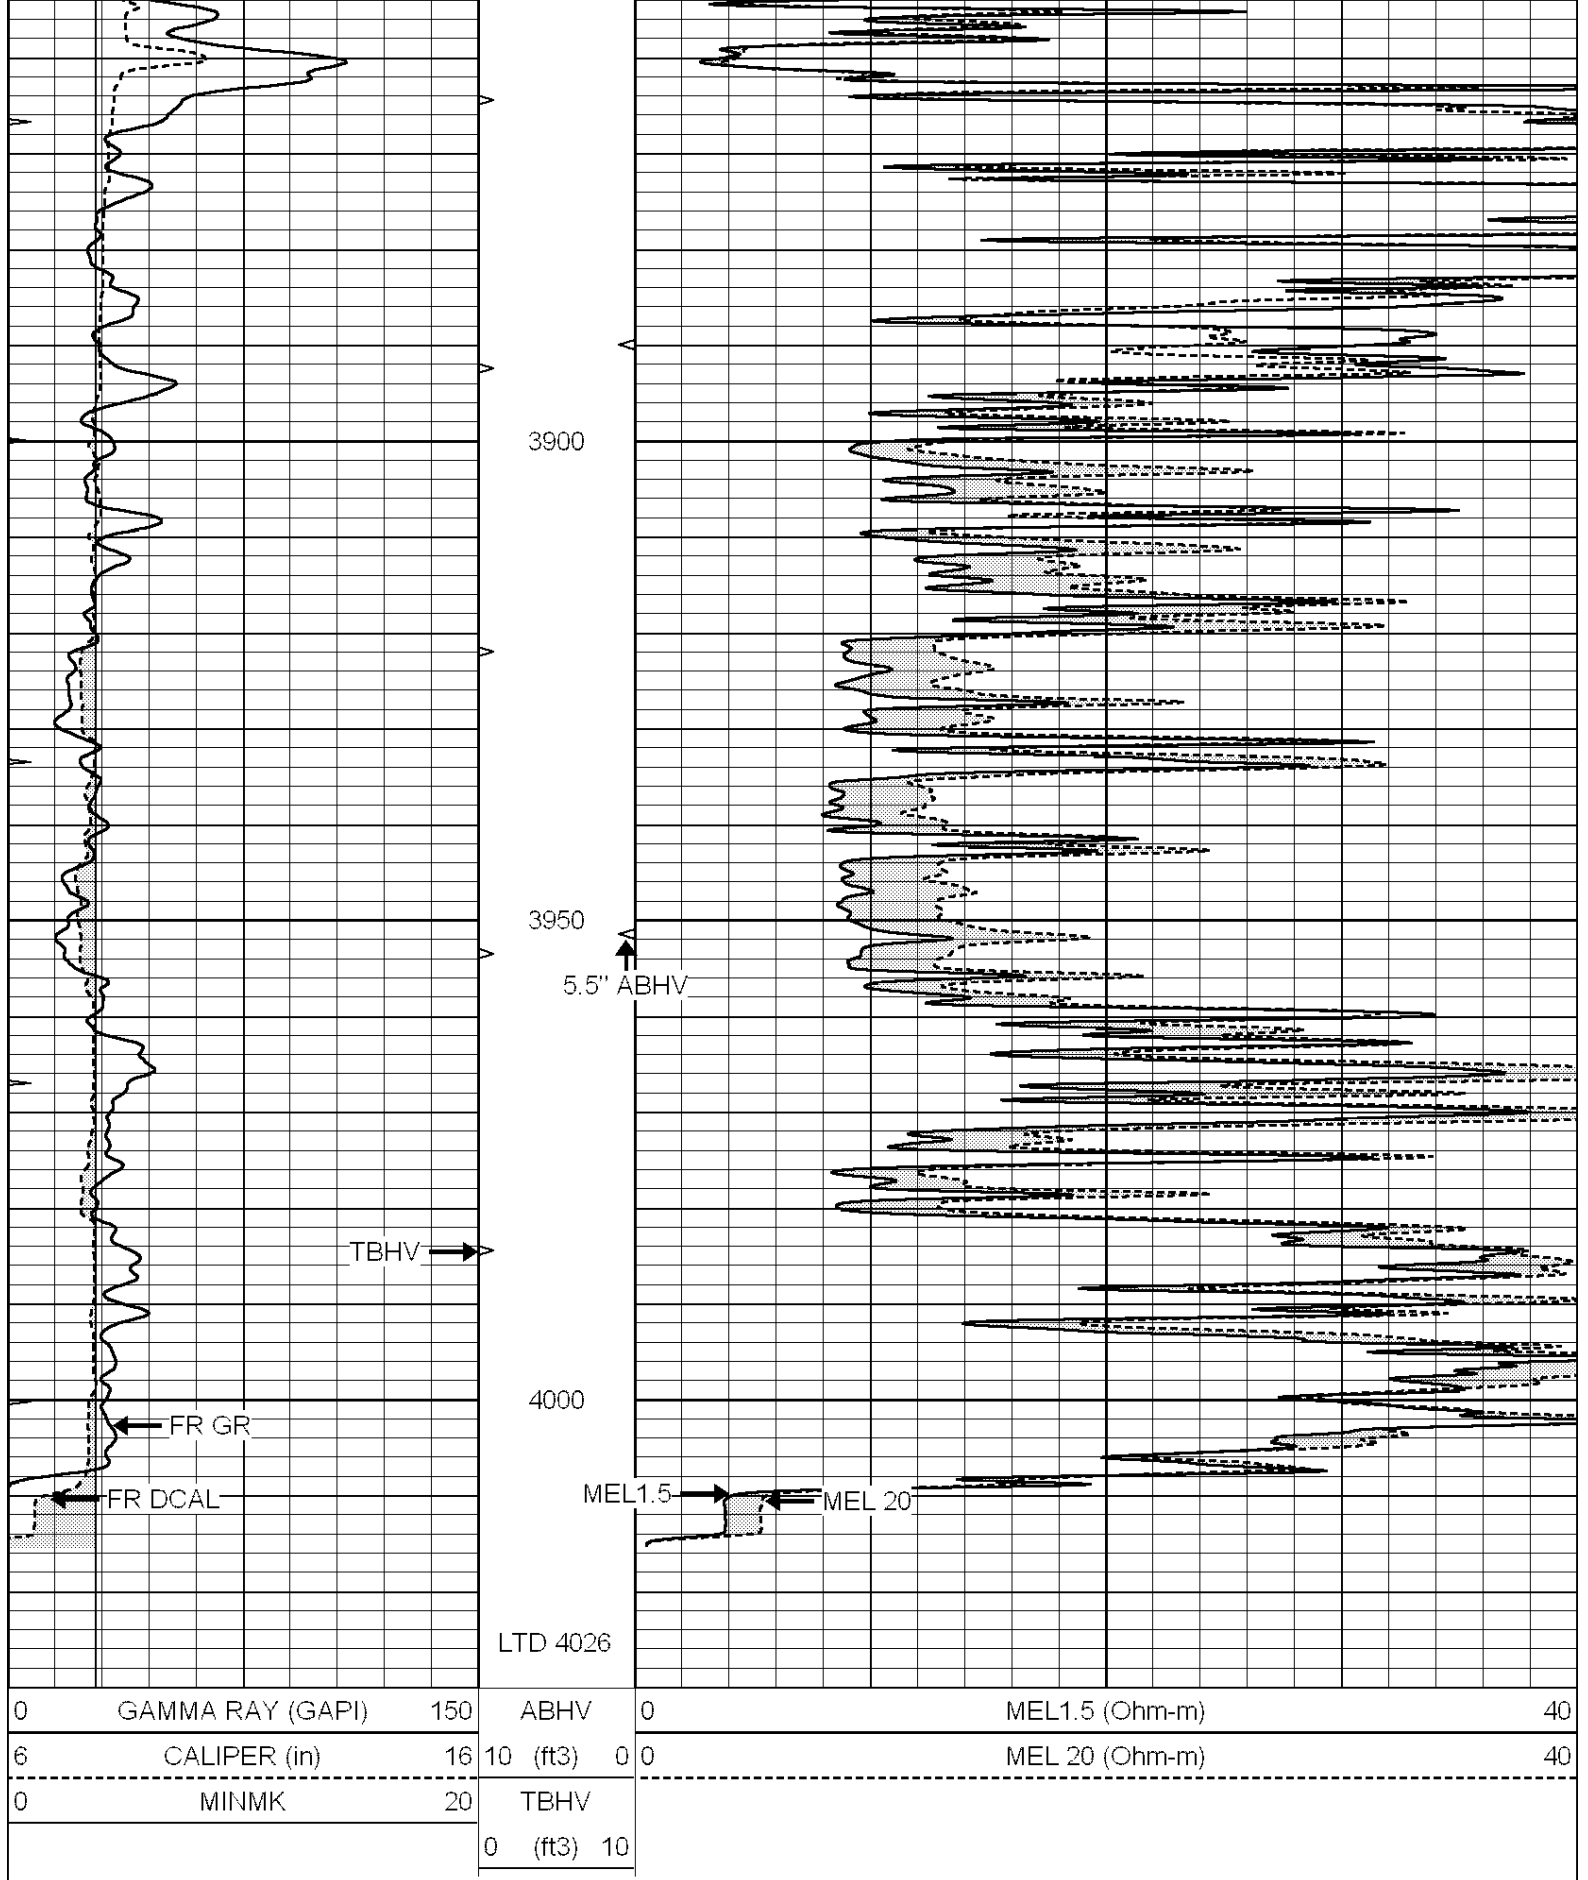


REPEAT SECTION

Database File: 2674pe.db
Dataset Pathname: pass5.3
Presentation Format: micro
Dataset Creation: Wed Aug 15 00:07:10 2018 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

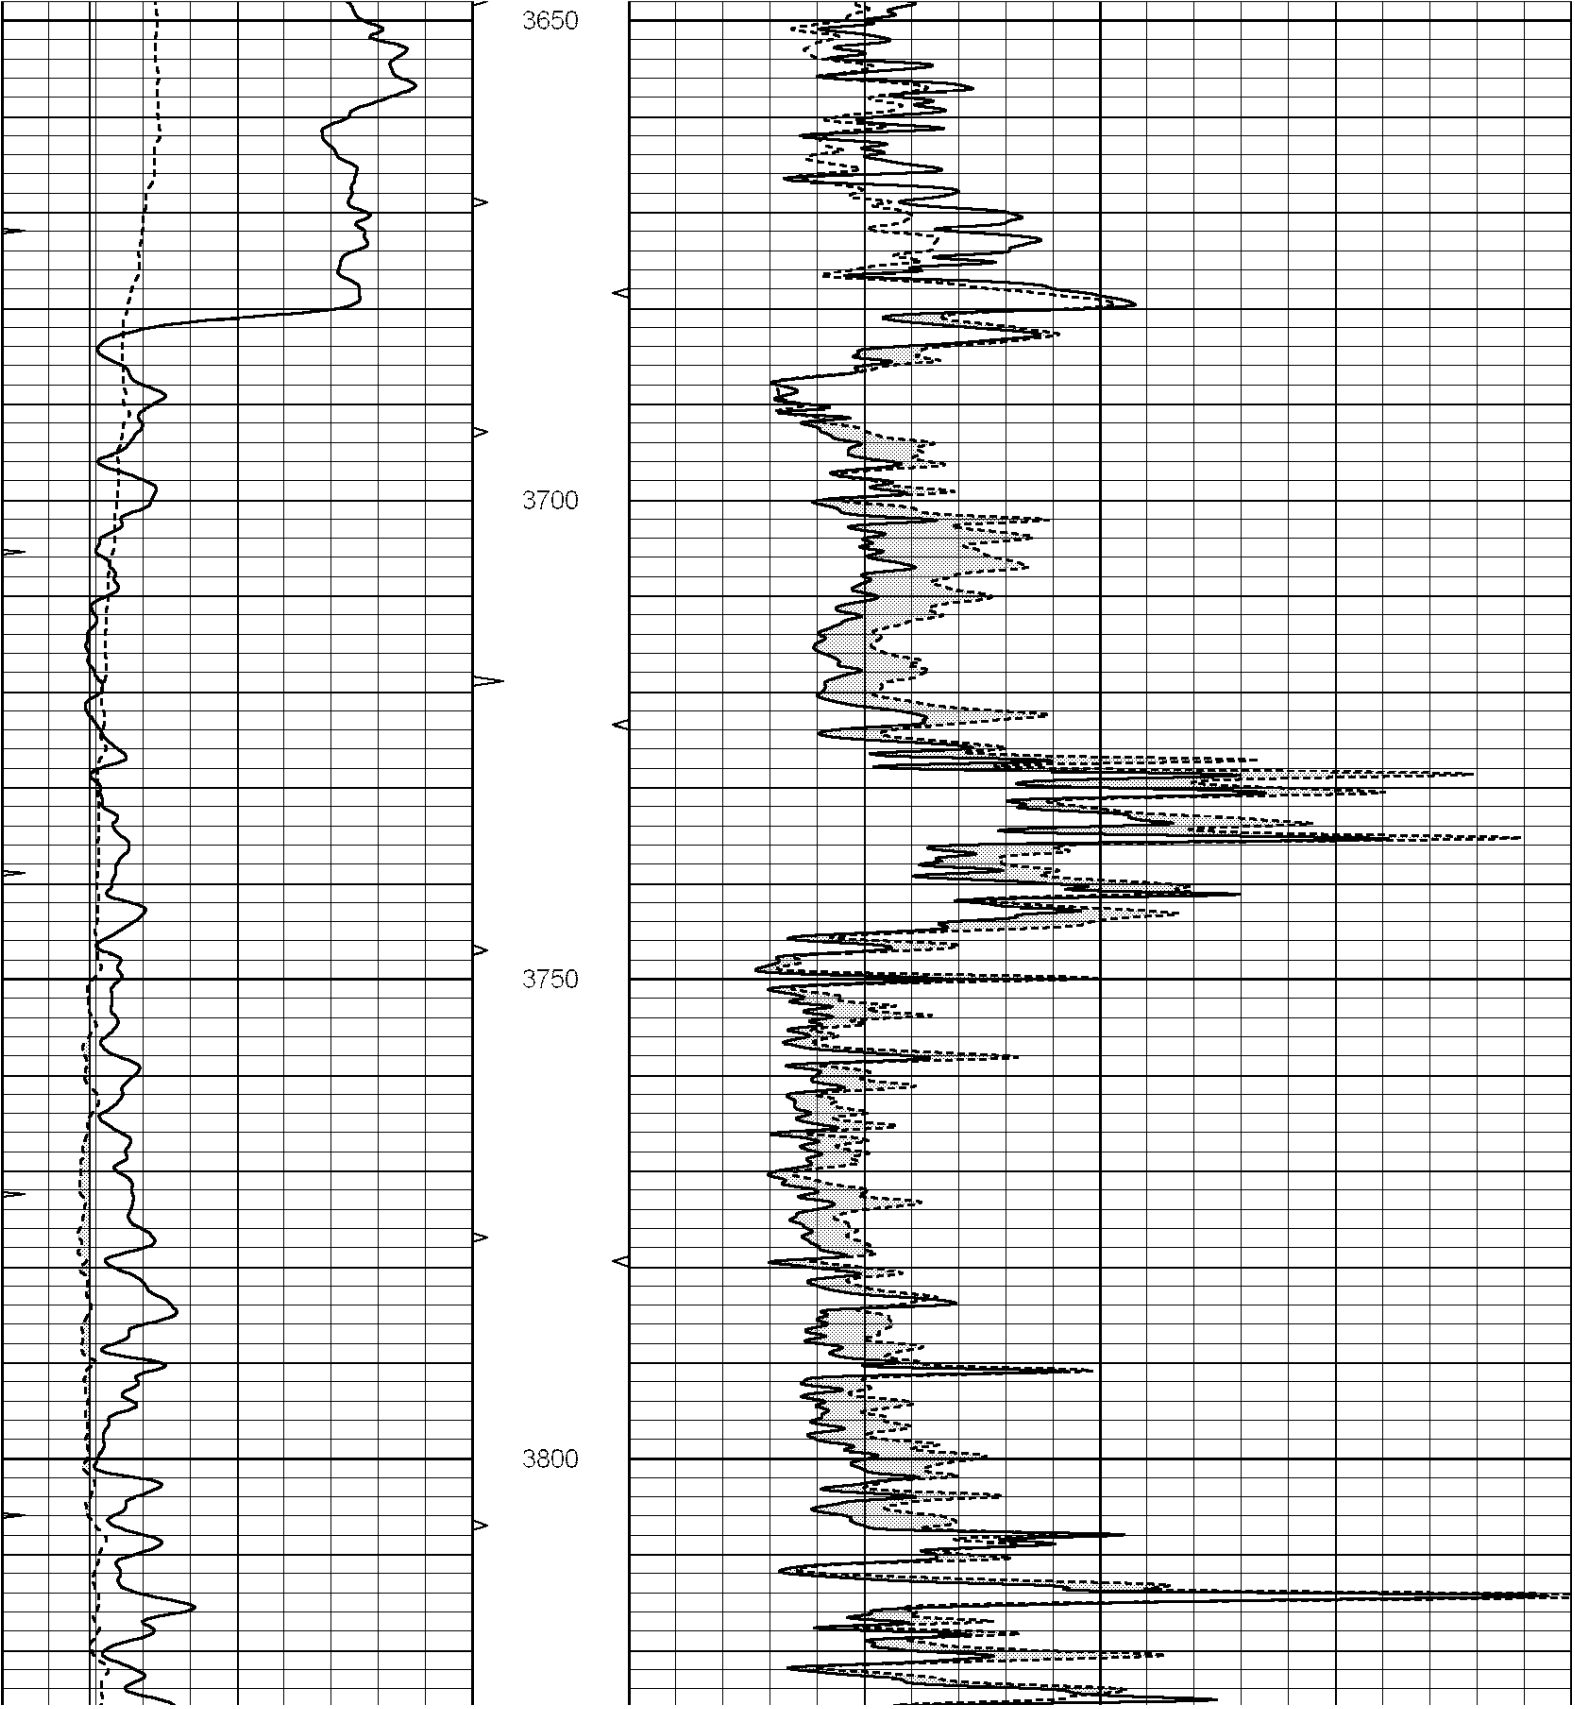

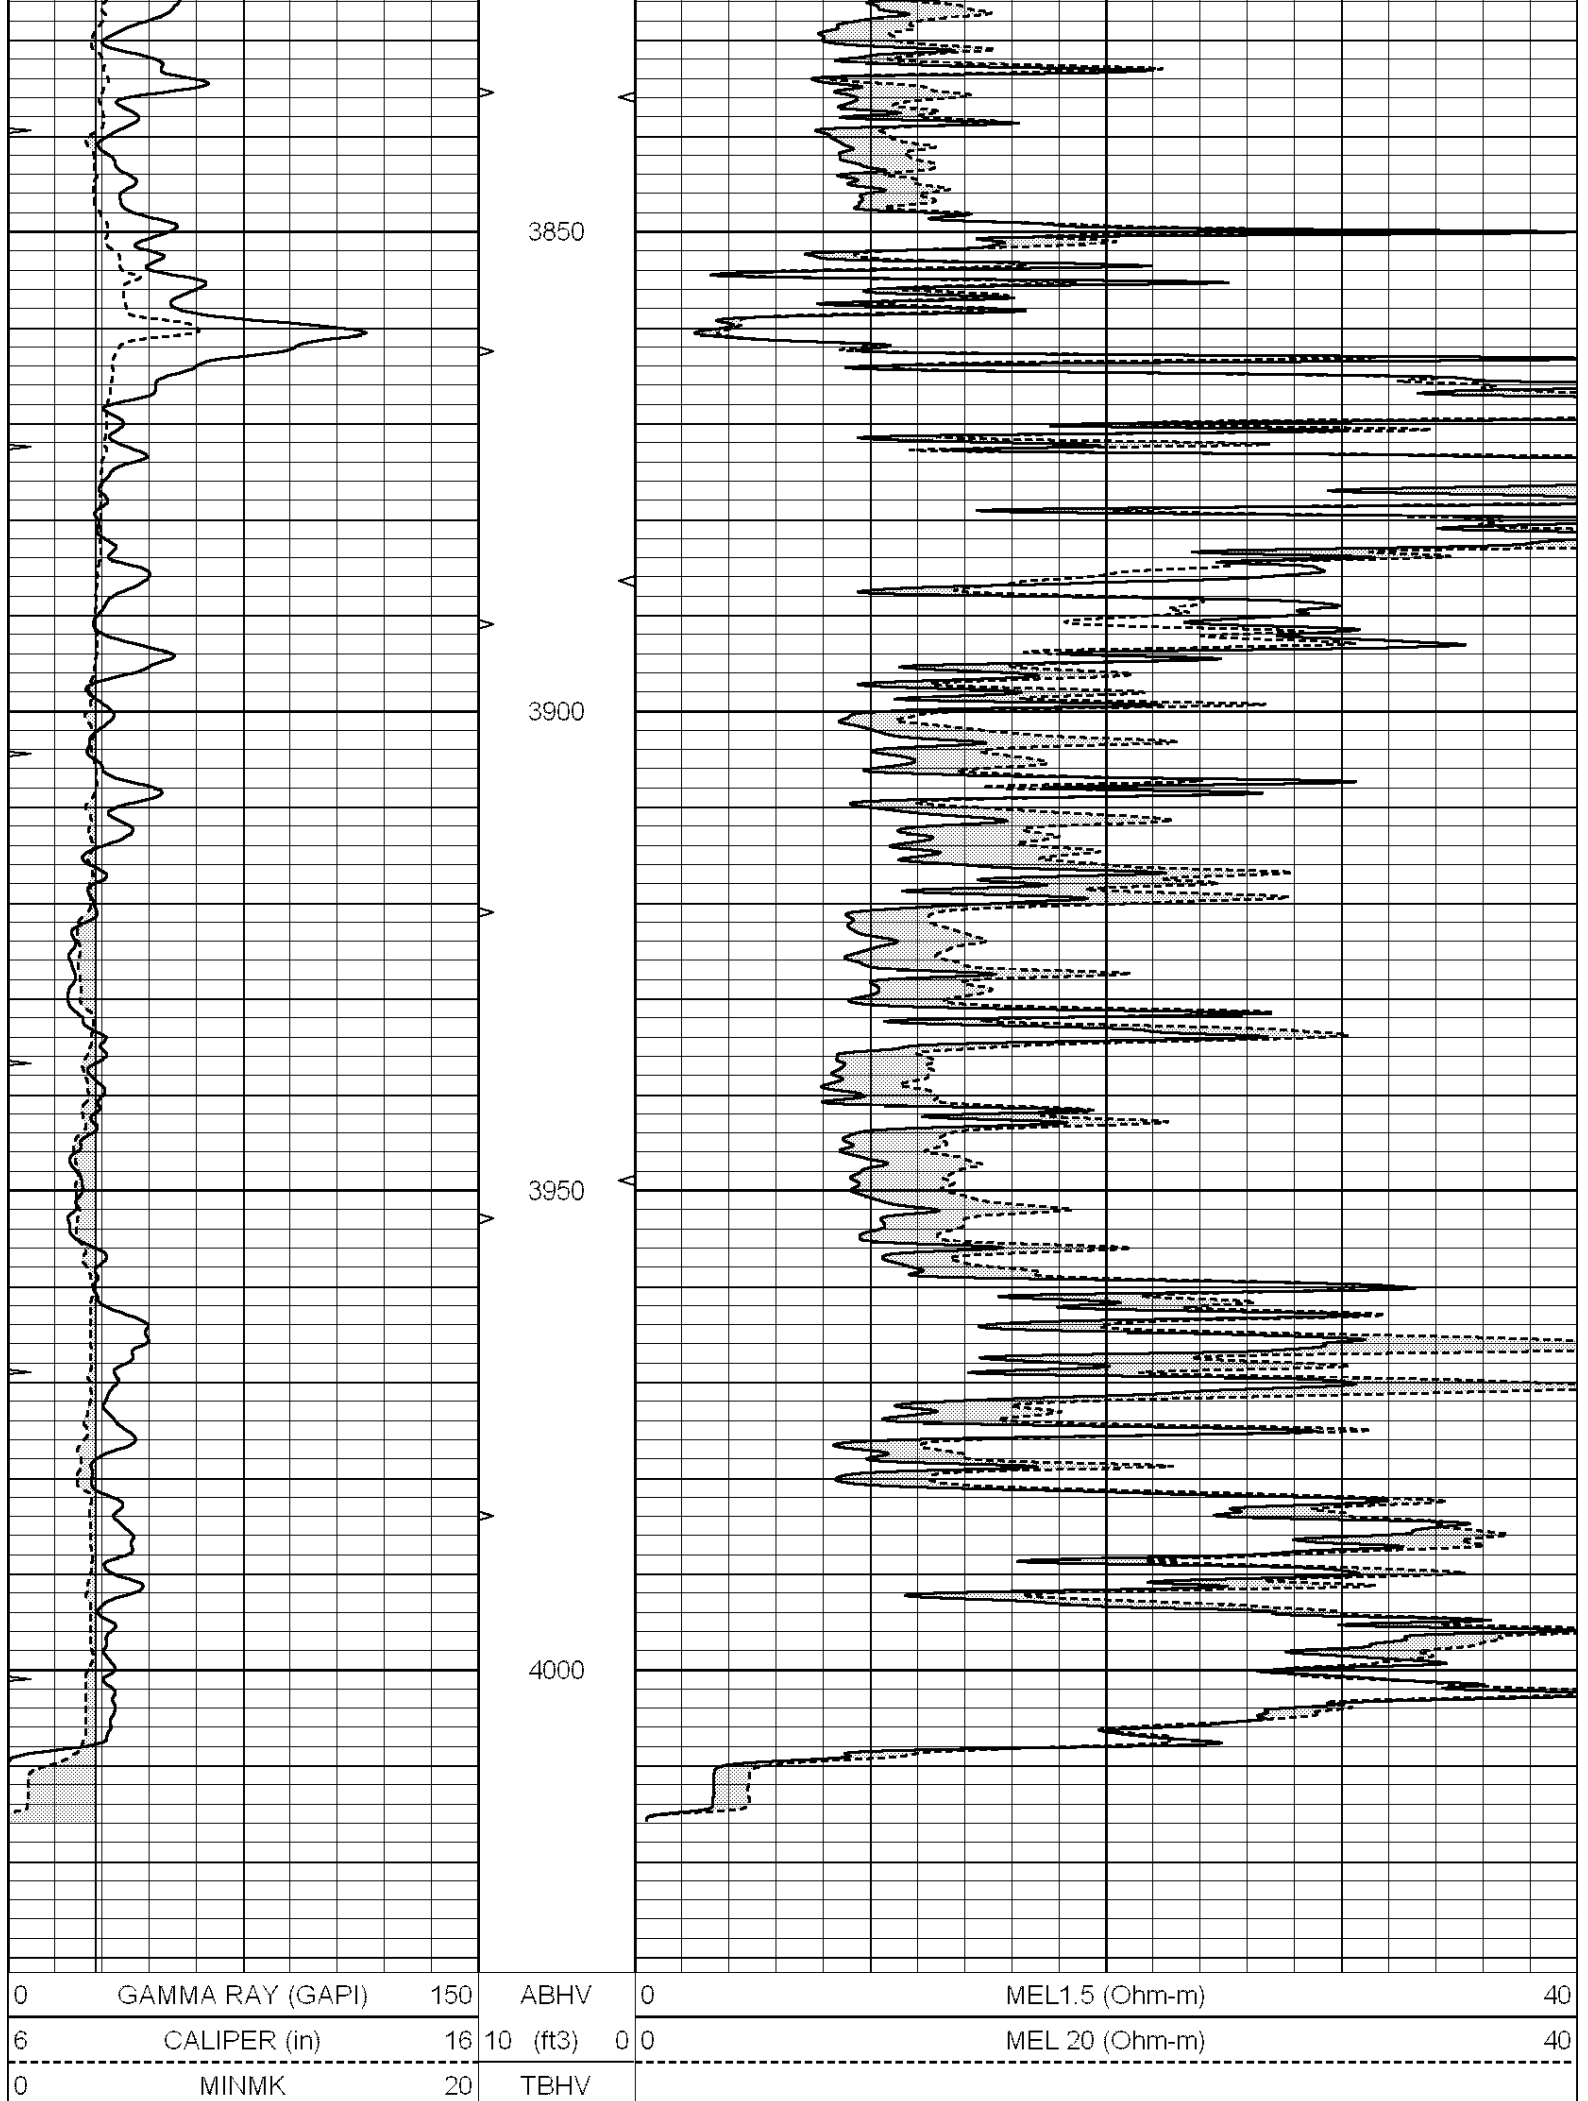

Calibration Report

Database File: 2674pe.db
 Dataset Pathname: pass6.1
 Dataset Creation: Wed Aug 15 00:46:29 2018 by Calc SOC 120430

MICRO Calibration Report

Serial Number: 070911
 Tool Model: ProbeN
 Performed: Mon Aug 13 21:26:58 2018

Caliper Calibration: Gain=3.894 Offset=2.131

	Low Cal	High Cal
References	7.700	18.000
Readings	1.430	4.075

1.5" Calibration: Gain=58.000 Offset=0.500

	Low Cal	High Cal
References	0.000	20.000
Readings	0.001	1.240

2" Calibration: Gain=70.000 Offset=0.500

	Low Cal	High Cal
References	0.000	20.000
Readings	0.001	1.076

Gamma Ray Calibration Report

Serial Number: 110959
 Tool Model: OPEN_GR
 Performed: Mon Aug 13 21:11:43 2018

Calibrator Value: 1.0 GAPI

Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps

Sensitivity: 0.2300 GAPI/cps