

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-167-23351-00-00
Spot: NWSWSE Sec/Twnshp/Rge: 35-15S-11W
900 feet from S Section Line, 2450 feet from E Section Line
Lease Name: PHILLIPS Well #: 1-35
County: RUSSELL Total Vertical Depth: 3440 feet

Operator License No.: 3882
Op Name: SAMUEL GARY JR. & ASSOCIATES, IN
Address: 1670 BROADWAY #3300
DENVER, CO 80202

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	461	0	235 SX

\$ 111.80

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 06/17/2006 2:30 AM
Plug Co. License No.: 33323 Plug Co. Name: PETROMARK DRILLING, LLC
Proposal Rcvd. from: ROBIN ROACH Company: PETROMARK DRILLING, LLC Phone: (316) 729-7406

Proposed Plugging Method: Order 145 sxs 60/40 pozmix - 6% gel with 1/4# flocele per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: HERB DEINES Witness Type: NONE
Date/Time Plugging Completed: 06/17/2006 7:30 AM KCC Agent: HERB DEINES

Actual Plugging Report:

Perfs:


1st. Plug at 3700' w/35 sxs.
2nd. Plug at 715' w/25 sxs.
3rd. Plug at 525' w/60 sxs.
4th. Plug at 40' w/10 sxs.
Rathole with 15 sxs.

Remarks: ALLIED CEMENTING COMPANY.

Plugged through: DP

District: 04

Signed

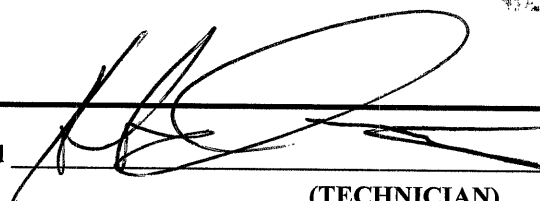

(TECHNICIAN)

INVOICED
DATE 7-14-06
2007060211

RECEIVED

JUL 14 2006

KCC WICHITA

JUL 13 2006

PCT