



SONIC LOG

Company	VINCENT OIL CORPORATION		
Well	PERKINS #3-33		
Field	WILDCAT		
County	FORD		
State	KANSAS		
Location:	AP1 # : 15-057-21003-00-00		
Permanent Datum	1650' FNL & 782' FEL		
Log Measured From	GROUND LEVEL		
Drilling Measured From	KELLY BUSHING 12' A.G.L.		
SEC 33	TWP 28S	RGE 23W	Elevation
			K.B. 2530
			D.F. 2528
			G.L. 2518
Date	10/28/18		
Run Number	TWO		
Depth Driller	5360		
Depth Logger	5362		
Bottom Logged Interval	5352		
Top Log Interval	600		
Casing Driller	8 5/8" @ 847		
Casing Logger	647		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.3/52		
pH / Fluid Loss	10.0/9.6		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.55@70		
Rmt @ Meas. Temp	.41@70		
Rmc @ Meas. Temp	.66@70		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.30@128		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	128F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	Ken LeBlanc		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS
KINGSDOWN 2 NORTH,
4 MILES WEST, NORTH 3/4
WEST INTO AT TANK BATTERY .





MAIN PASS


Database File: 3153pe.db
Dataset Pathname: pass5.1
Presentation Format: _slt
Dataset Creation: Sun Oct 28 16:55:29 2018
Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	ABHV	140	DELTA TIME (usec/ft)		40	
6	CALIPER (in)	16	10 (ft3)	0	30	SONIC POROSITY (pu)		-10
0	MINMK	20	TBHV	0	ITT (msec)		20	
			0 (ft3)	10				

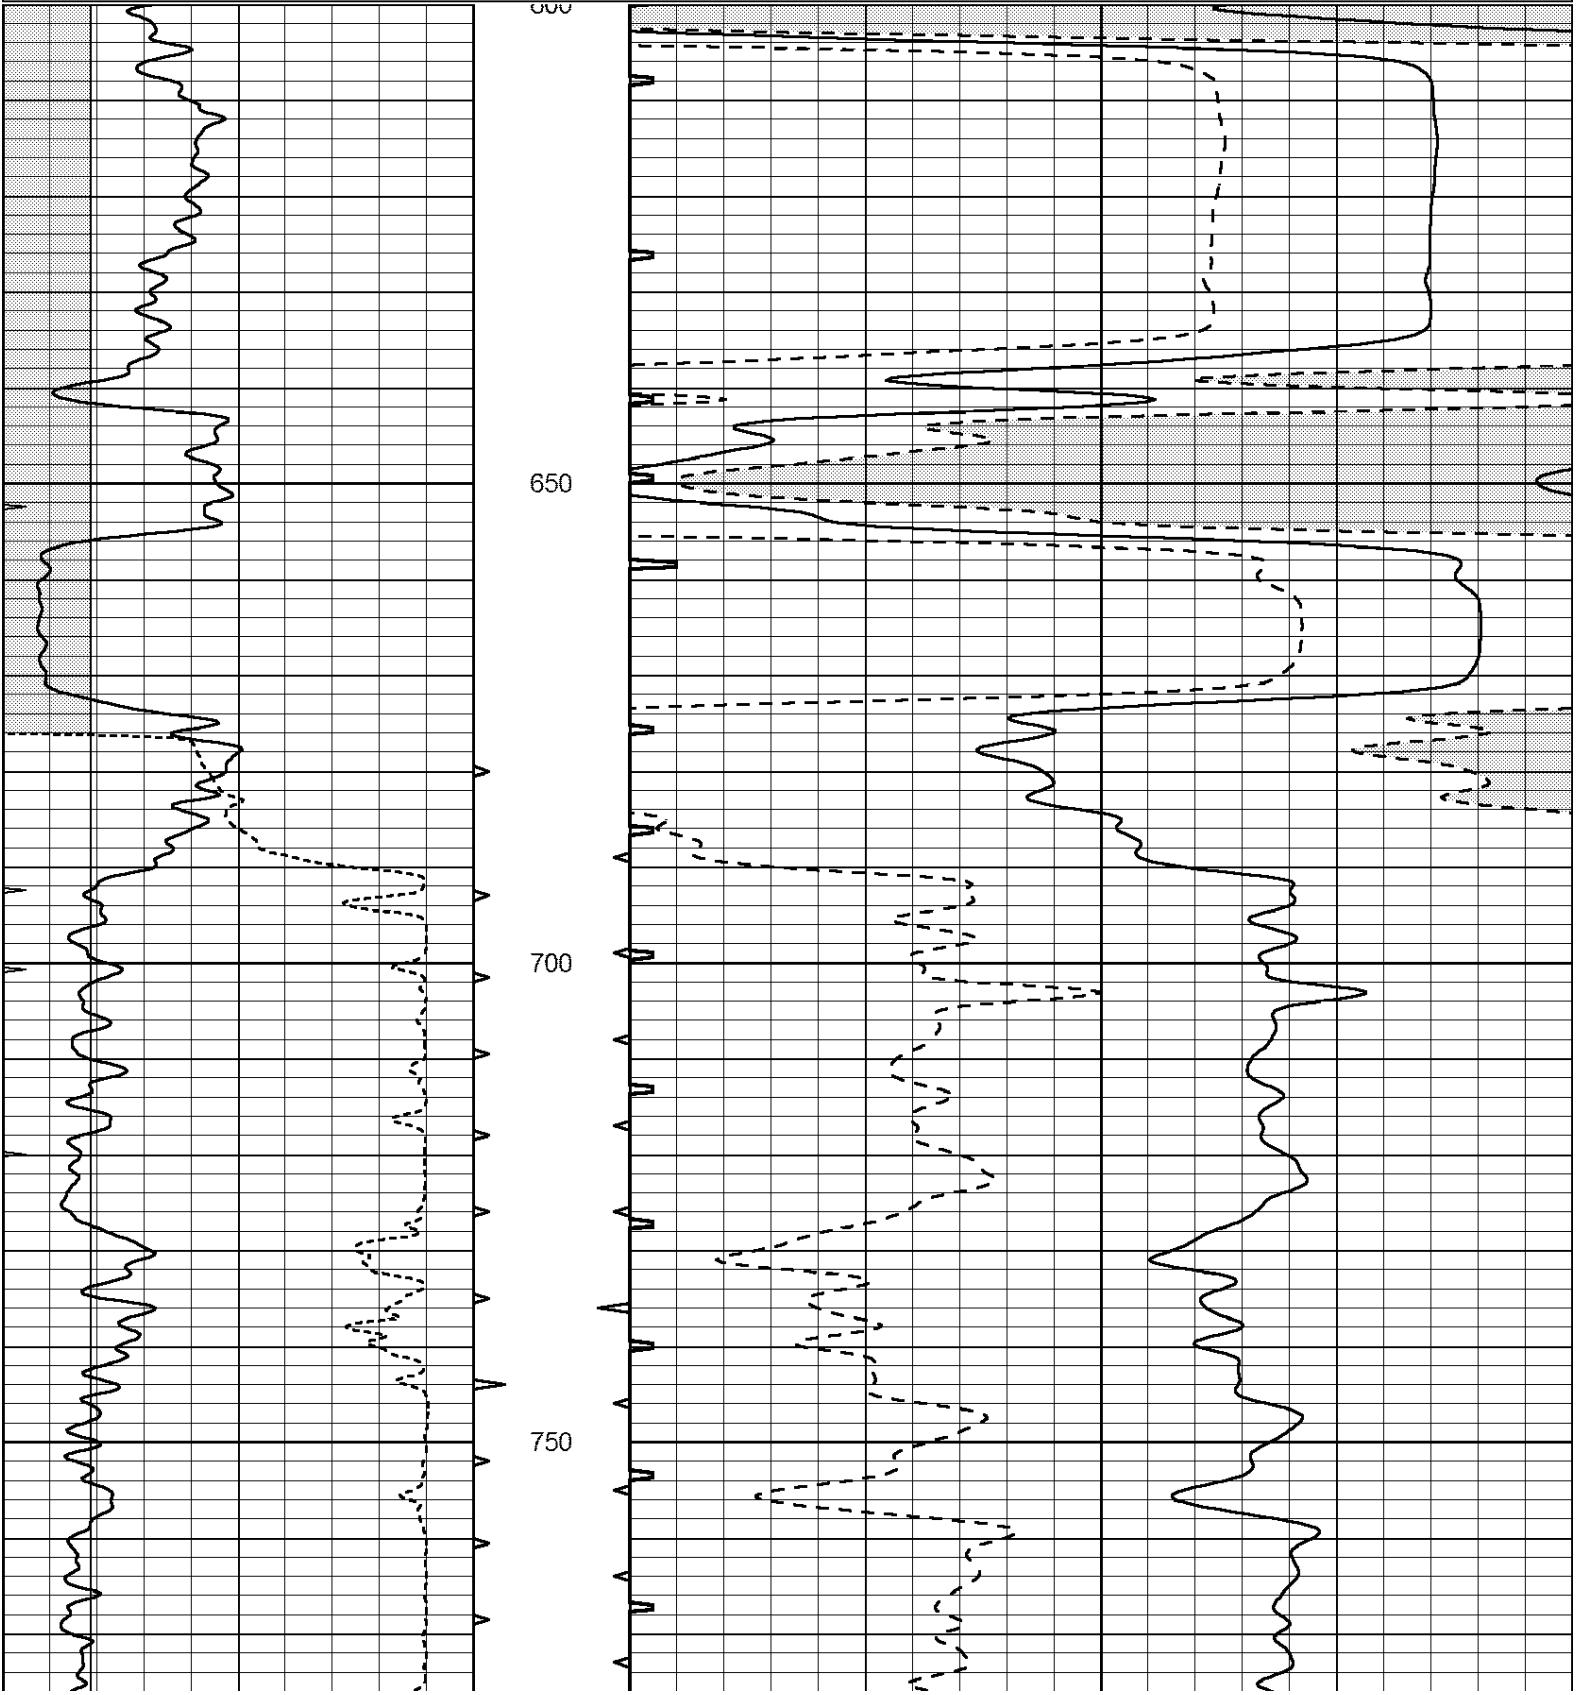

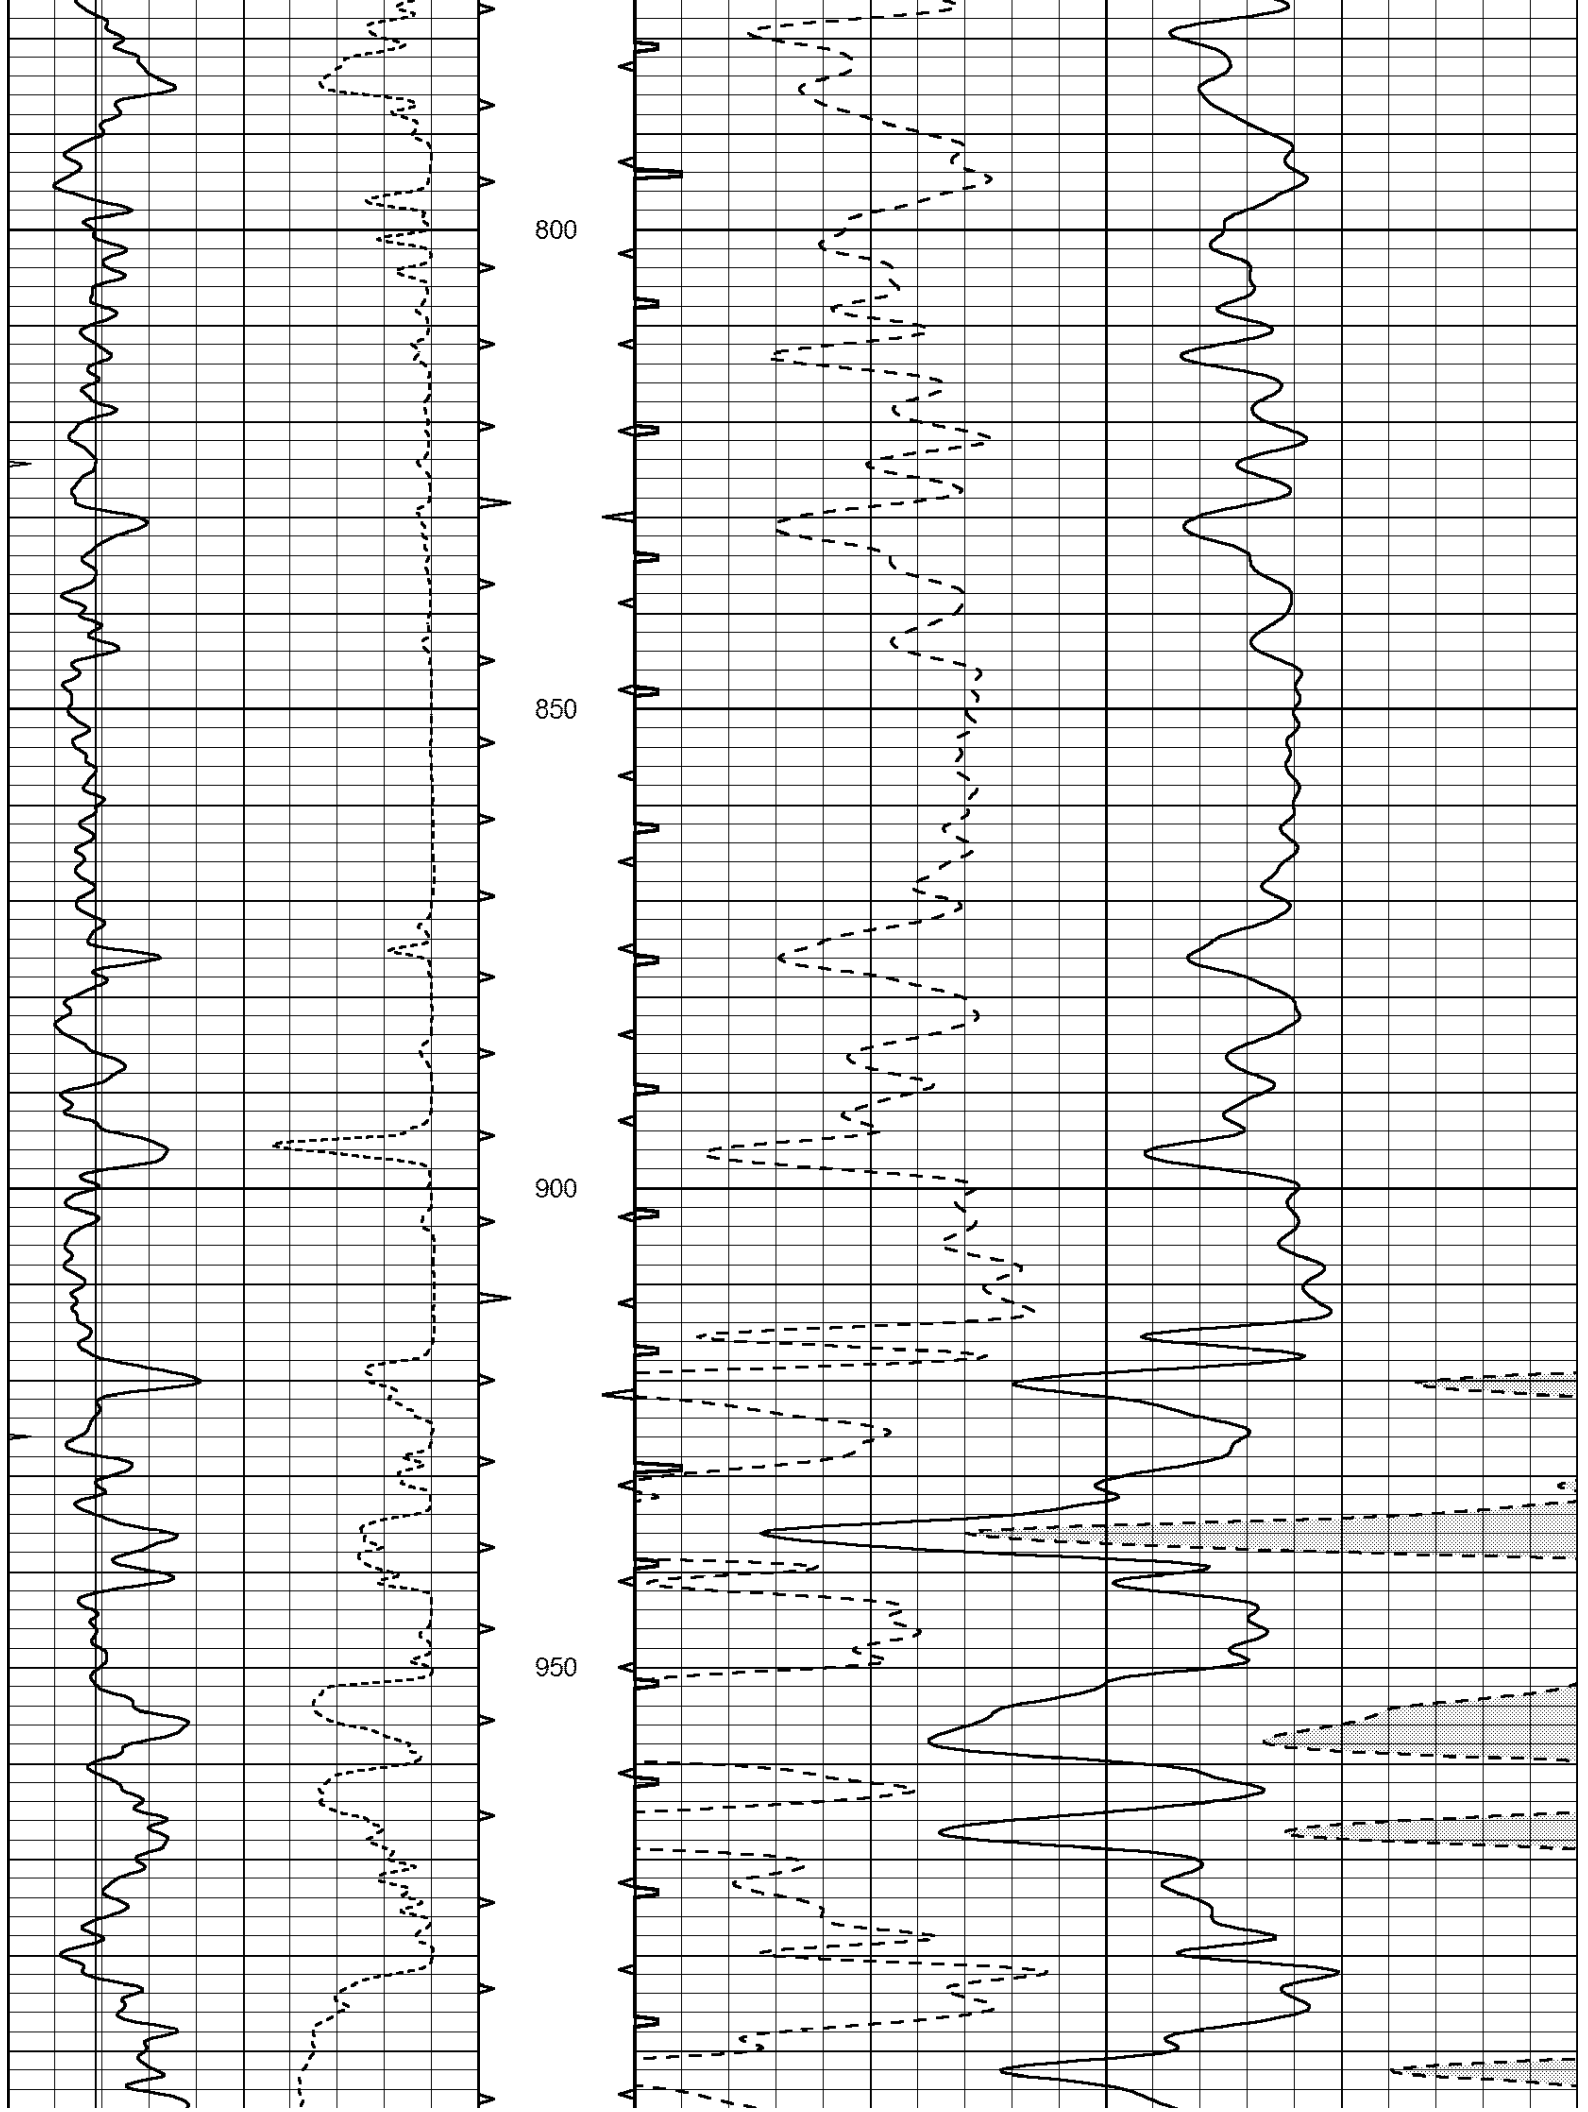

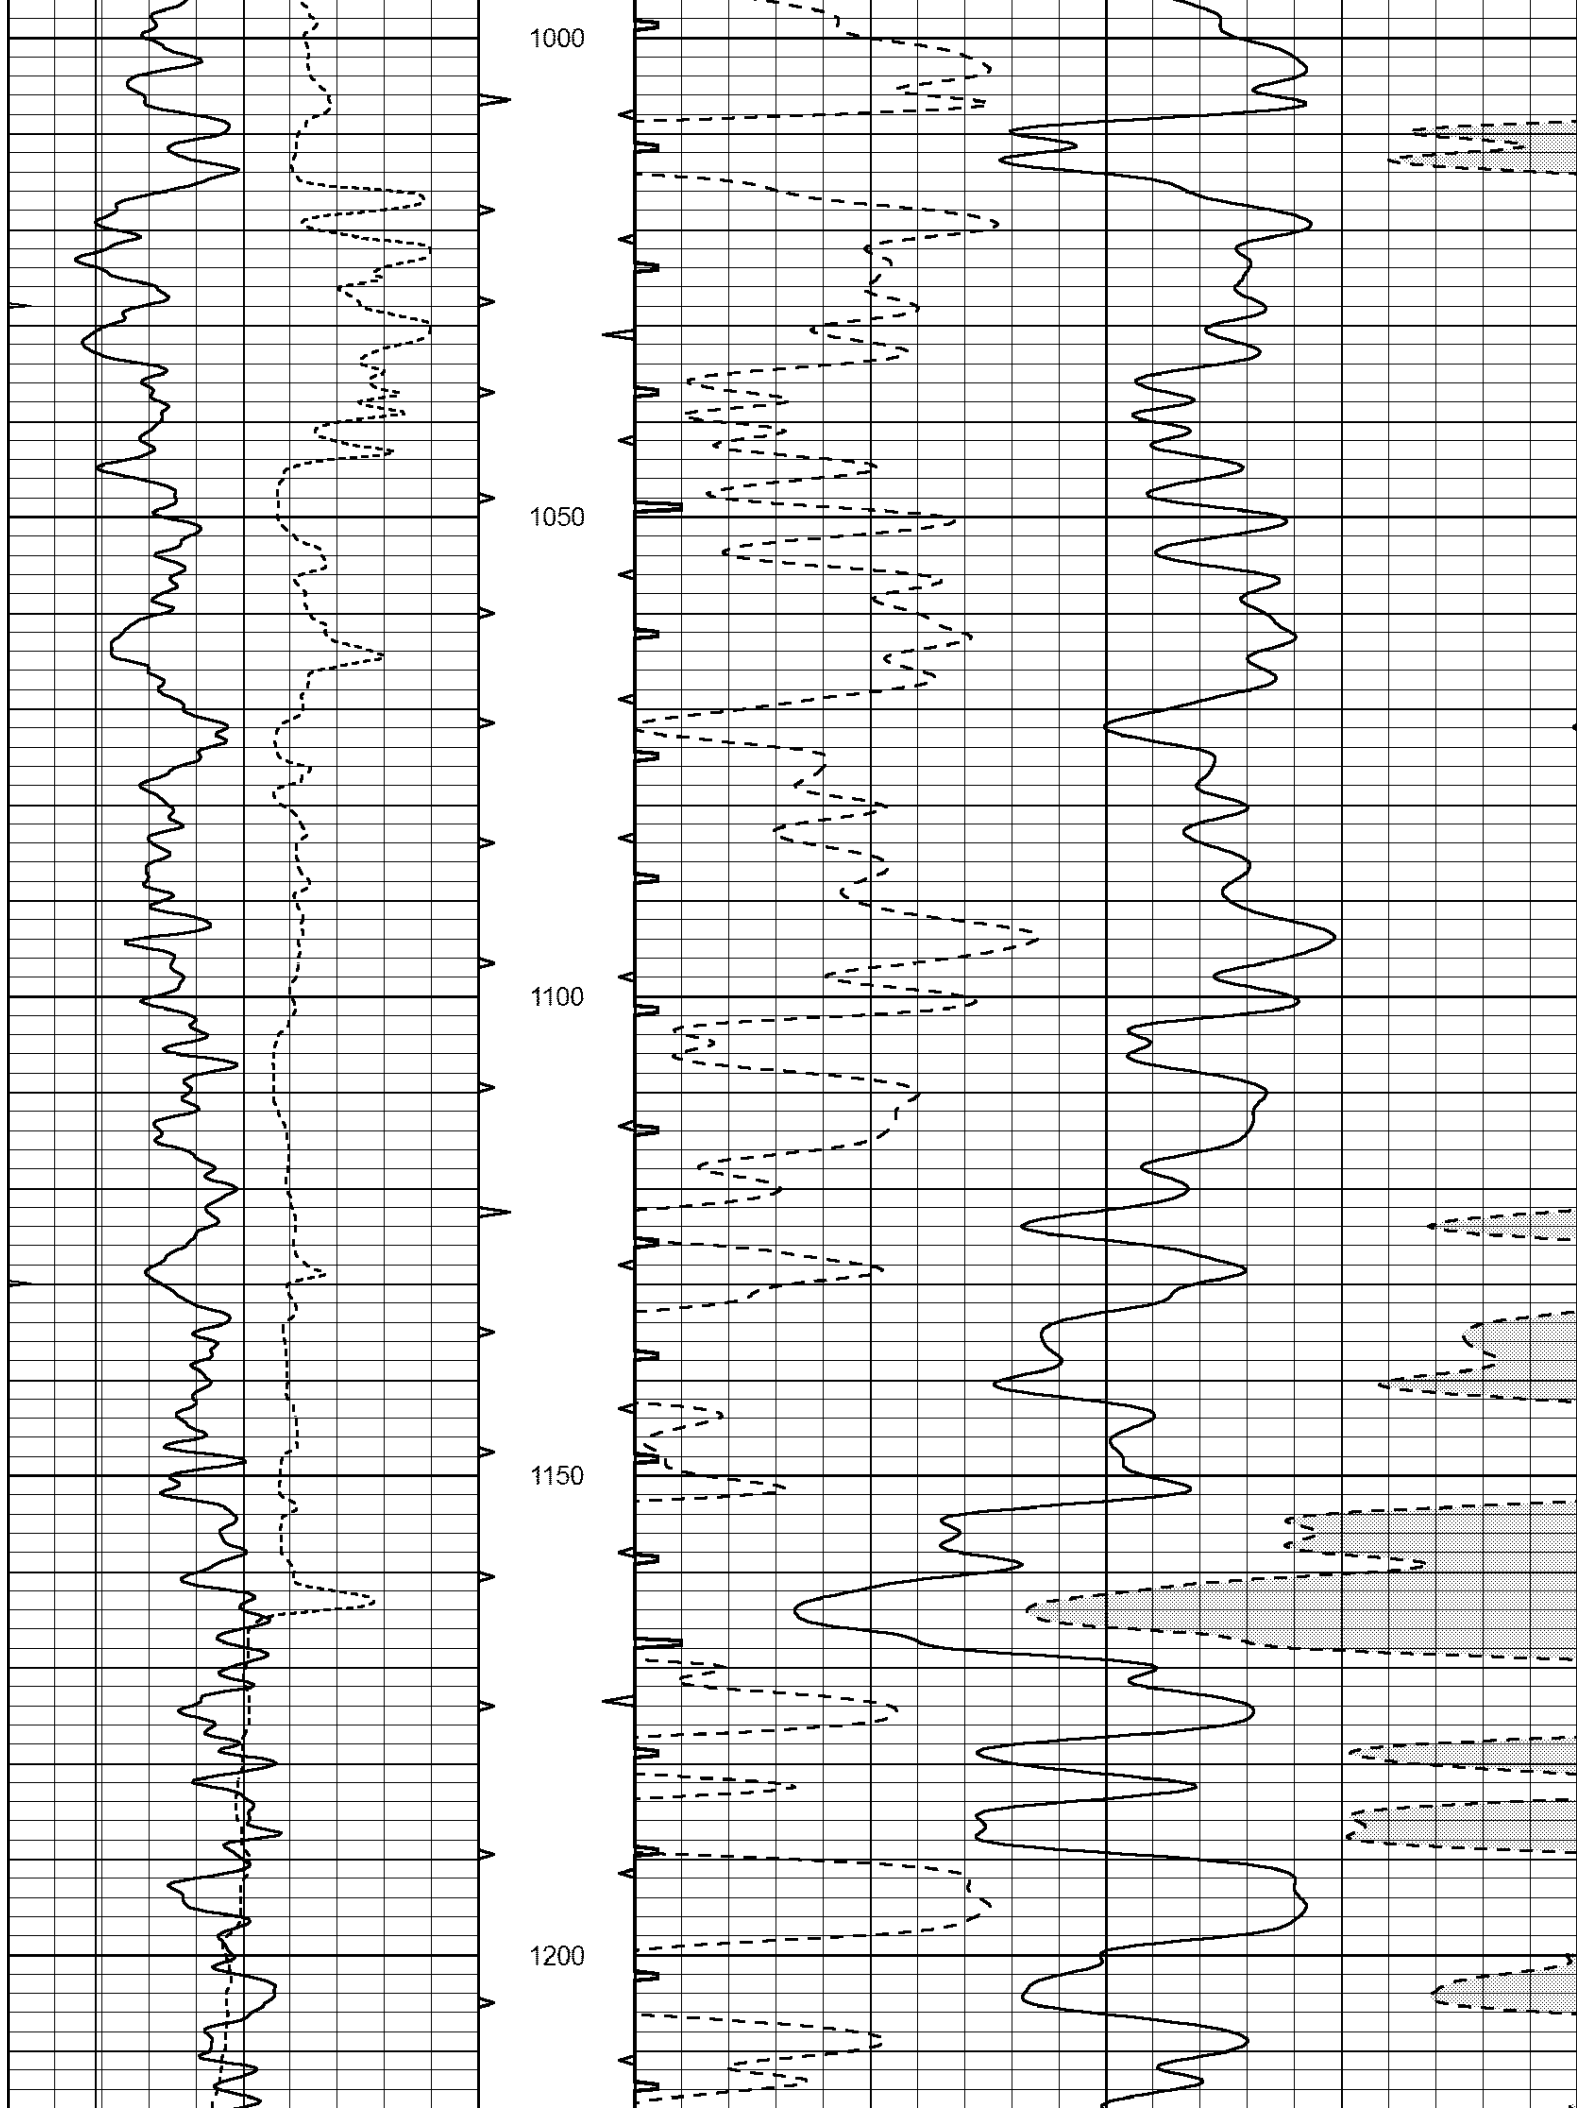

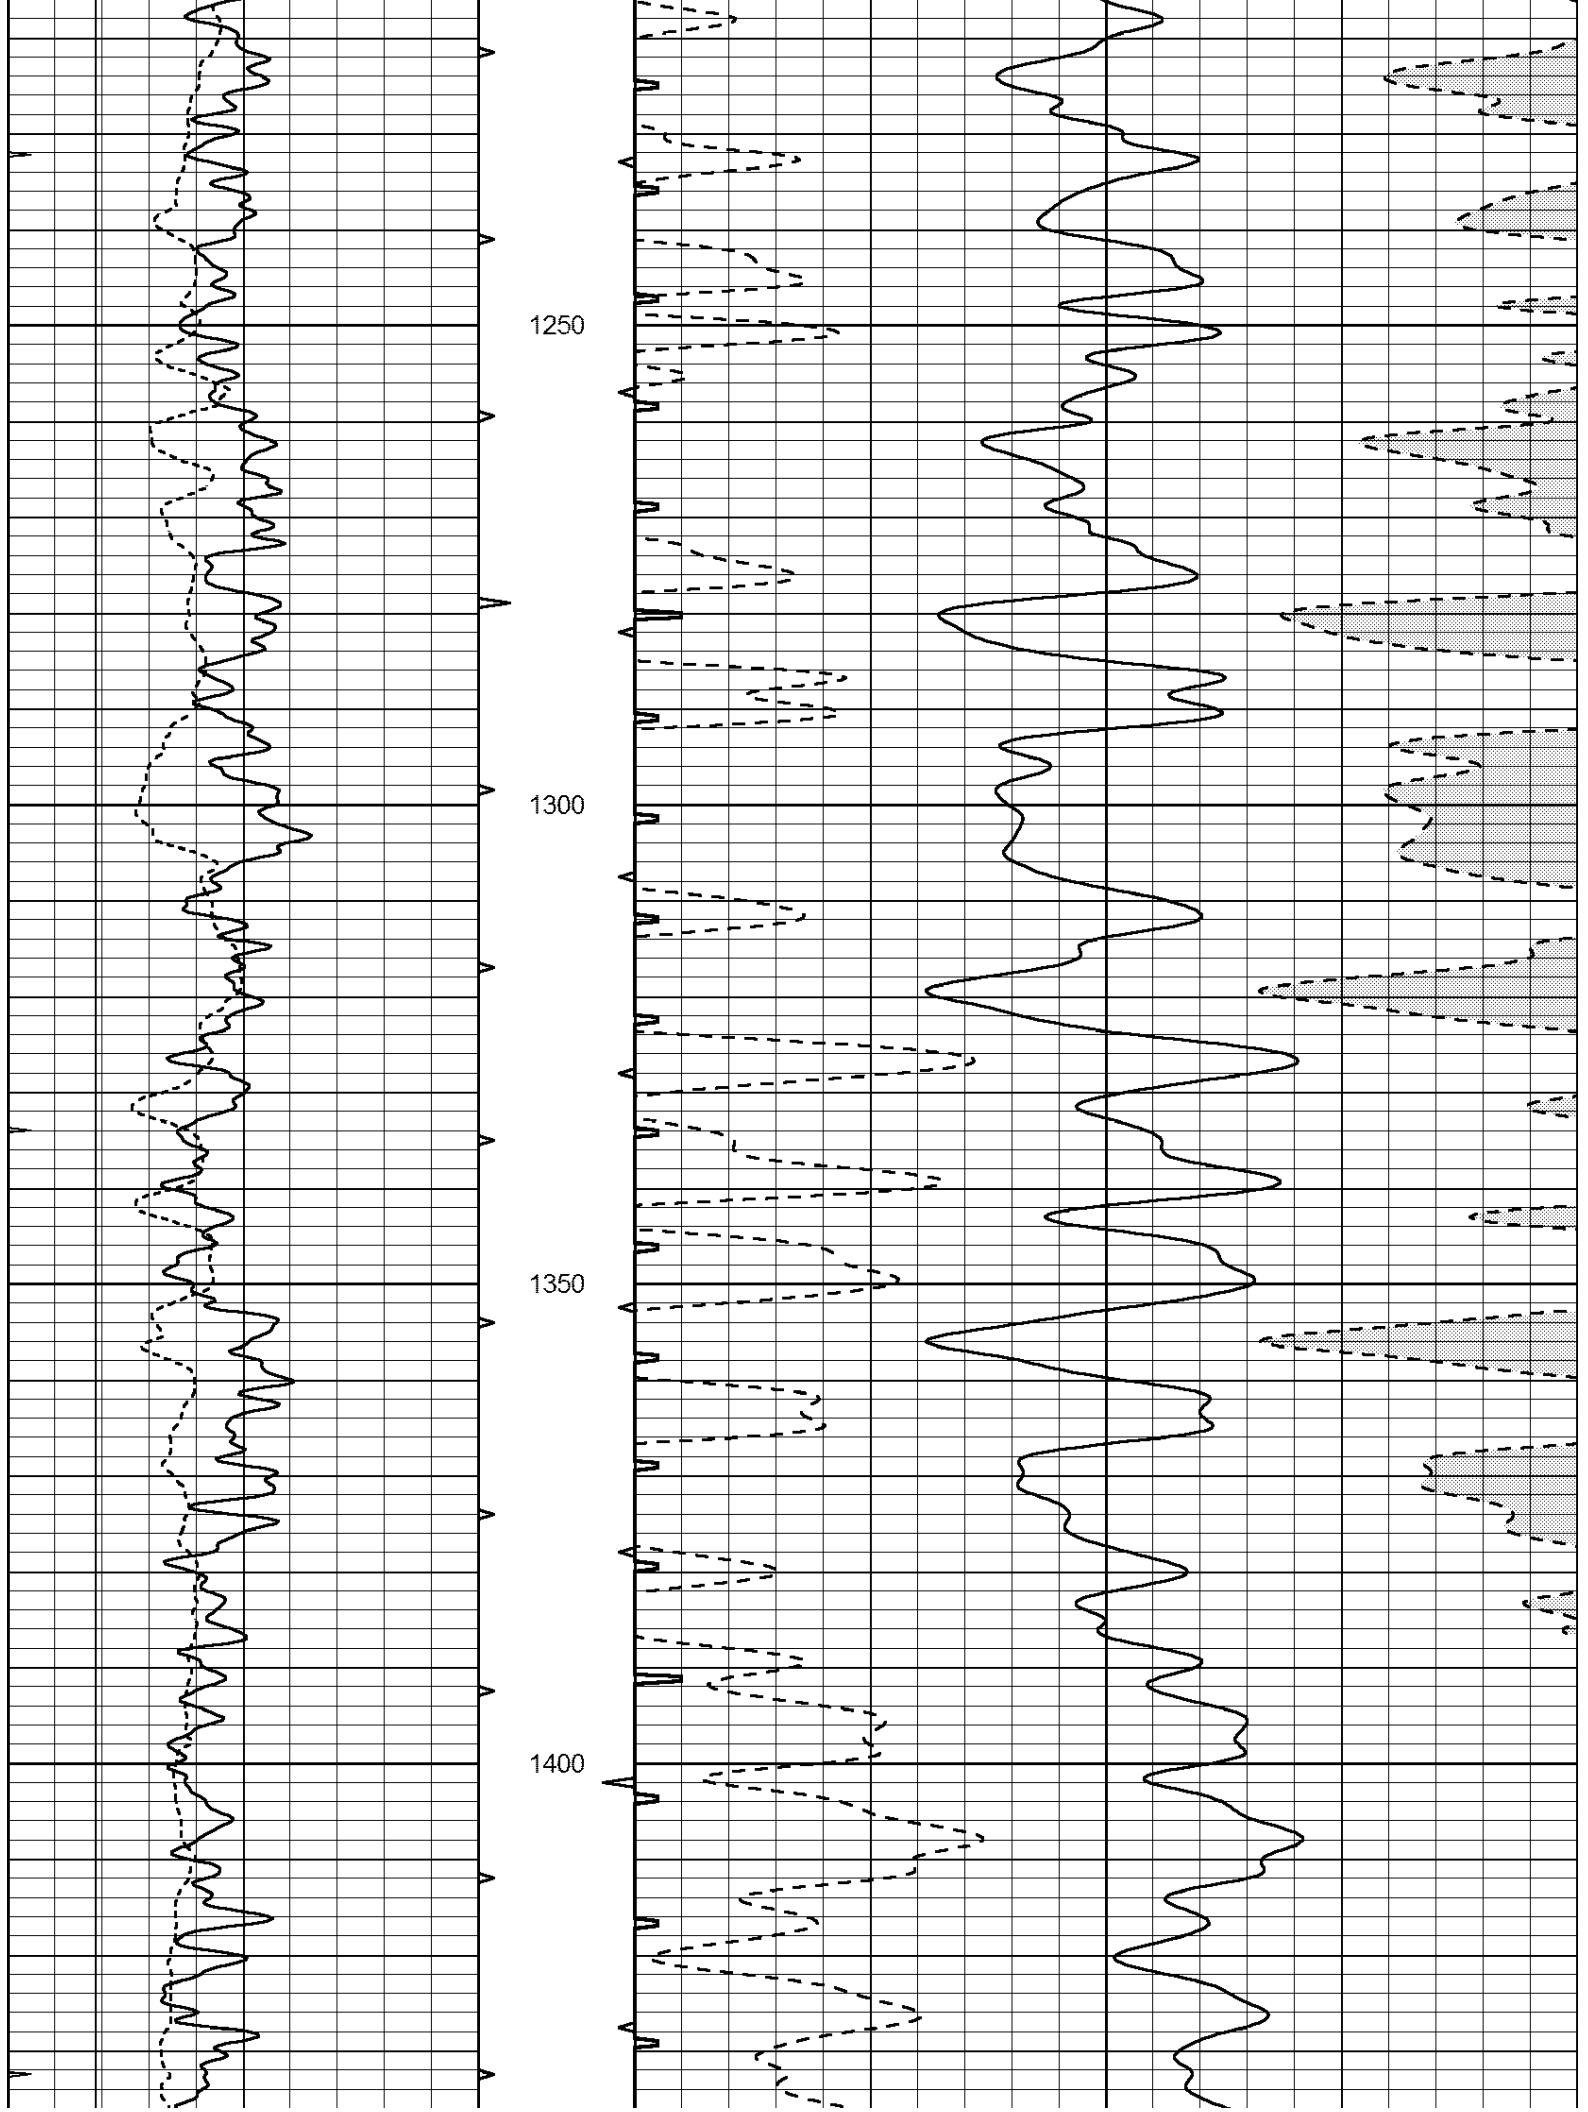

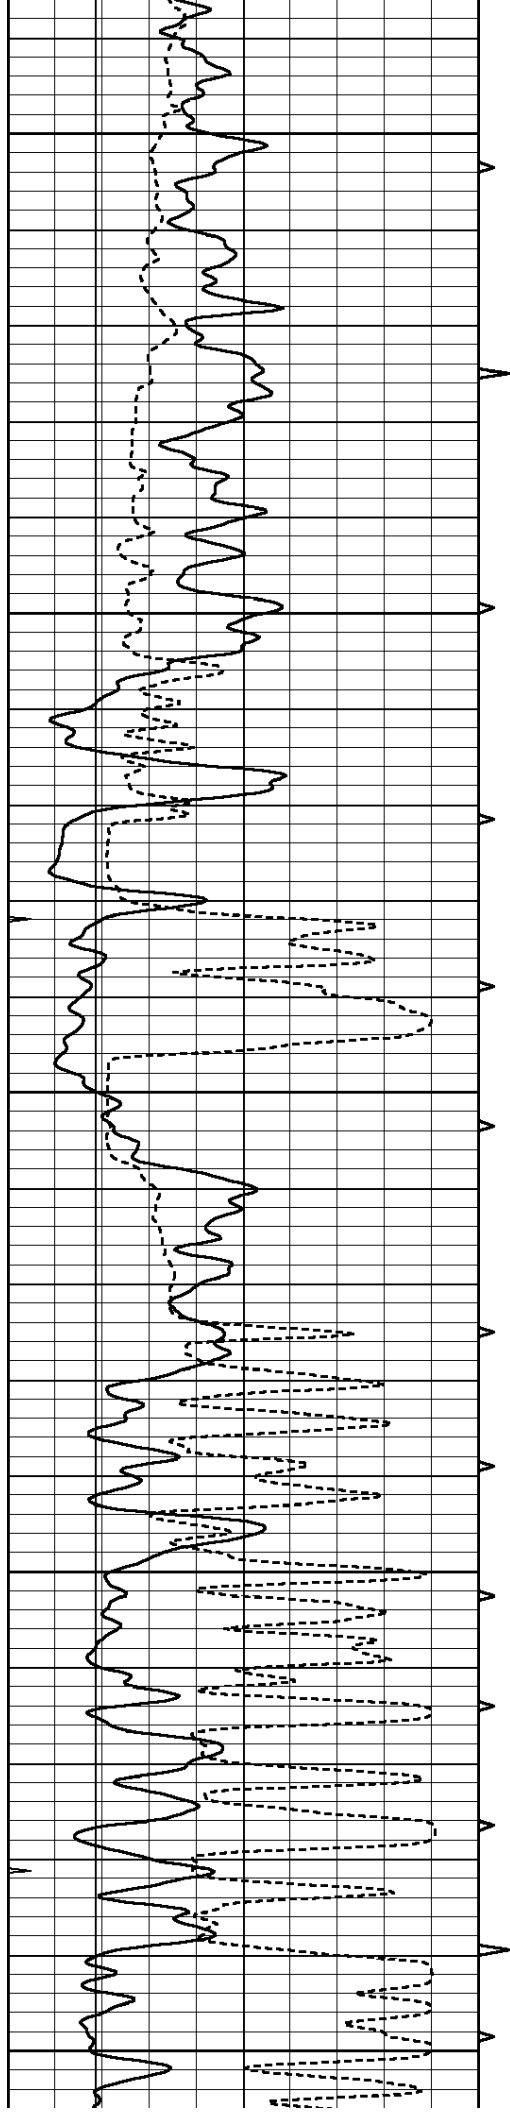


1450


1500

1550

1600

1650

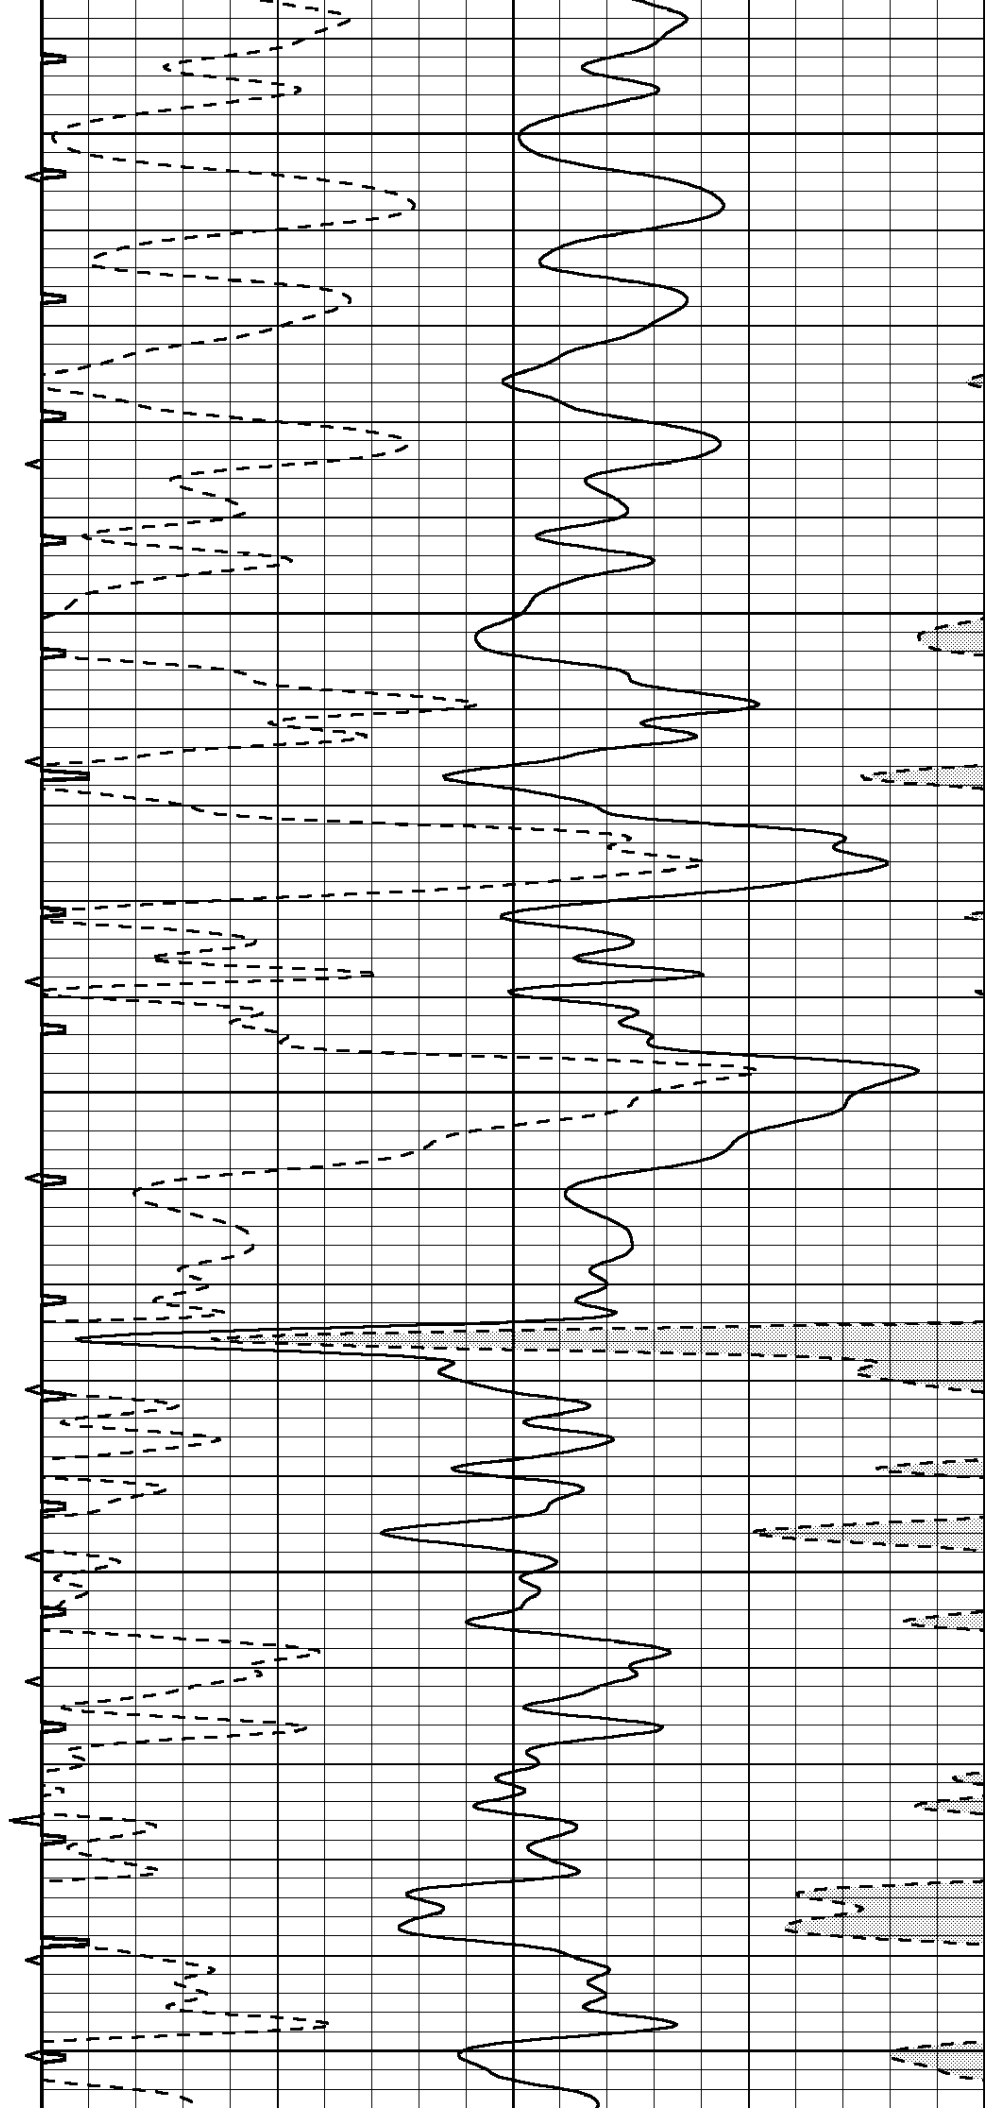

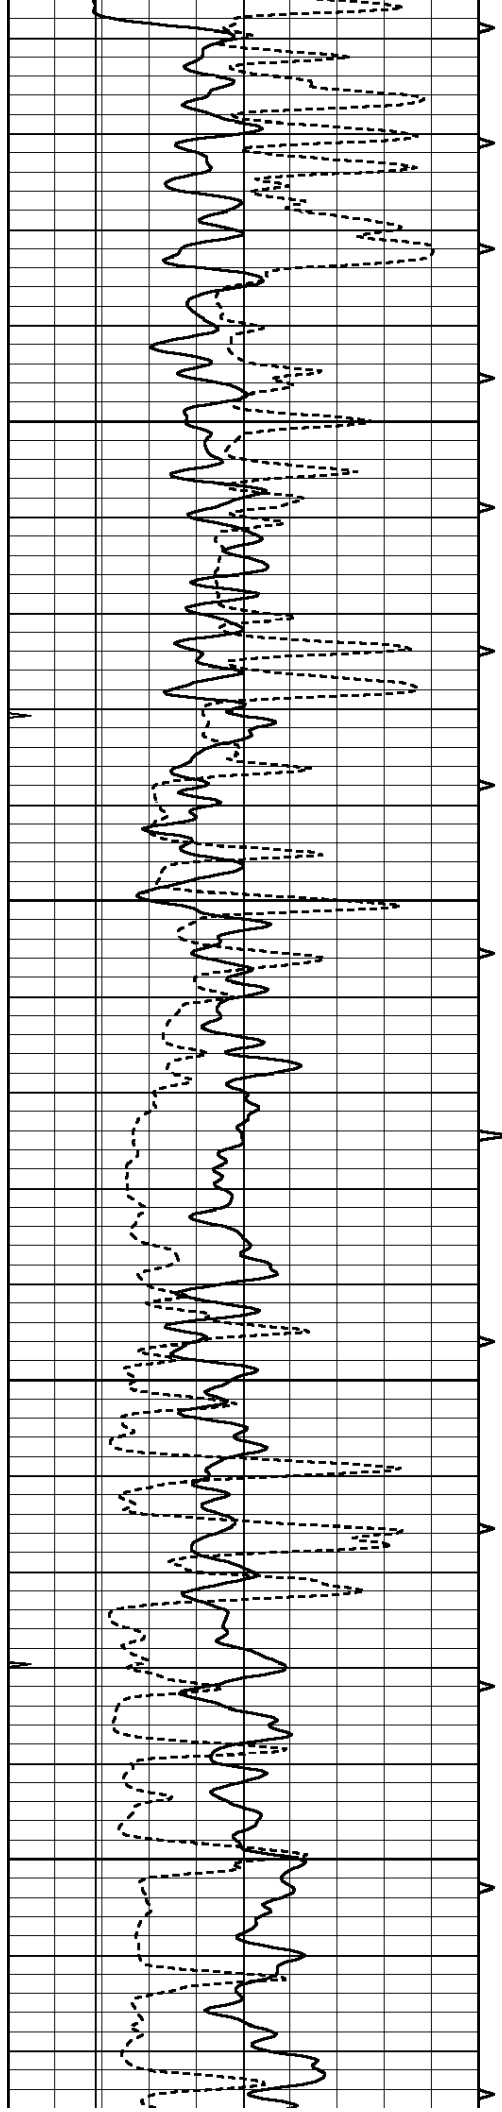



1700

1750

1800

1850

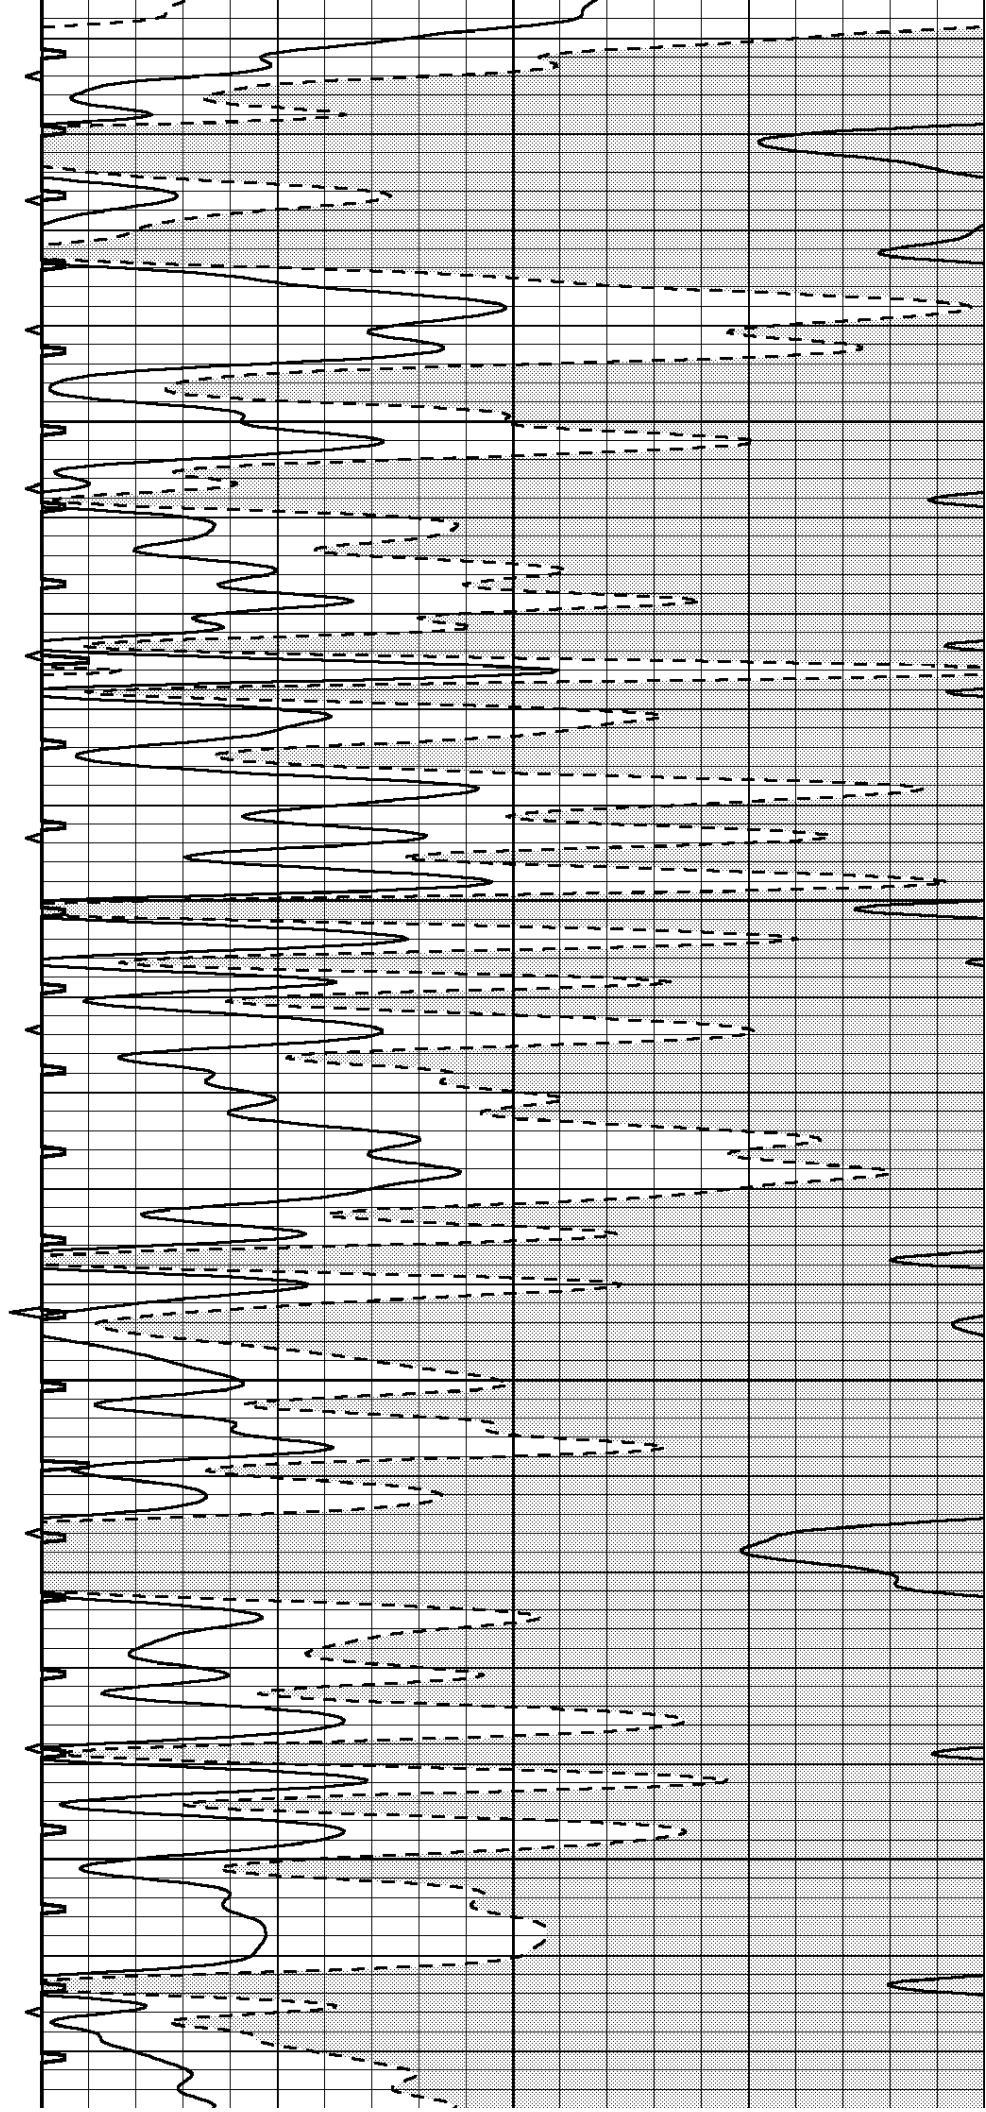

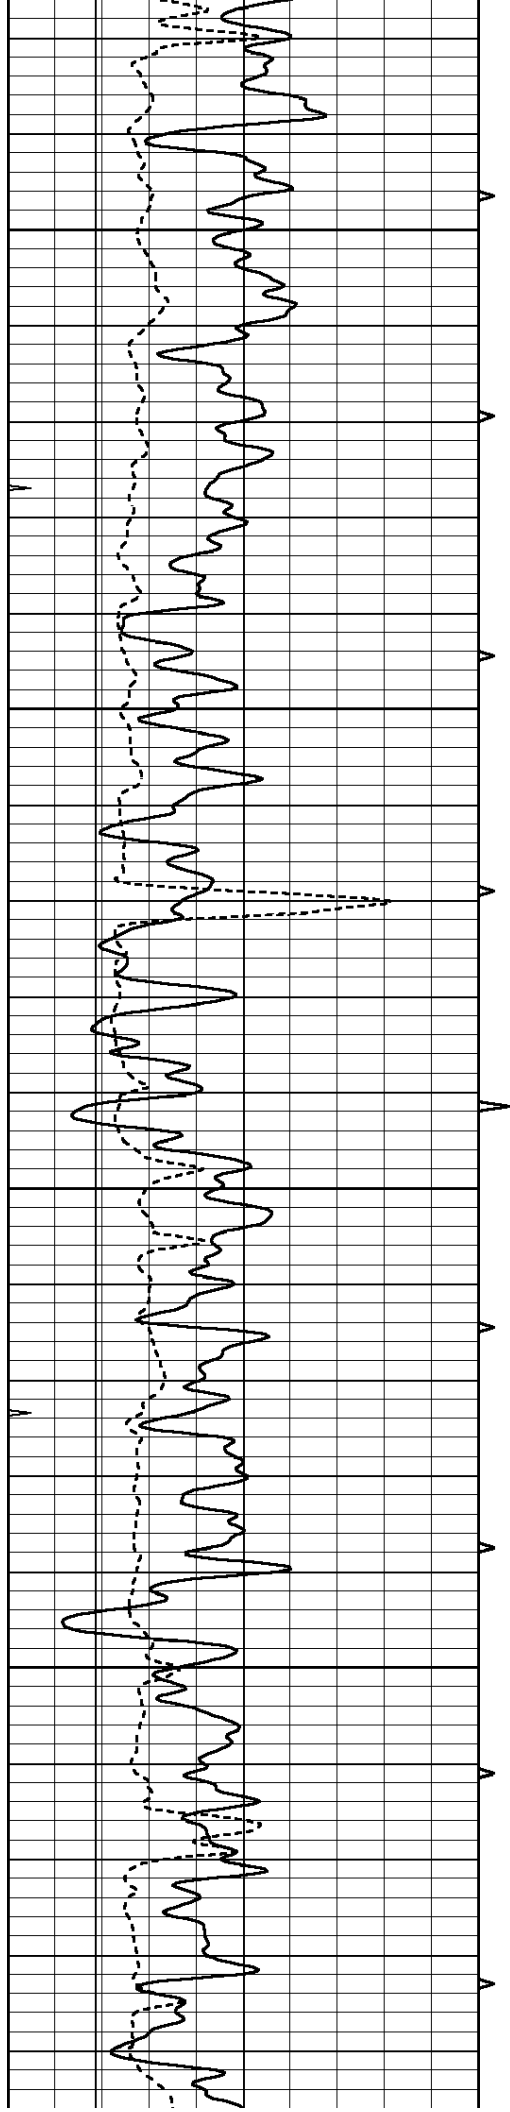




1900


1950

2000

2050

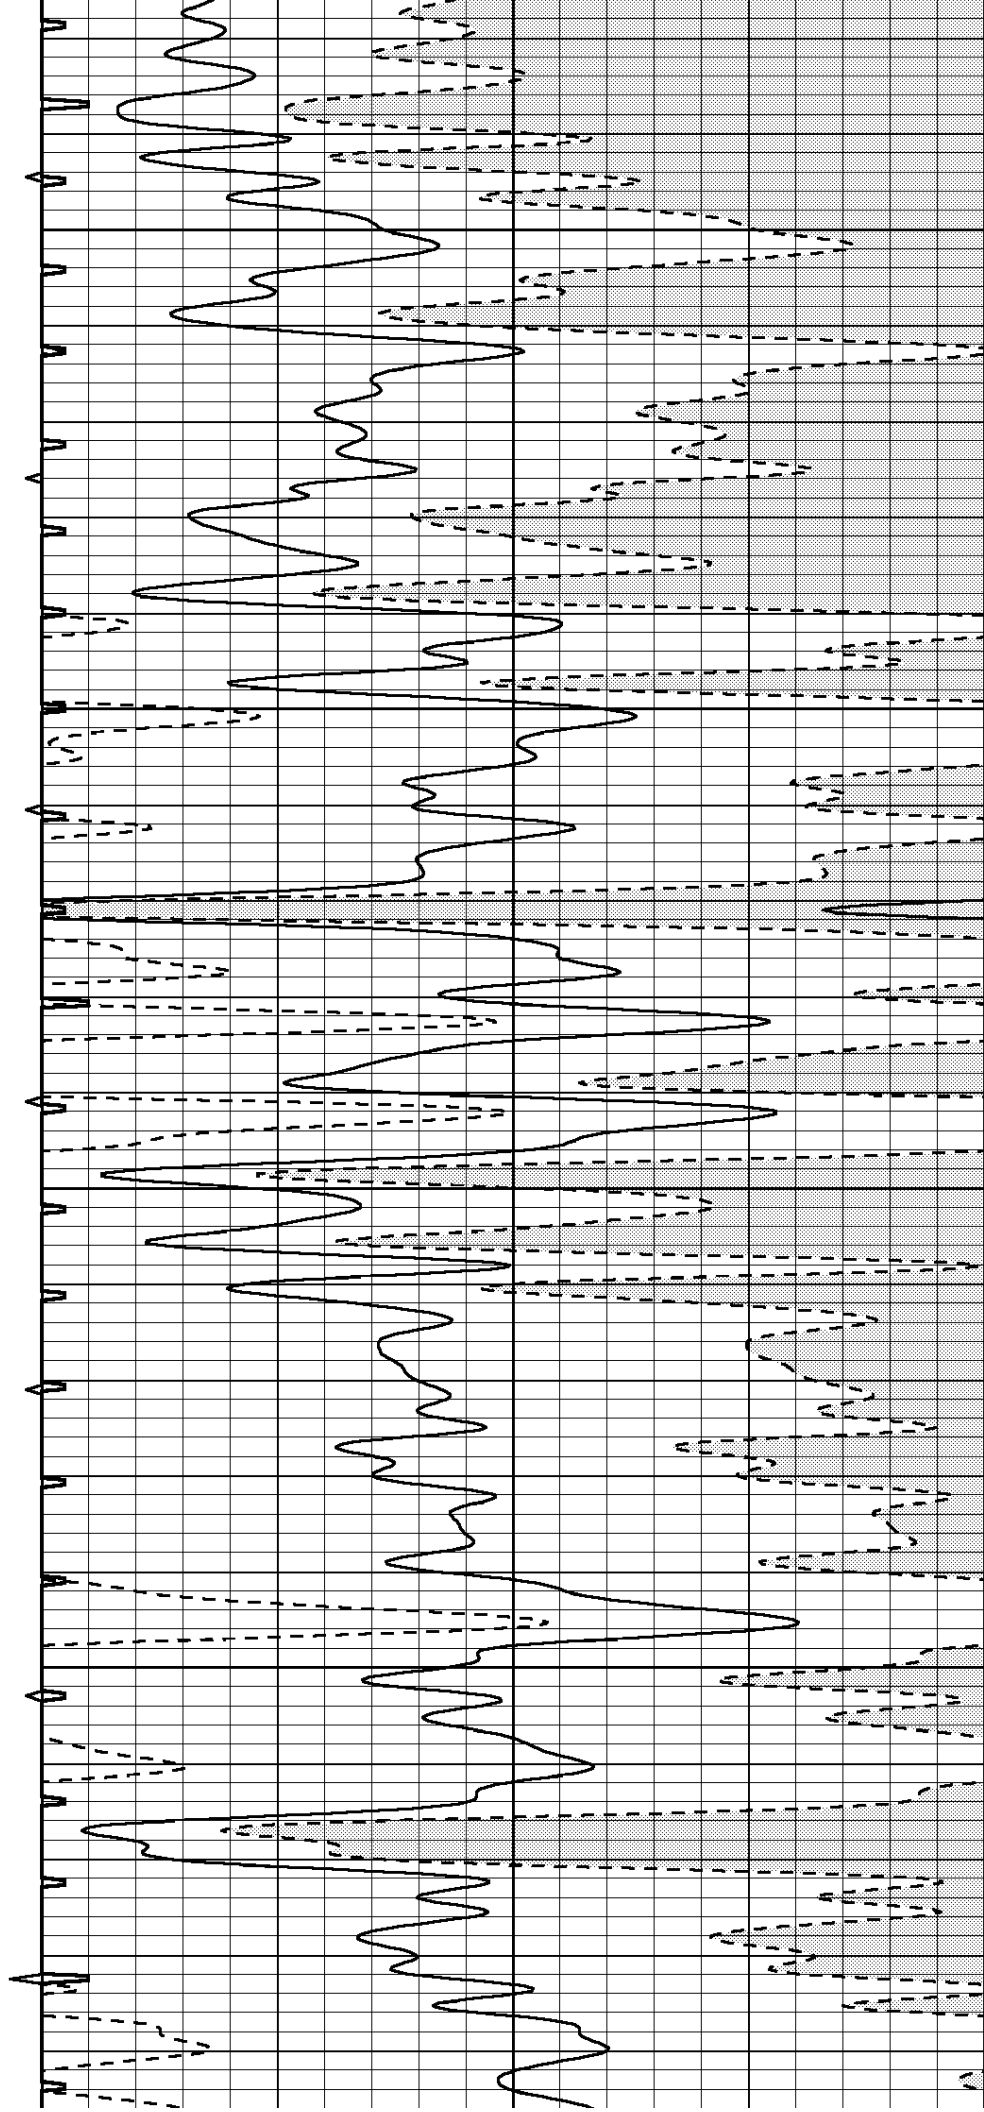

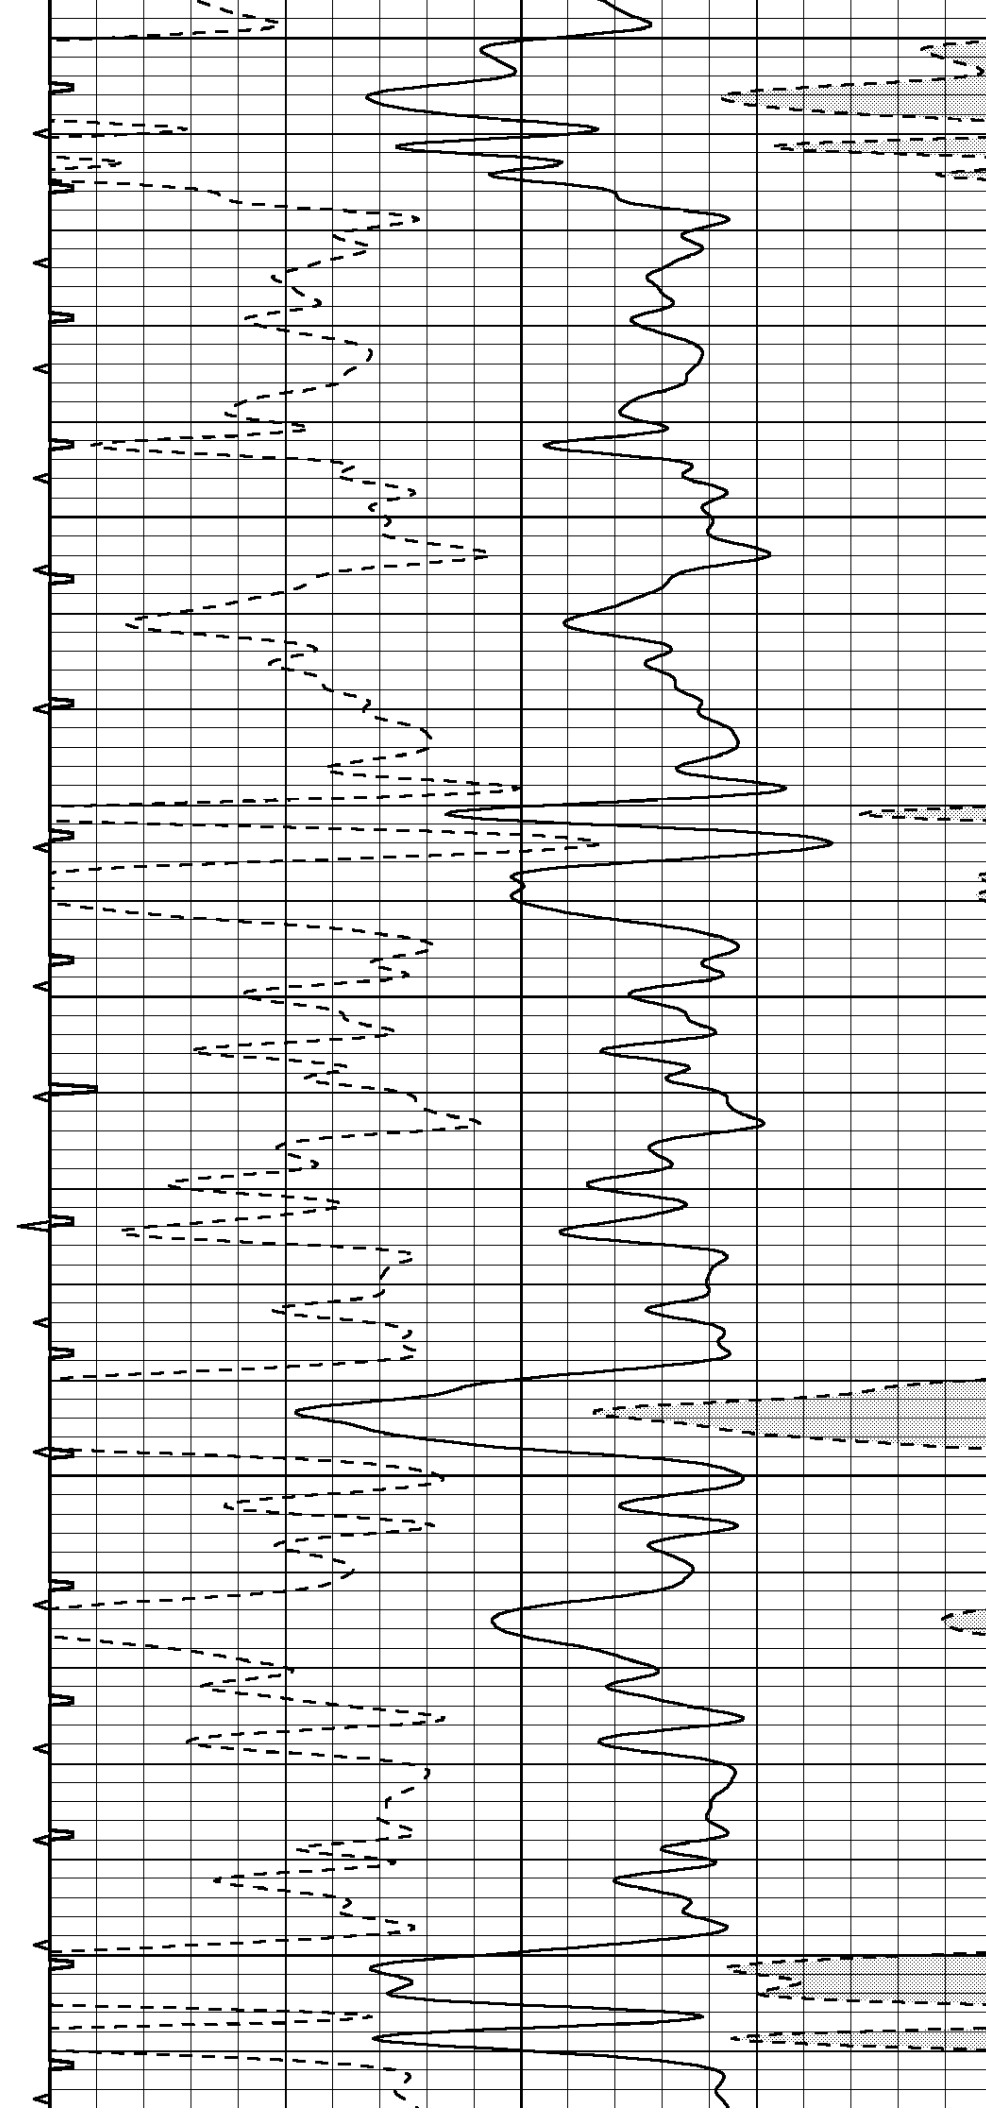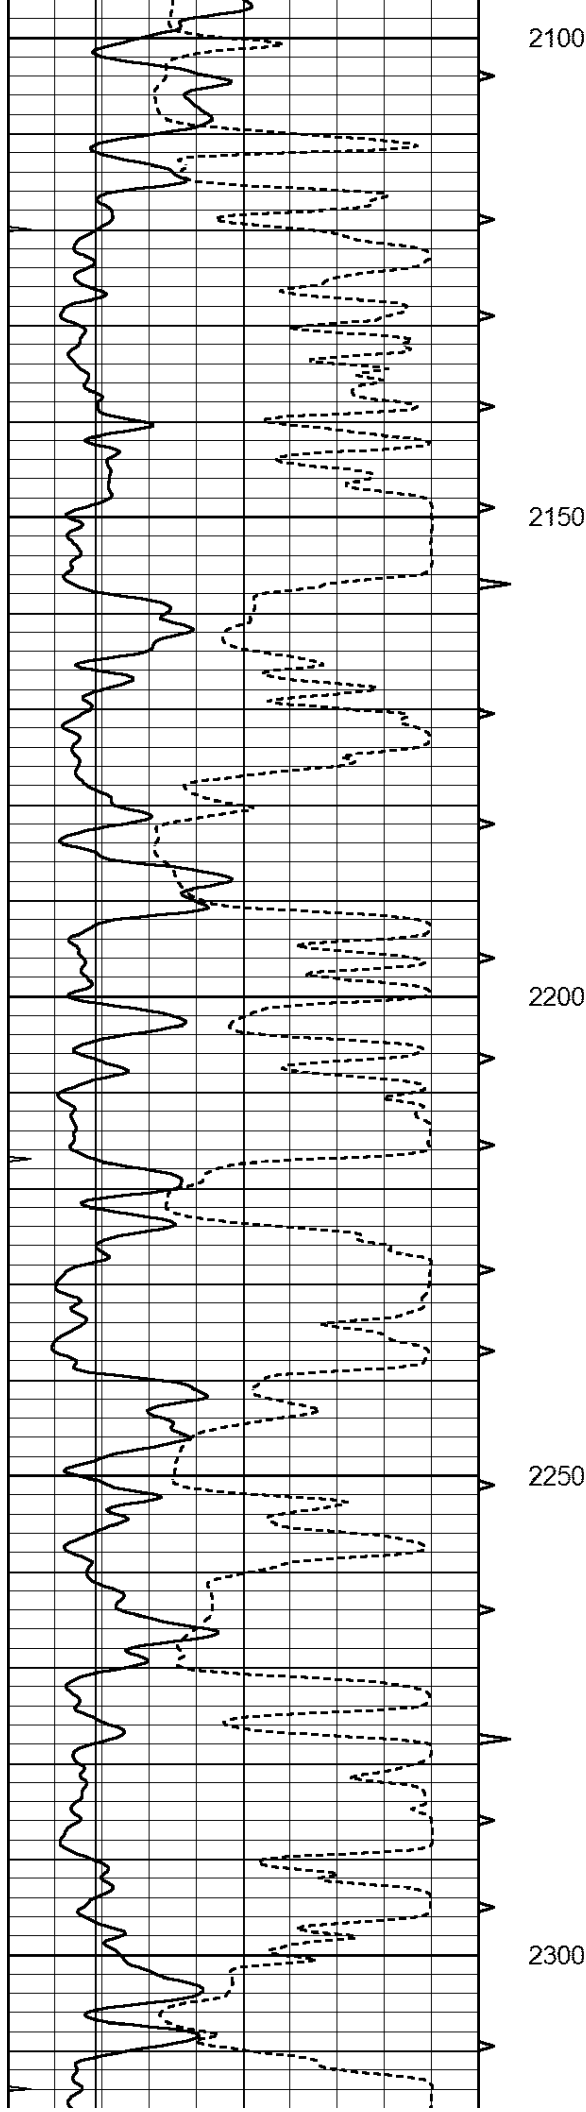

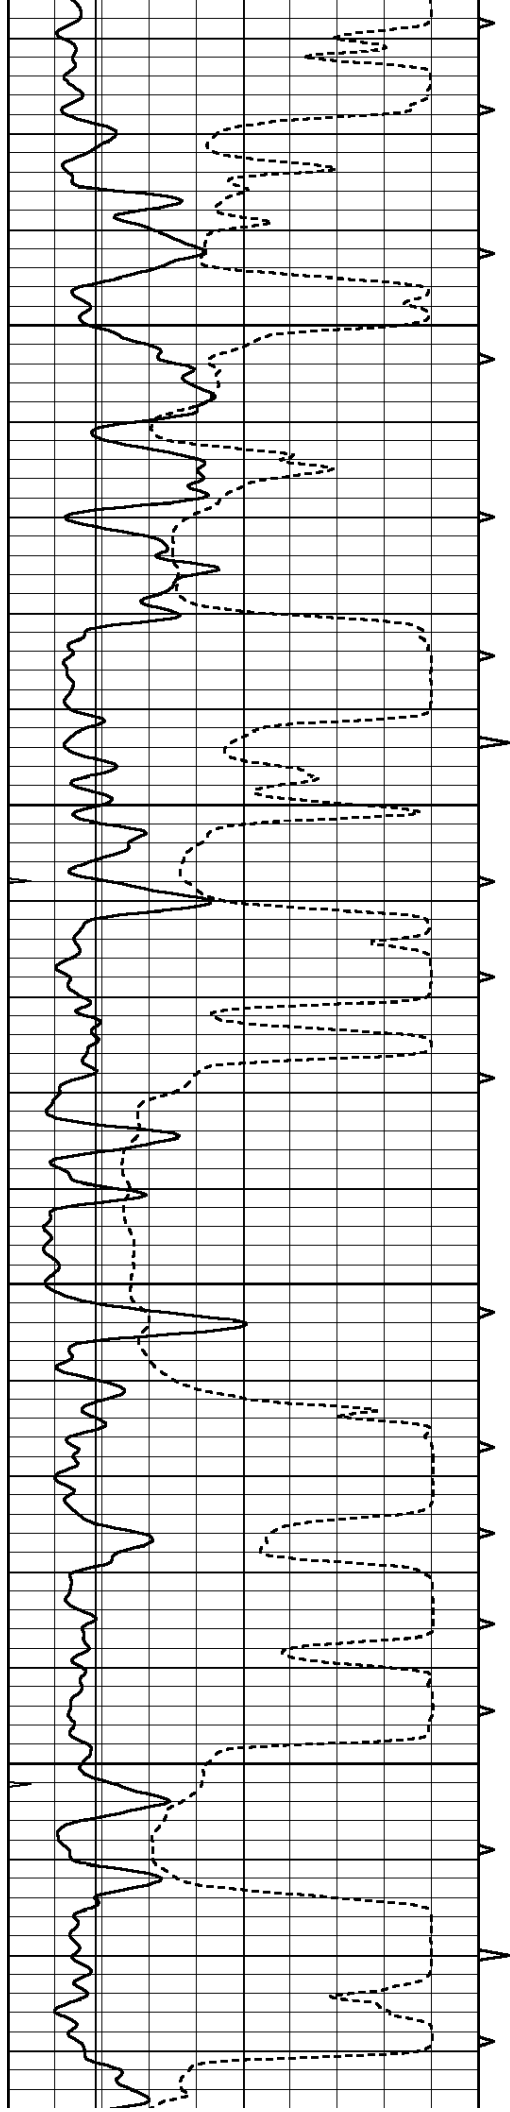



2350

2400

2450

2500

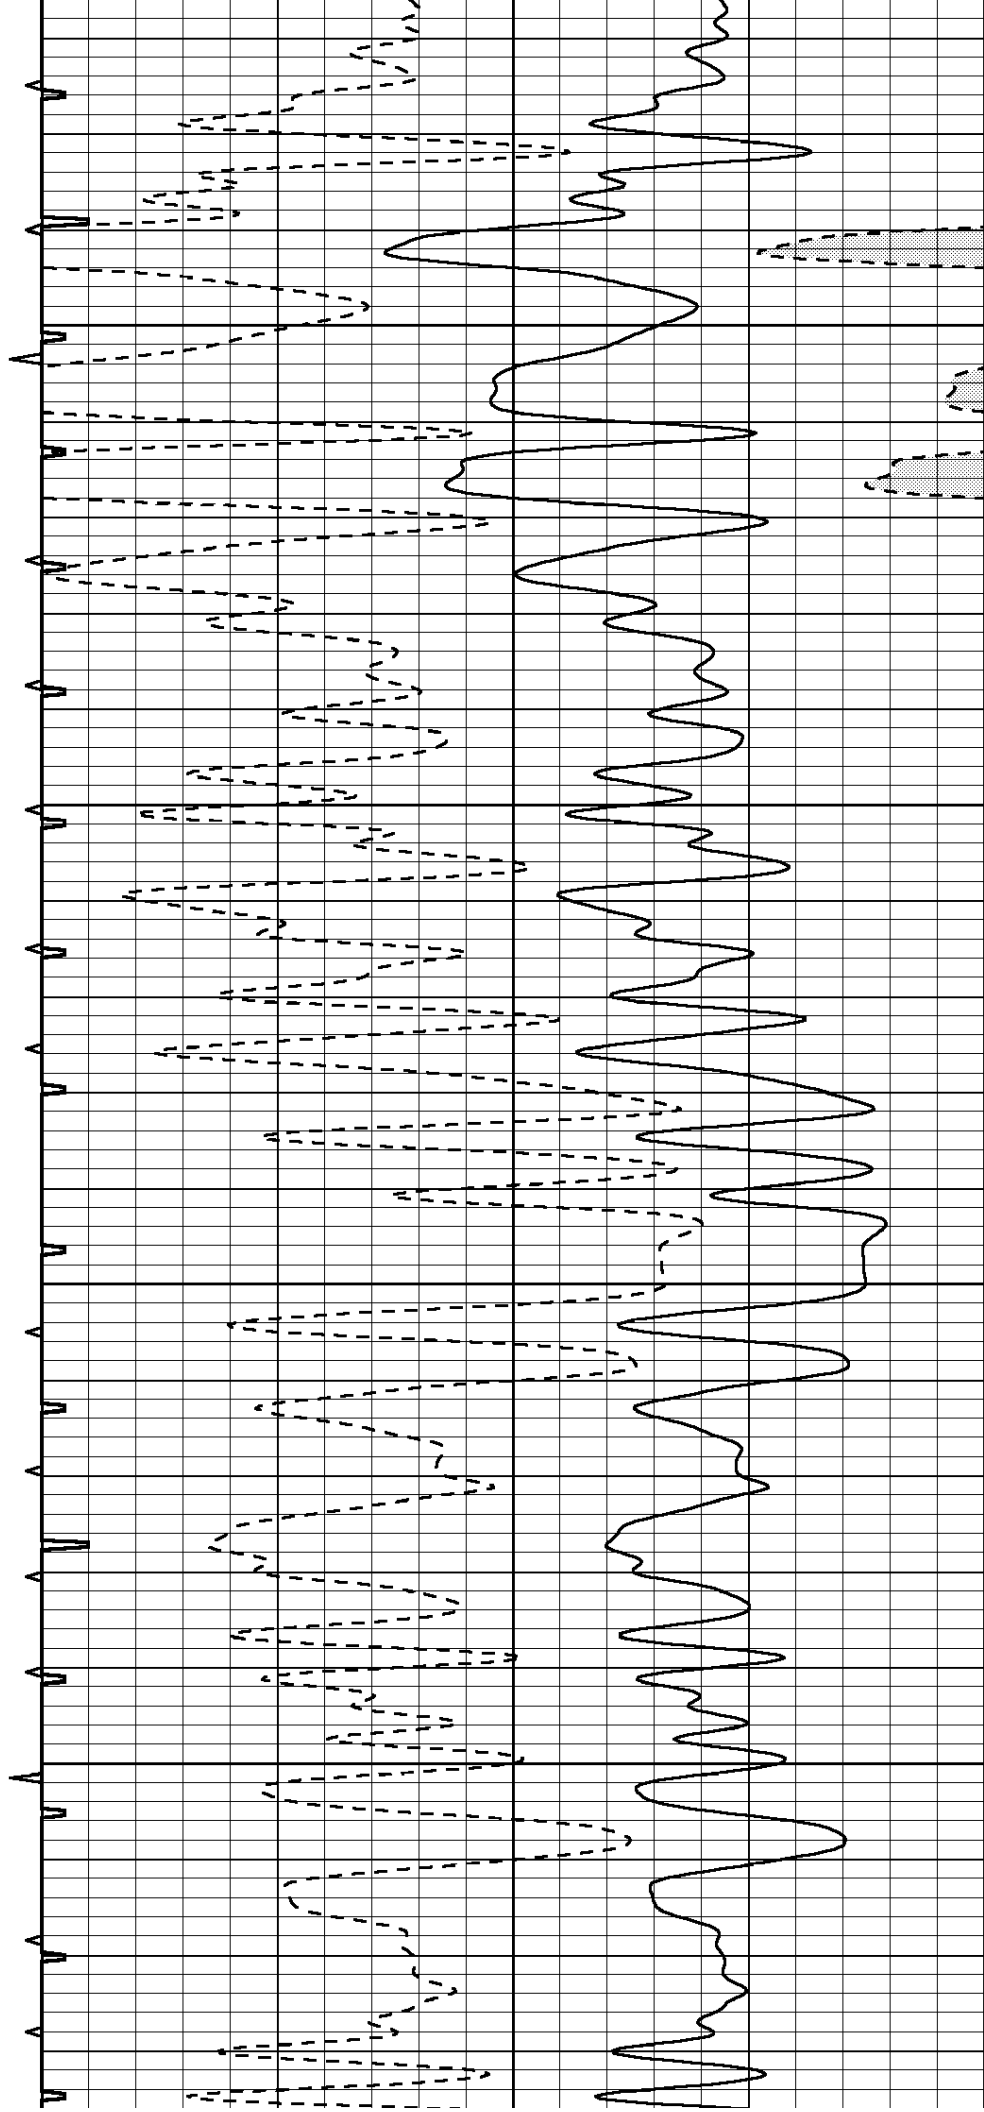

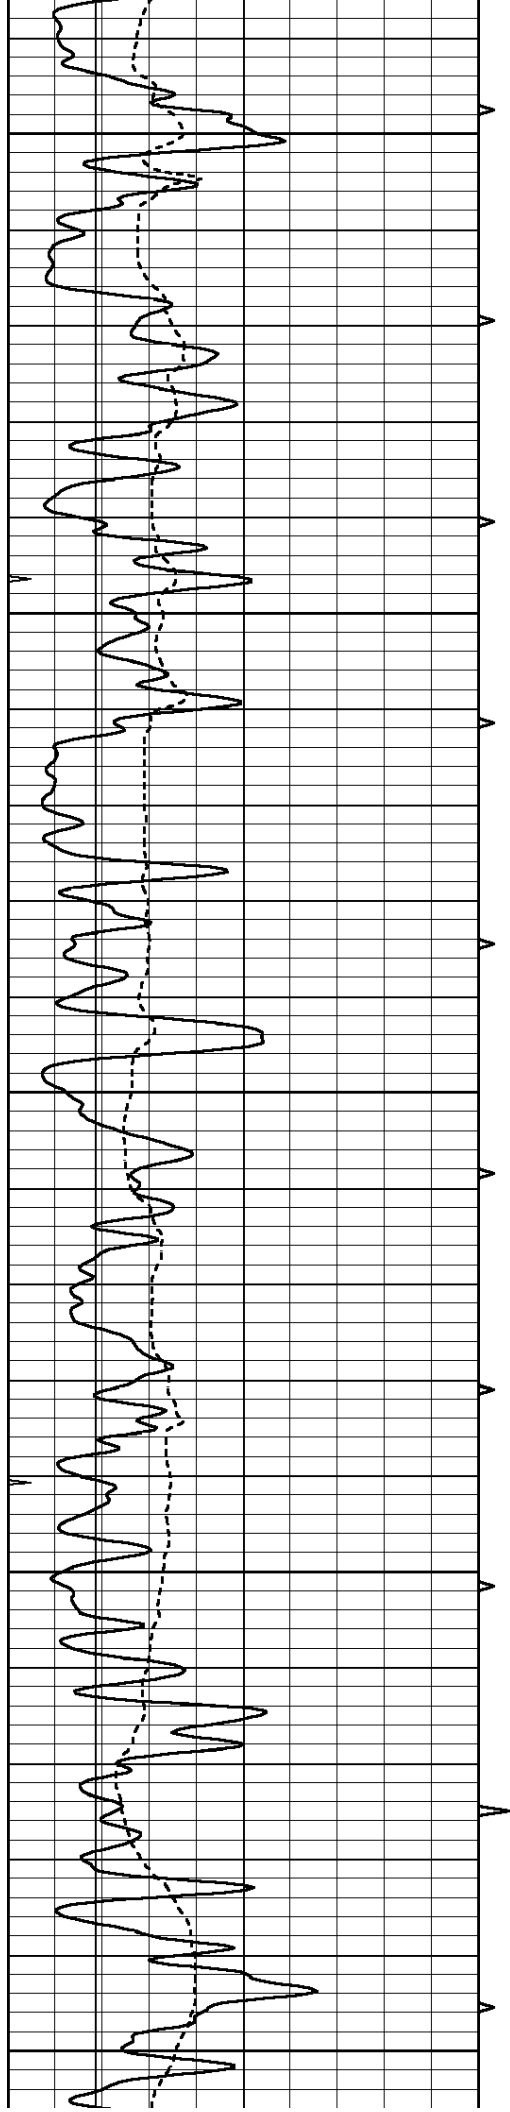


2550



2600


2650



2700


2750

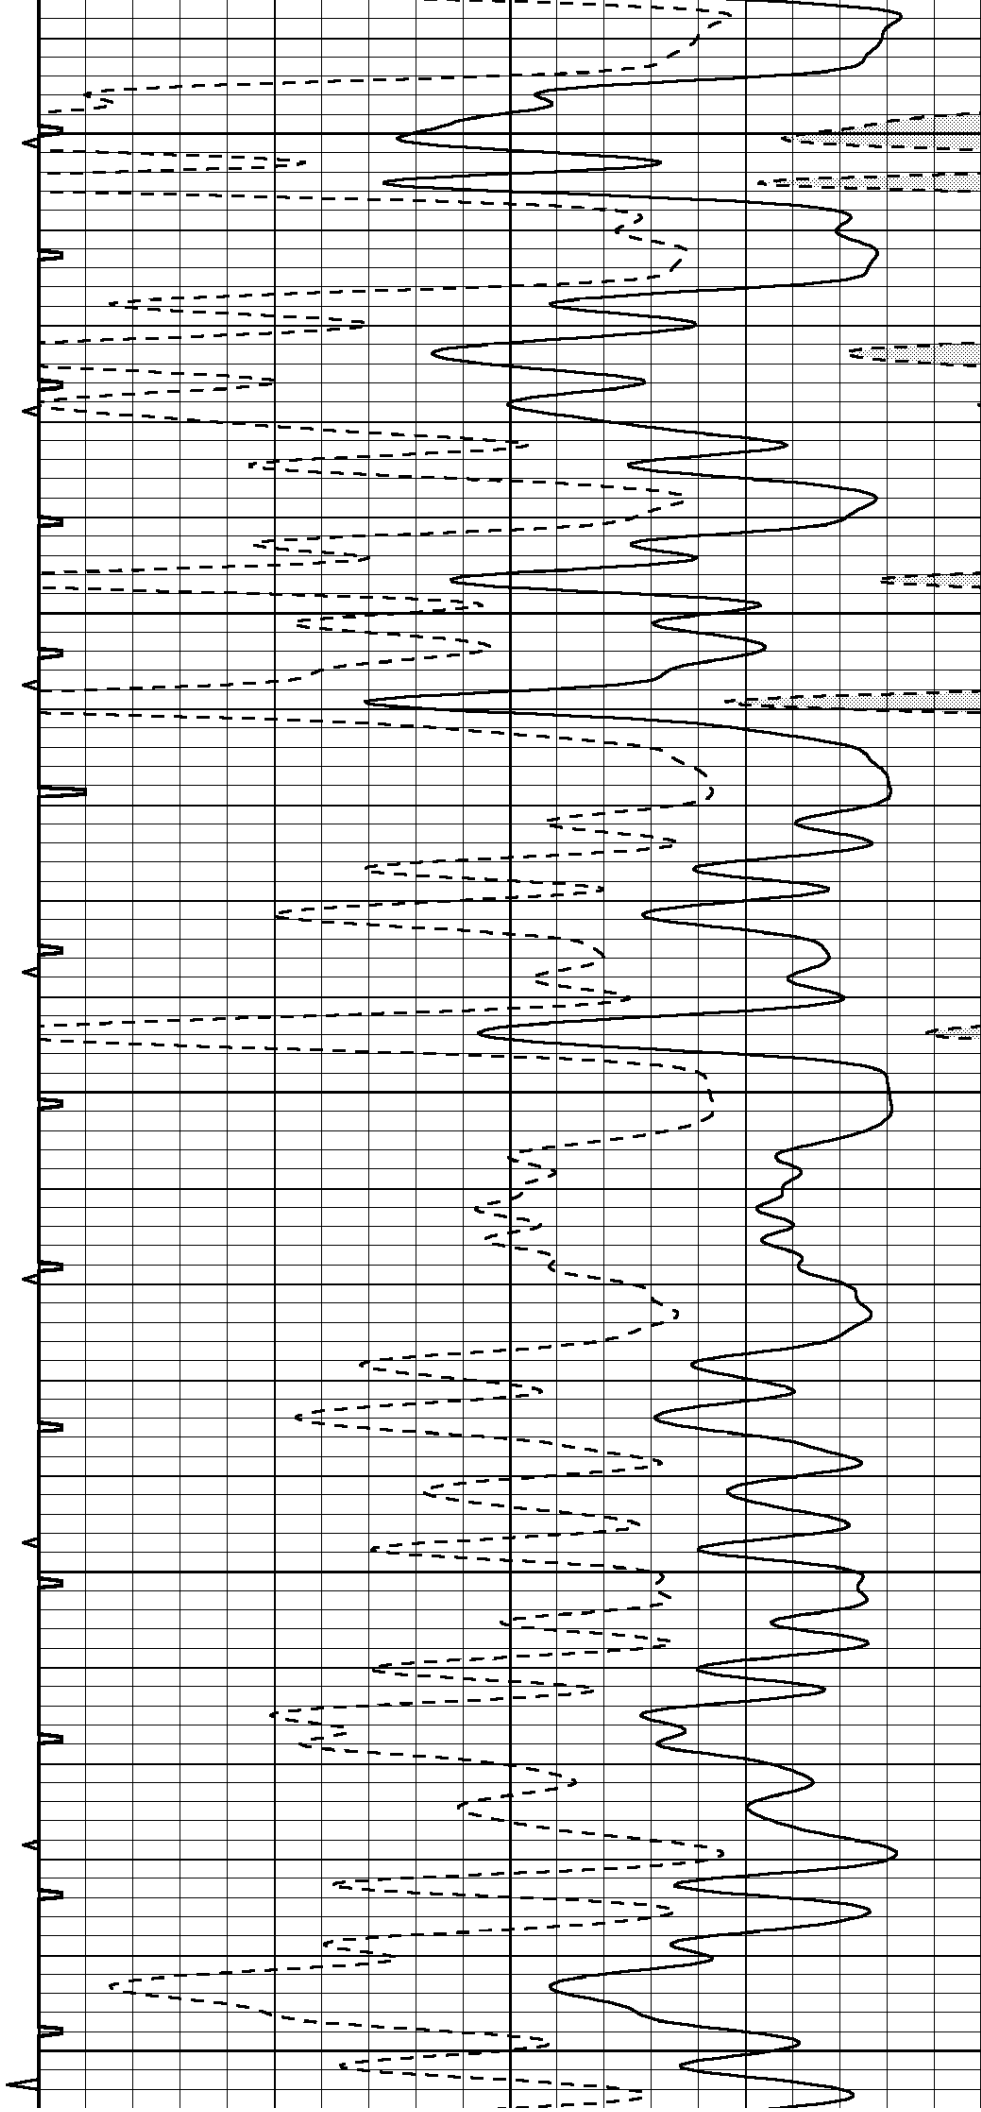

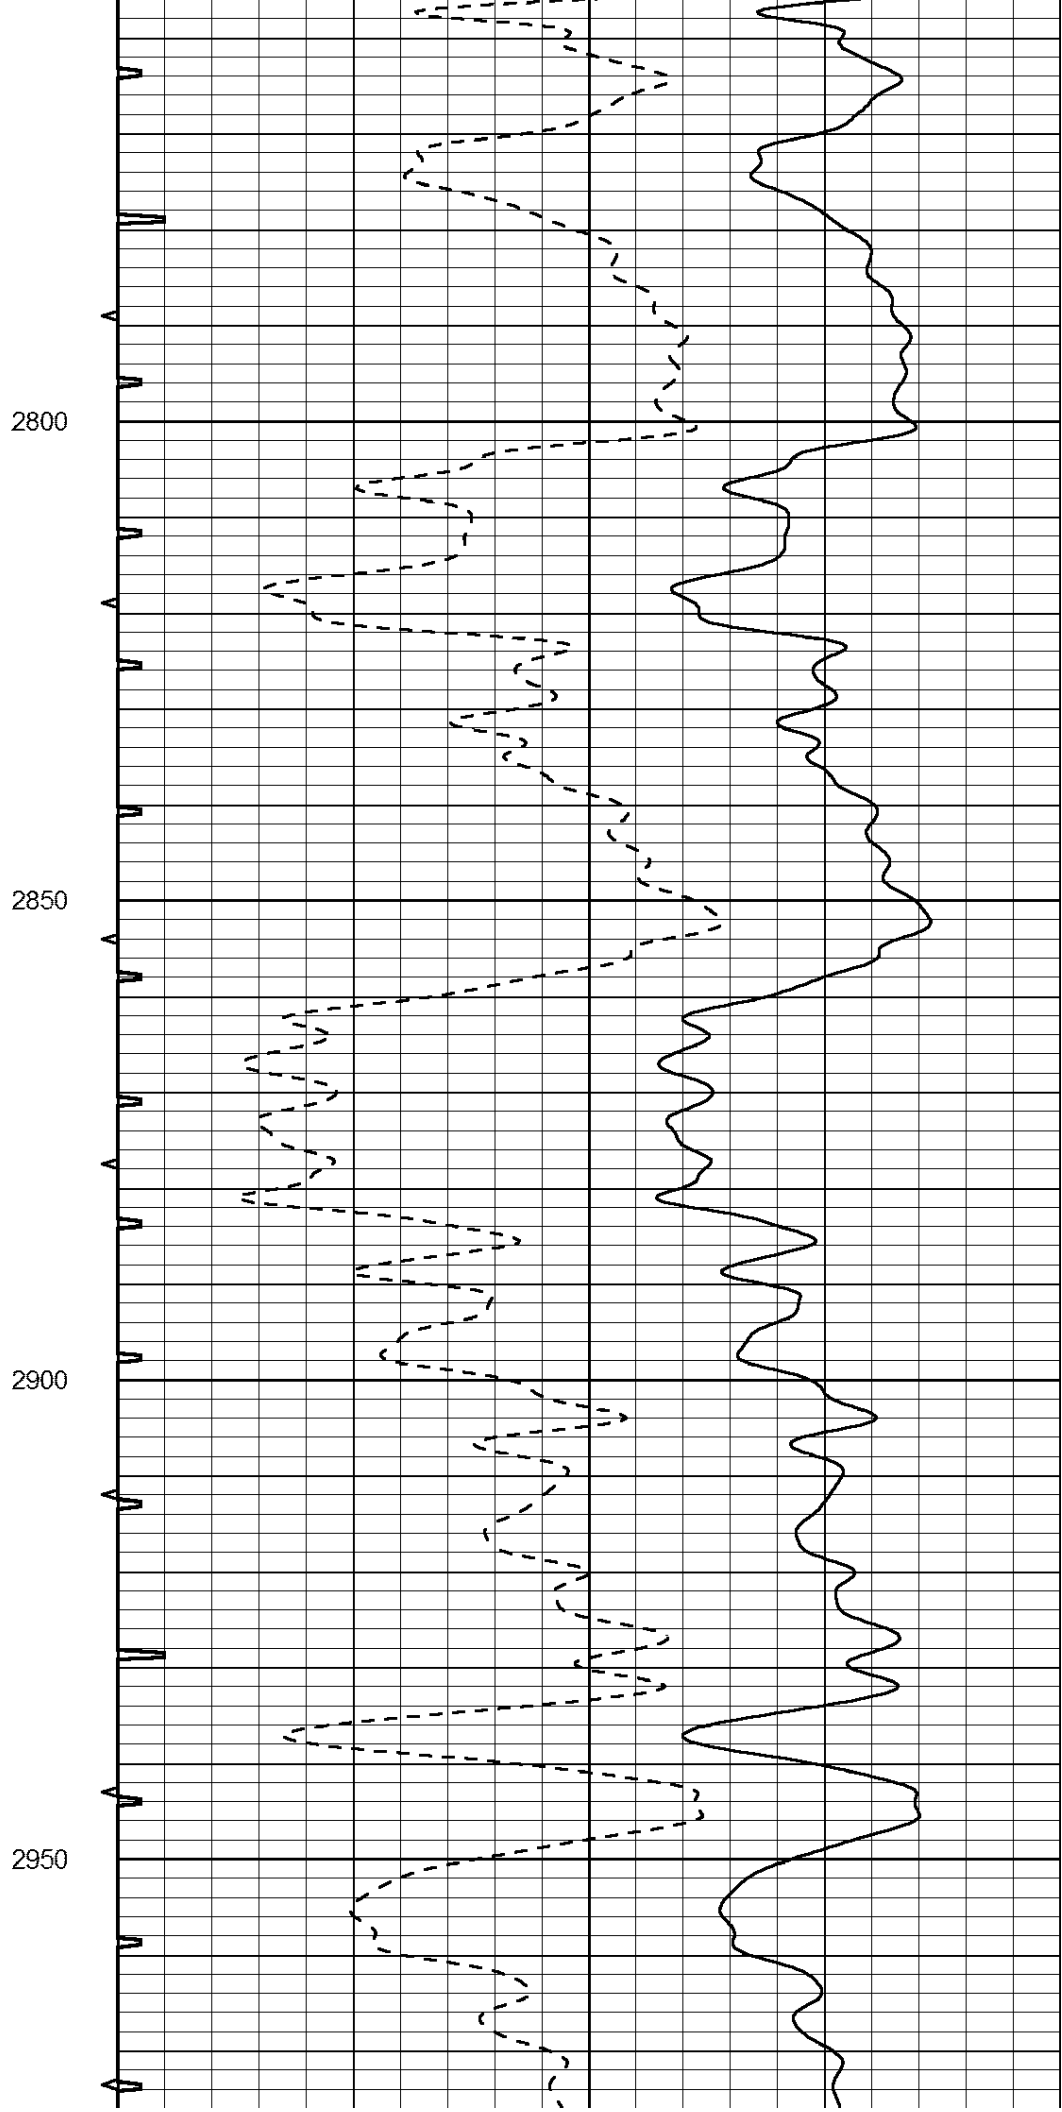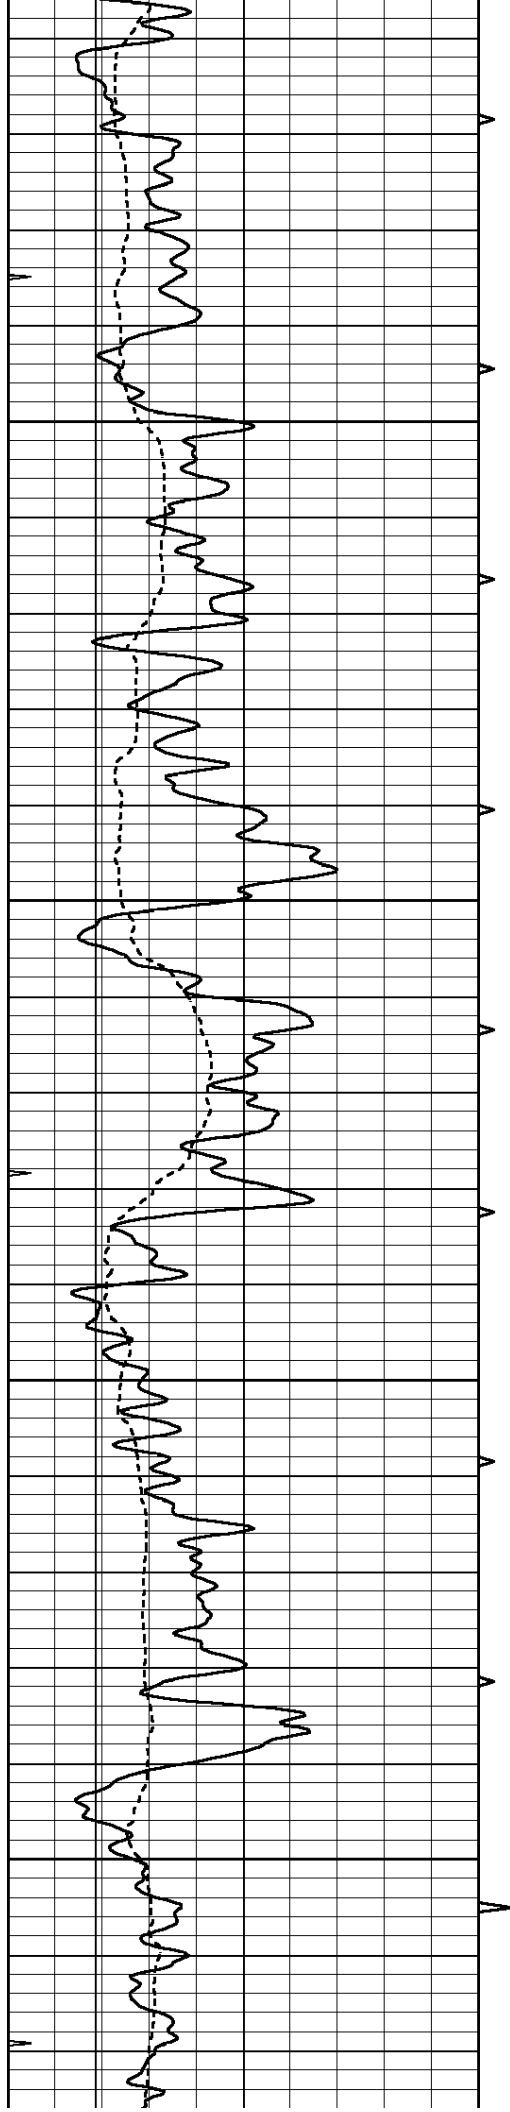

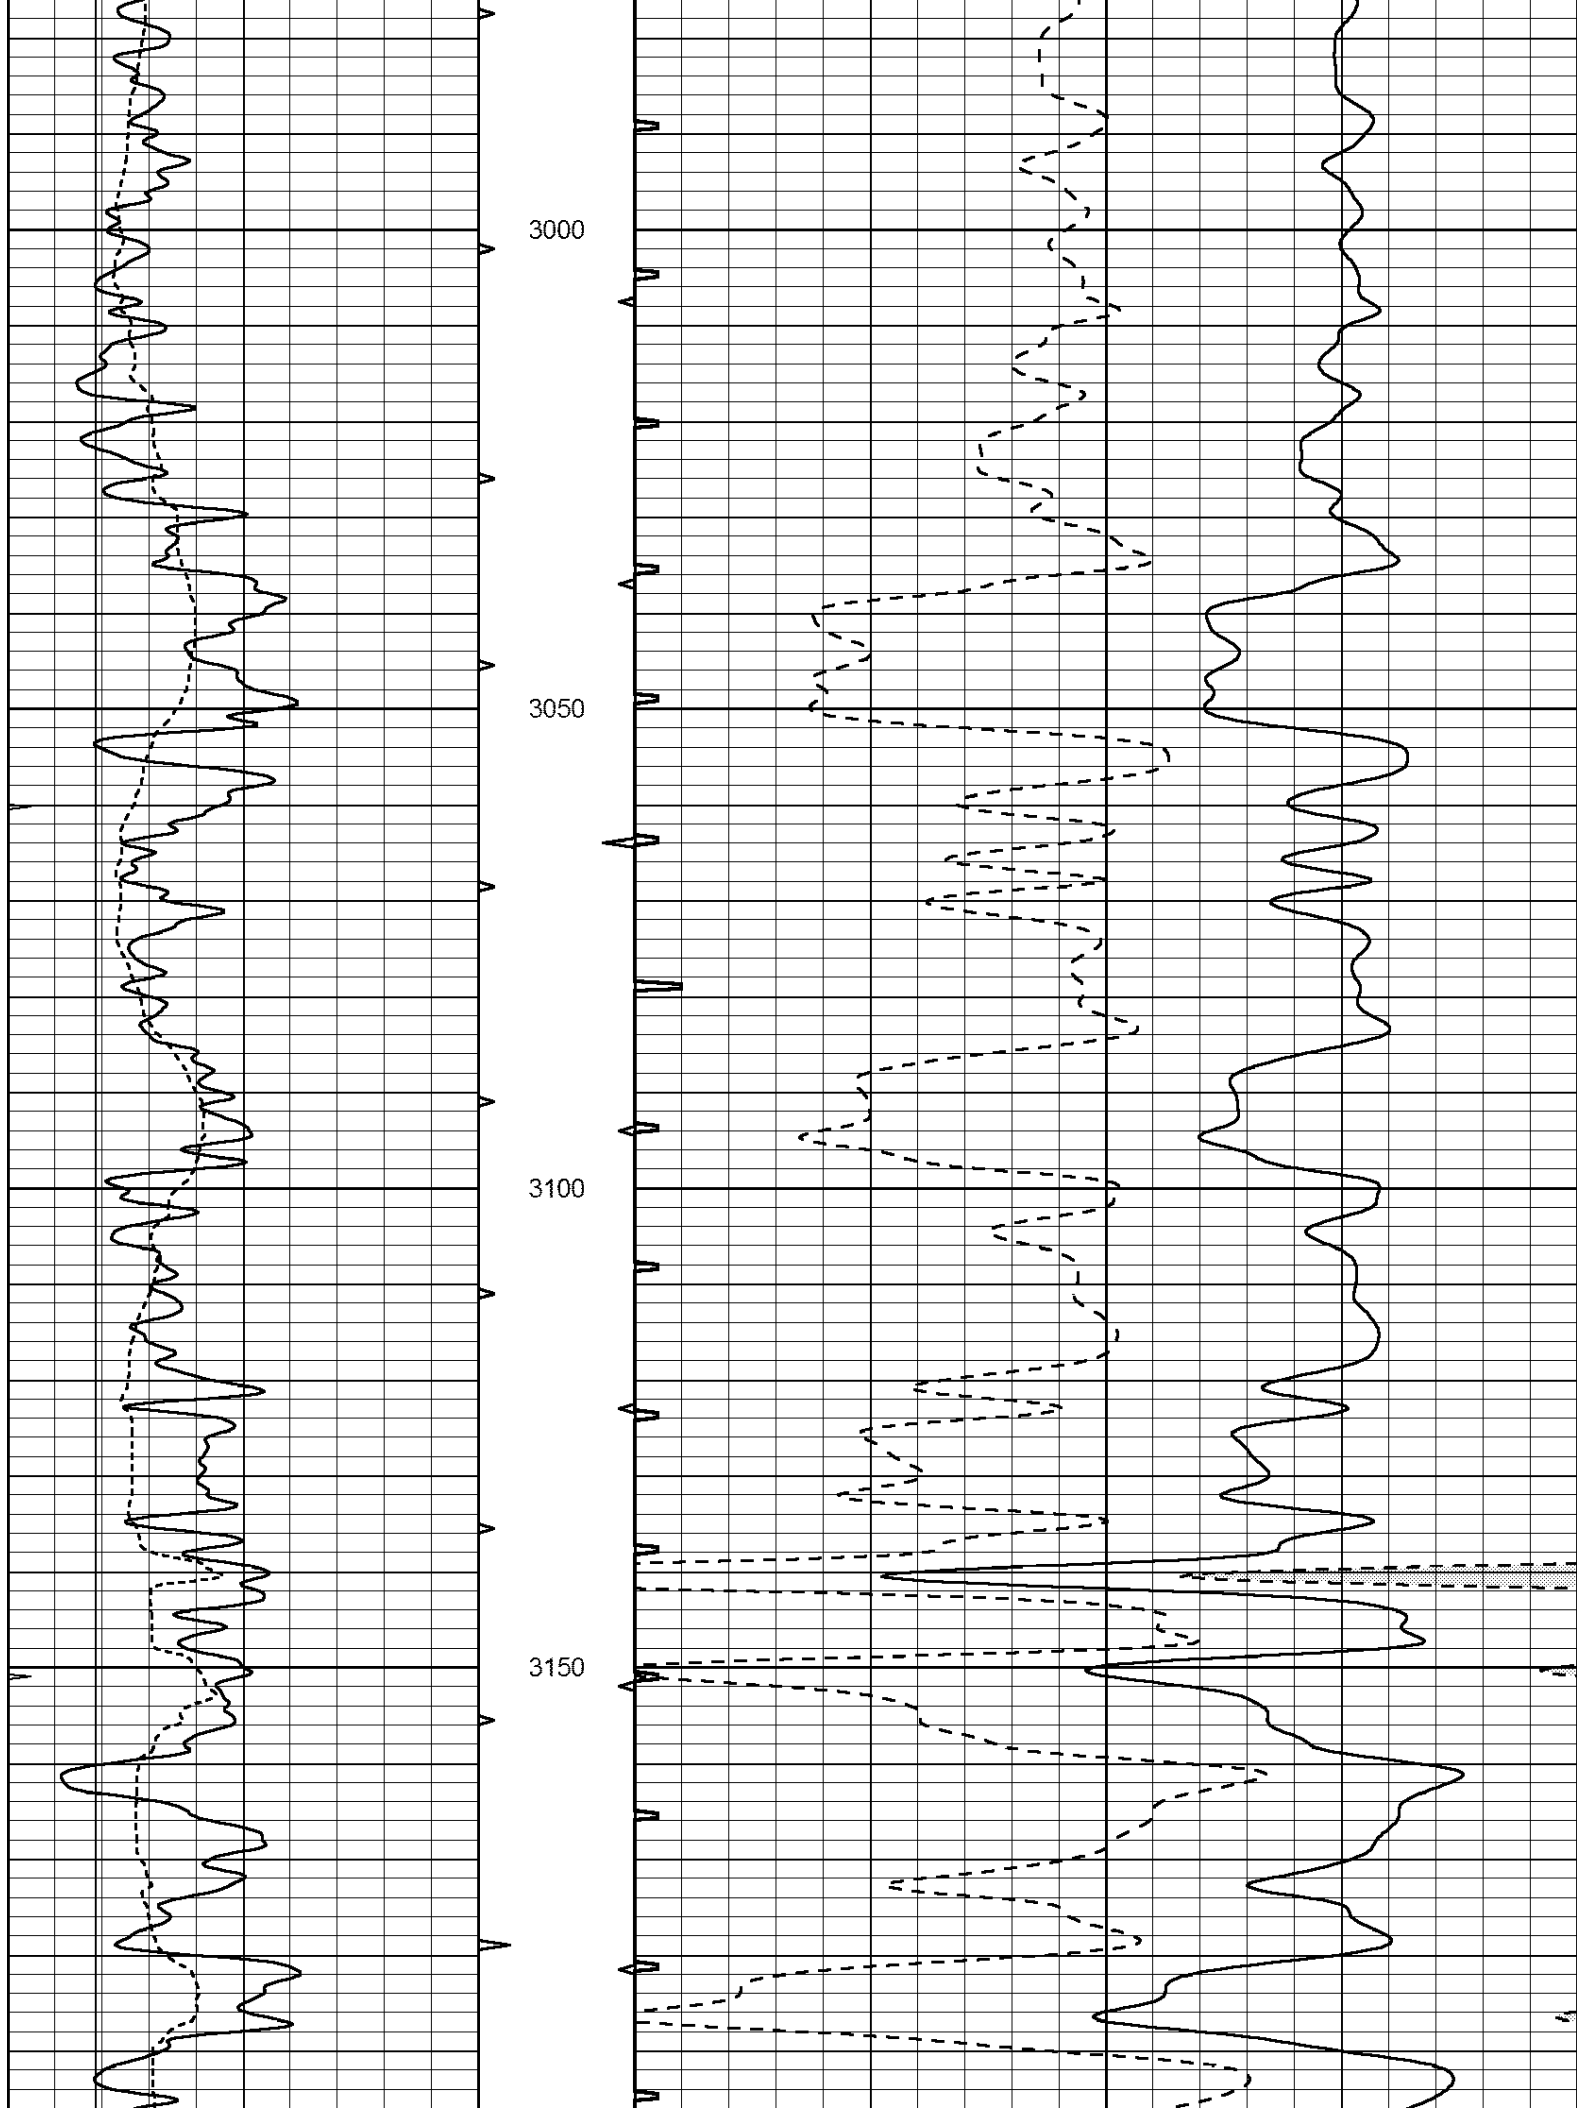

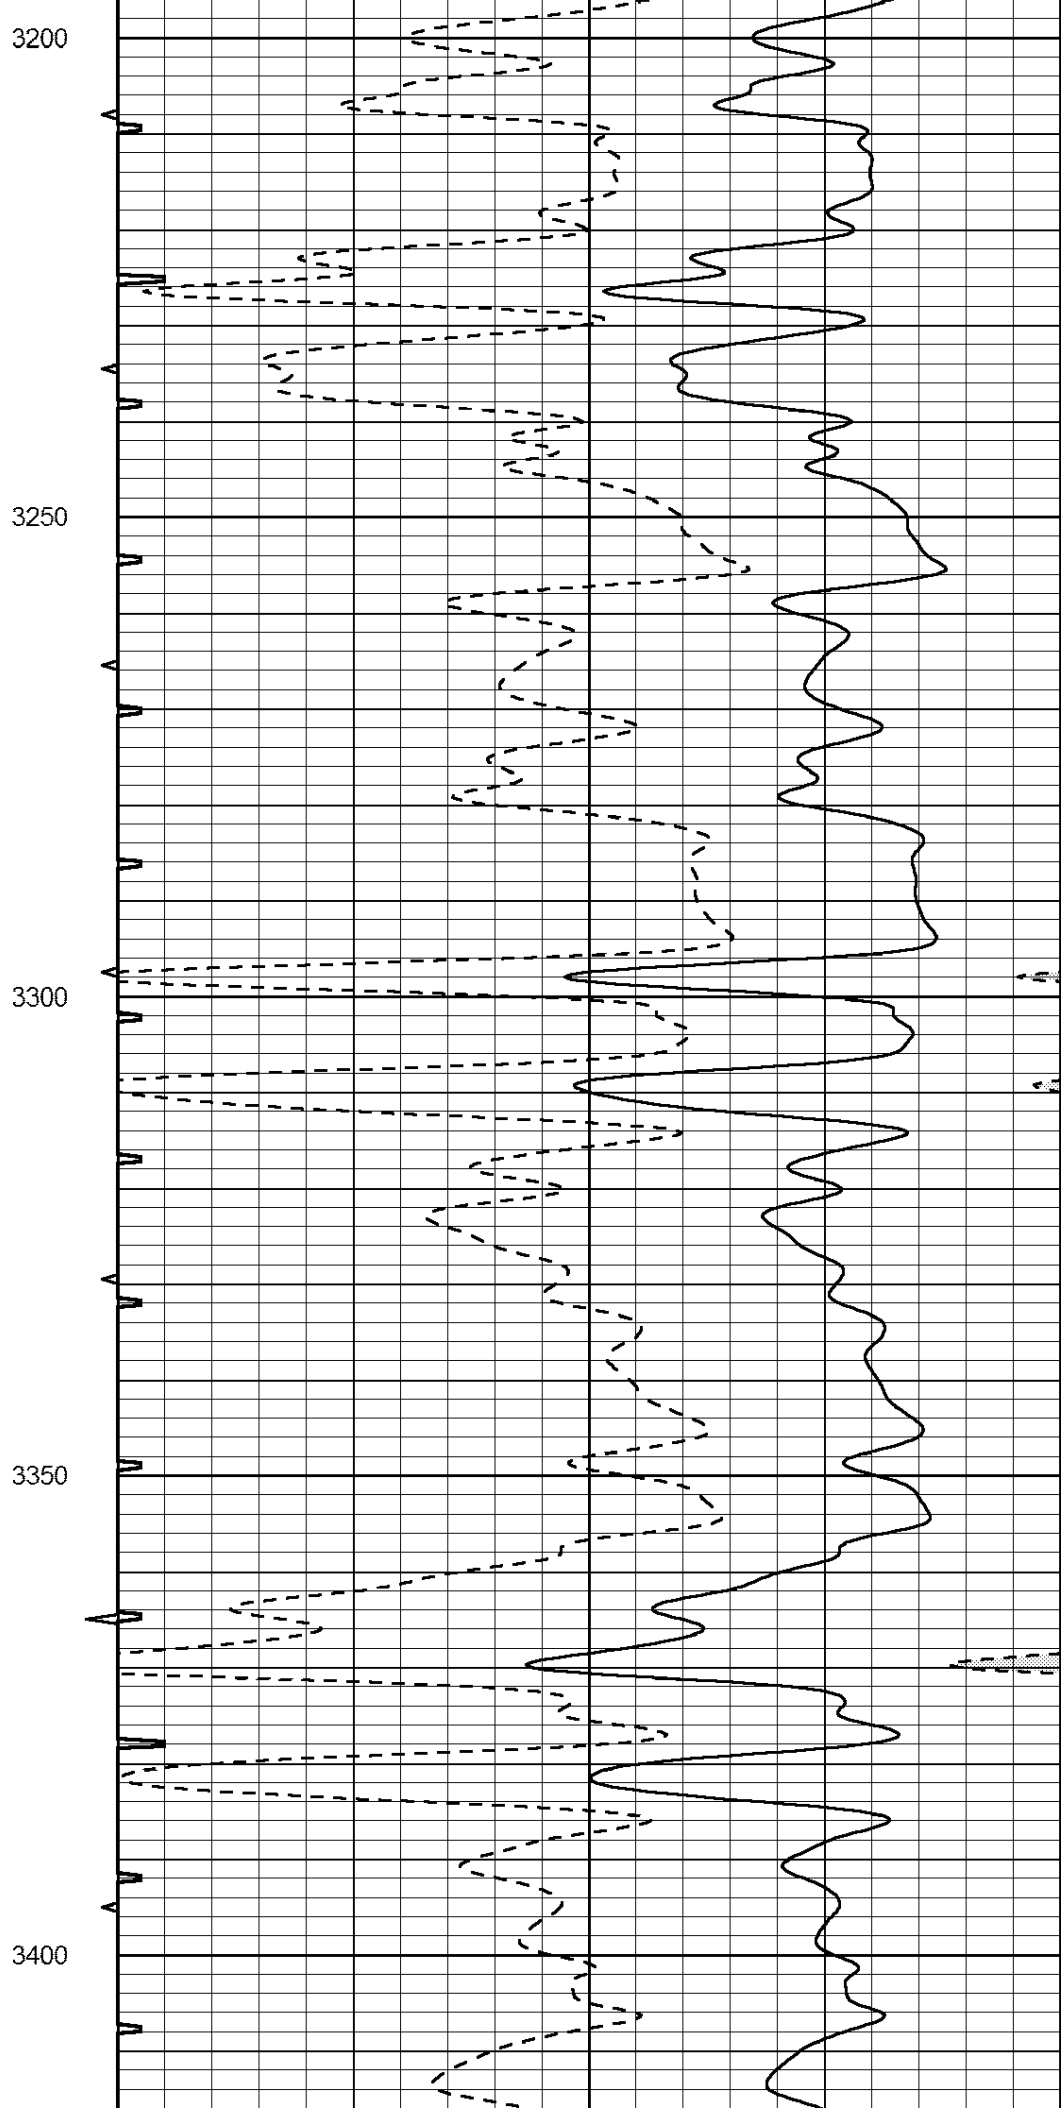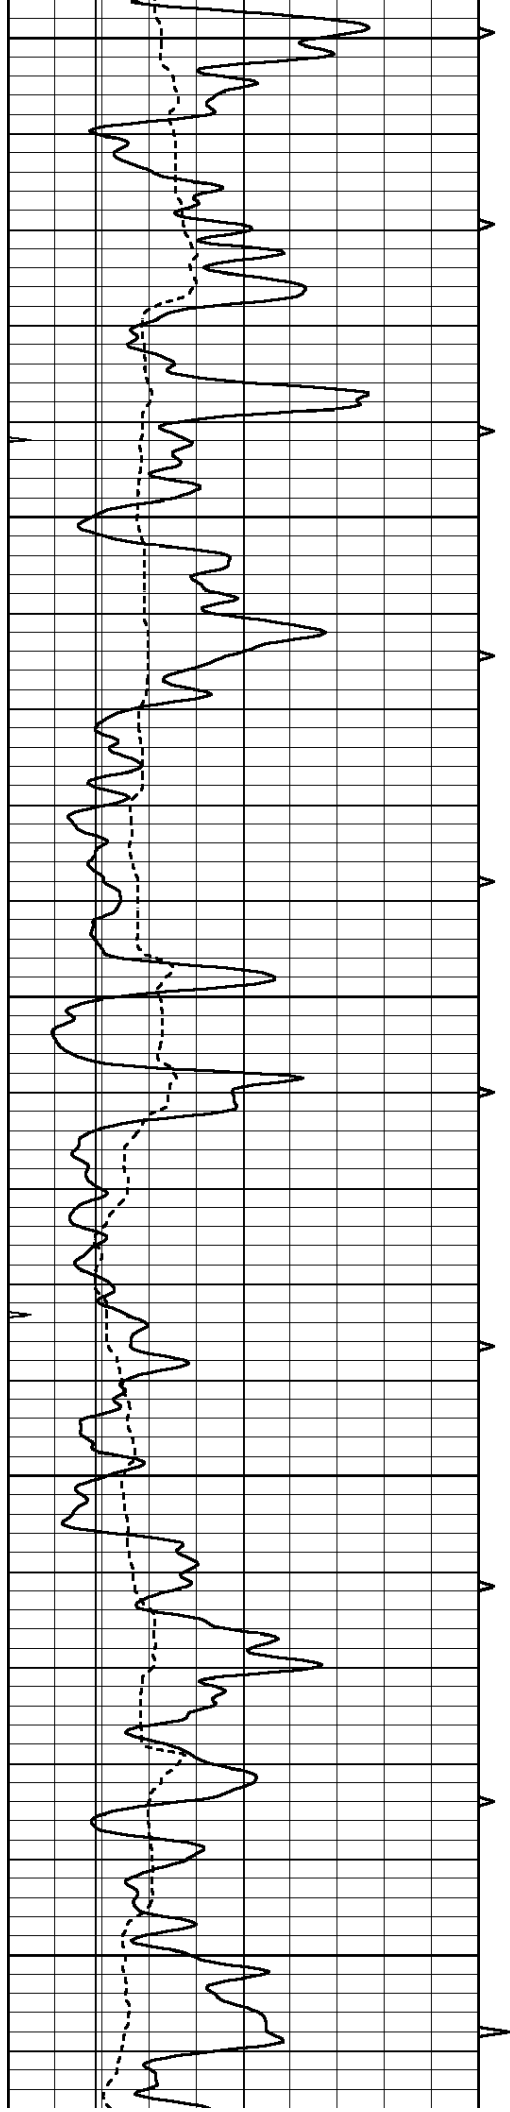

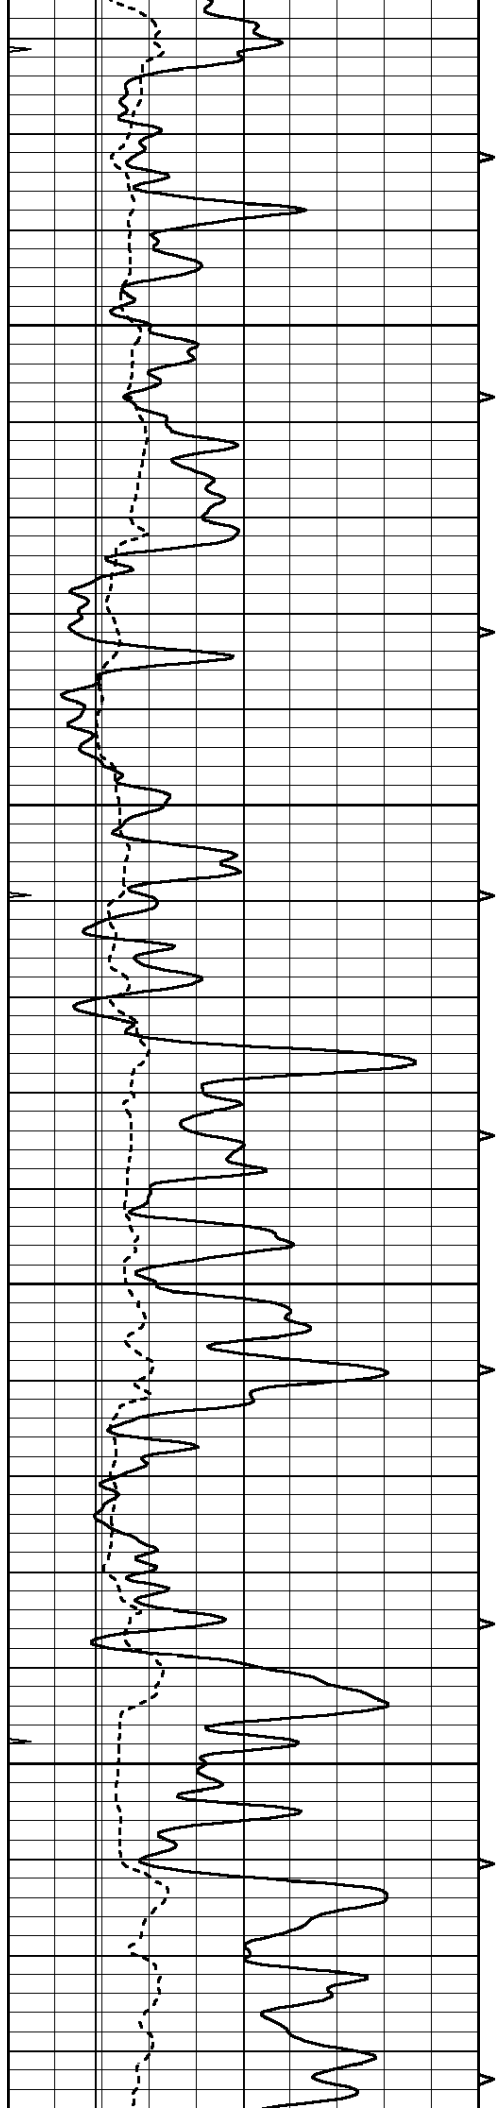



3450


3500

3550

3600

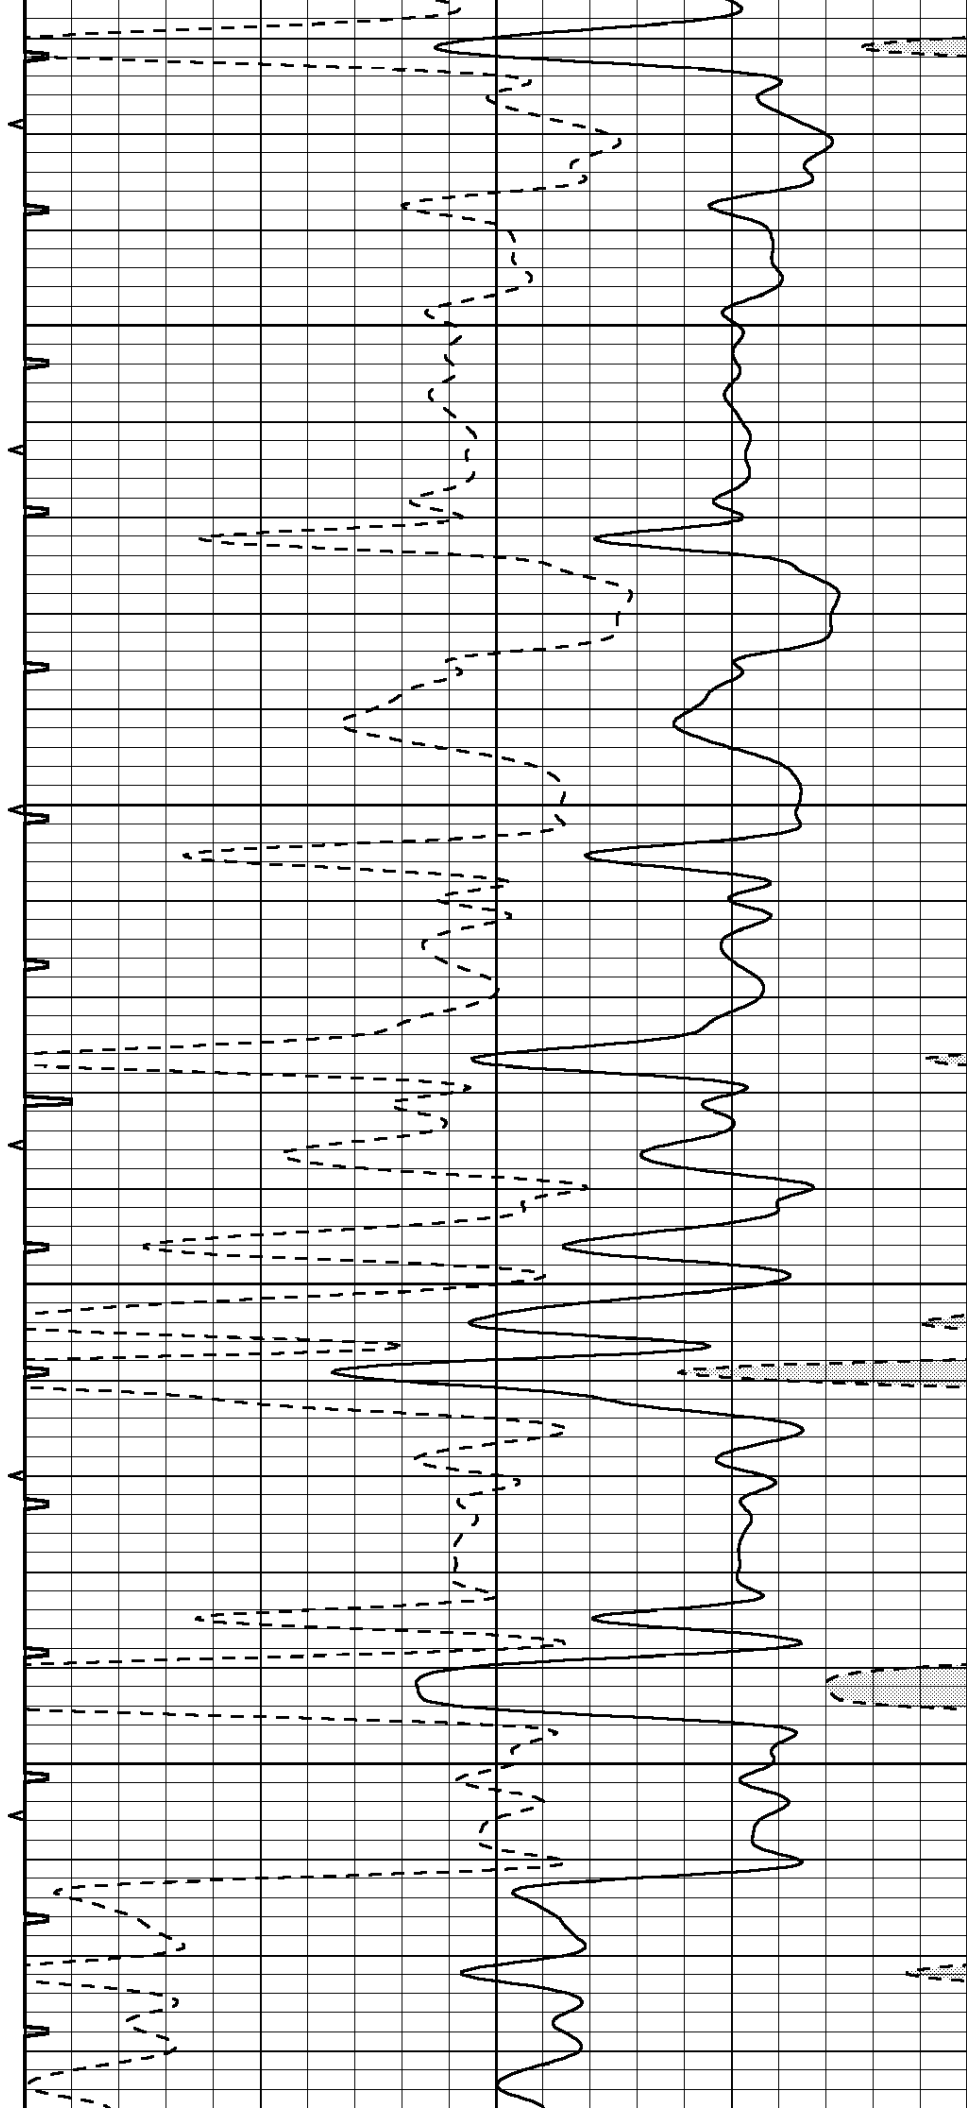

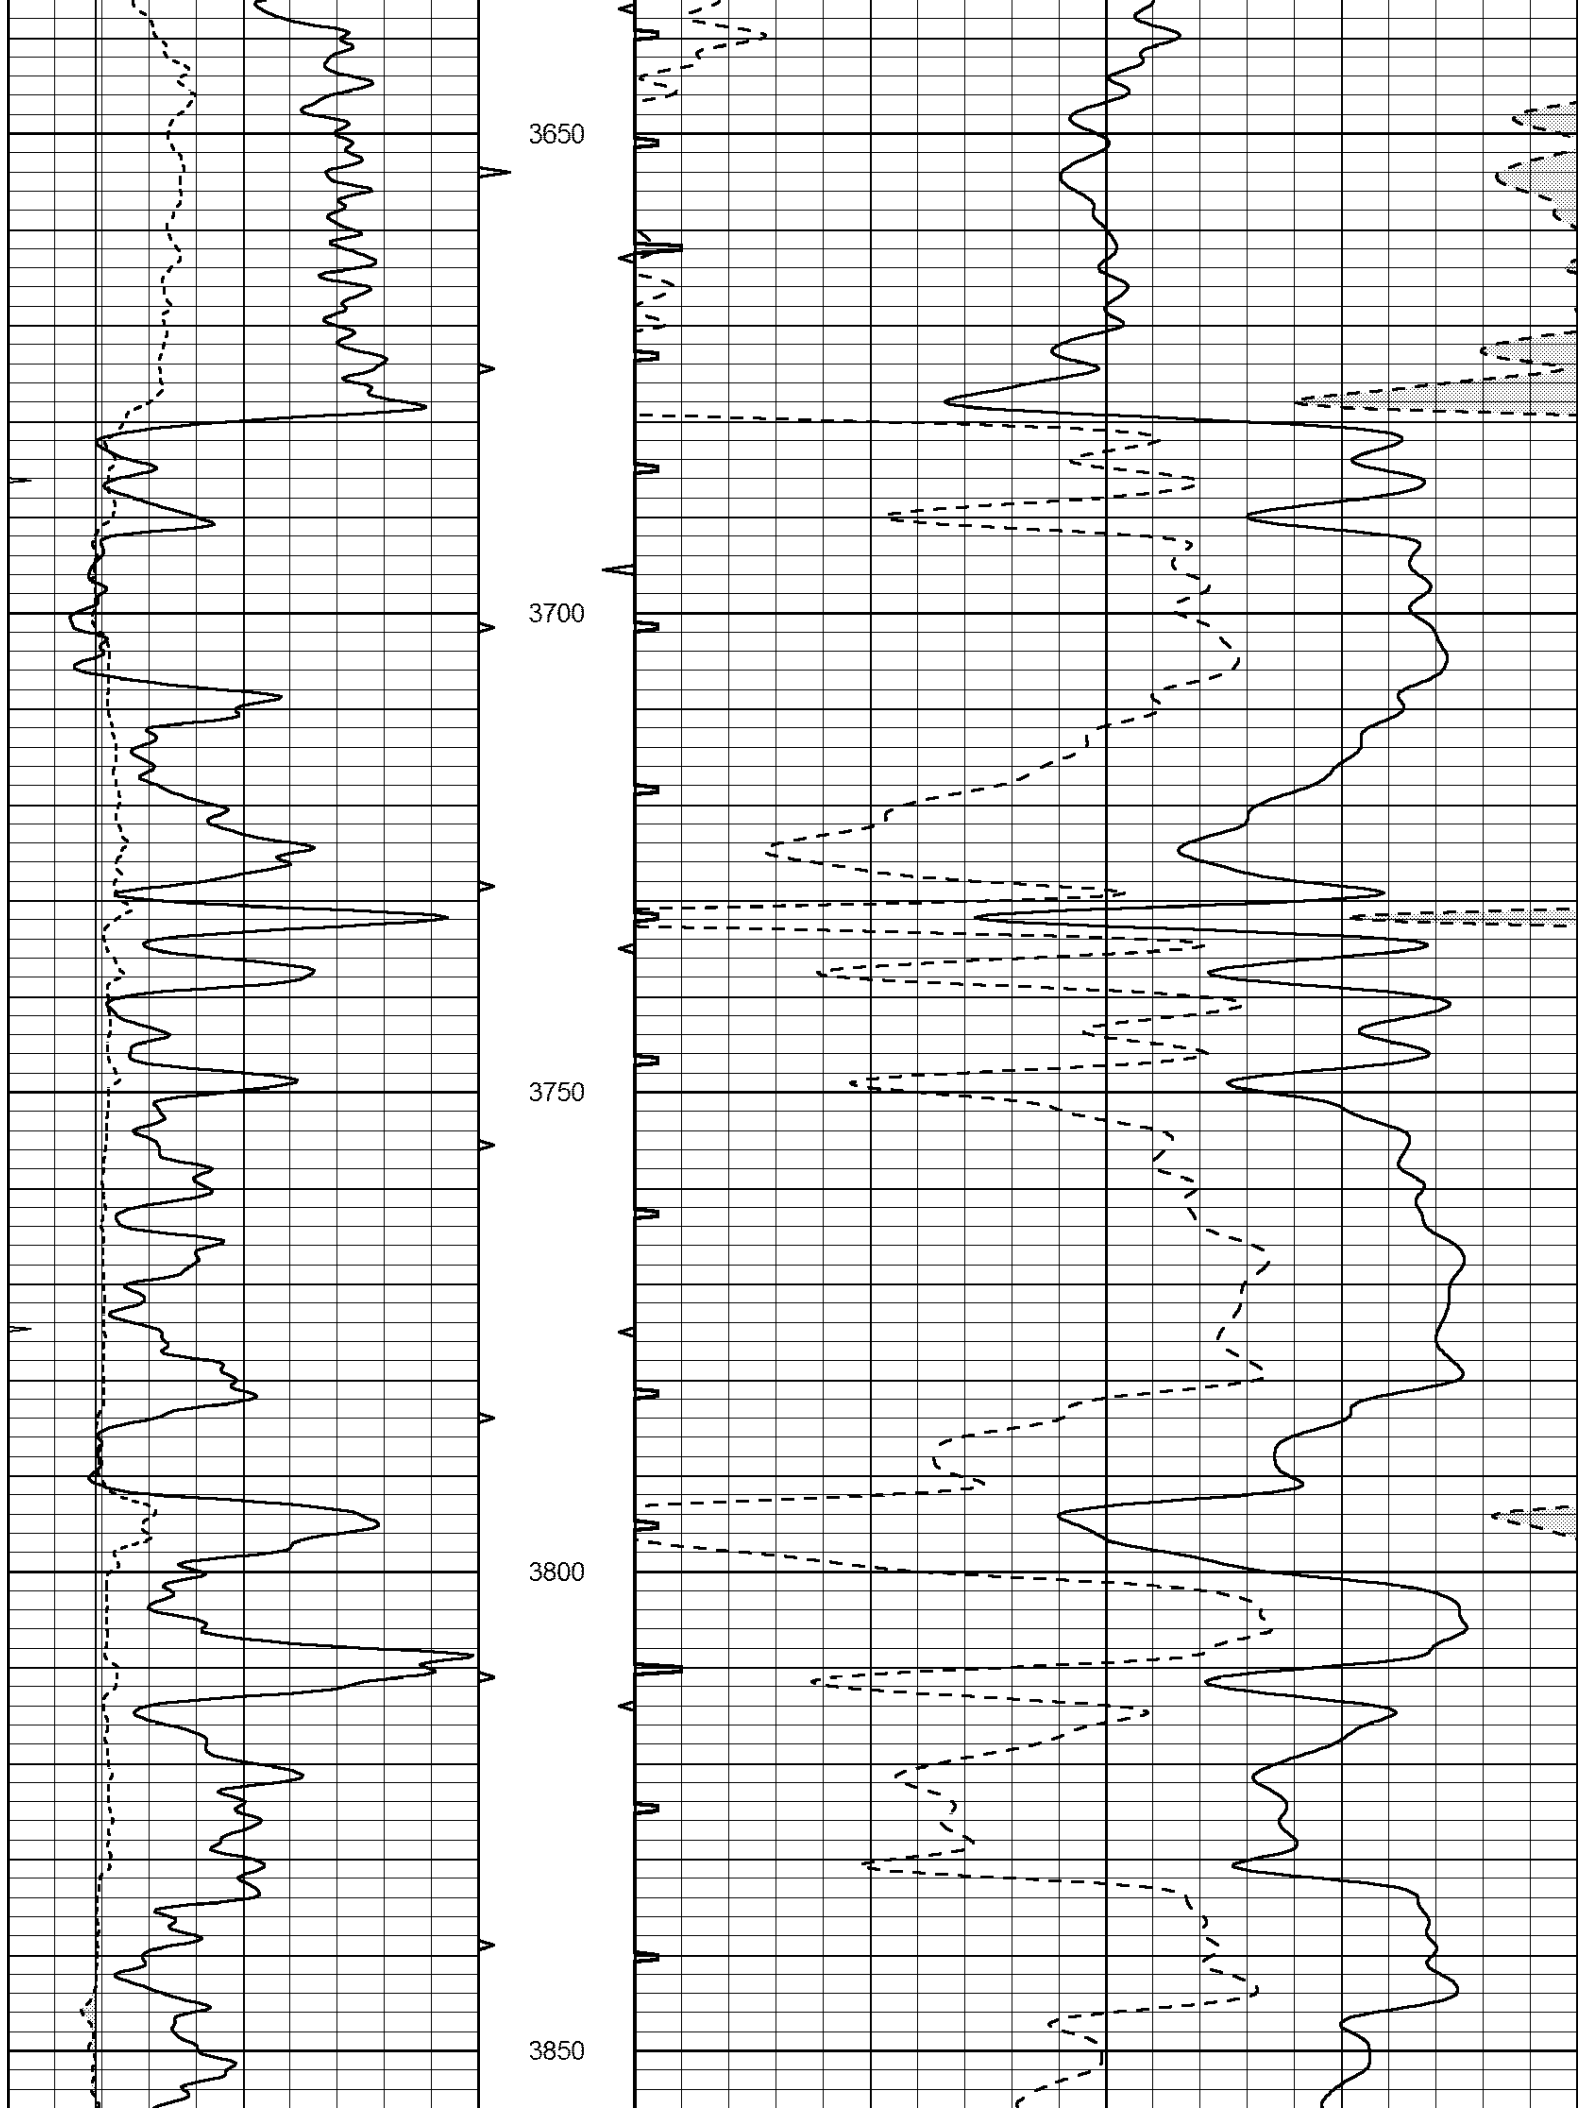

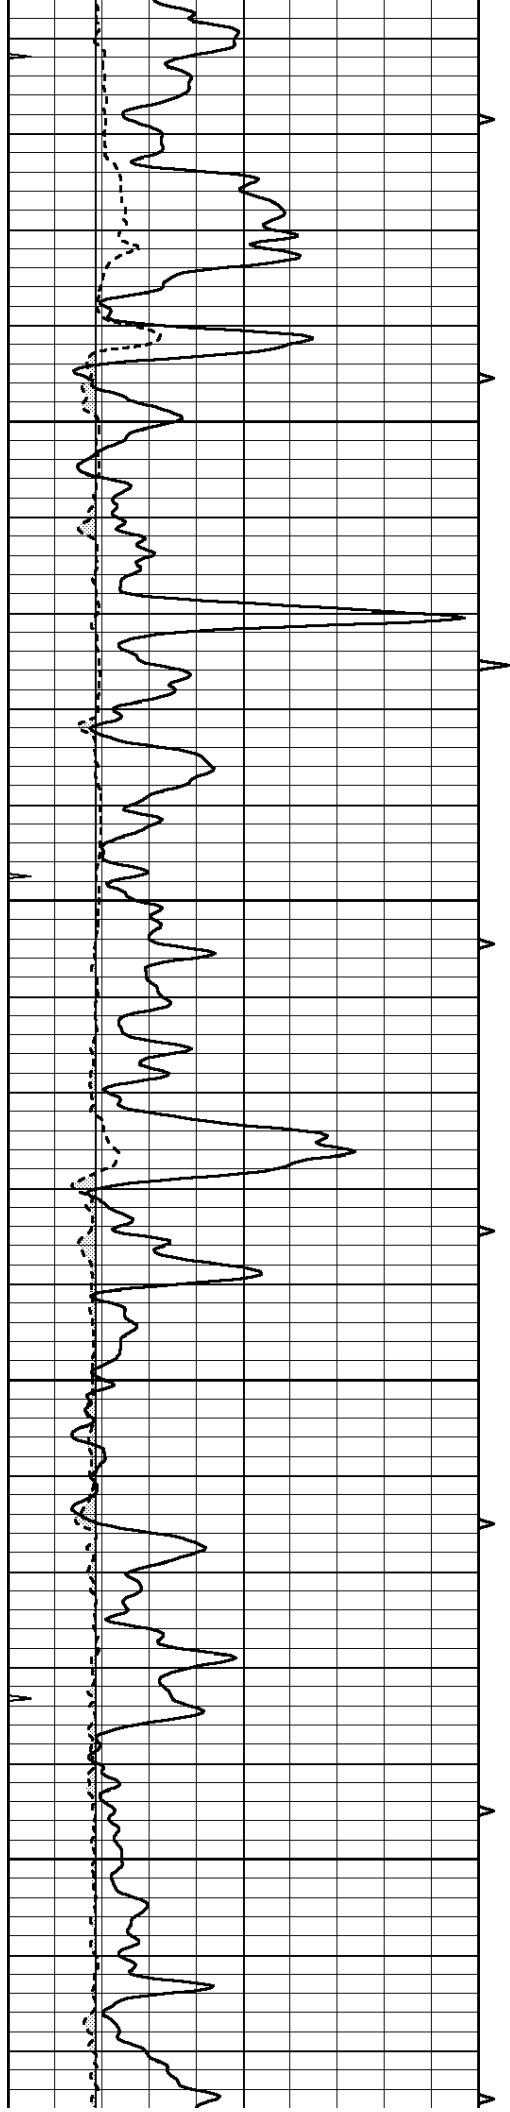



3900

3950

4000

4050

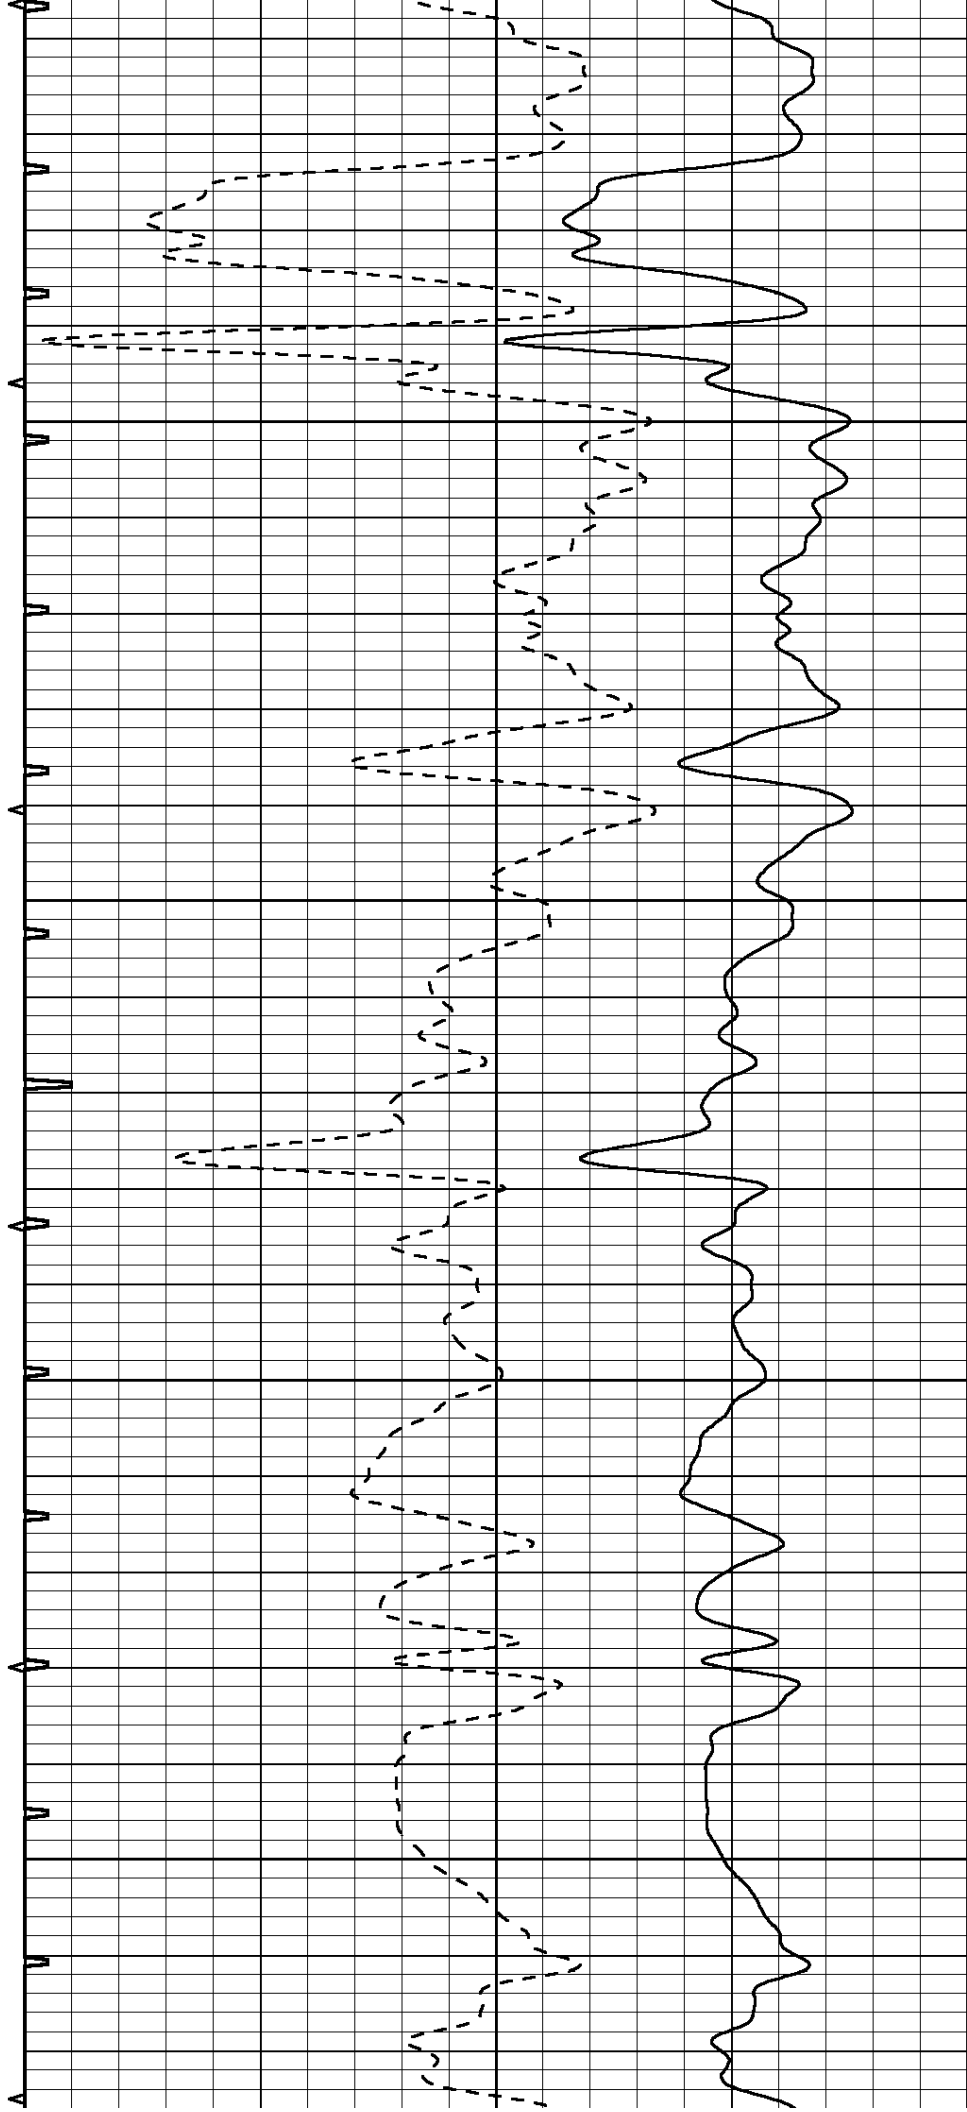

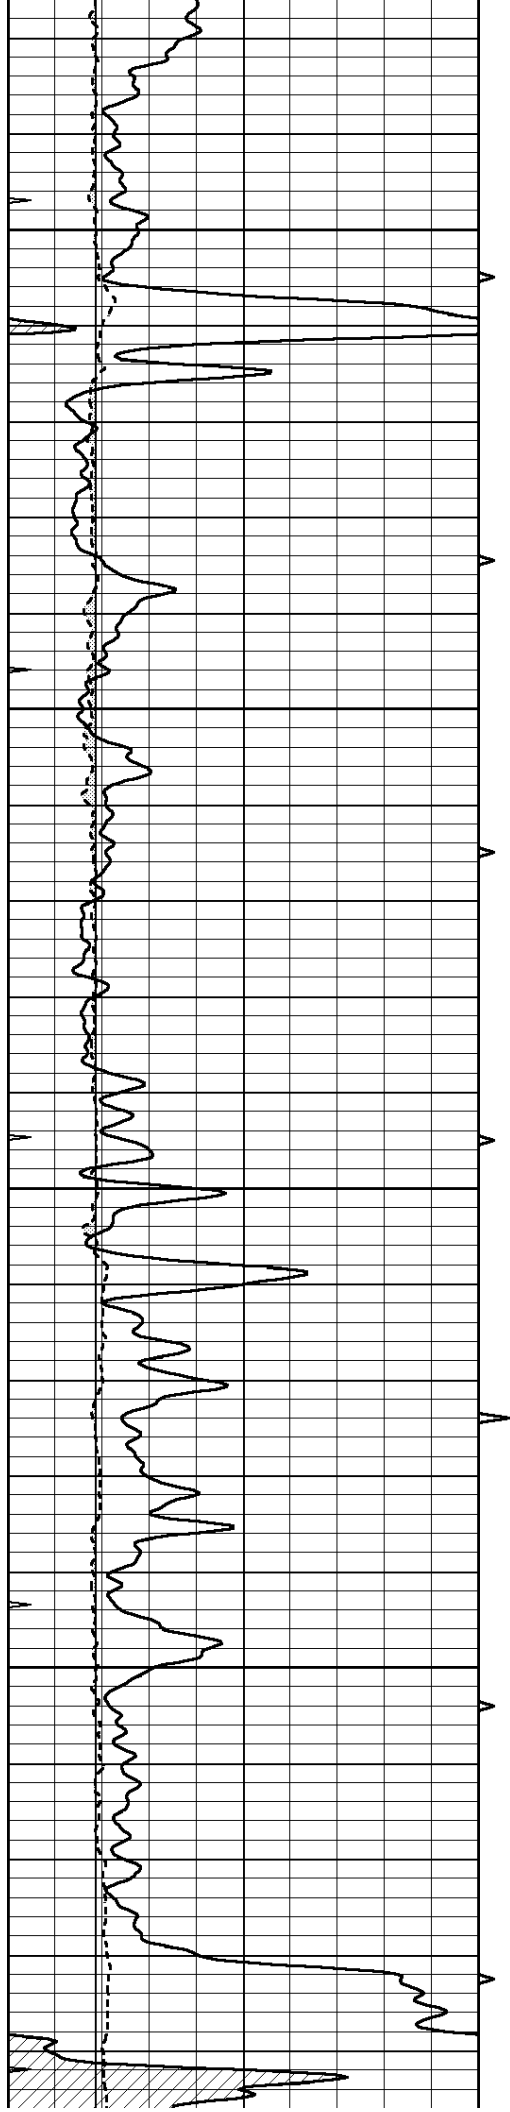




4100


4150

4200

4250

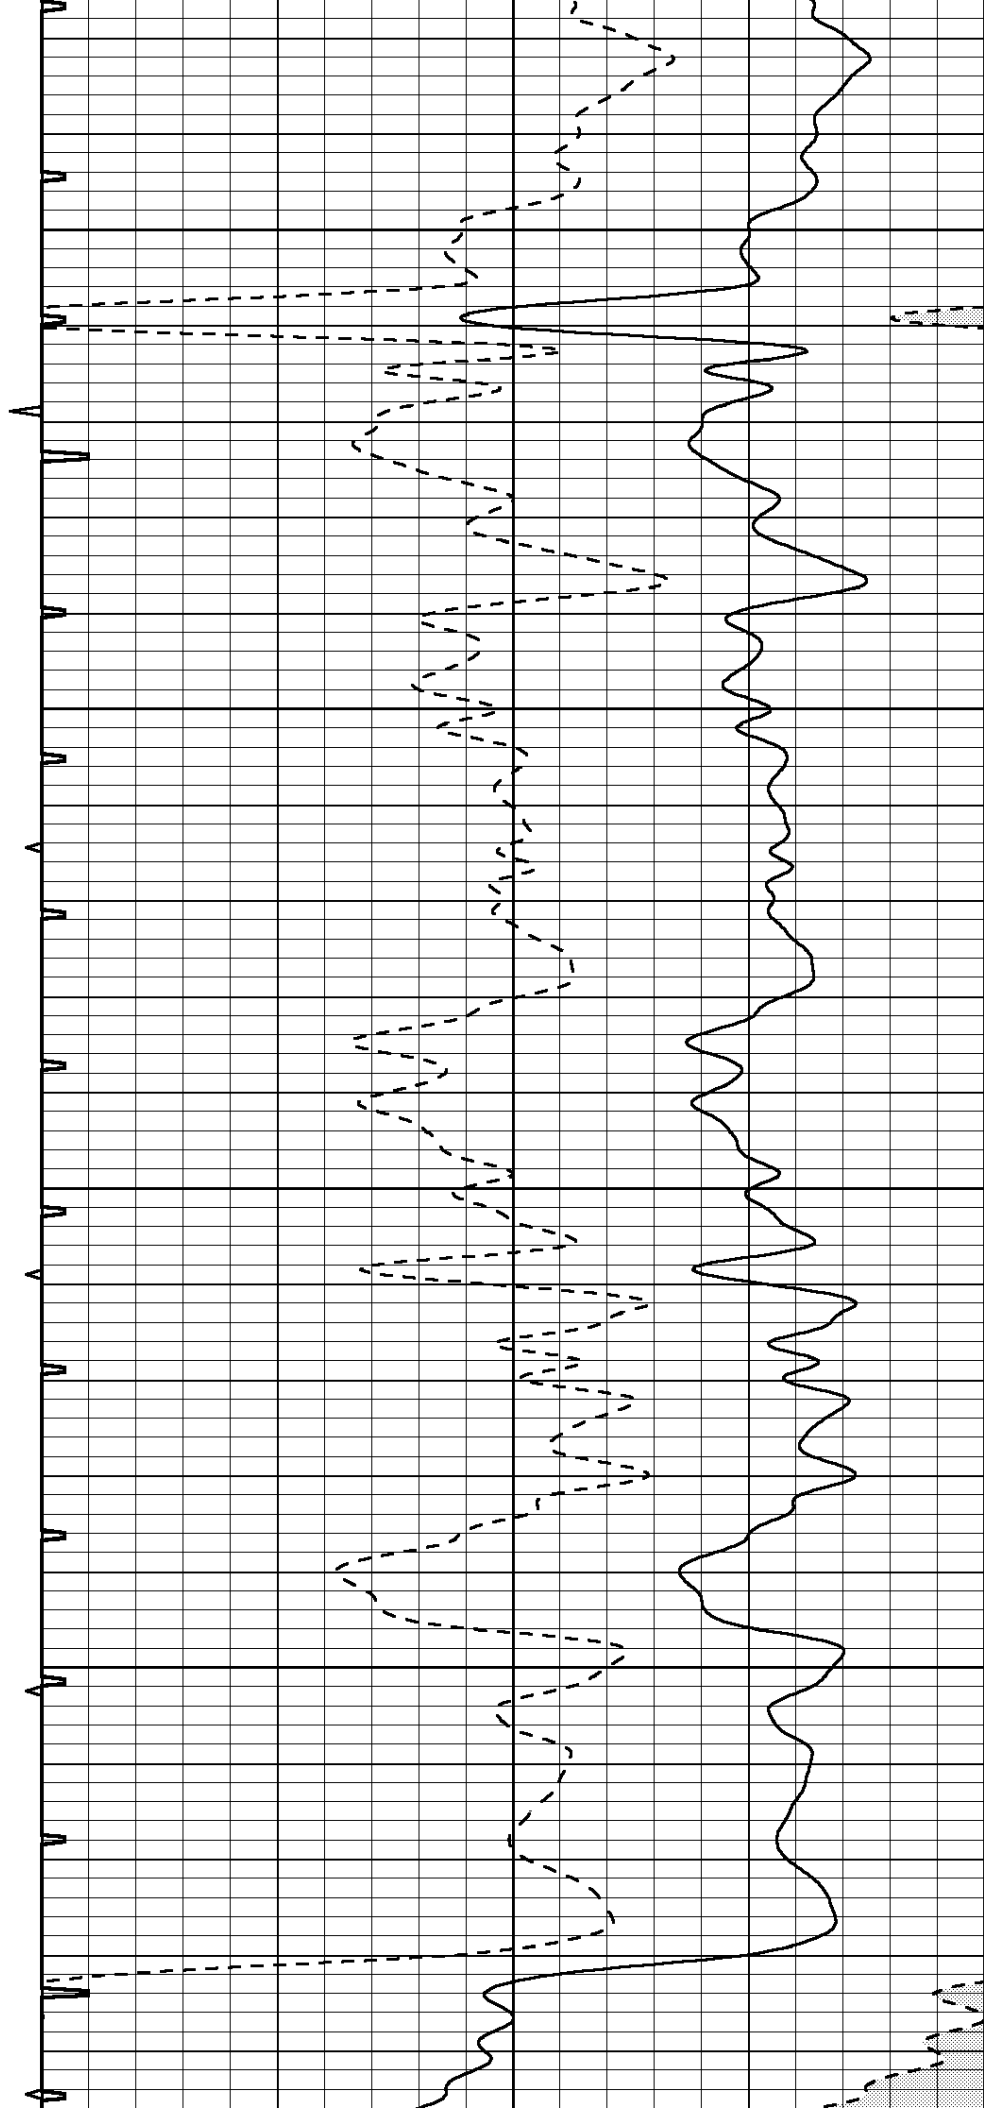

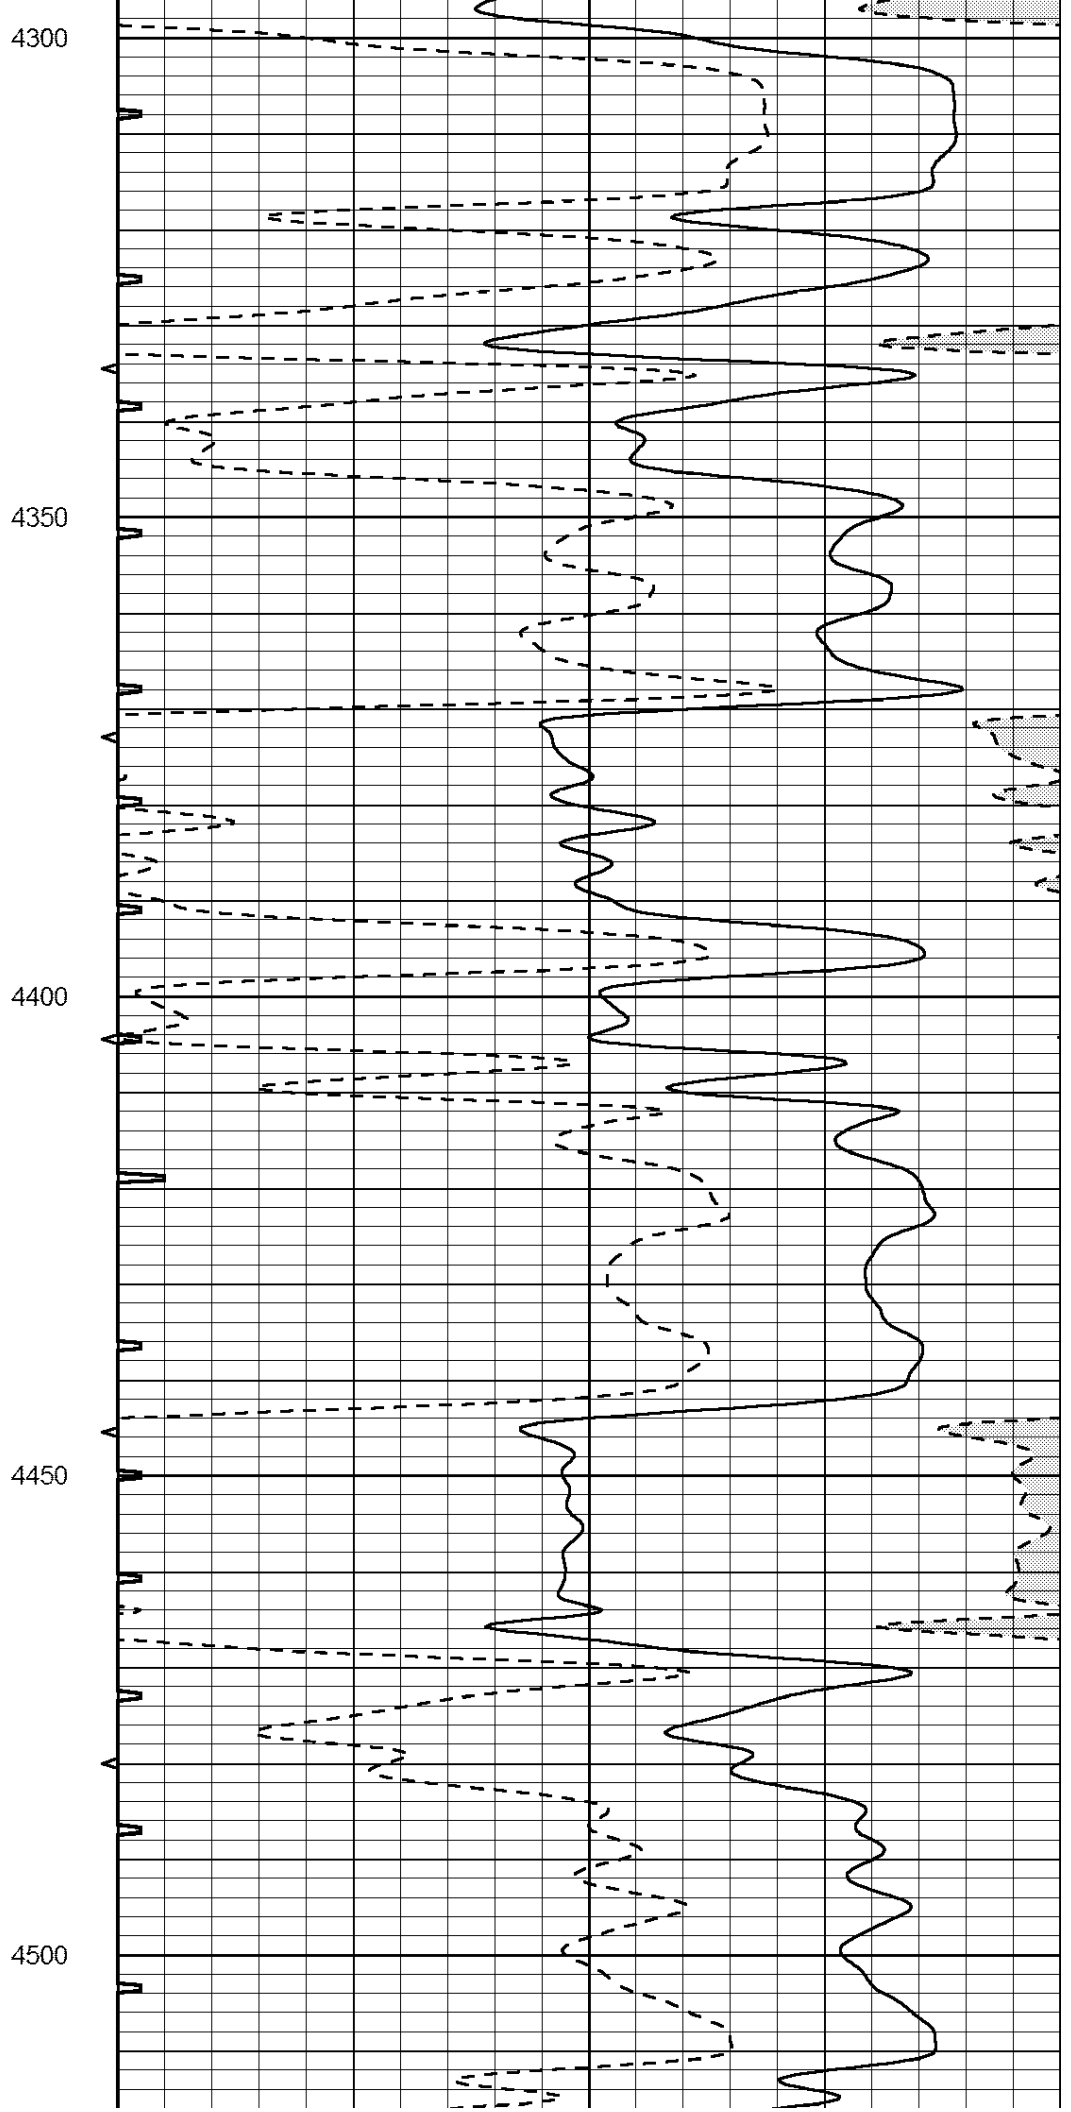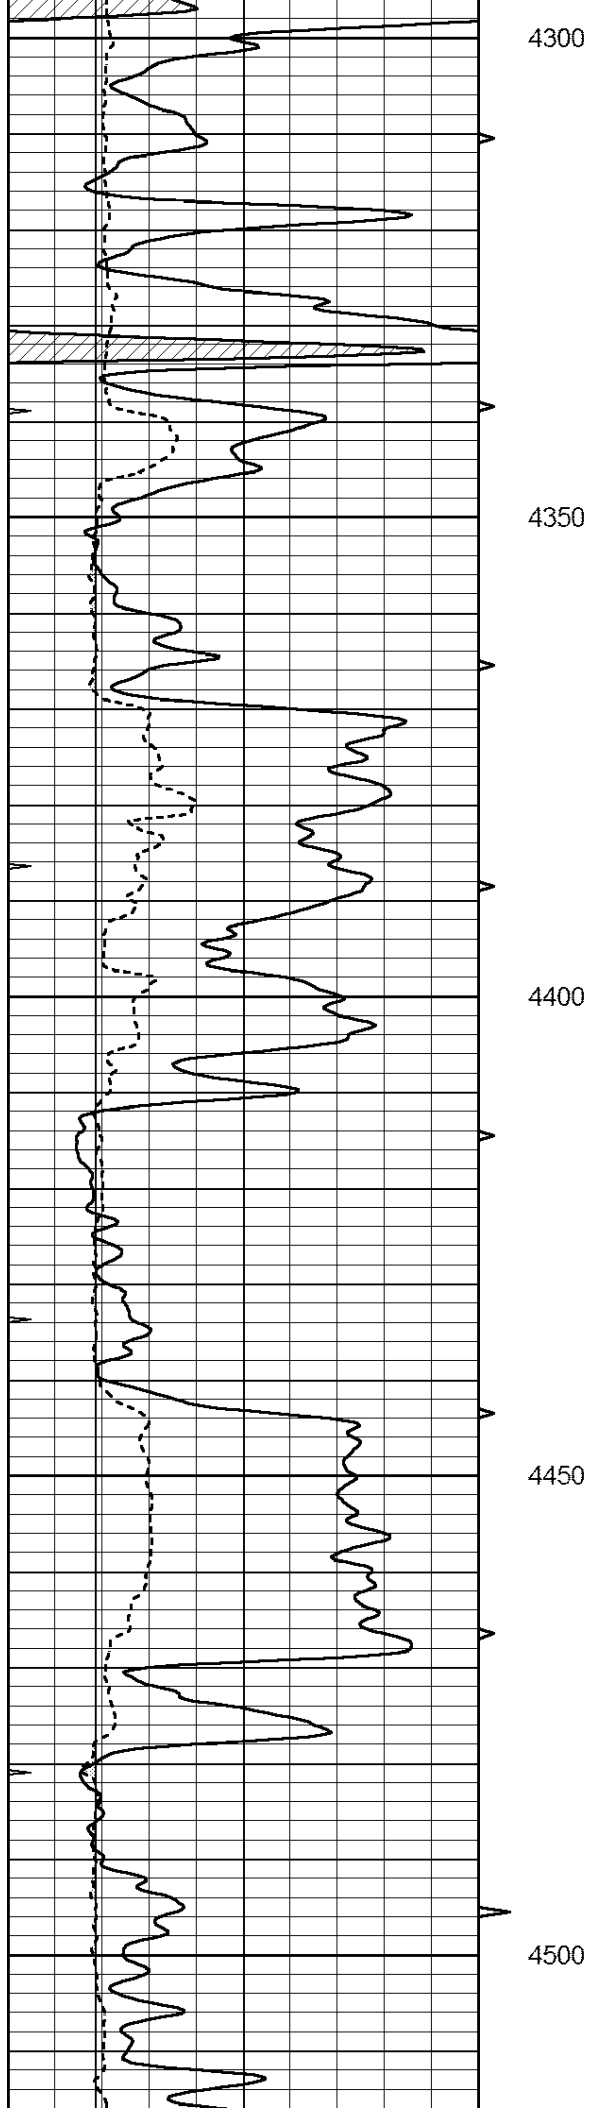

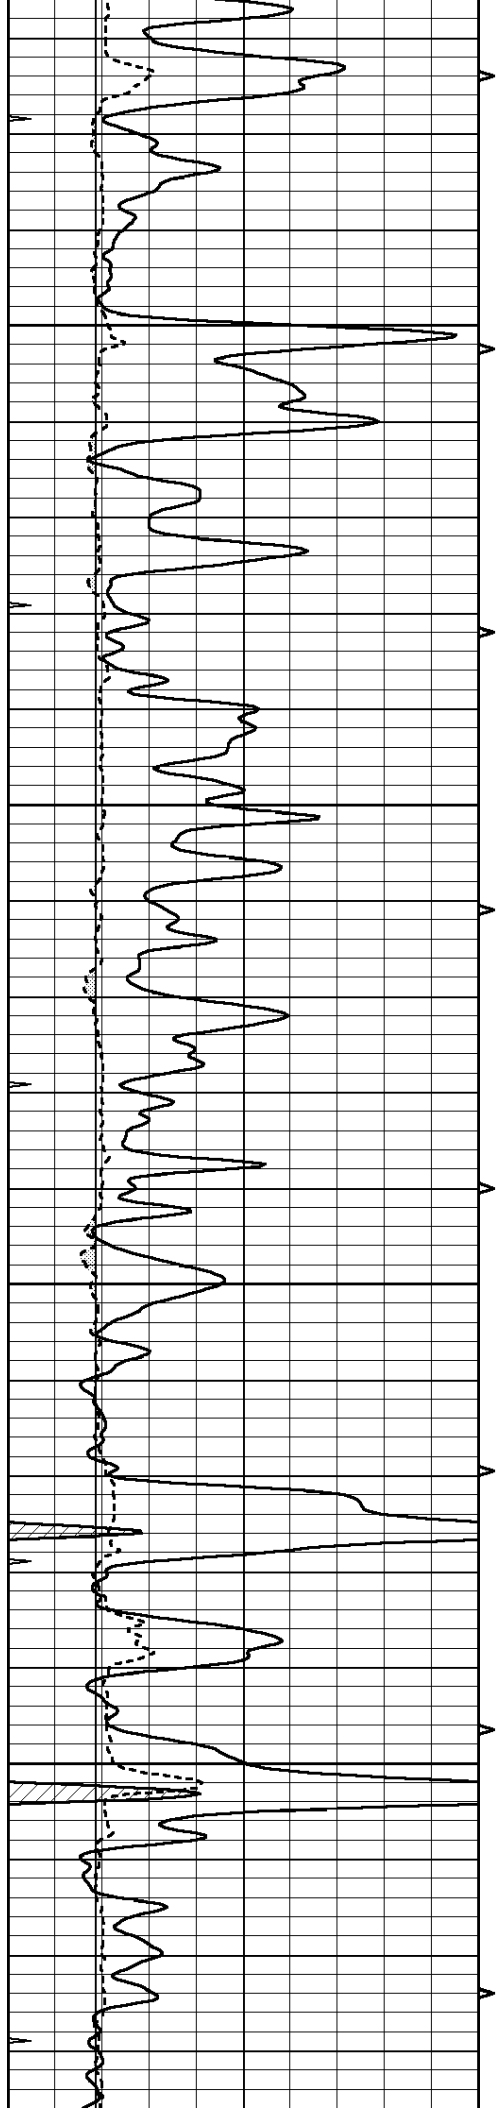



4550

4600

4650

4700

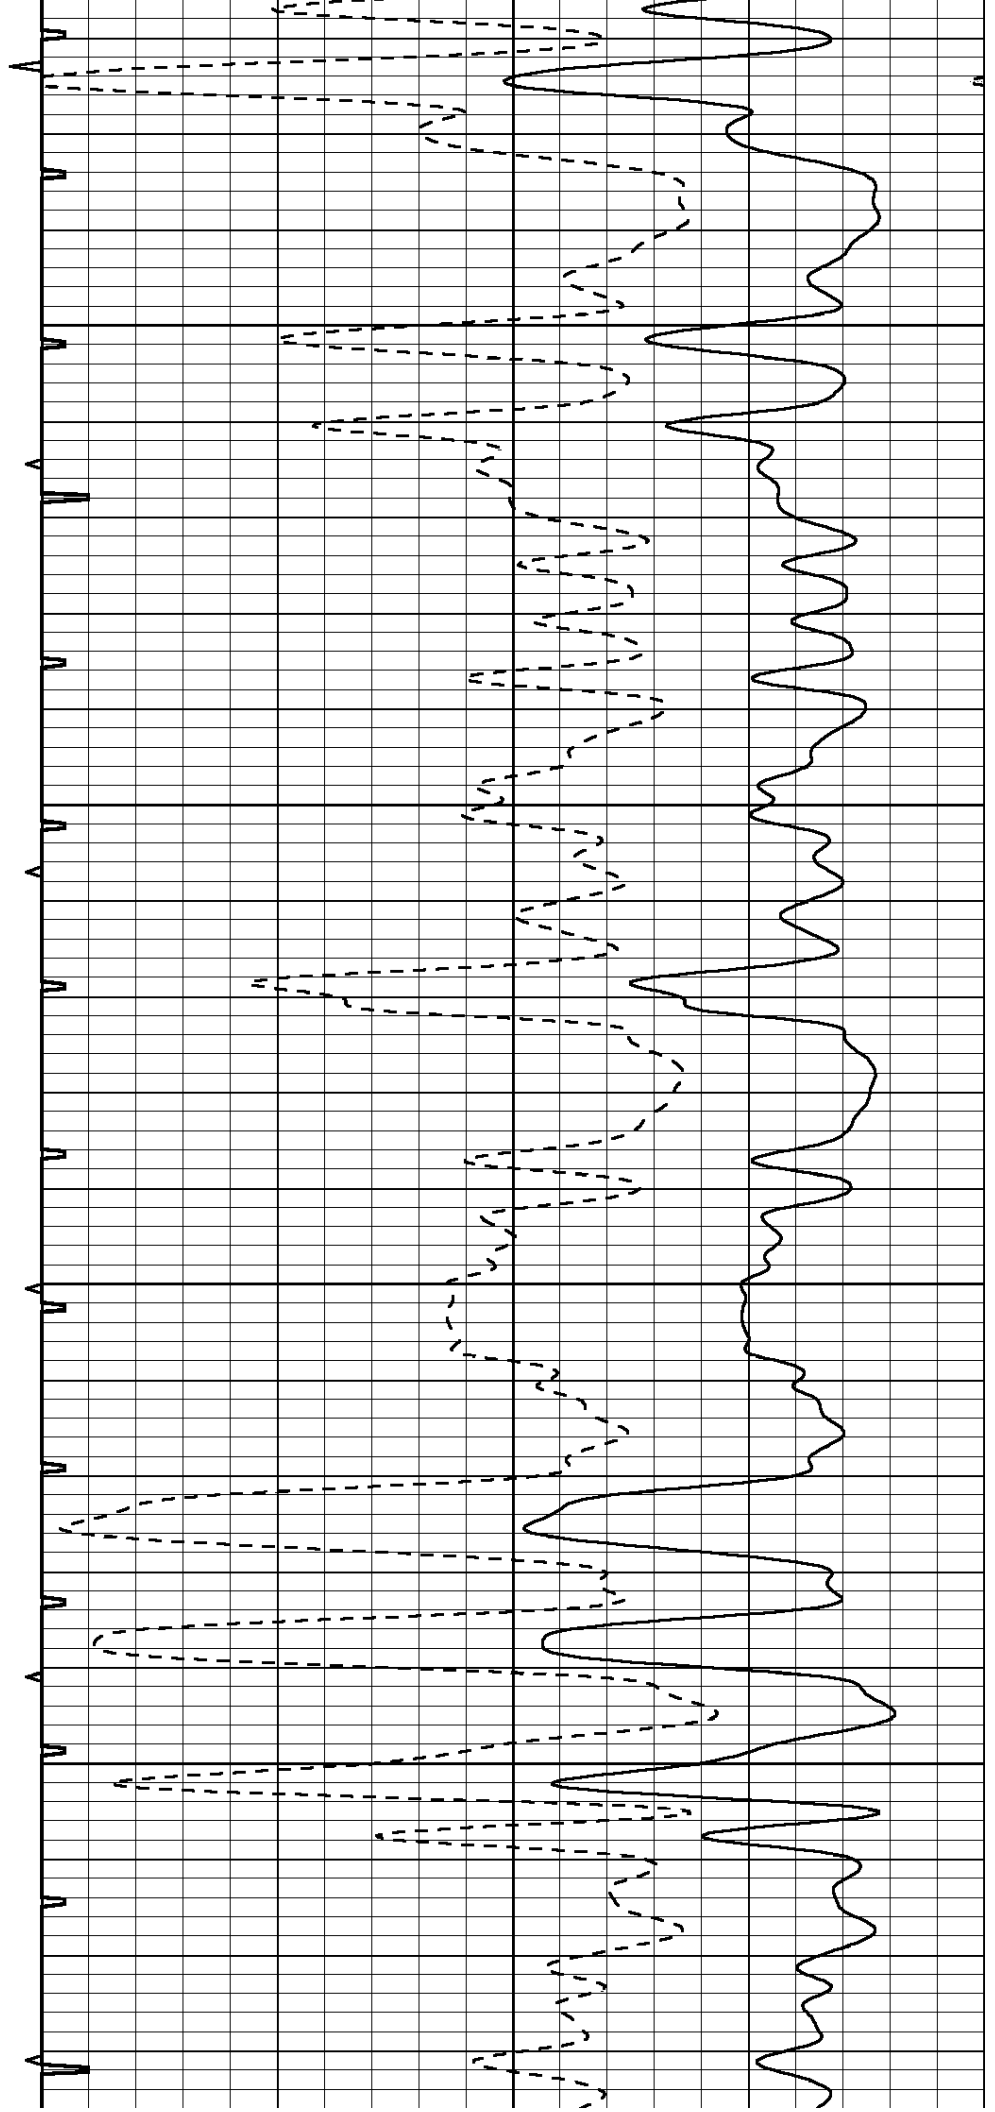

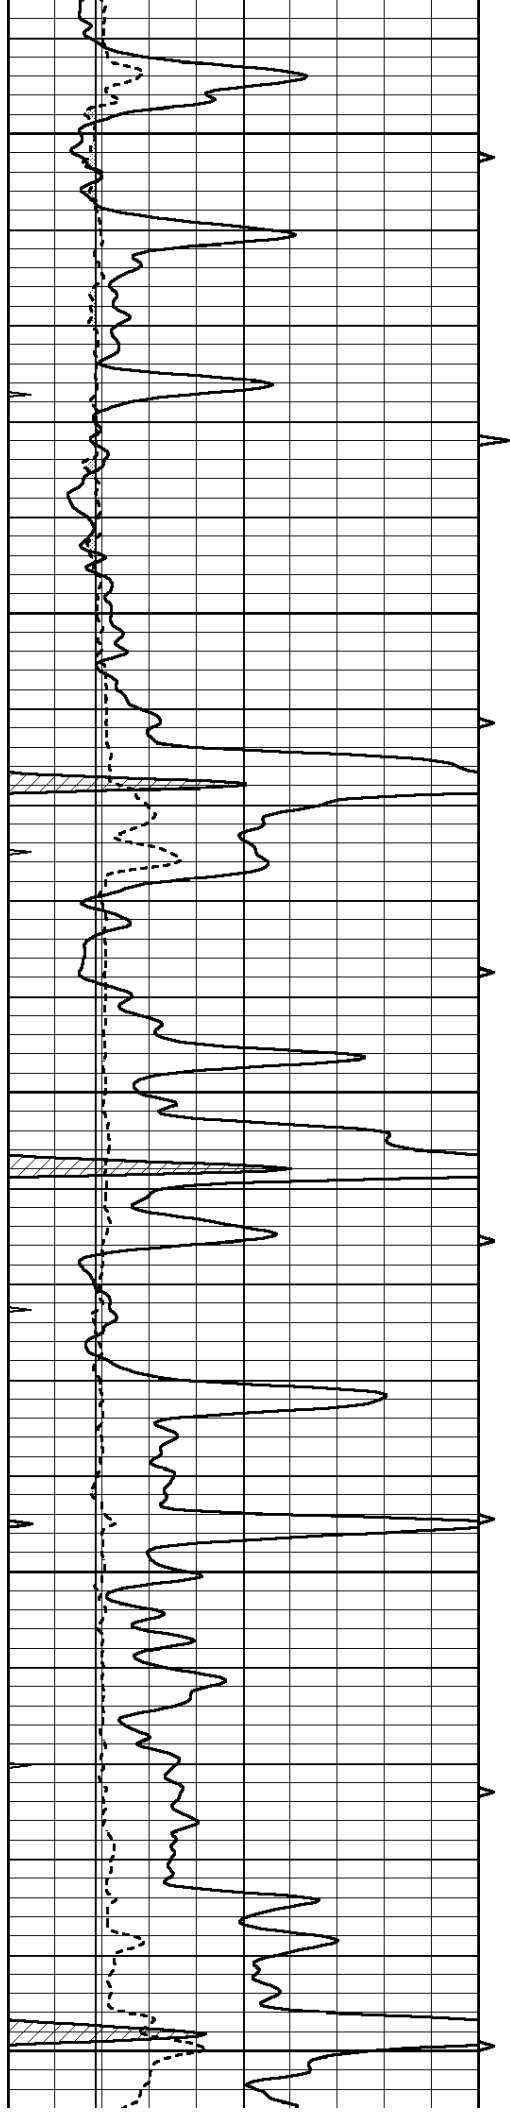


4750


4800

4850

4900

4950

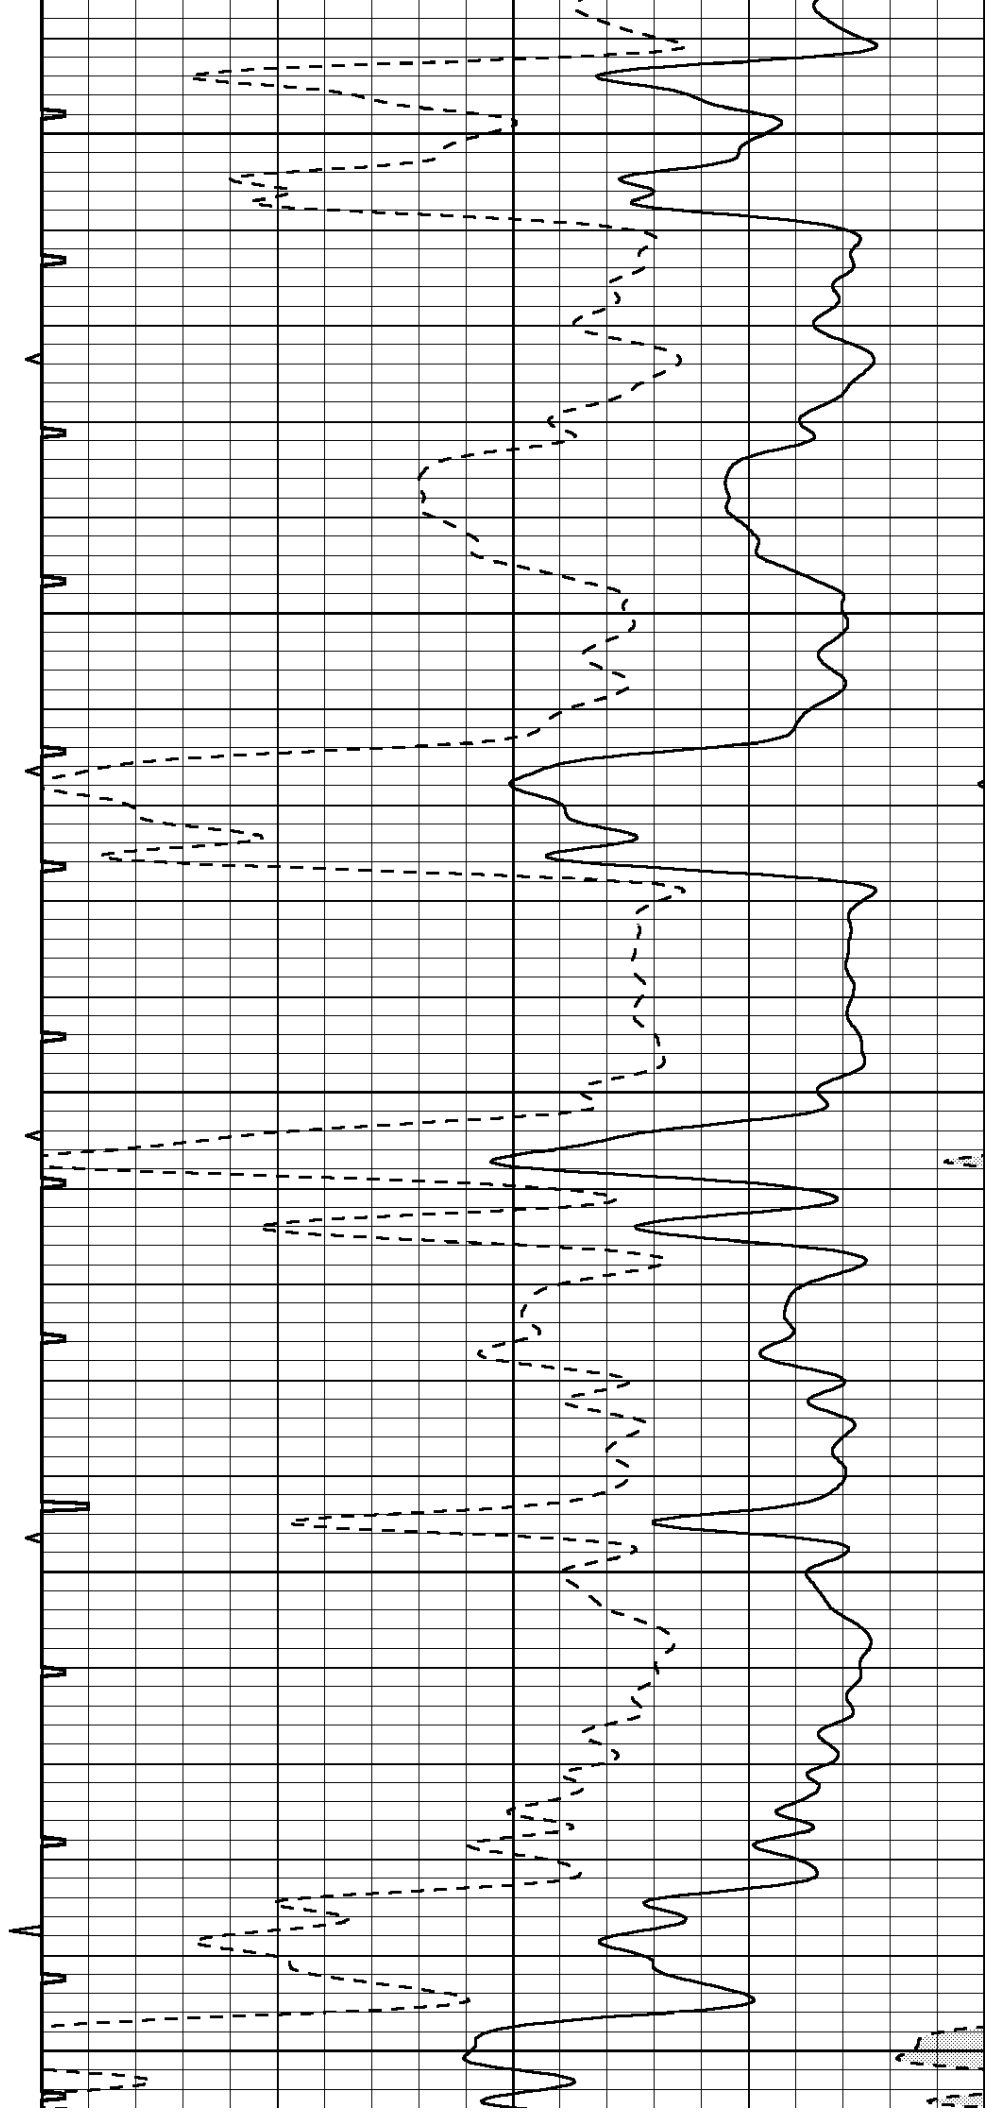

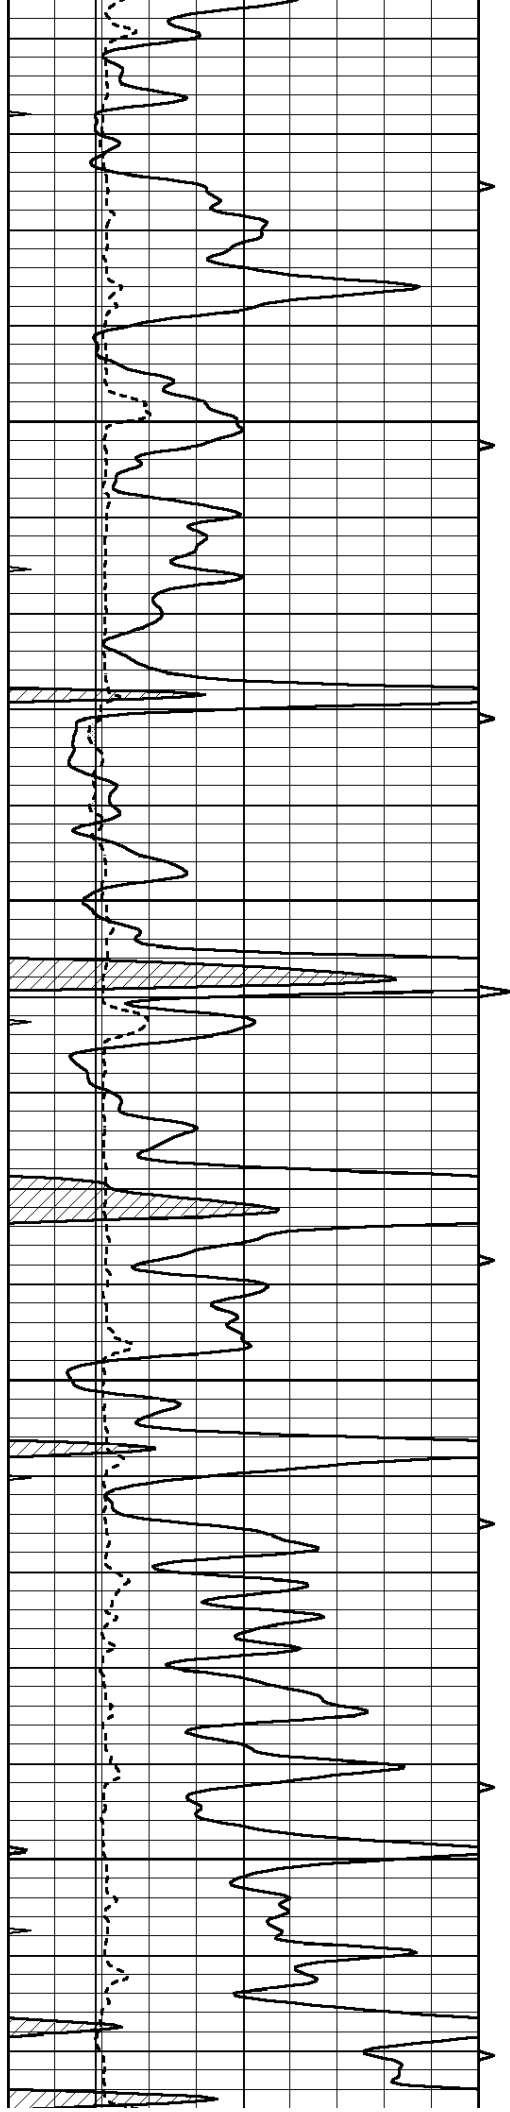



5000


5050

5100

5150

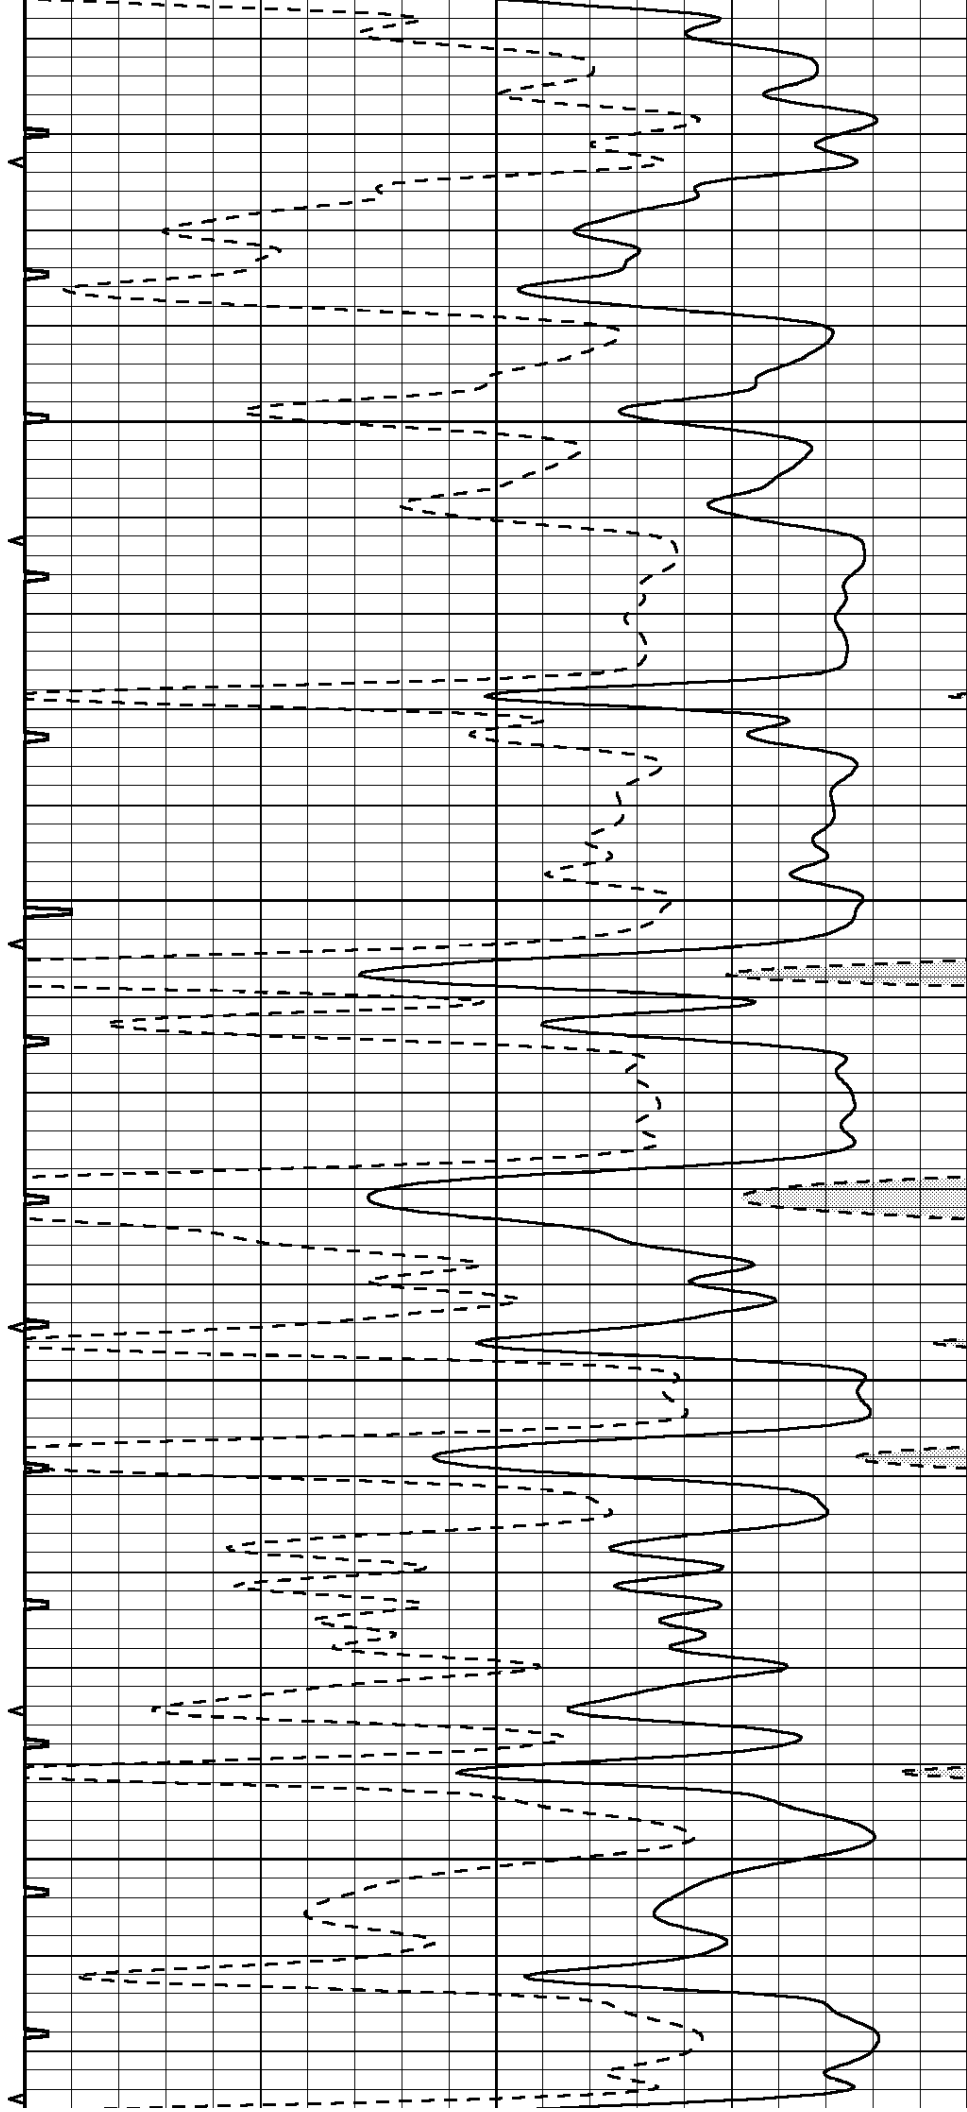

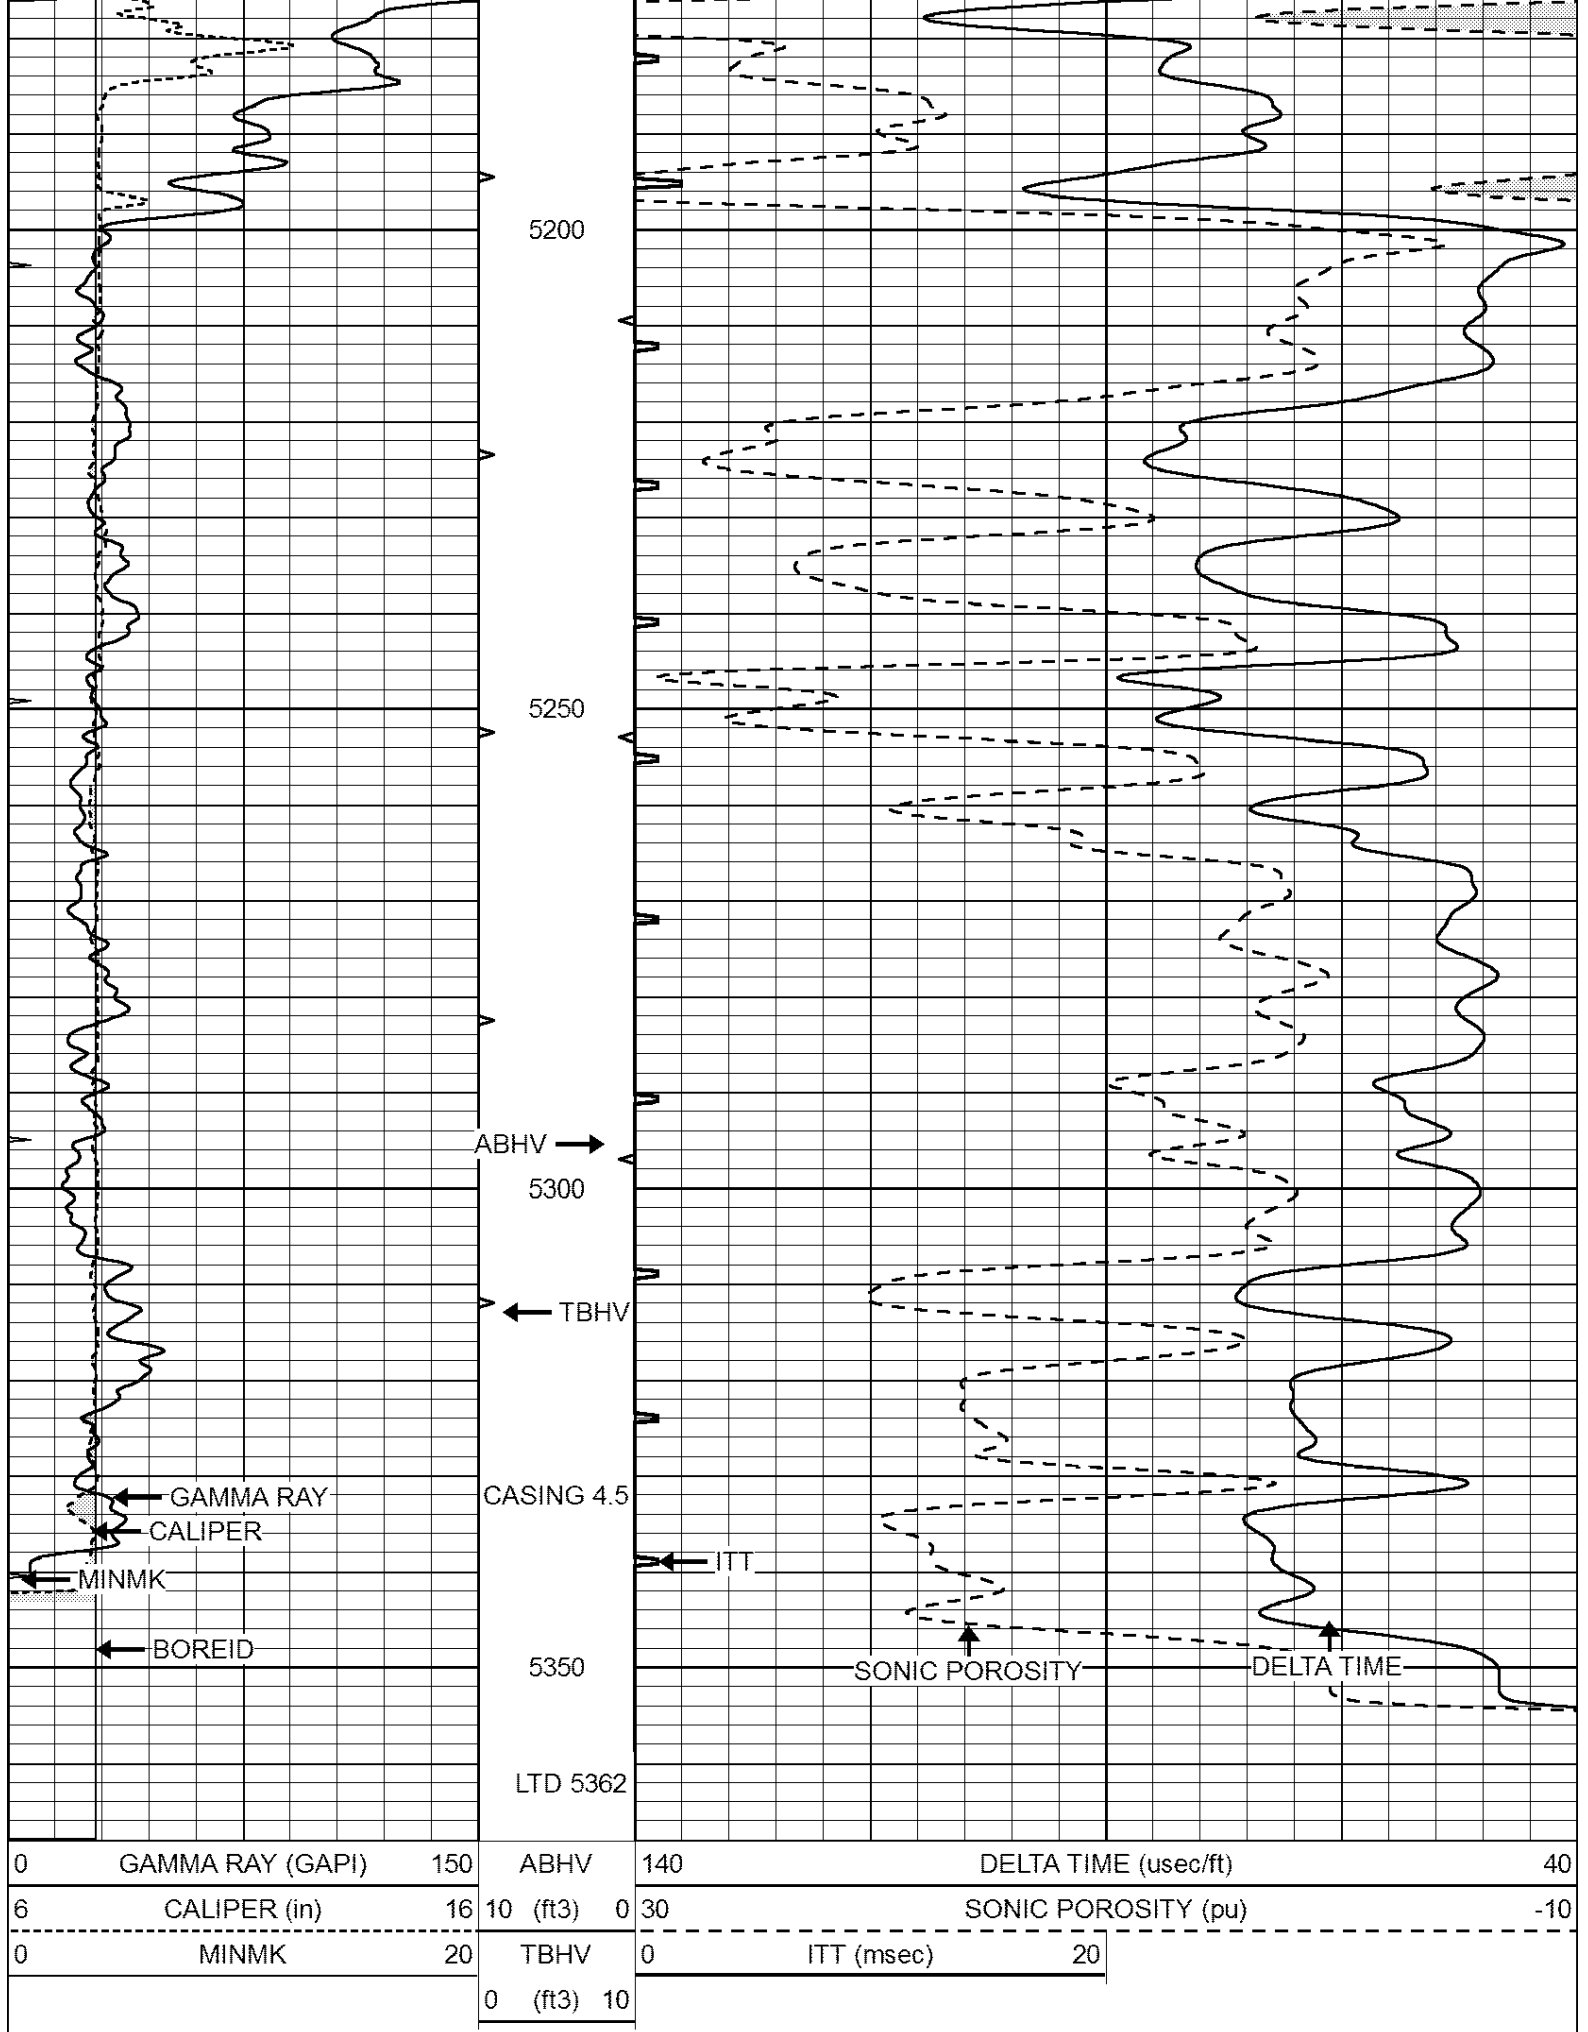


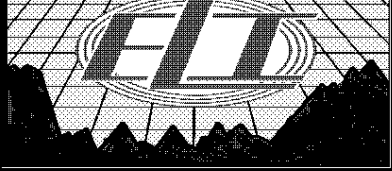


REPEAT SECTION

Database File: 3153pe.db
Dataset Pathname: pass4.1
Presentation Format: _slt
Dataset Creation: Sun Oct 28 16:10:15 2018
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	140	DELTA TIME (usec/ft)	40
6	CALIPER (in)	16	10 (ft3)	0	SONIC POROSITY (pu)	-10
0	MINMK	20	TBHV	0	ITT (msec)	20
			0 (ft3)	10		

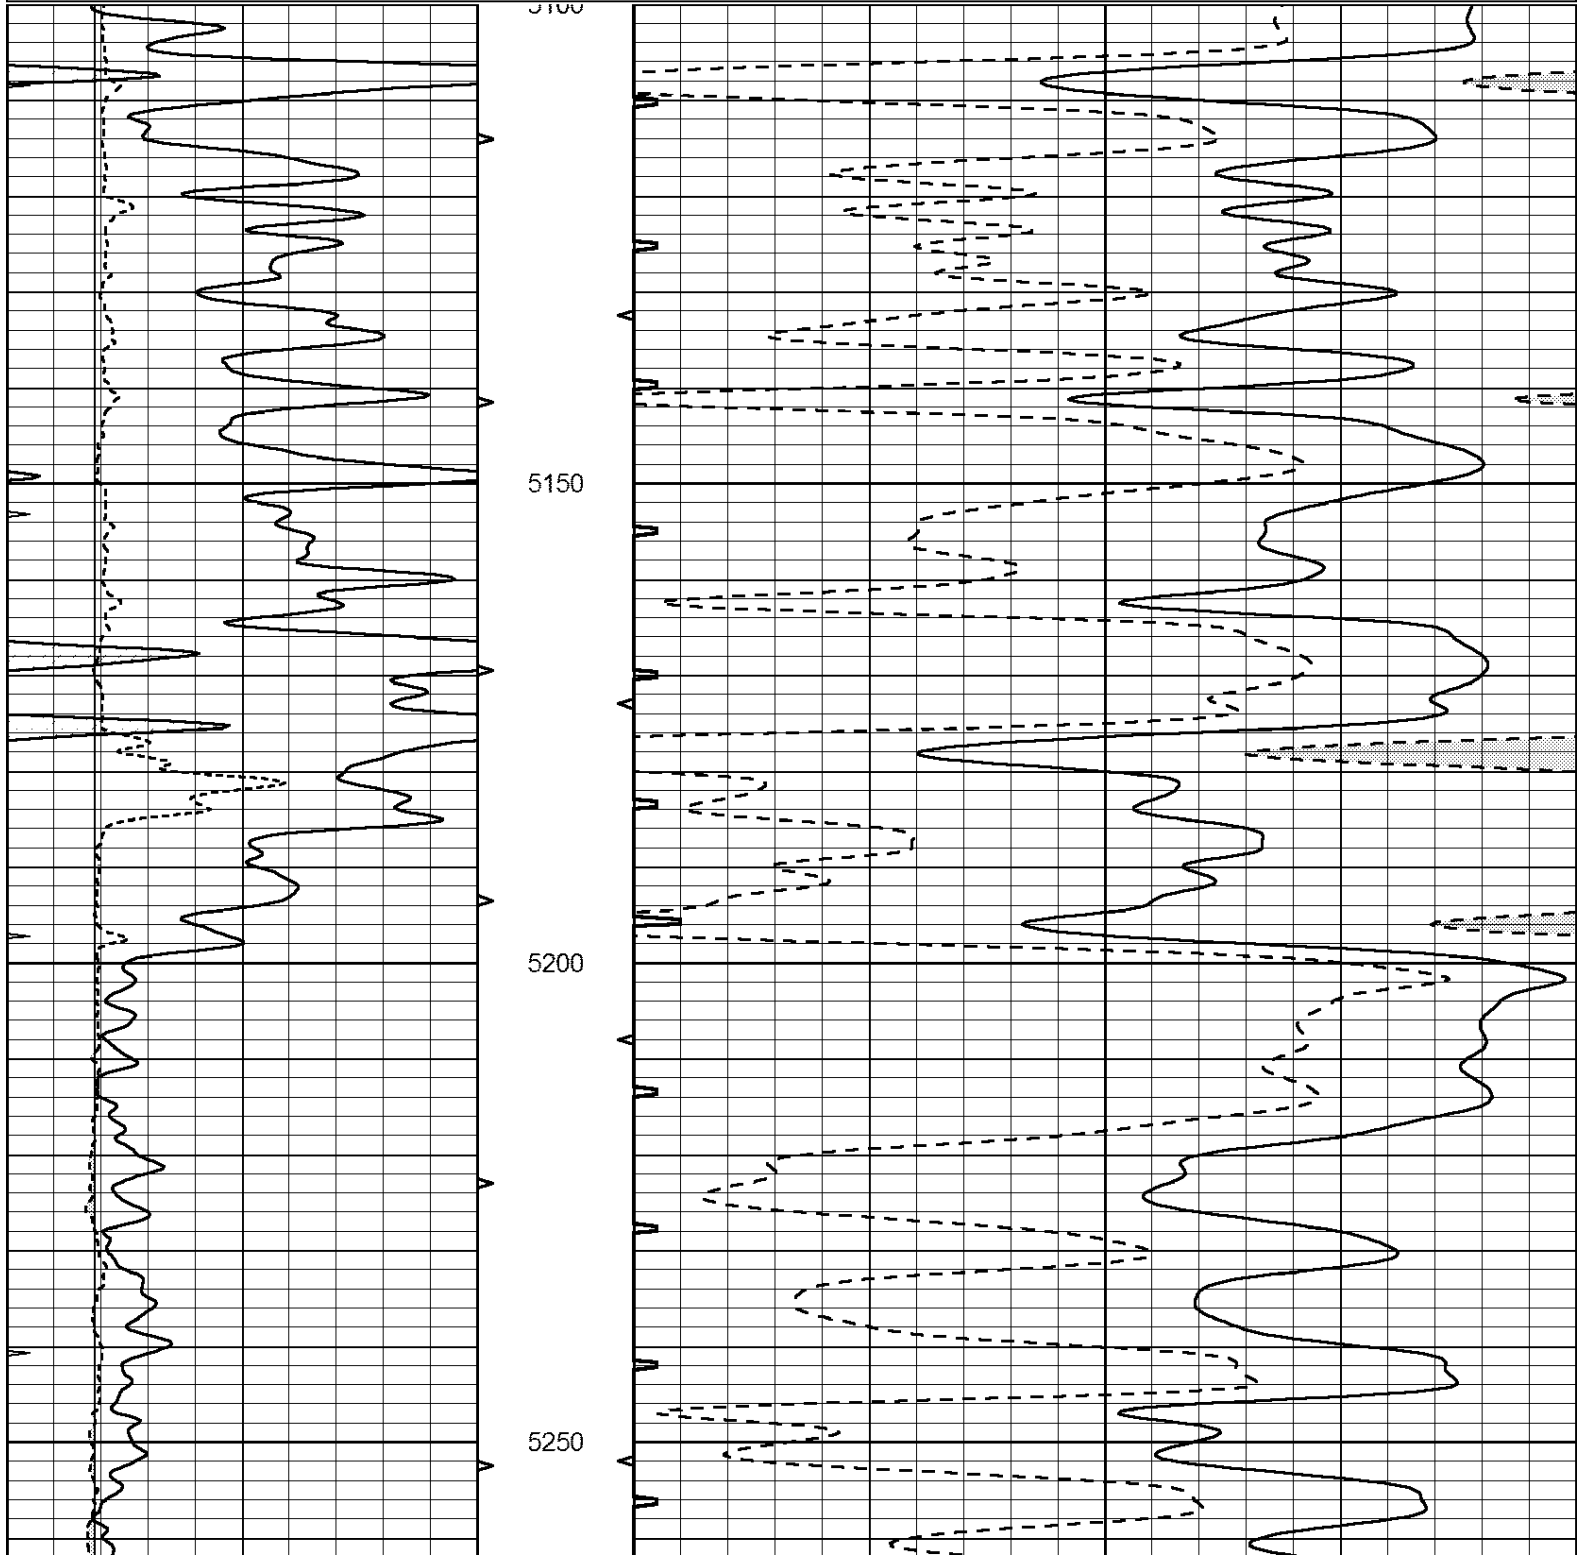

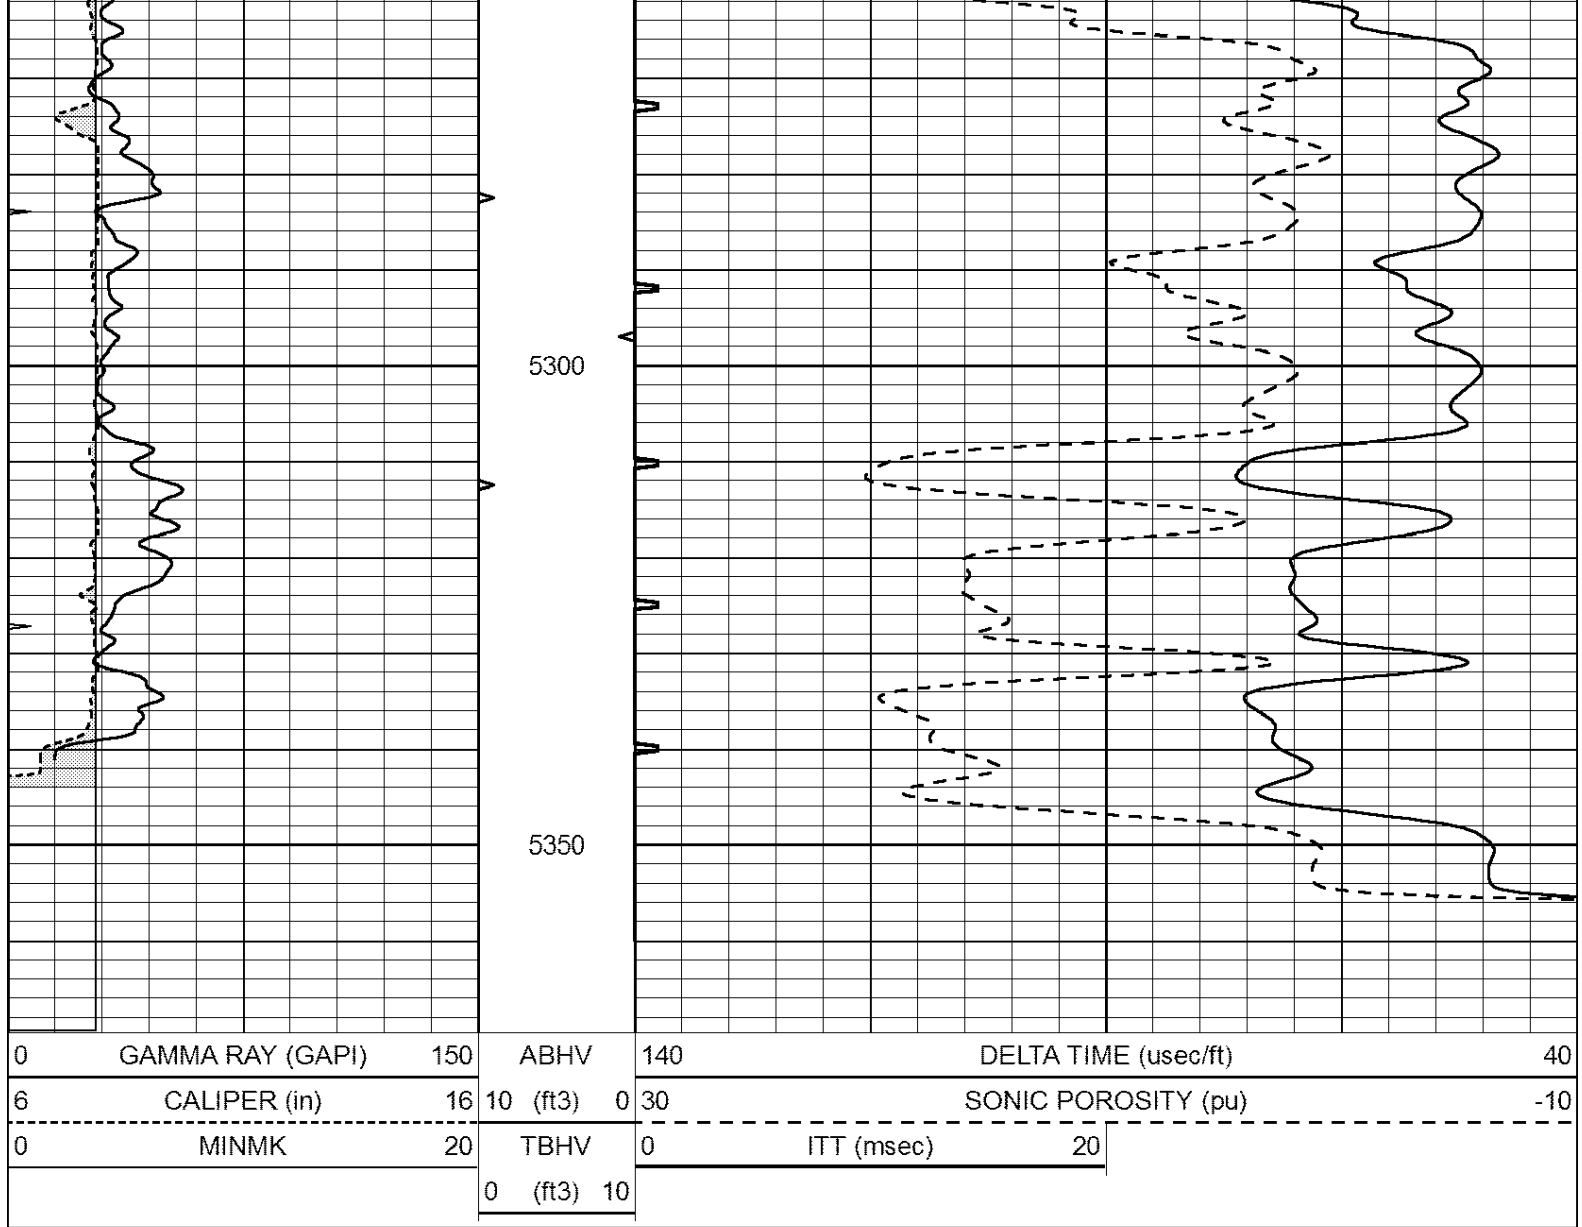

Calibration Report

Database File: 3153pe.db
Dataset Pathname: pass4.1
Dataset Creation: Sun Oct 28 16:10:15 2018

MICRO Calibration Report

Serial Number: MICRO4
Tool Model: PROBE
Performed: Tue Sep 25 18:25:59 2018

Caliper Calibration: Gain=3.238 Offset=-10.624
References Low Cal High Cal
Readings 7.000 14.000
5.800 8.104

1.5" Calibration: Gain=60.717 Offset=-1.618
References Low Cal High Cal
Readings 0.000 20.000
0.007 1.280

2" Calibration: Gain=75.130 Offset=-1.687
References Low Cal High Cal
Readings 0.000 20.000

Readings	0.040	1.208
Gamma Ray Calibration Report		
Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Sun Sep 30 12:56:34 2018	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.5500	GAPI/cps