

Notice: Fill out COMPLETELY and return to Conservation Division at the address below within 30 days from plugging date

KANSAS CORPORATION COMMISSION OIL & GAS CONSERVATION DIVISION WELL PLUGGING RECORD K.A.R. 82-3-117

RECEIVED

JUL 17 2006

KCC WICHITA

Form CP-4 September 2003

Type or Print on this Form Form must be Signed All blanks must be Filled

Lease Operator: Anadarko Petroleum Corporation
Address: 1201 Lake Robbins Dr, The Woodlands, TX 77380
Phone: (832) 636-8380 Operator License # 4549
Type of Well: EOR Docket # E-26,115
The plugging proposal was approved on: 04/17/2006
by: Eric MacLaren (KCC District Agent's)
Is ACO-1 filed? Yes
Producing Formation(s): Lower Chester

API Number 15- 175-20404 -00-01
Lease Name Hitch Unit
Well Number 1-1
Spot Location (QQQQ) CNW SE
1980 Feet from North / South Line of Section
1980 Feet from East / West Line of Section
Sec. 3 Twp. 33 S. R. 34 East West
County: Seward
Date Well Completed: 05/09/1979 (original)
Plugging Commenced: 04/18/2006
Plugging Completed: 04/19/2006

Show depth and thickness of all water, oil and gas formations.


Table with columns: Oil, Gas or Water Records (Formation, Content) and Casing Record (Surface Conductor & Production) (From, To, Size, Put in, Pulled out). Includes handwritten entries for 'Prod' and 'KCC Per 2/18/06 Per CP213'.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole.

HLS set CIBP w/2 sxs cmt. 6000' to 5980'. Load 5-1/2" w/mud to 1700. Mixed 25 sx plug in 5-1/2" from 1700 to 1500, mud to 0. Shot & pulled 5-1/2 to 500', 30 sxs 500' to 400', 10 sxs 40' to 0. Capped 8-5/8" 3 ft. below GL. Jim Holland with KCC witnessed

Name of Plugging Contractor: Sargent & Horton Plugging, Inc. License # 31151
Address: Route 1, Box 49 BA, Tyrone, OK 73951-9731
Name of Party Responsible for Plugging Fees: Anadarko Petroleum Corporation
State of Texas County, Montgomery, ss.
Martha C. Howard (Employee of Operator) or (Operator) on above-described well, being first duly

sworn on oath, says: That I have knowledge of the facts statements, and matters herein contained, and the log of the above-described well as filed and the same are true and correct, so help me God.

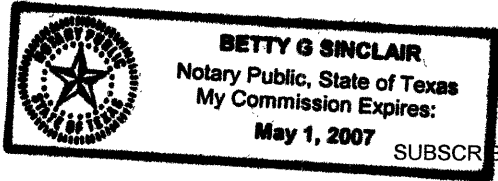

(Signature) Martha C. Howard

(Address) 1201 Lake Robbins Dr., The Woodlands, TX 77380

SUBSCRIBED and SWORN TO before me this 13th day of July, 2006
Notary Public Betty G Sinclair My Commission Expires: 5/1/2007

Handwritten initials 'AG'