DUAL INDUCTION LOG

Company MAI OIL OPERATIONS
Well DOLL #1
Field CHASE-SILICA
County BARTON State KANSAS
Location: API # : 15-009-26233-00-00
553 FNL & 985 FEL
SEC 28 TWP 20S RGE 11W
Permanent Datum GROUND LEVEL Elevation 1776
Log Measured From KELLY BUSHING 8' A.G.L.
Drilling Measured From KELLY BUSHING

Other Services: CDL/CNL/MEL

Elevation: K.B. 1784 D.F. 1782 G.L. 1776

Date	10/10/18		
Run Number	ONE		
Depth Driller	3425		
Depth Logger	3425		
Bottom Logged Interval	3424		
Top Log Interval	50		
Casing Driller	8 5/8@ 520		
Casing Logger	520		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 6000 PPM	
Density / Viscosity	8.9/46		
pH / Fluid Loss	9.5/9.6		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.50@66		
Rmf @ Meas. Temp	.38@66		
Rmc @ Meas. Temp	.60@66		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.29@111		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	111F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	JIM MUSGROVE		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS
SOUTH ON ELLINWOOD BLACK TOP 4.5 MILES,
EAST ON FIRST BAPTIST CHURCH BLACKTOP 3 MILES,
SOUTH 1/8, WEST INTO.


MAIN PASS


Database File: 2921ddn.db
Dataset Pathname: pass5.1
Presentation Format: _dil2
Dataset Creation: Wed Oct 10 08:15:13 2018 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:600

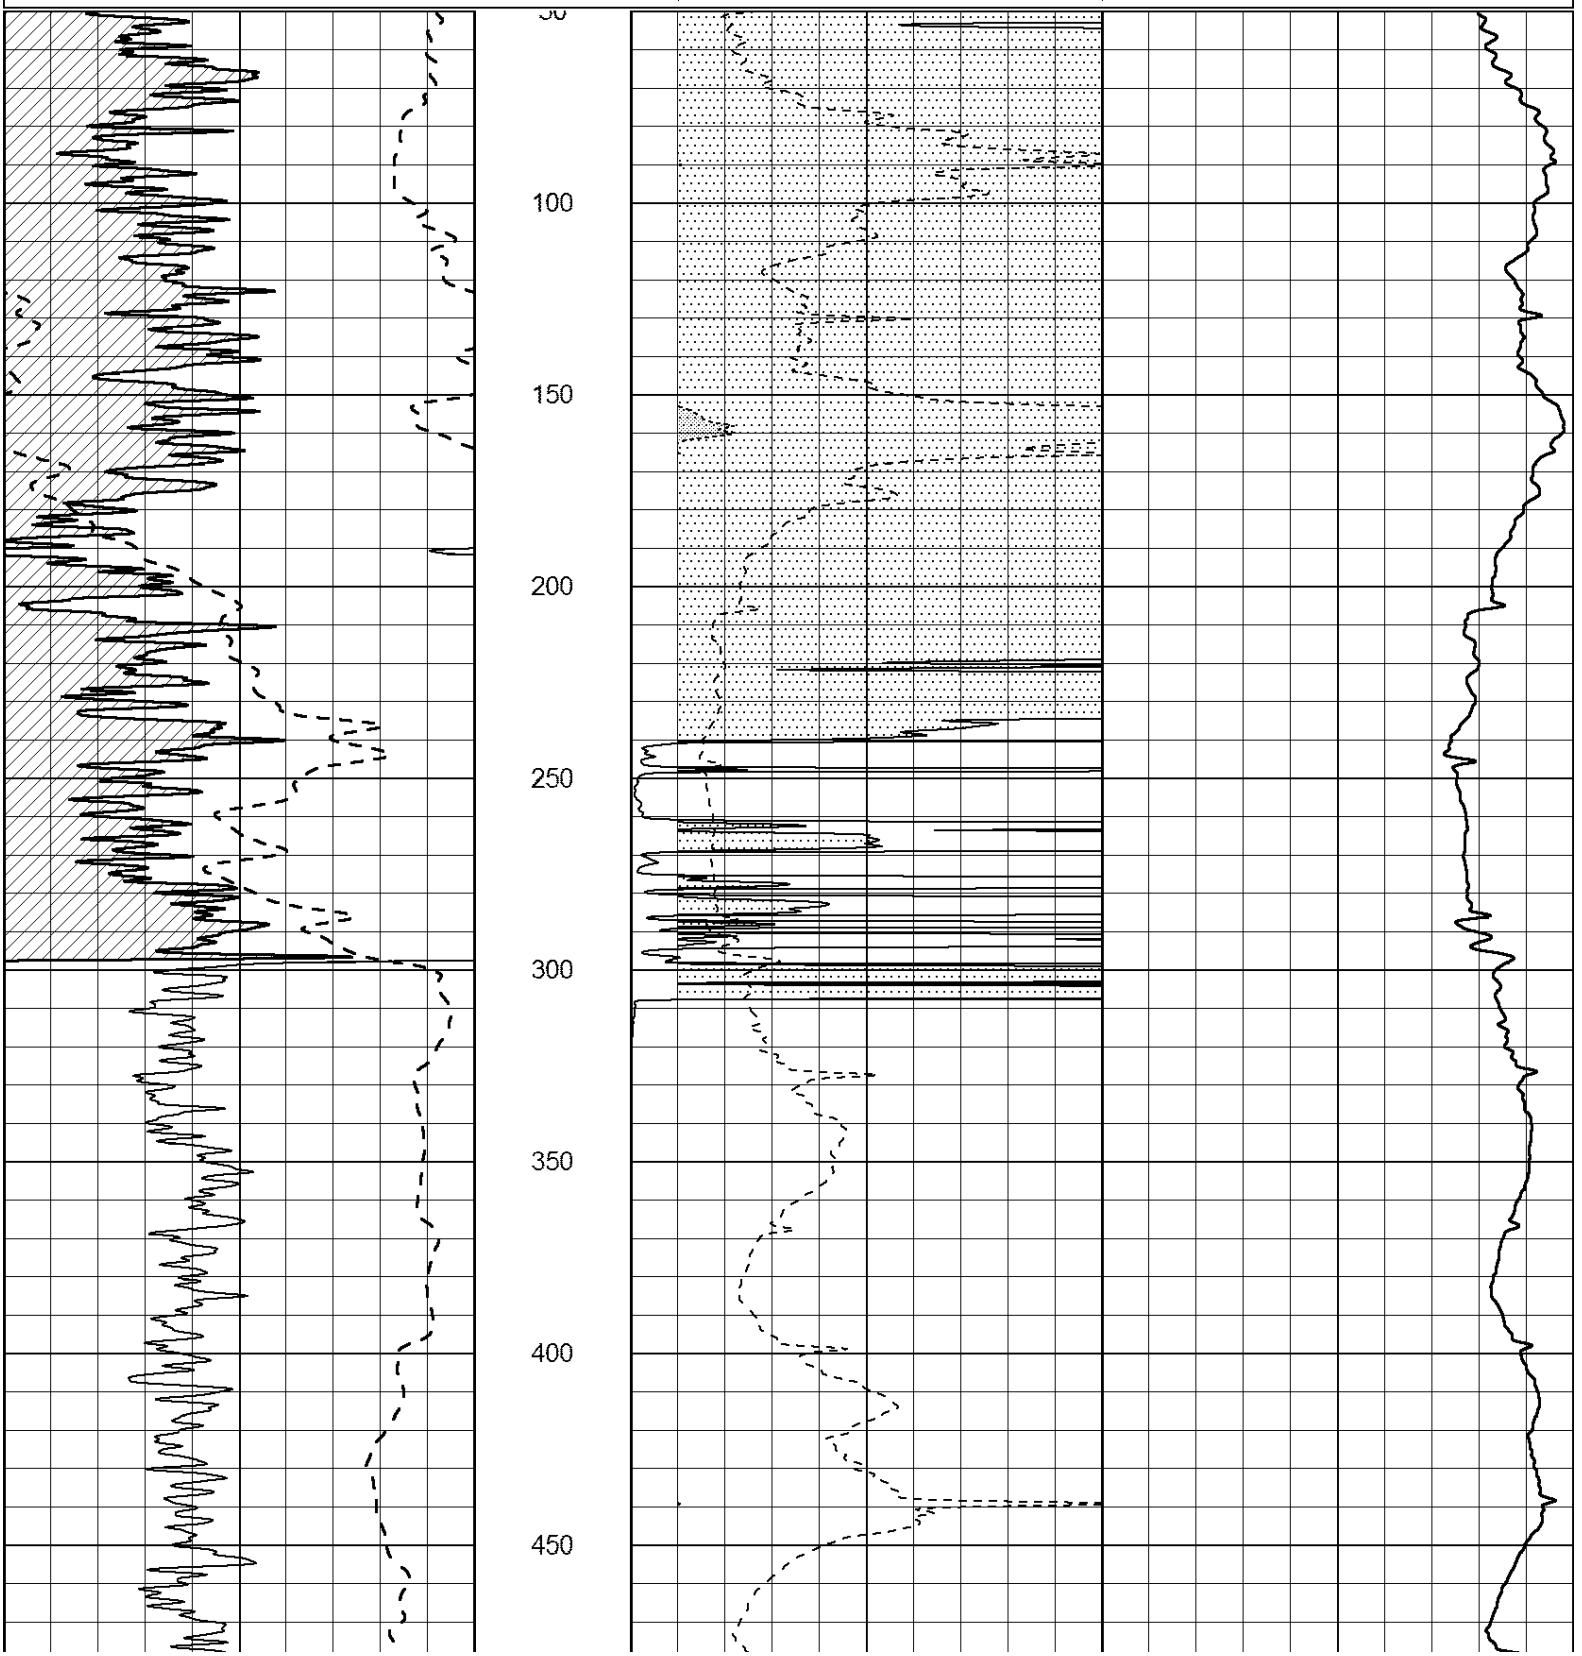


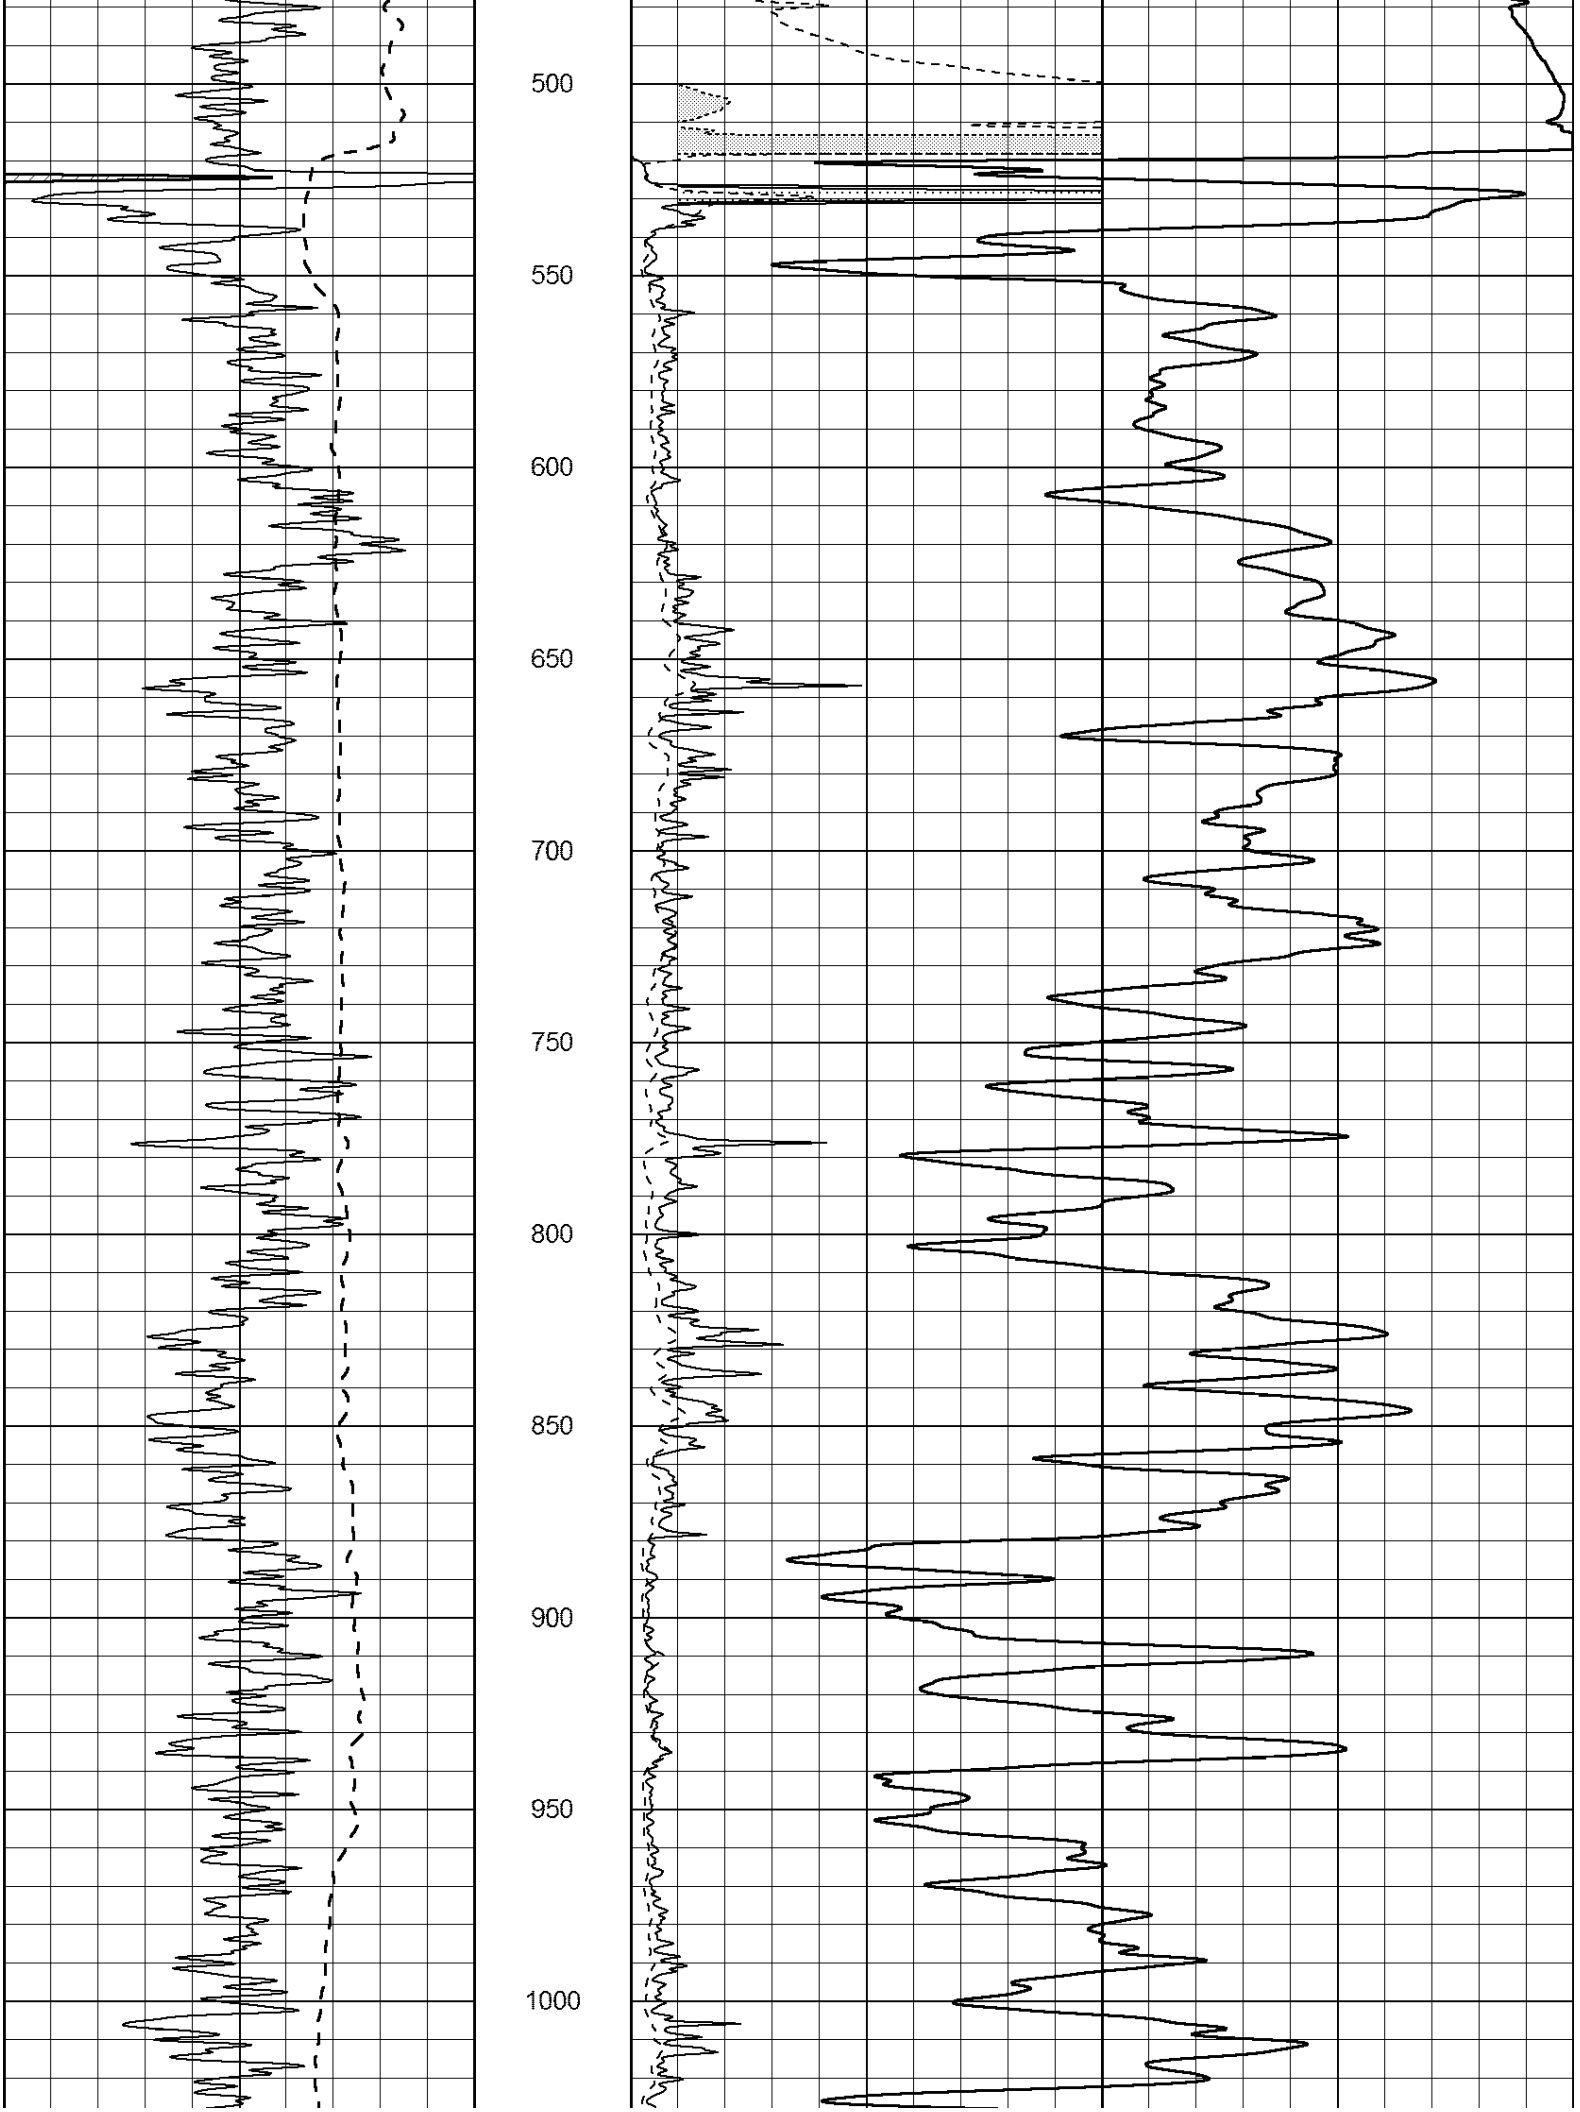

500
550
600
650
700
750
800
850
900
950
1000

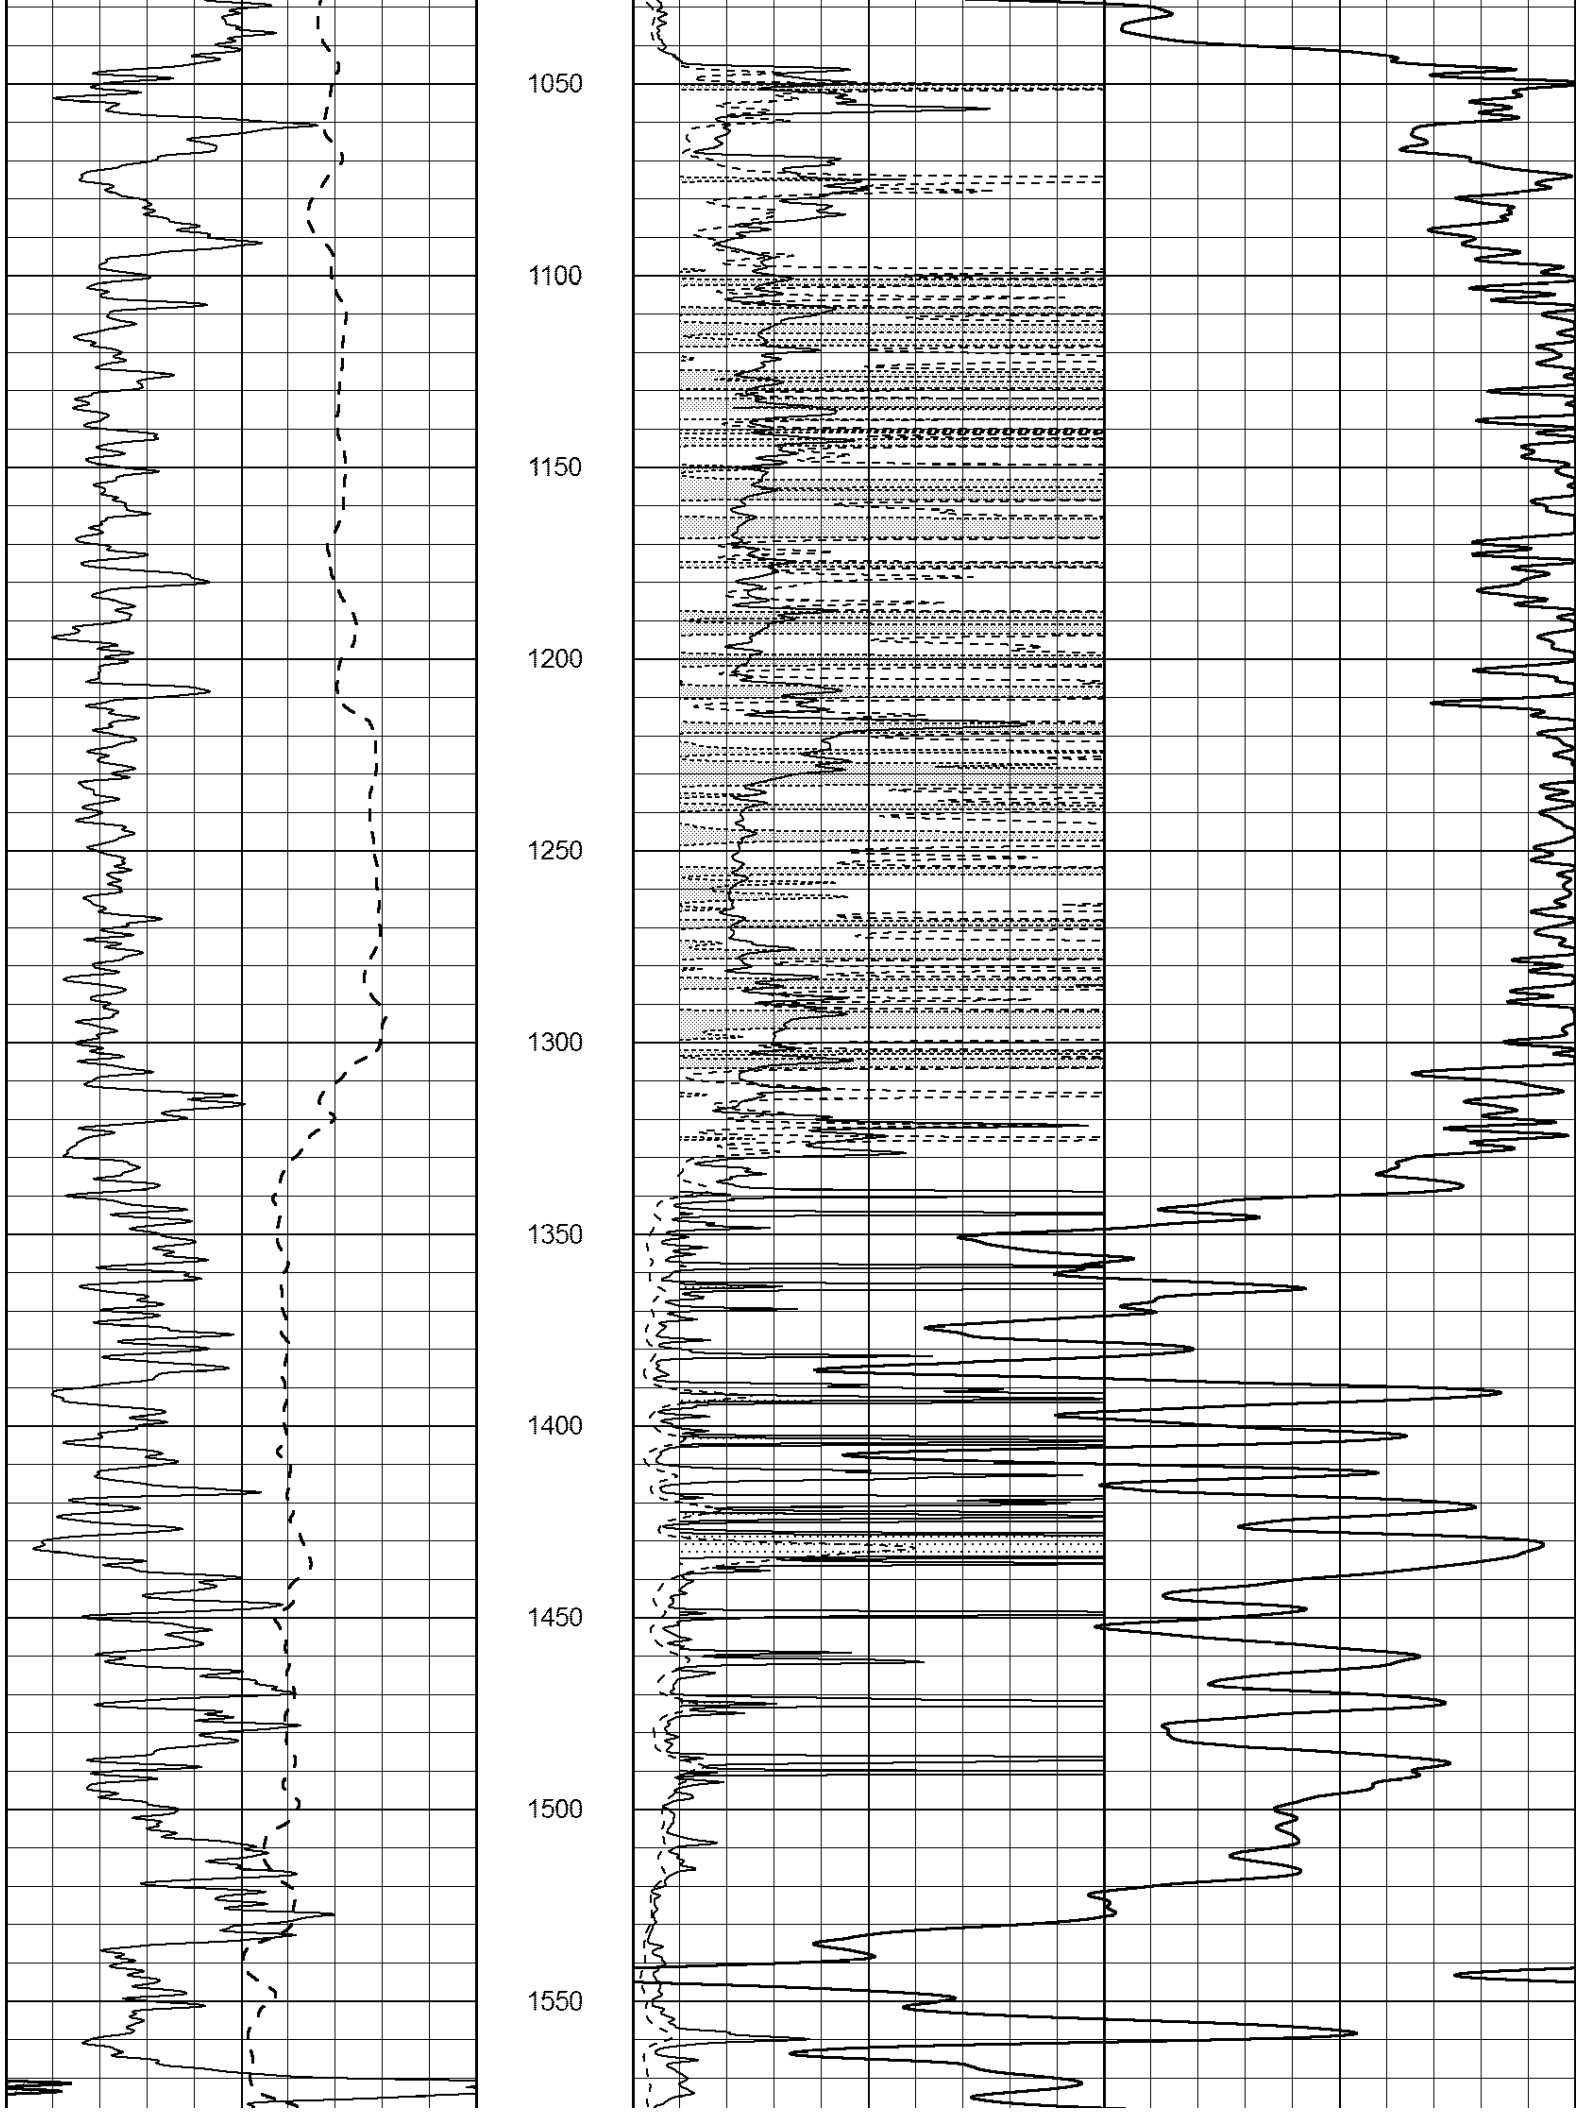
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500
1550

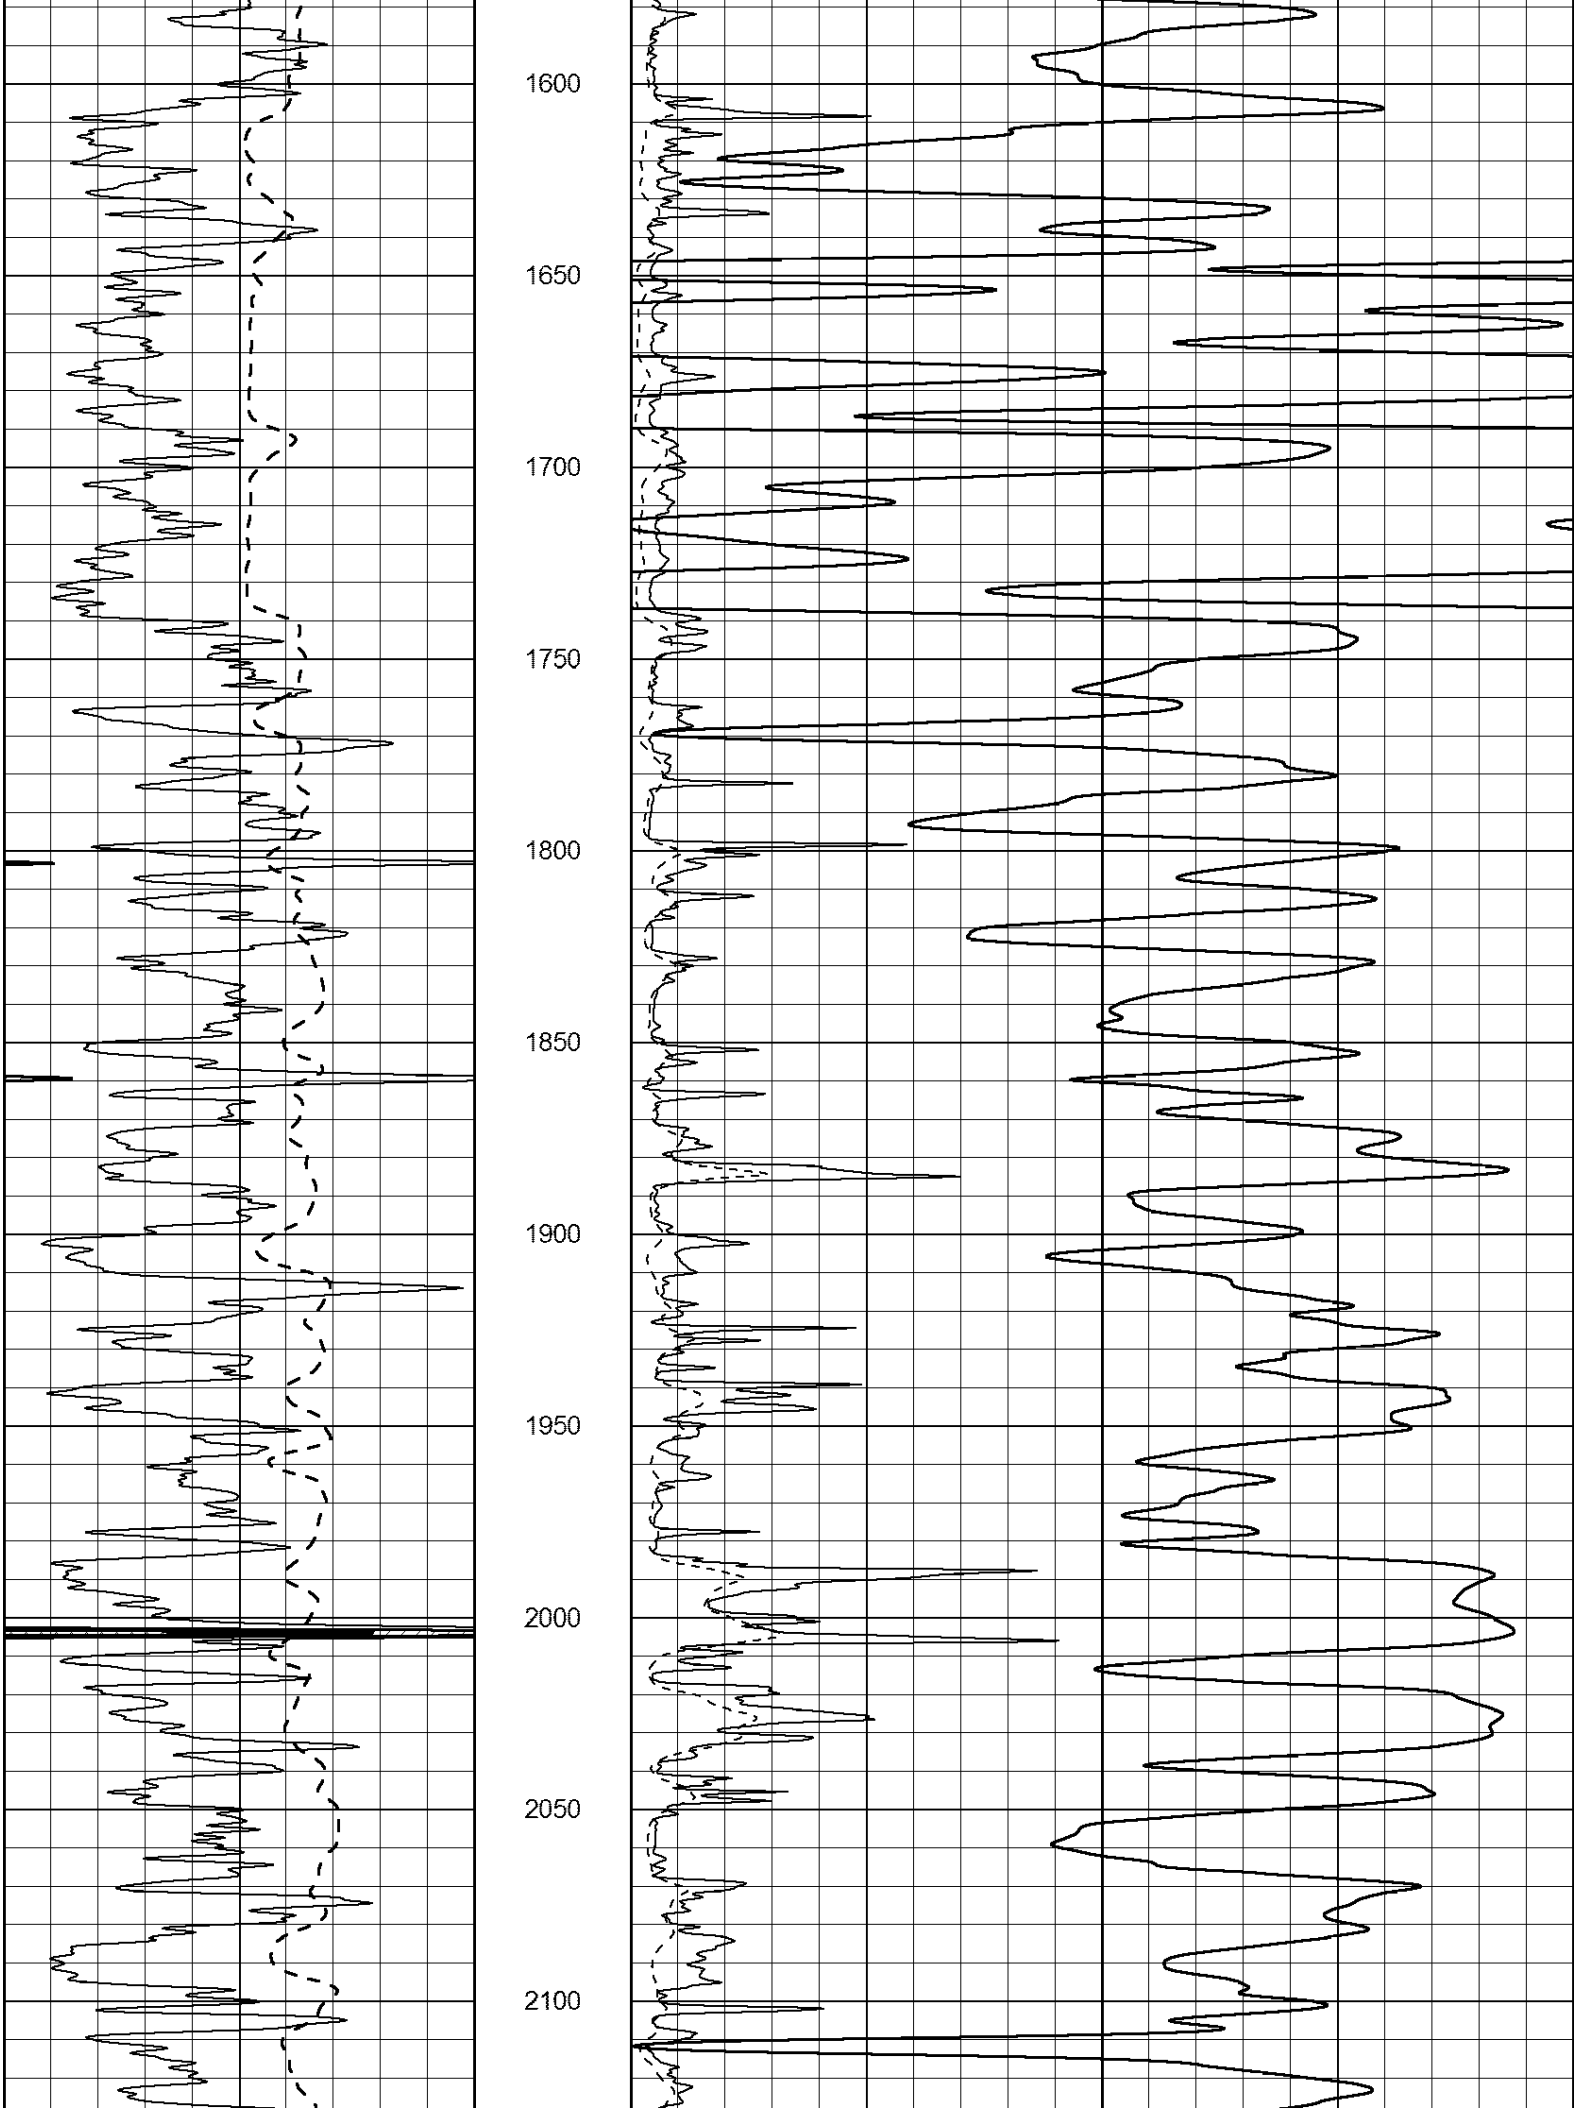
1600
1650
1700
1750
1800
1850
1900
1950
2000
2050
2100

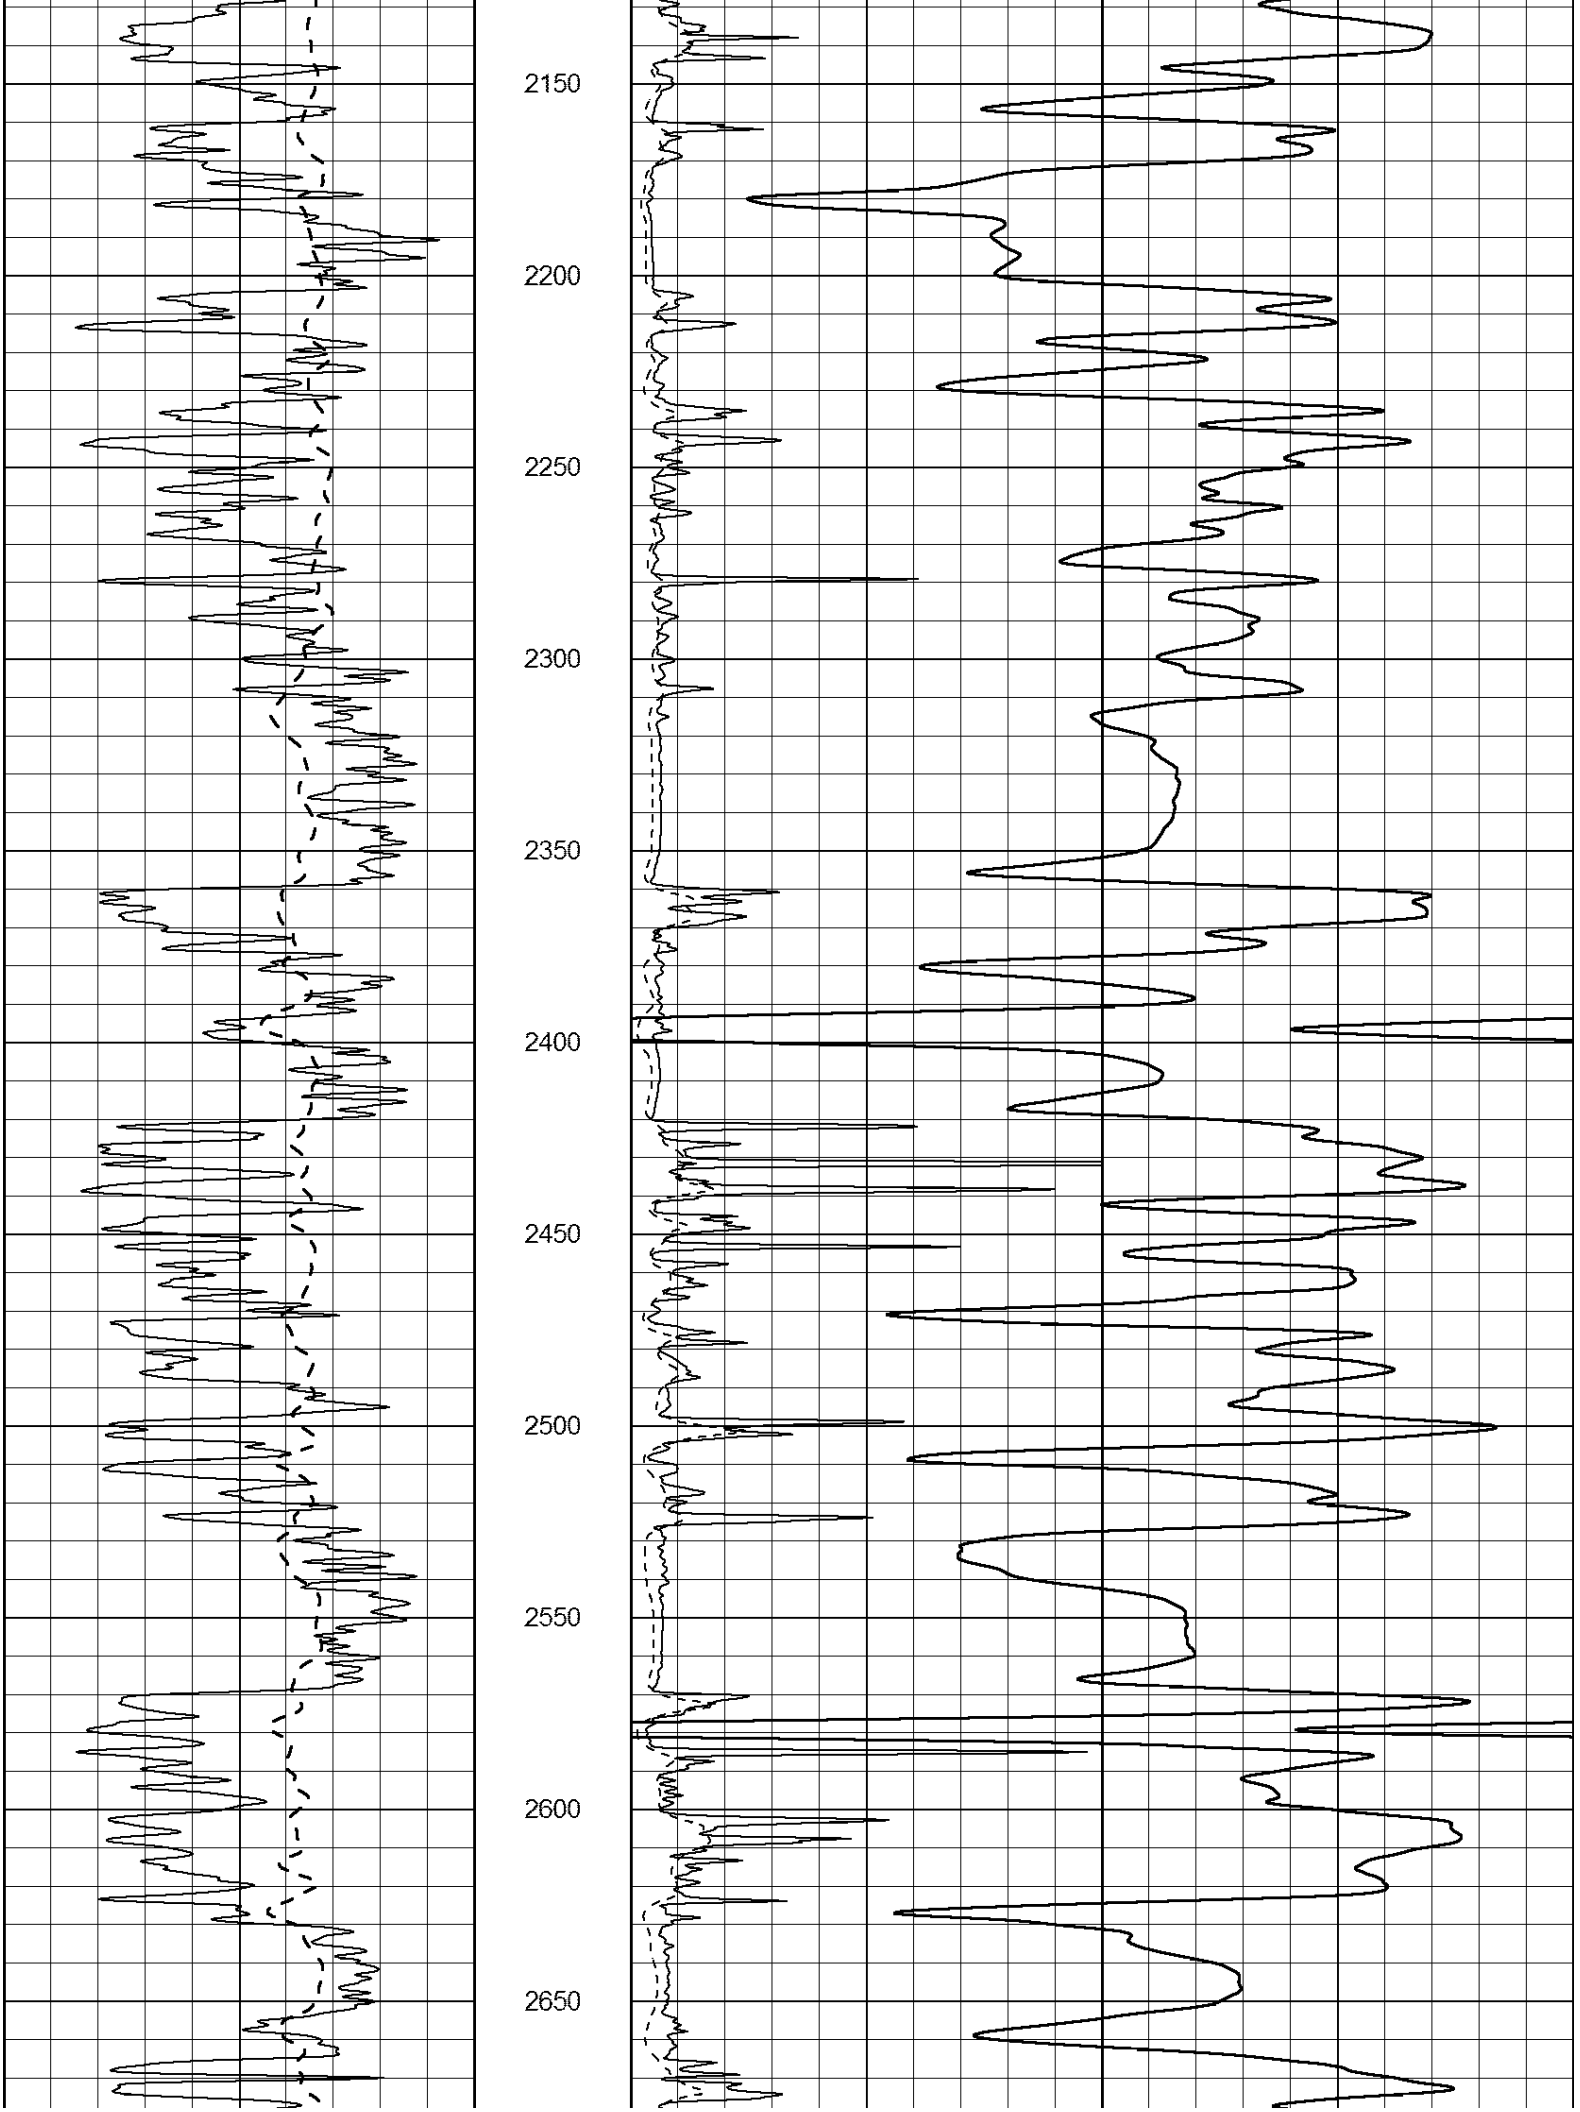
2150
2200
2250
2300
2350
2400
2450
2500
2550
2600
2650

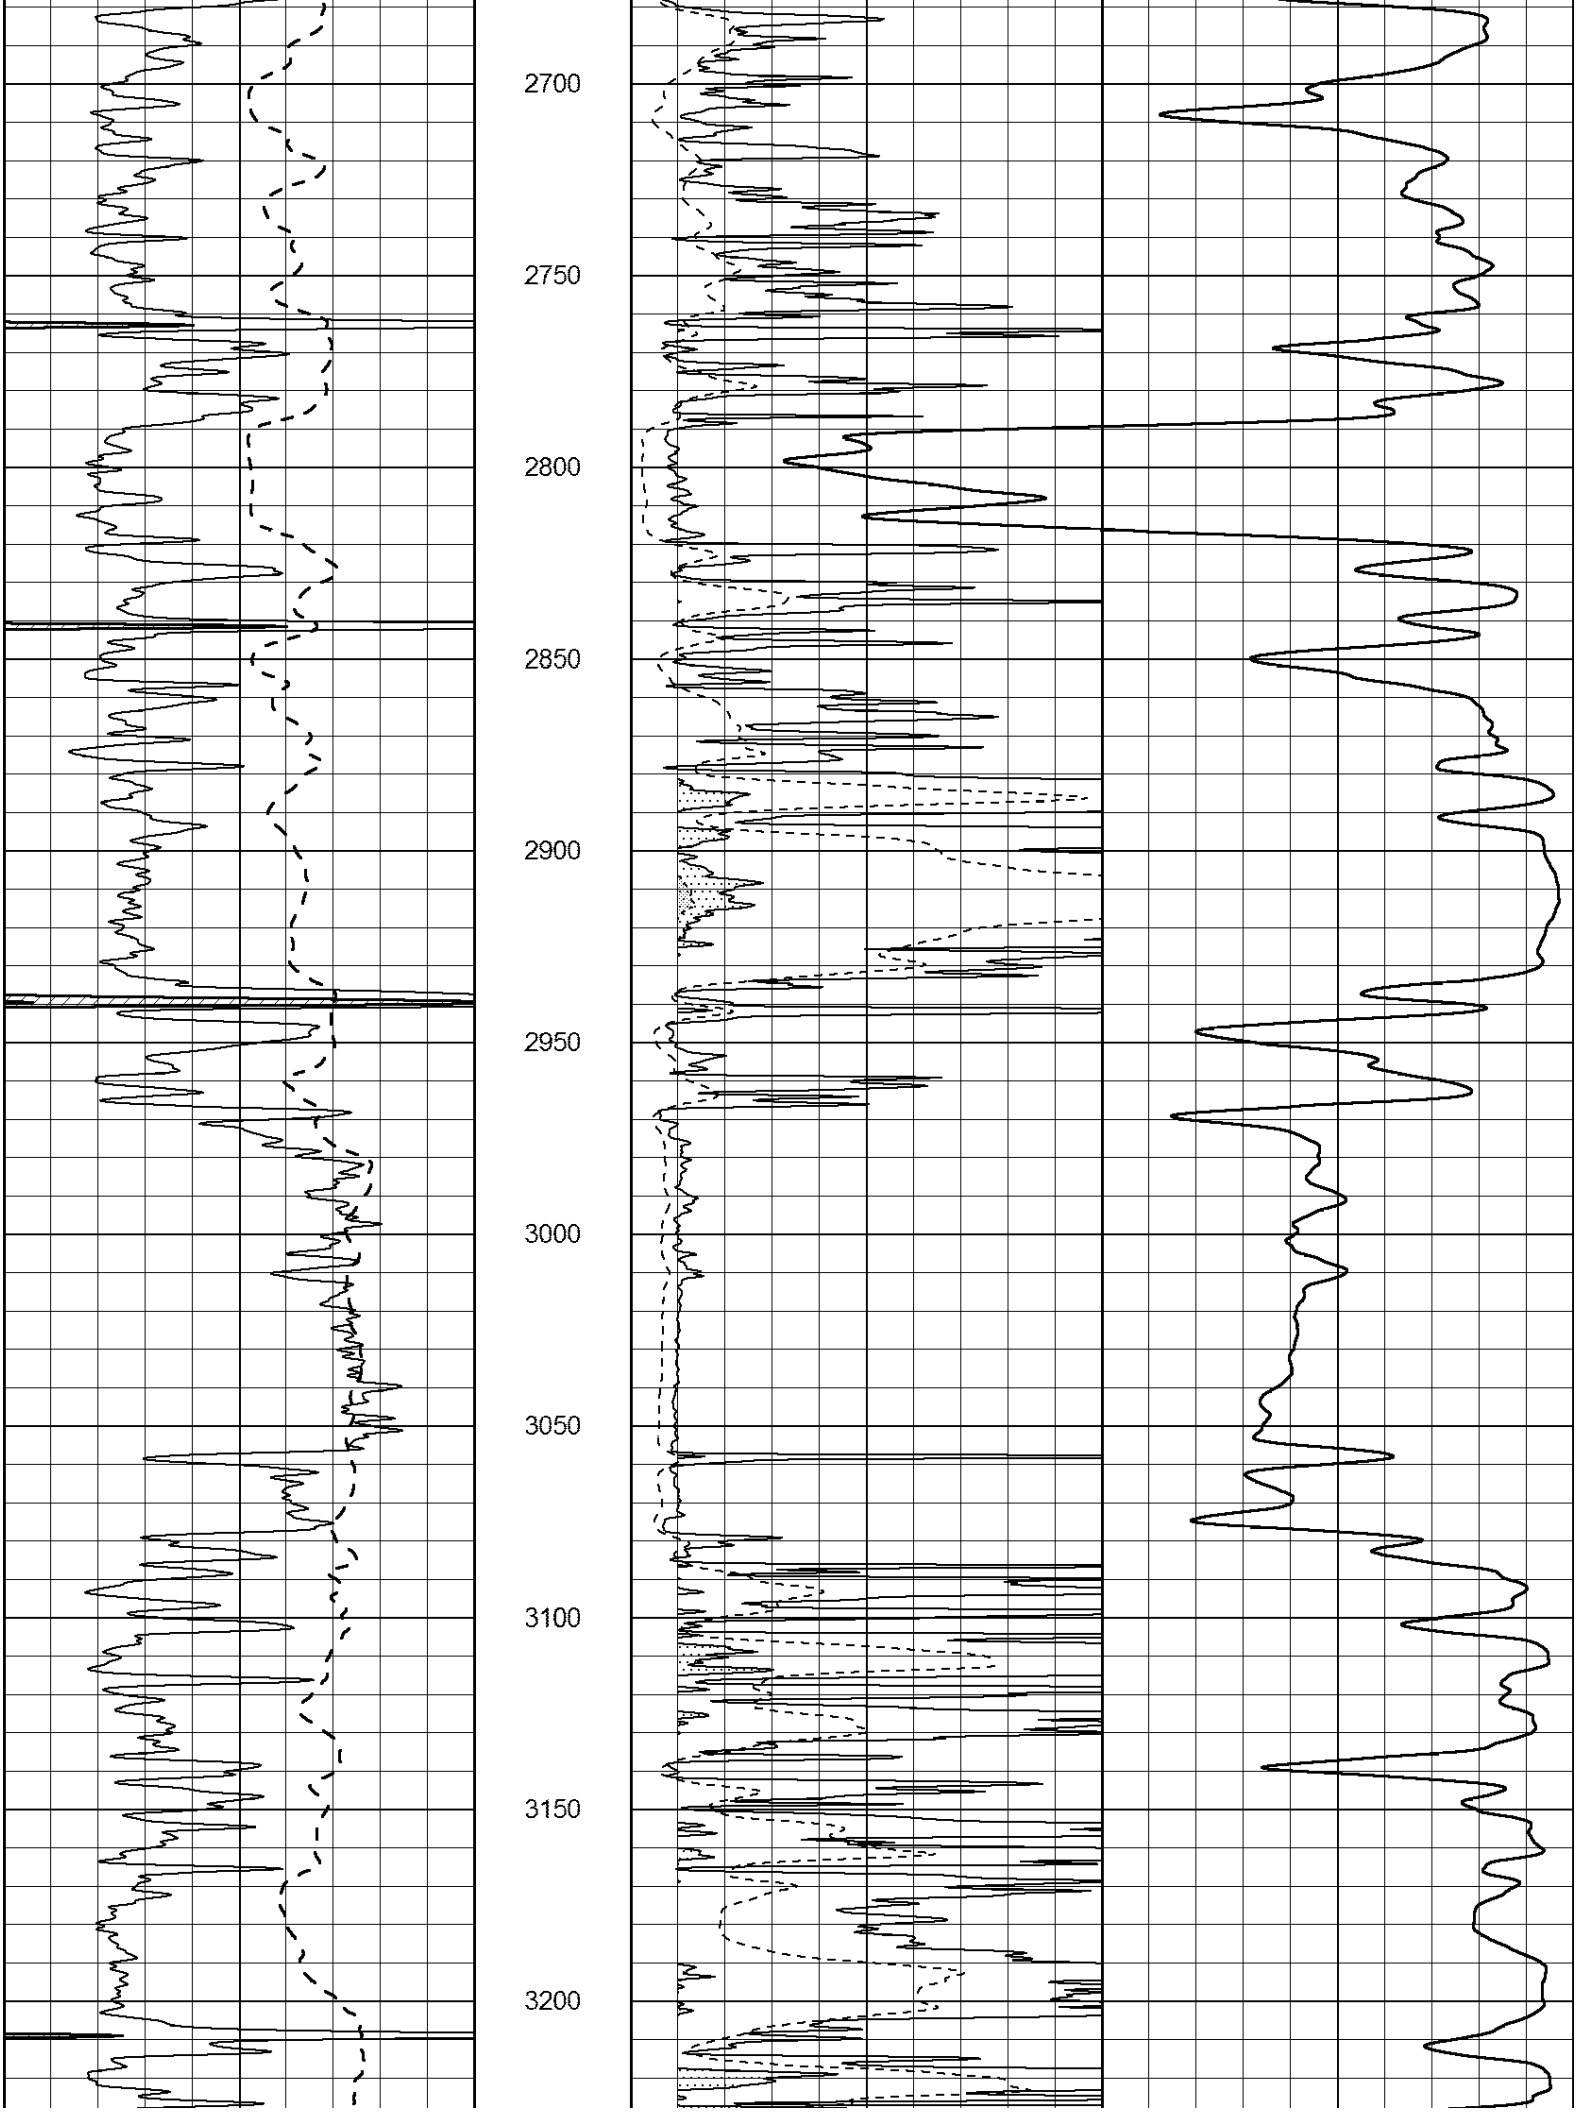
2700
2750
2800
2850
2900
2950
3000
3050
3100
3150
3200

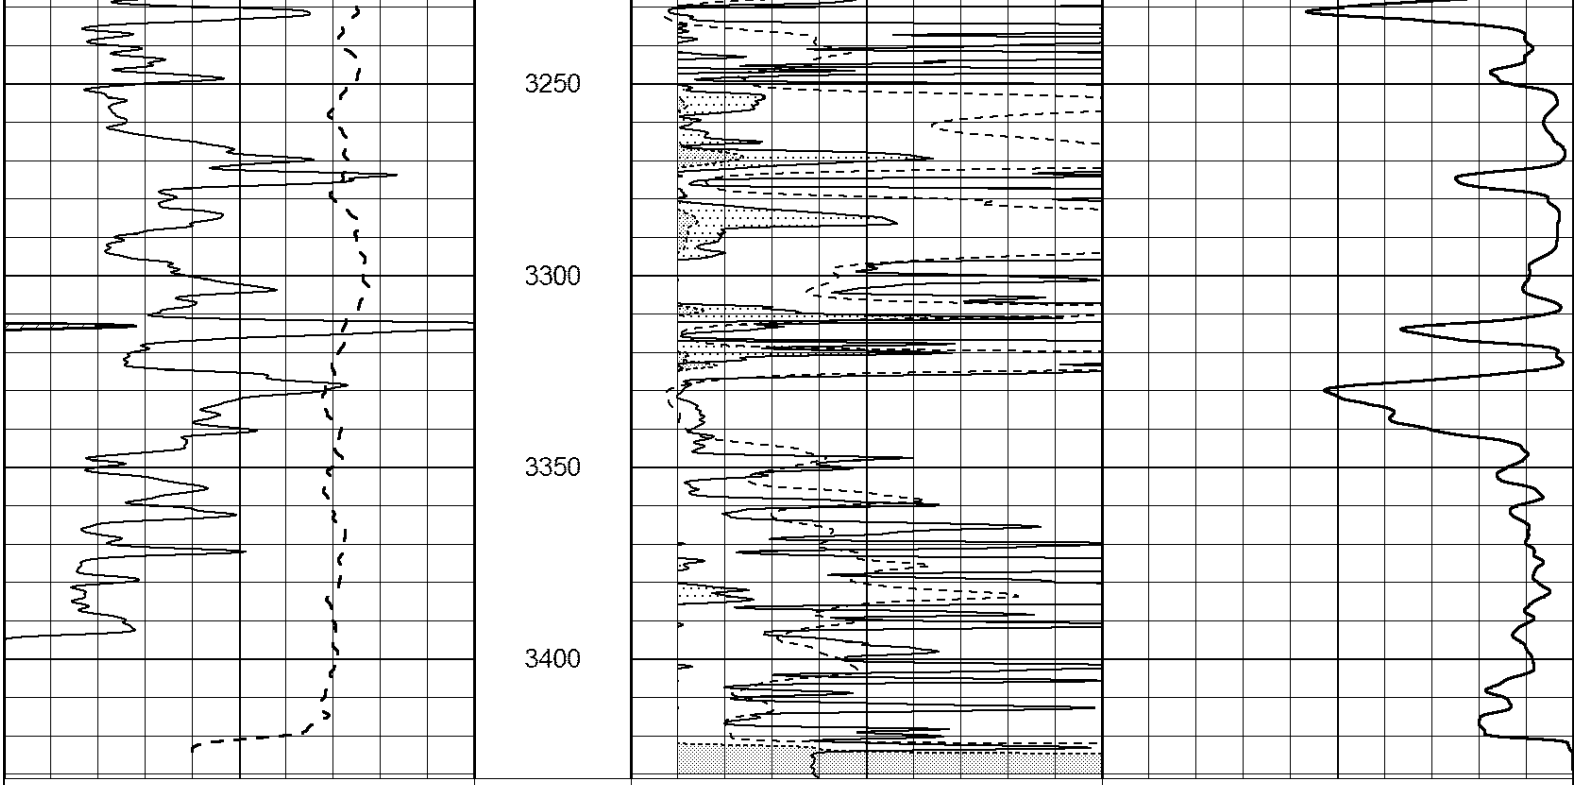



MAIN PASS

Database File: 2921ddn.db
Dataset Pathname: pass5.1
Presentation Format: _dil
Dataset Creation: Wed Oct 10 08:15:13 2018 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

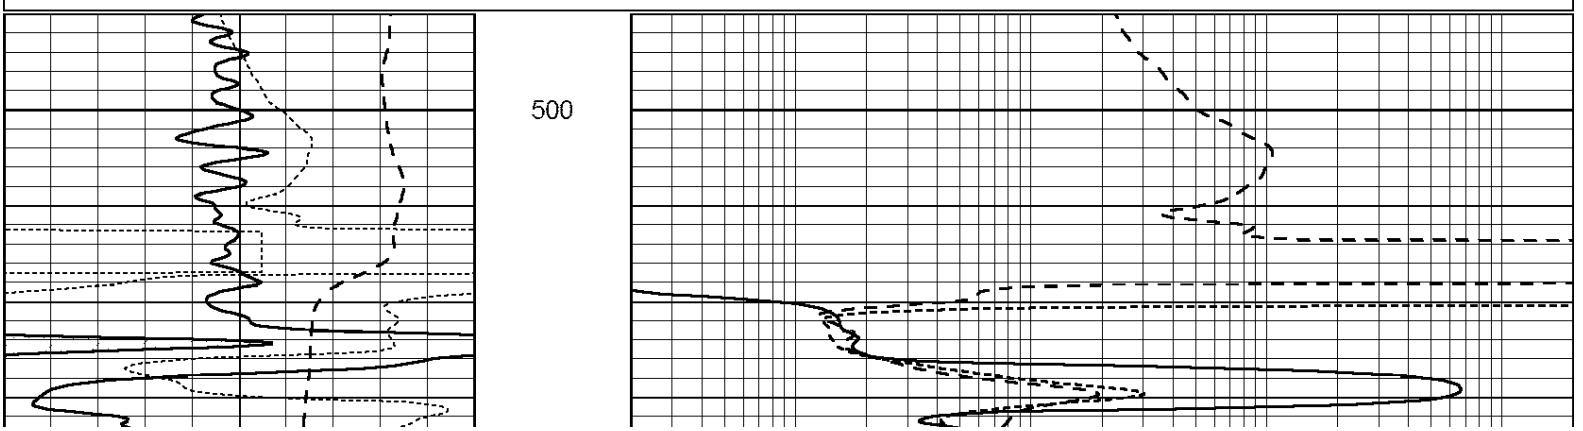

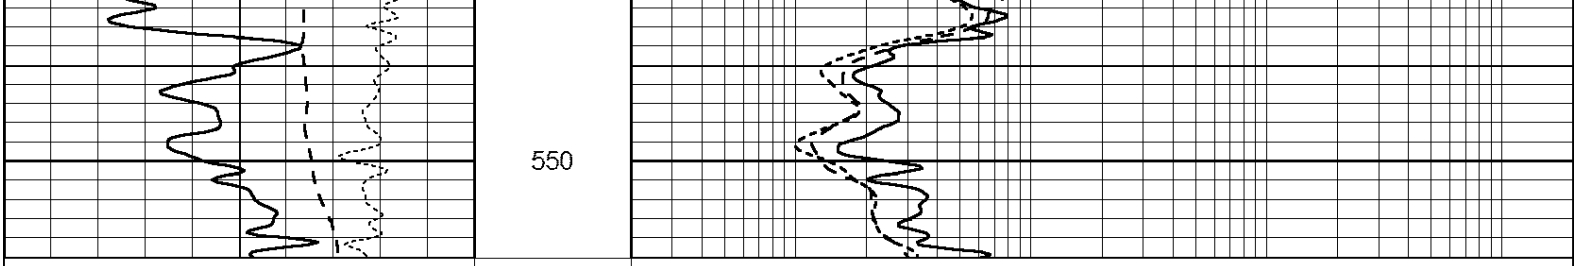

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000


MAIN PASS


Database File: 2921ddn.db
Dataset Pathname: pass5.1
Presentation Format: _dil
Dataset Creation: Wed Oct 10 08:15:13 2018 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

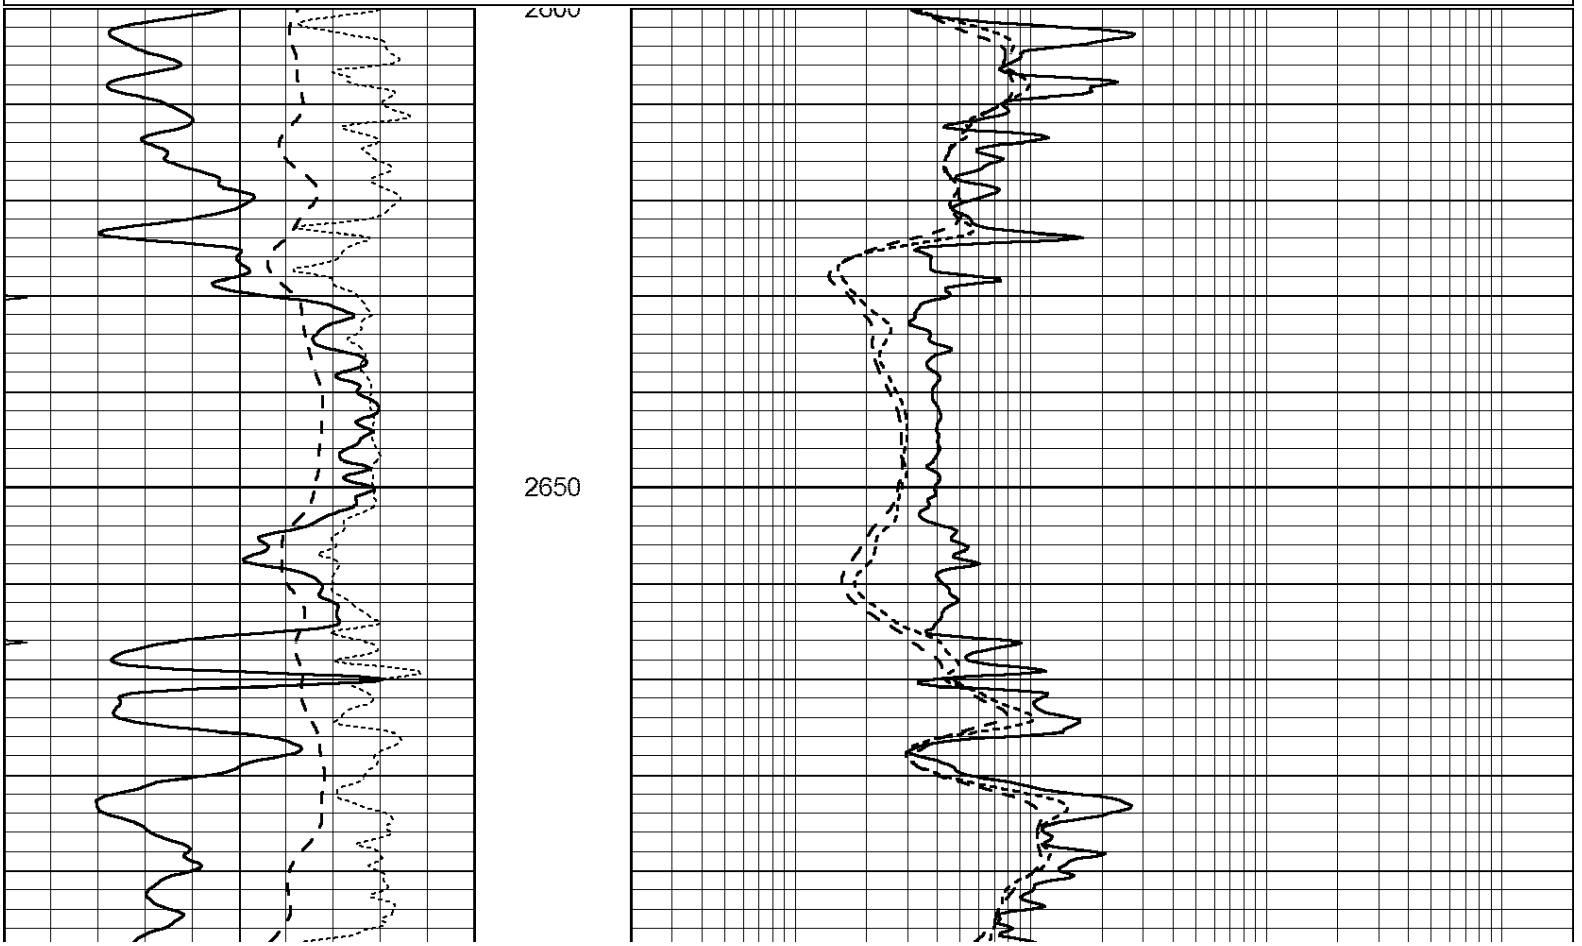

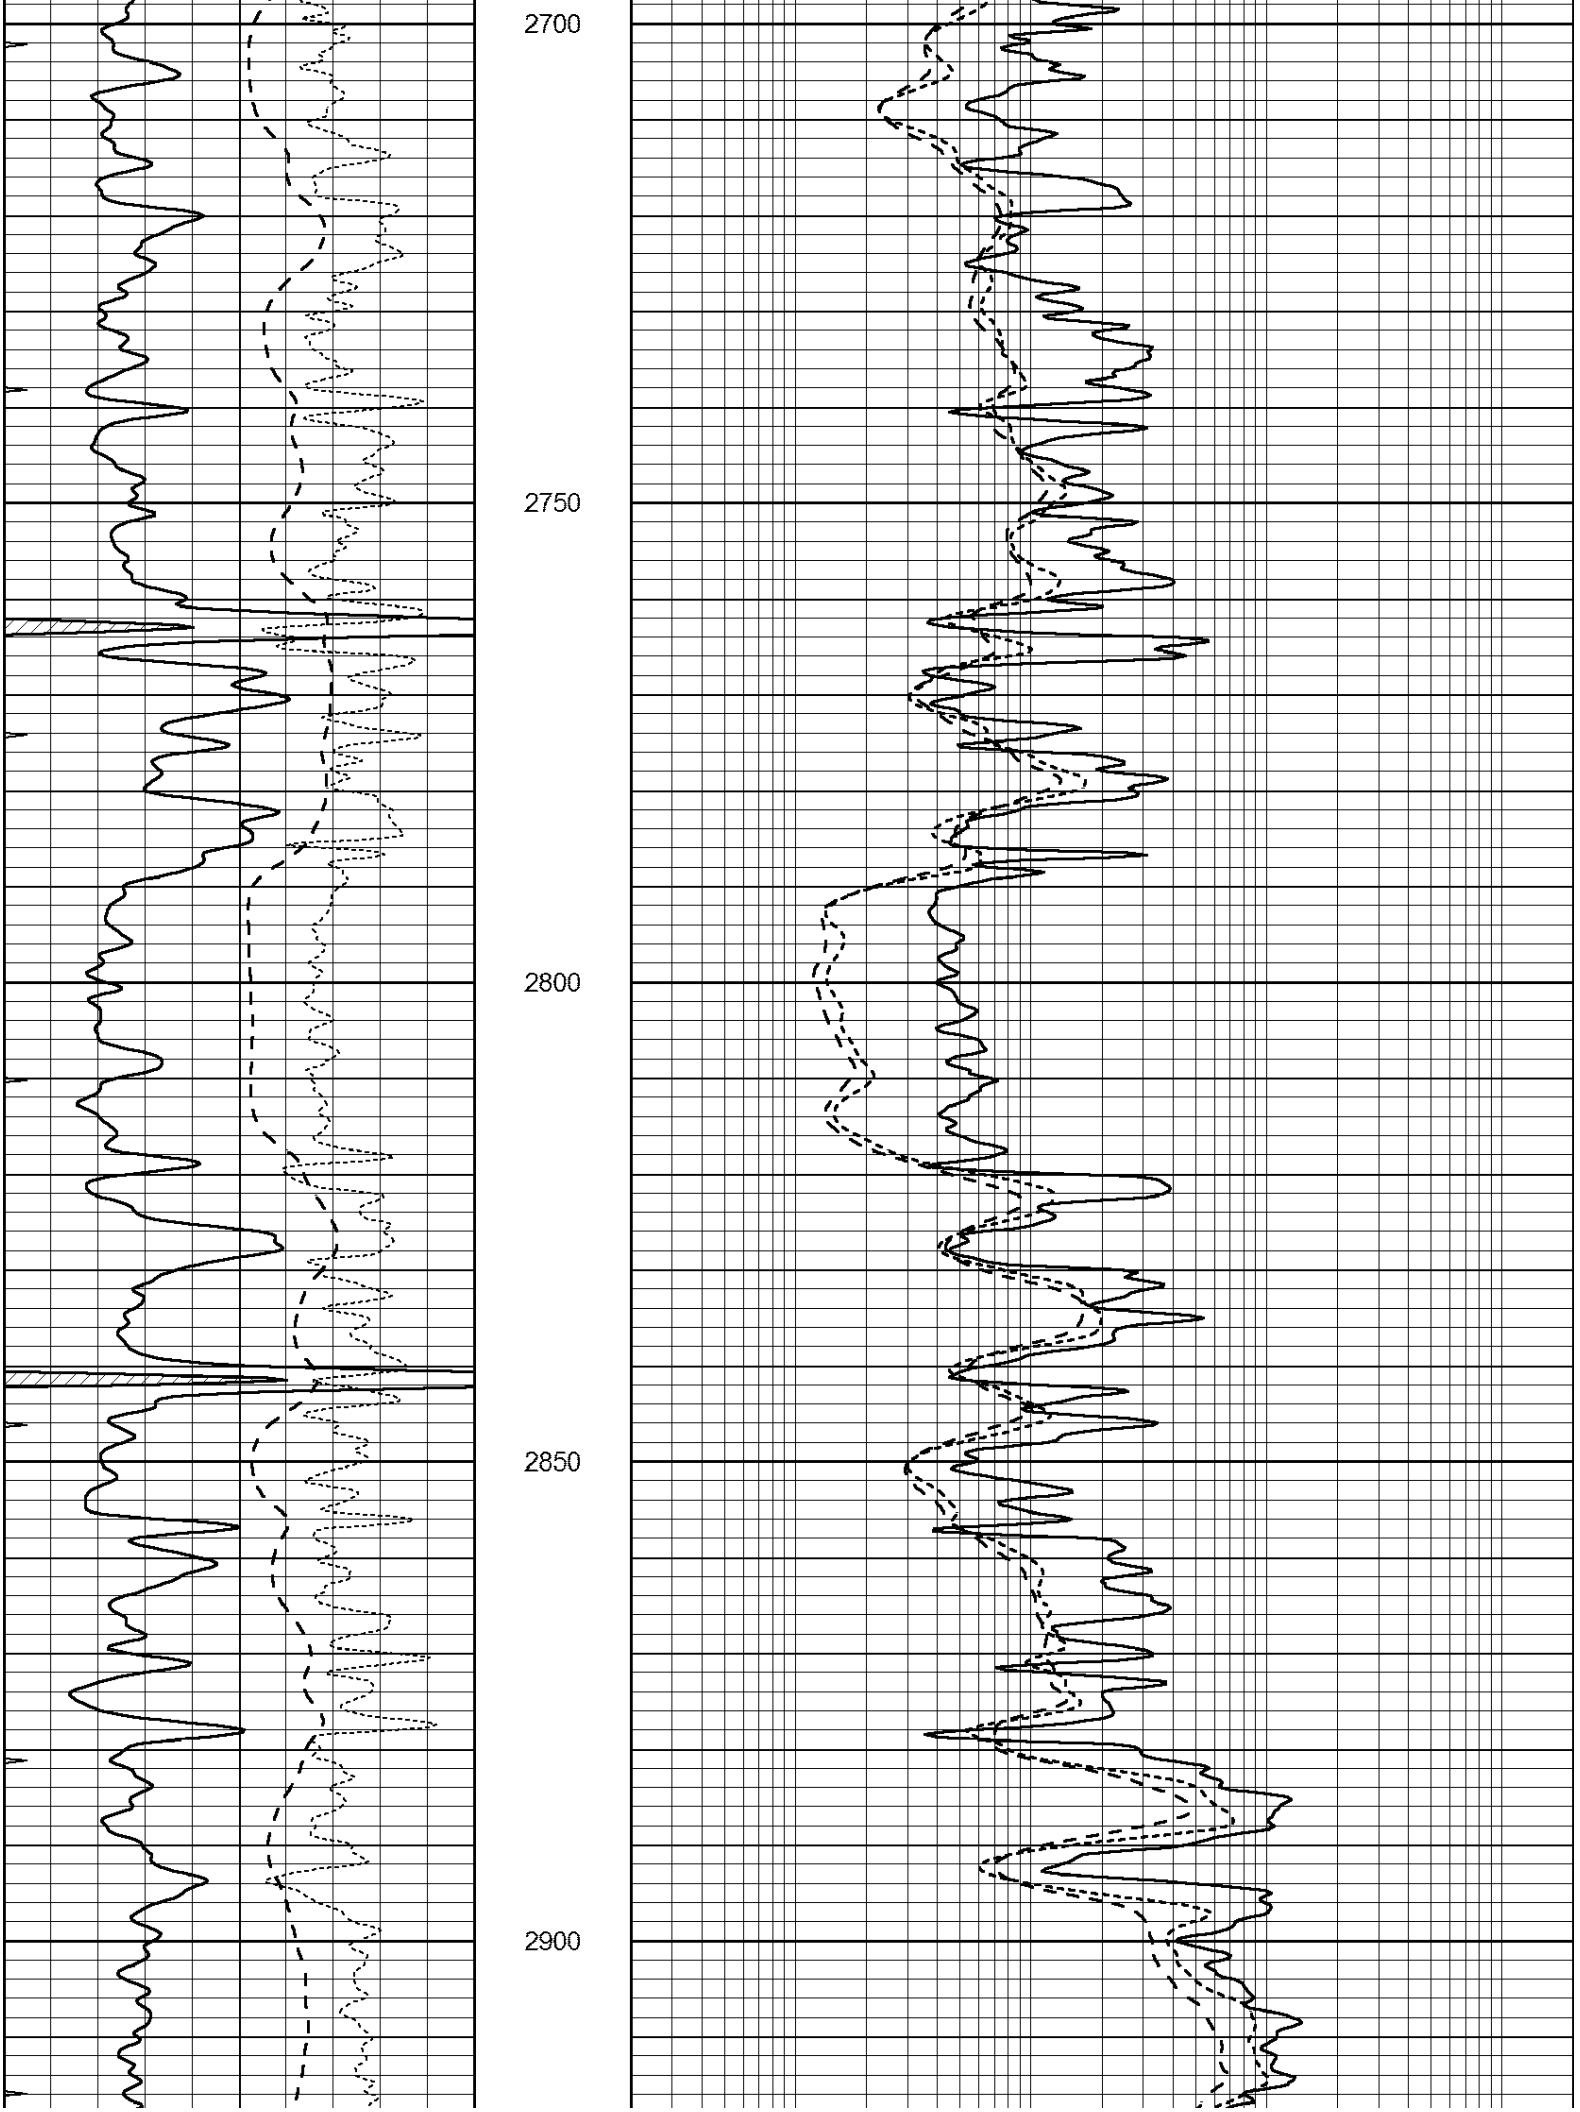
2700
2750
2800
2850
2900

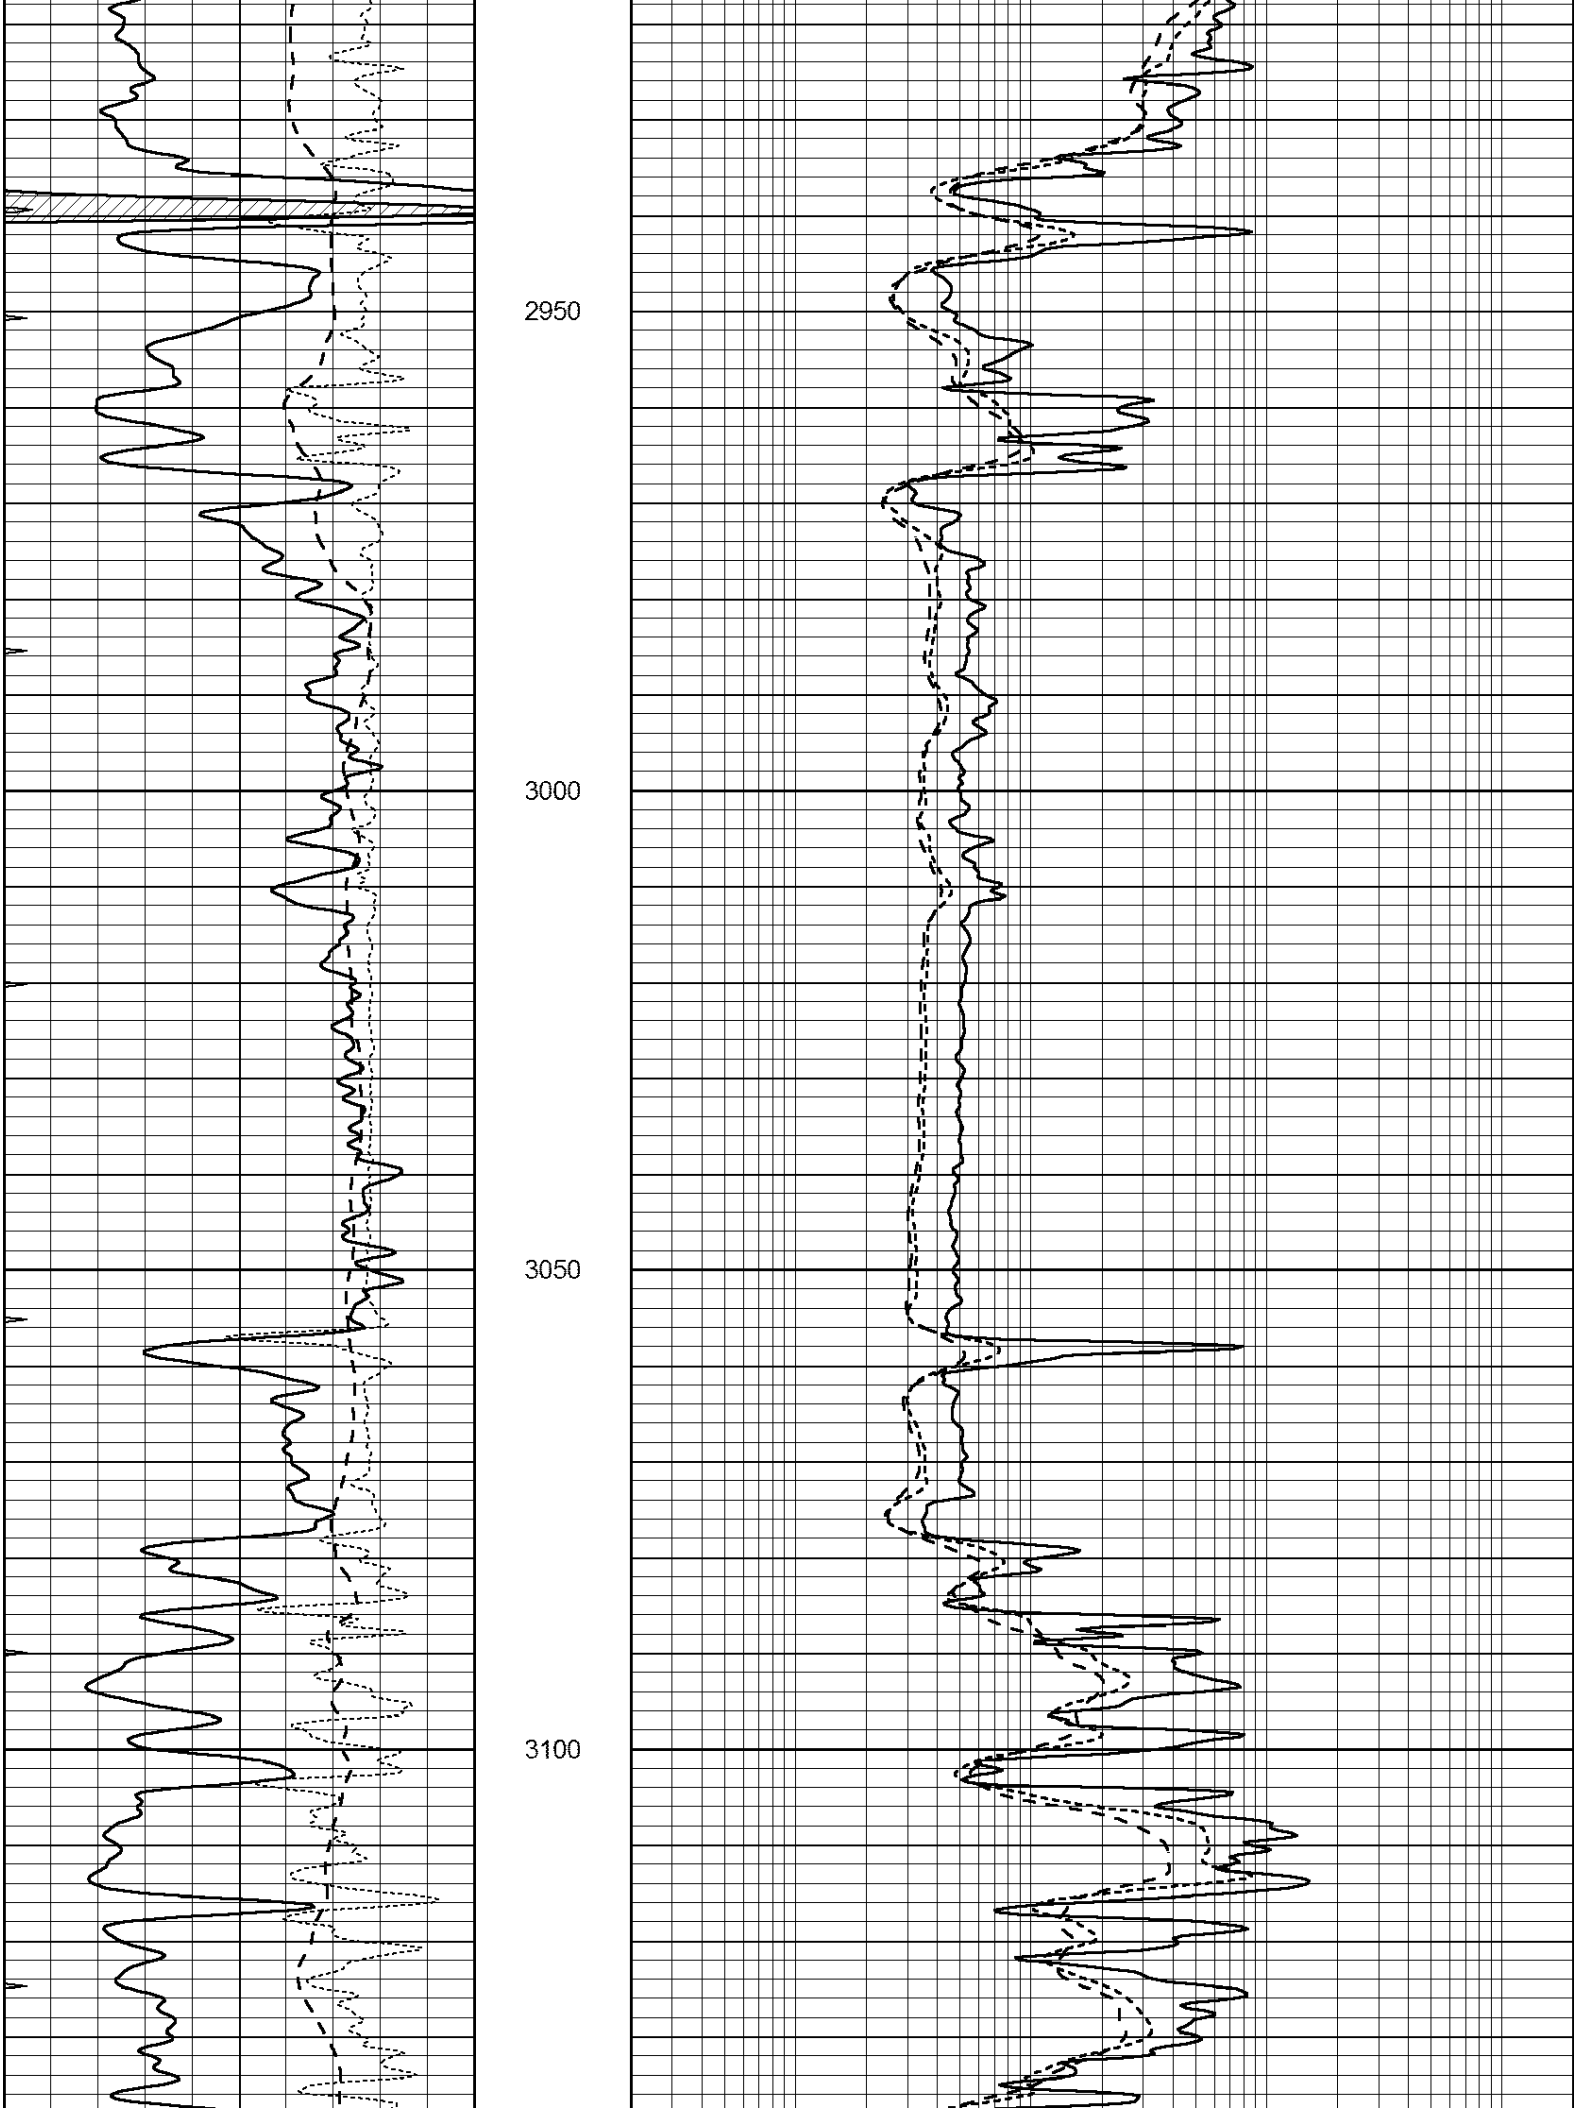
2950
3000
3050
3100

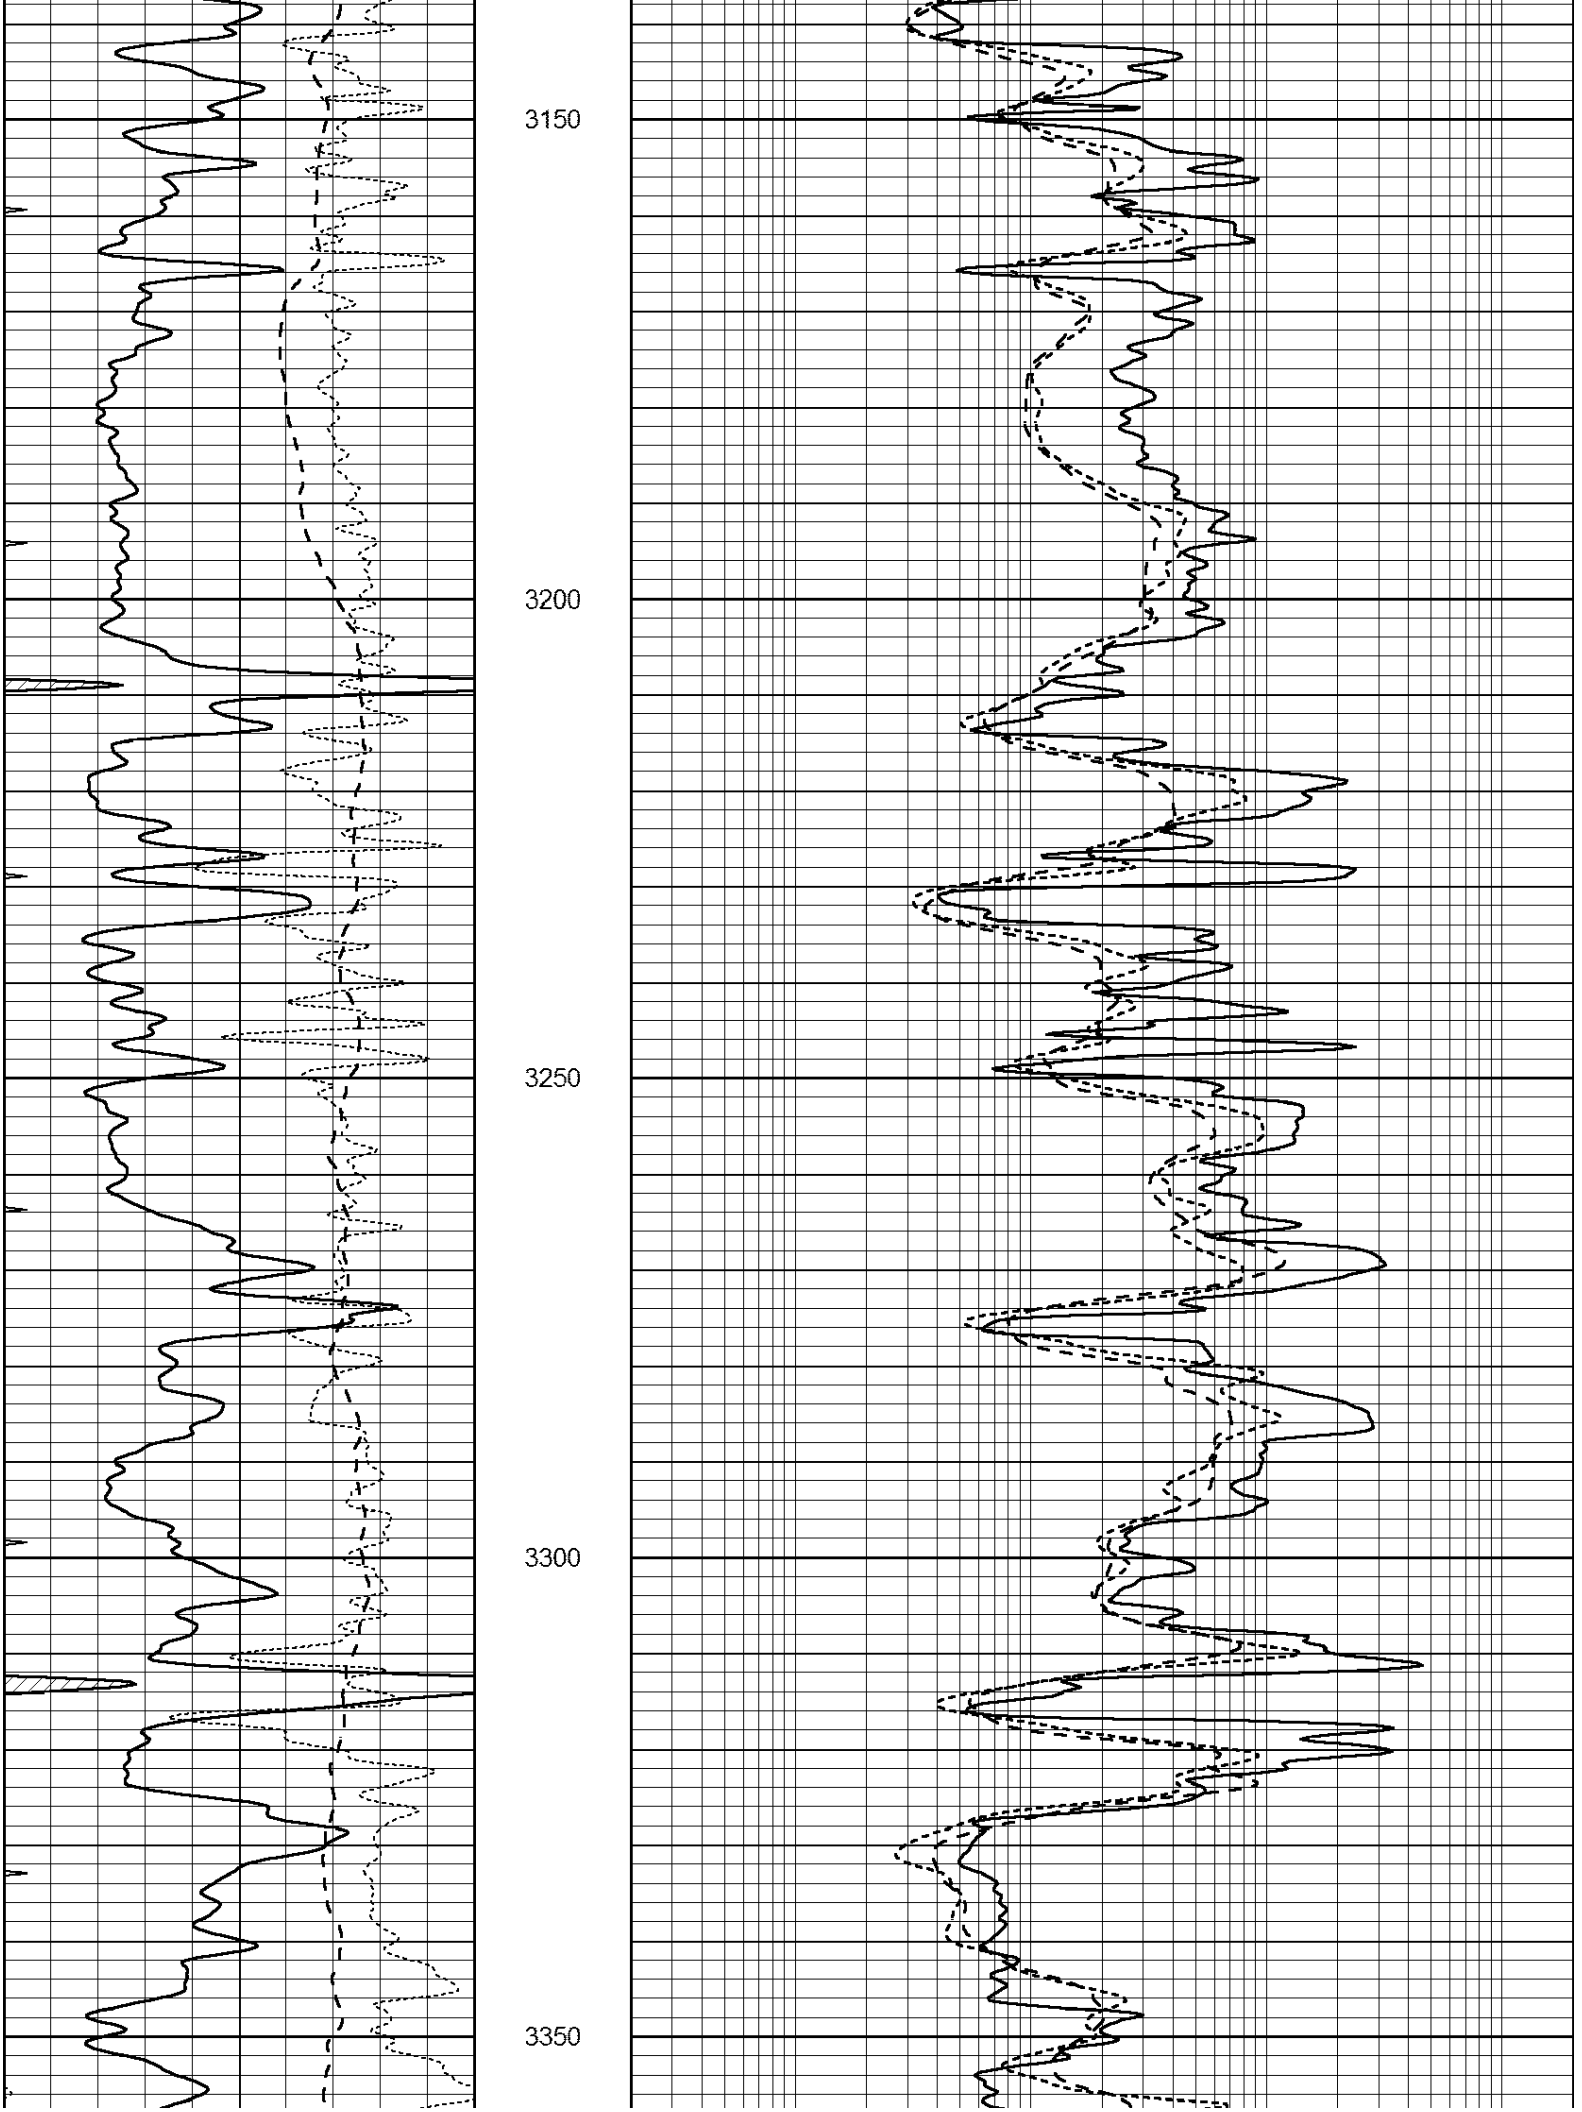
3150
3200
3250
3300
3350

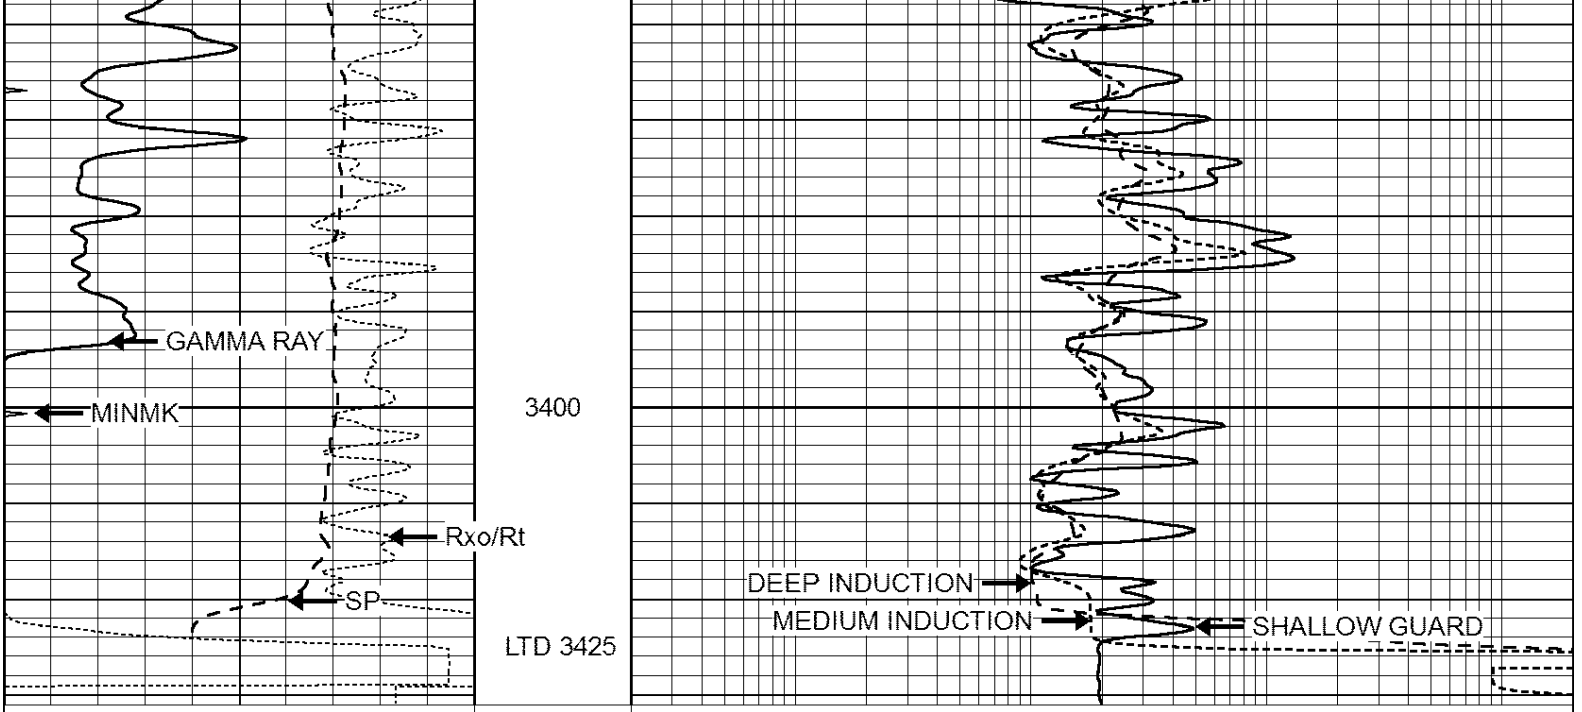

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000


REPEAT SECTION

Database File: 2921ddn.db
Dataset Pathname: pass3.1
Presentation Format: _dil
Dataset Creation: Wed Oct 10 08:02:56 2018 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

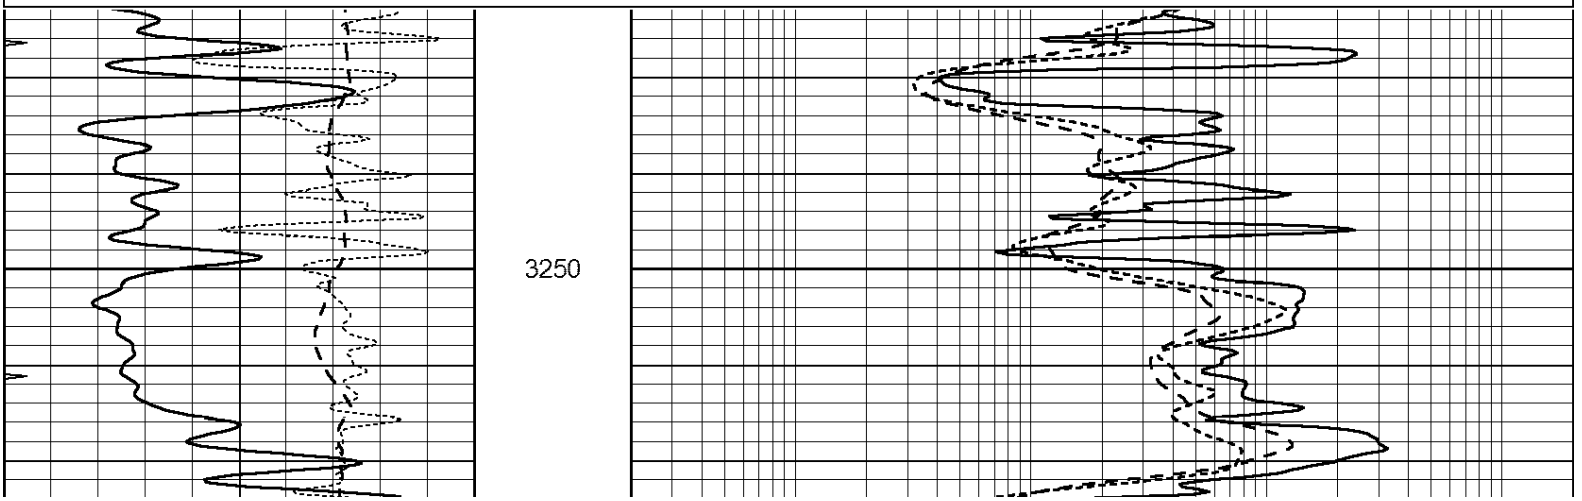

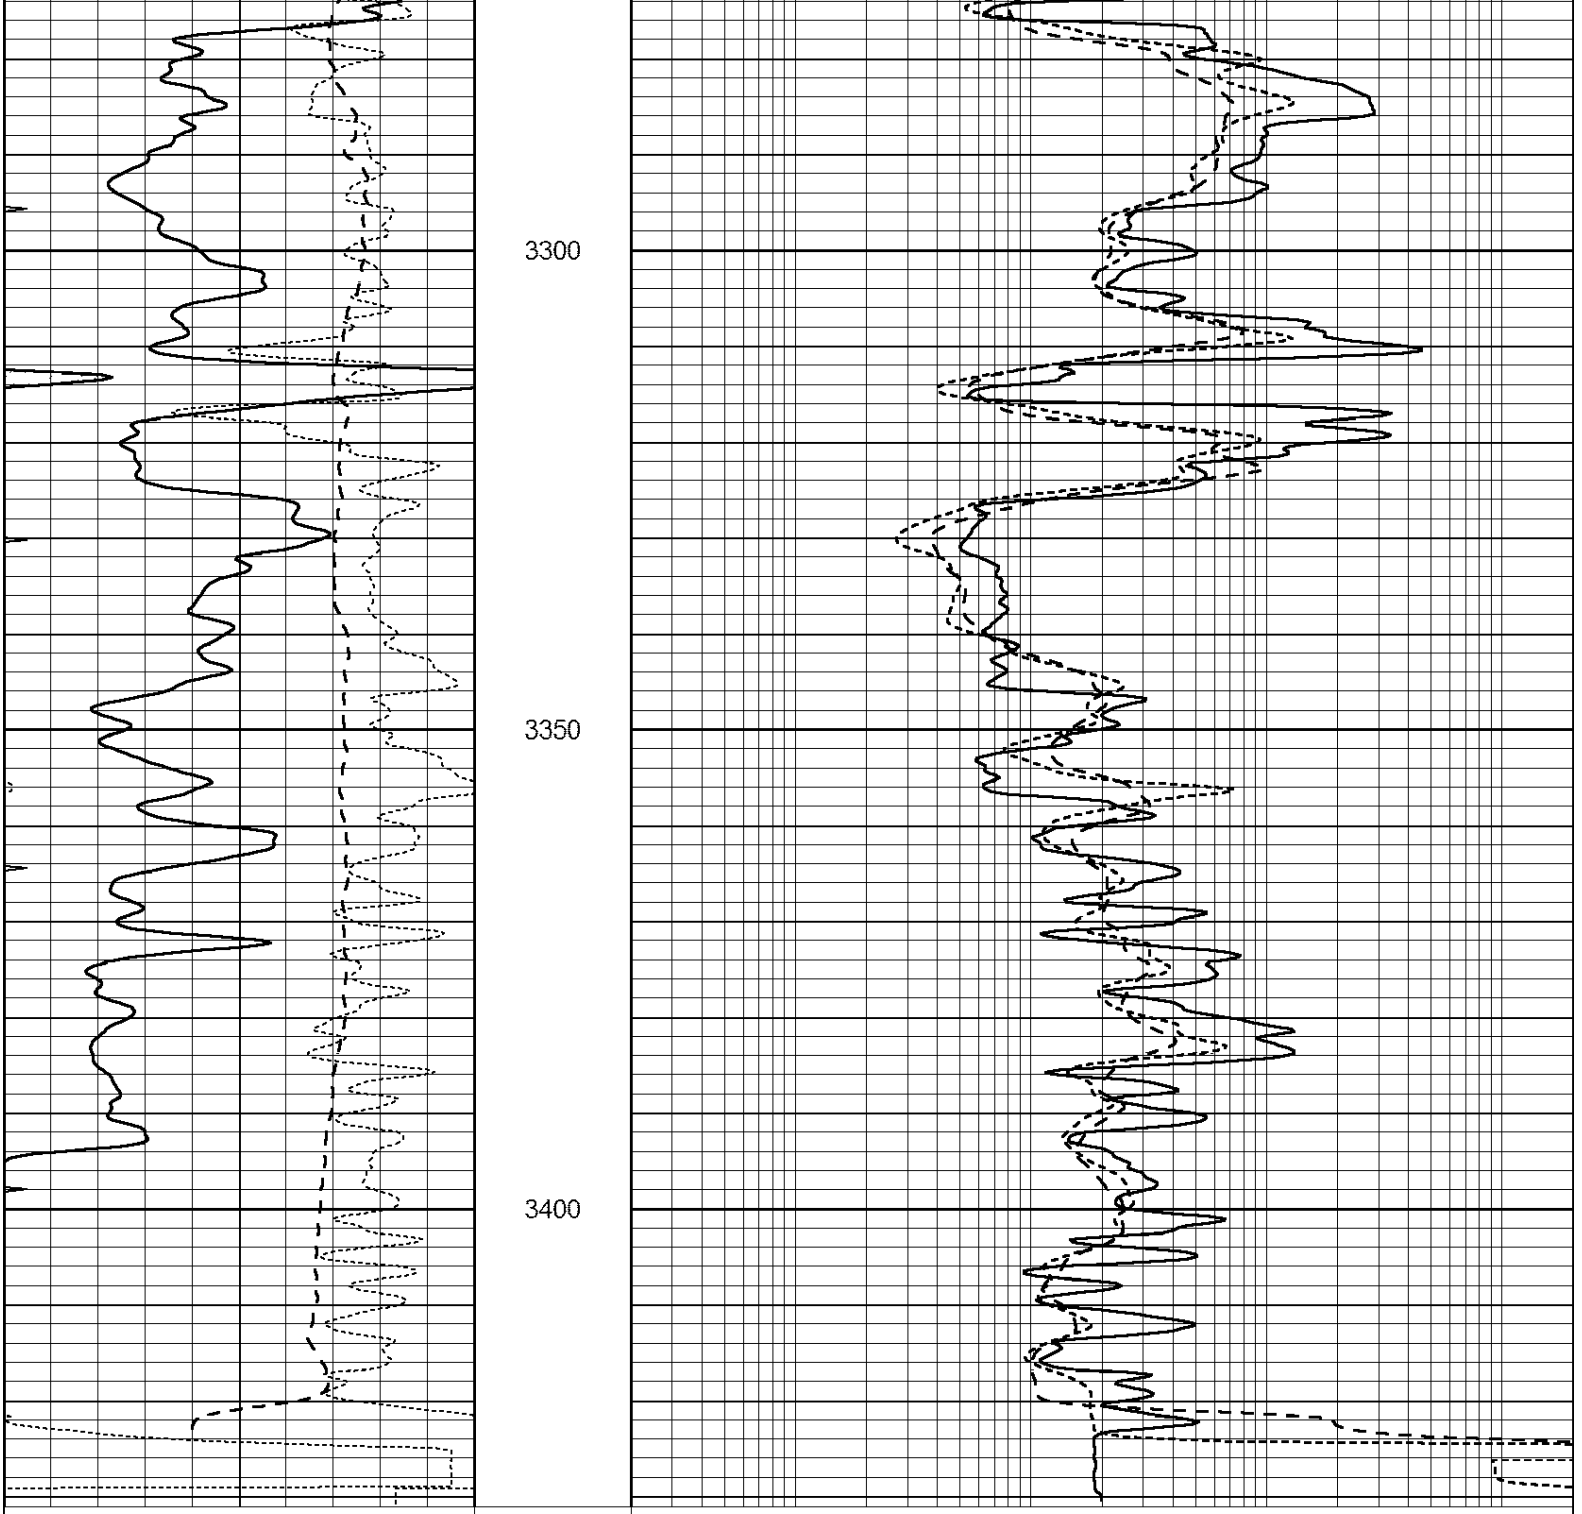

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Calibration Report

Database File: 2921ddn.db
Dataset Pathname: pass3.1
Dataset Creation: Wed Oct 10 08:02:56 2018 by Calc Open-Cased 090629

Dual Induction Calibration Report

Serial-Model:	PROBE8-DILG
Surface Cal Performed:	Mon Sep 10 14:28:35 2018
Downhole Cal Performed:	Mon Sep 10 14:28:38 2018

Downhole Cal Performed: Mon Sep 10 14:28:40 2018
After Survey Verification Performed: Mon Sep 10 14:28:40 2018

Surface Calibration

	Readings			References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.029	0.796	V	0.000	464.000	mmho/m	590.000	-12.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification

	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report
Serial: 006 Model: PRB

Master Calibration

Performed Thu Sep 27 12:07:11 2018

	Background	Magnesium	Aluminum	Sandstone	
Window 1	1185.6	7077.4	2520.9	8182.4	cps
Window 2	1116.8	5910.1	2163.2	6739.4	cps
Window 3	880.1	3145.8	1325.0	3461.2	cps
Window 4	289.5	295.8	290.8	295.3	cps
Long Space	0.0	4793.3	1046.5	5622.7	cps
Short Space	2.9	1608.0	1038.9	1622.7	cps
Rho		1.7100	2.5960	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	

Rib Angle	: 44.0	Rib Slope	: 0.965	Density/Spine Ratio	: 0.560
Spine Angle	: 74.0	Spine Slope	: 3.484	Spine Intercept	: -17.2

Before Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc

Measured Pe			0.0000	0.0000	

After Survey Verification — Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 6I
Tool Model: G

CALIBRATION

Detector	Readings		Target		Normalization
Short Space	1.00	cps	1.00	cps	1.0000
Long Space	1.00	cps	1.00	cps	1.0000

PRE-SURVEY VERIFICATION

	Detector	Readings		Measured		Target	
1)	Short Space		cps				
	Long Space		cps		pu		pu
2)	Short Space		cps				
	Long Space		cps		pu		
3)	Short Space		cps				
	Long Space		cps		pu		

POST-SURVEY VERIFICATION

	Detector	Readings		Measured		Target	
1)	Short Space		cps				
	Long Space		cps		pu		pu
2)	Short Space		cps				
	Long Space		cps		pu		pu
3)	Short Space		cps				
	Long Space		cps		pu		pu

Gamma Ray Calibration Report

Serial Number: GR6
Tool Model: OPEN
Performed: Mon Sep 10 14:29:23 2018

Calibrator Value: 150.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 276.0 cps

Sensitivity: 0.5500 GAPI/cps