



Weatherford®


COMPOSITE LOG

COMPANY		SHAKESPEARE OIL CO., INC.			
WELL		K OTTLEY 2-14			
FIELD		WILDCAT			
PROVINCE/COUNTY		LOGAN			
COUNTRY/STATE		USA / KANSAS			
LOCATION		NW-SW-SE-SE 500' FSL & 1150' FEL			
SEC 14	TWP 14S	RGE 32W	Other Services		
Latitude		38.831151			
Longitude		-100.8393015			
API Number		15-109-21579			
Permanent Datum Ground Level, Elevation 2791 feet					Elevations: KB 2800.00 DF GL 2791.00
Log Measured From KB, 9.00 feet above Permanent Datum					
Drilling Measured From KB					
Date	01-FEB-2019				
Run Number	ONE				
Service Order	18148-236170428				
Depth Driller	4550.00				feet
Depth Logger	4548.00				feet
First Reading	4544.60				feet
Last Reading	3500.00				feet
Casing Driller	264.00				feet
Casing Logger	262.00				feet
Bit Size	7.875				inches
Hole Fluid Type	WATER BASED				
Density / Viscosity	9.40 lb/USg		57.00	sec/qt	
PH / Fluid Loss	10.00		9.60	ml/30Min	
Sample Source	FLOW LINE				
Rm @ Measured Temp	0.45 @ 83.0		ohm-m		
Rmf @ Measured Temp	0.40 @ 83.0		ohm-m		
Rmc @ Measured Temp	0.54 @ 83.0		ohm-m		
Source Rmf / Rmc	CALC		CALC		
Rm @ BHT	0.34 @111.0		ohm-m		
Time Since Circulation	3.0 HOURS				
Max Recorded Temp	111.00		deg F		
Equipment / Base	13244		LIB		
Recorded By	S. WIGHT				
Witnessed By	TIM LAUER				

BOREHOLE RECORD					Last Edited: 01-FEB-2019 07:24
Bit Size inches		Depth From feet		Depth To feet	
12.250		0.00		264.00	
7.875		264.00		4550.00	
CASING RECORD					
Type	Size inches	Depth From feet	Shoe Depth feet	Weight pounds/ft	
SURFACE	8.625	0.00	264.00	24.00	

REMARKS
- RUN ONE: MCG, MML, MDN, MPD, MAI RUN IN COMBINATION. - HARDWARE: DUAL BOWSPRING USED ON MDN. 0.5 INCH STANDOFF USED ON MAI.
- 2.71 G/CC LIMESTONE DENSITY MATRIX USED TO CALCULATE POROSITY.
- BOREHOLE RUGOSITY, TIGHT PULLS, AND WASHOUTS WILL AFFECT DATA QUALITY.
- ALL INTERVALS LOGGED AND SCALED PER CUSTOMER'S REQUEST.
- TOTAL HOLE VOLUME FROM TD TO SURFACE CASING: 1835 CU.FT.
- ANNULAR HOLE VOLUME WITH 4.5 INCH PRODUCTION CASING FROM TD TO SURFACE CASING: 1360 CU.FT.
- RIG: DUKE #4.
- OPERATOR: B TOVAR, B COPELAND, D STEELE

In interpreting, communicating or providing information and/or making recommendations, either written or oral, as to logs or test or other data, type or amount of material, or Work or other service to be furnished, or manner of performance, or in predicting results to be obtained, the Contractor will give the Company the benefit of the Contractor's best judgment based on its experience and will perform all such Work in a good and workmanlike manner. Any interpretation of test or other data, and any recommendation or reservoir description based upon such interpretations, are opinions based upon inferences from measurements and empirical relationships and assumptions, which inferences and assumptions are not infallible, and with respect to which professional engineers and analysts may differ. ACCORDINGLY ANY INTERPRETATION OR RECOMMENDATION RESULTING FROM THE SERVICES WILL BE AT THE SOLE RISK OF THE COMPANY, AND THE CONTRACTOR CANNOT AND DOES NOT WARRANT THE ACCURACY, CORRECTNESS OR COMPLETENESS OF ANY SUCH INTERPRETATION OR RECOMMENDATION, WHICH INTERPRETATIONS AND RECOMMENDATIONS SHOULD NOT, THEREFORE, UNDER ANY CIRCUMSTANCES BE RELIED UPON AS THE SOLE OR MAIN BASIS FOR ANY DRILLING, COMPLETION, WELL TREATMENT, PRODUCTION OR FINANCIAL DECISION, OR ANY PROCEDURE INVOLVING ANY RISK TO THE SAFETY OF ANY DRILLING ACTIVITY, DRILLING RIG OR ITS CREW OR ANY OTHER INDIVIDUAL. THE COMPANY HAS FULL RESPONSIBILITY FOR ALL DECISIONS CONCERNING THE SERVICES.

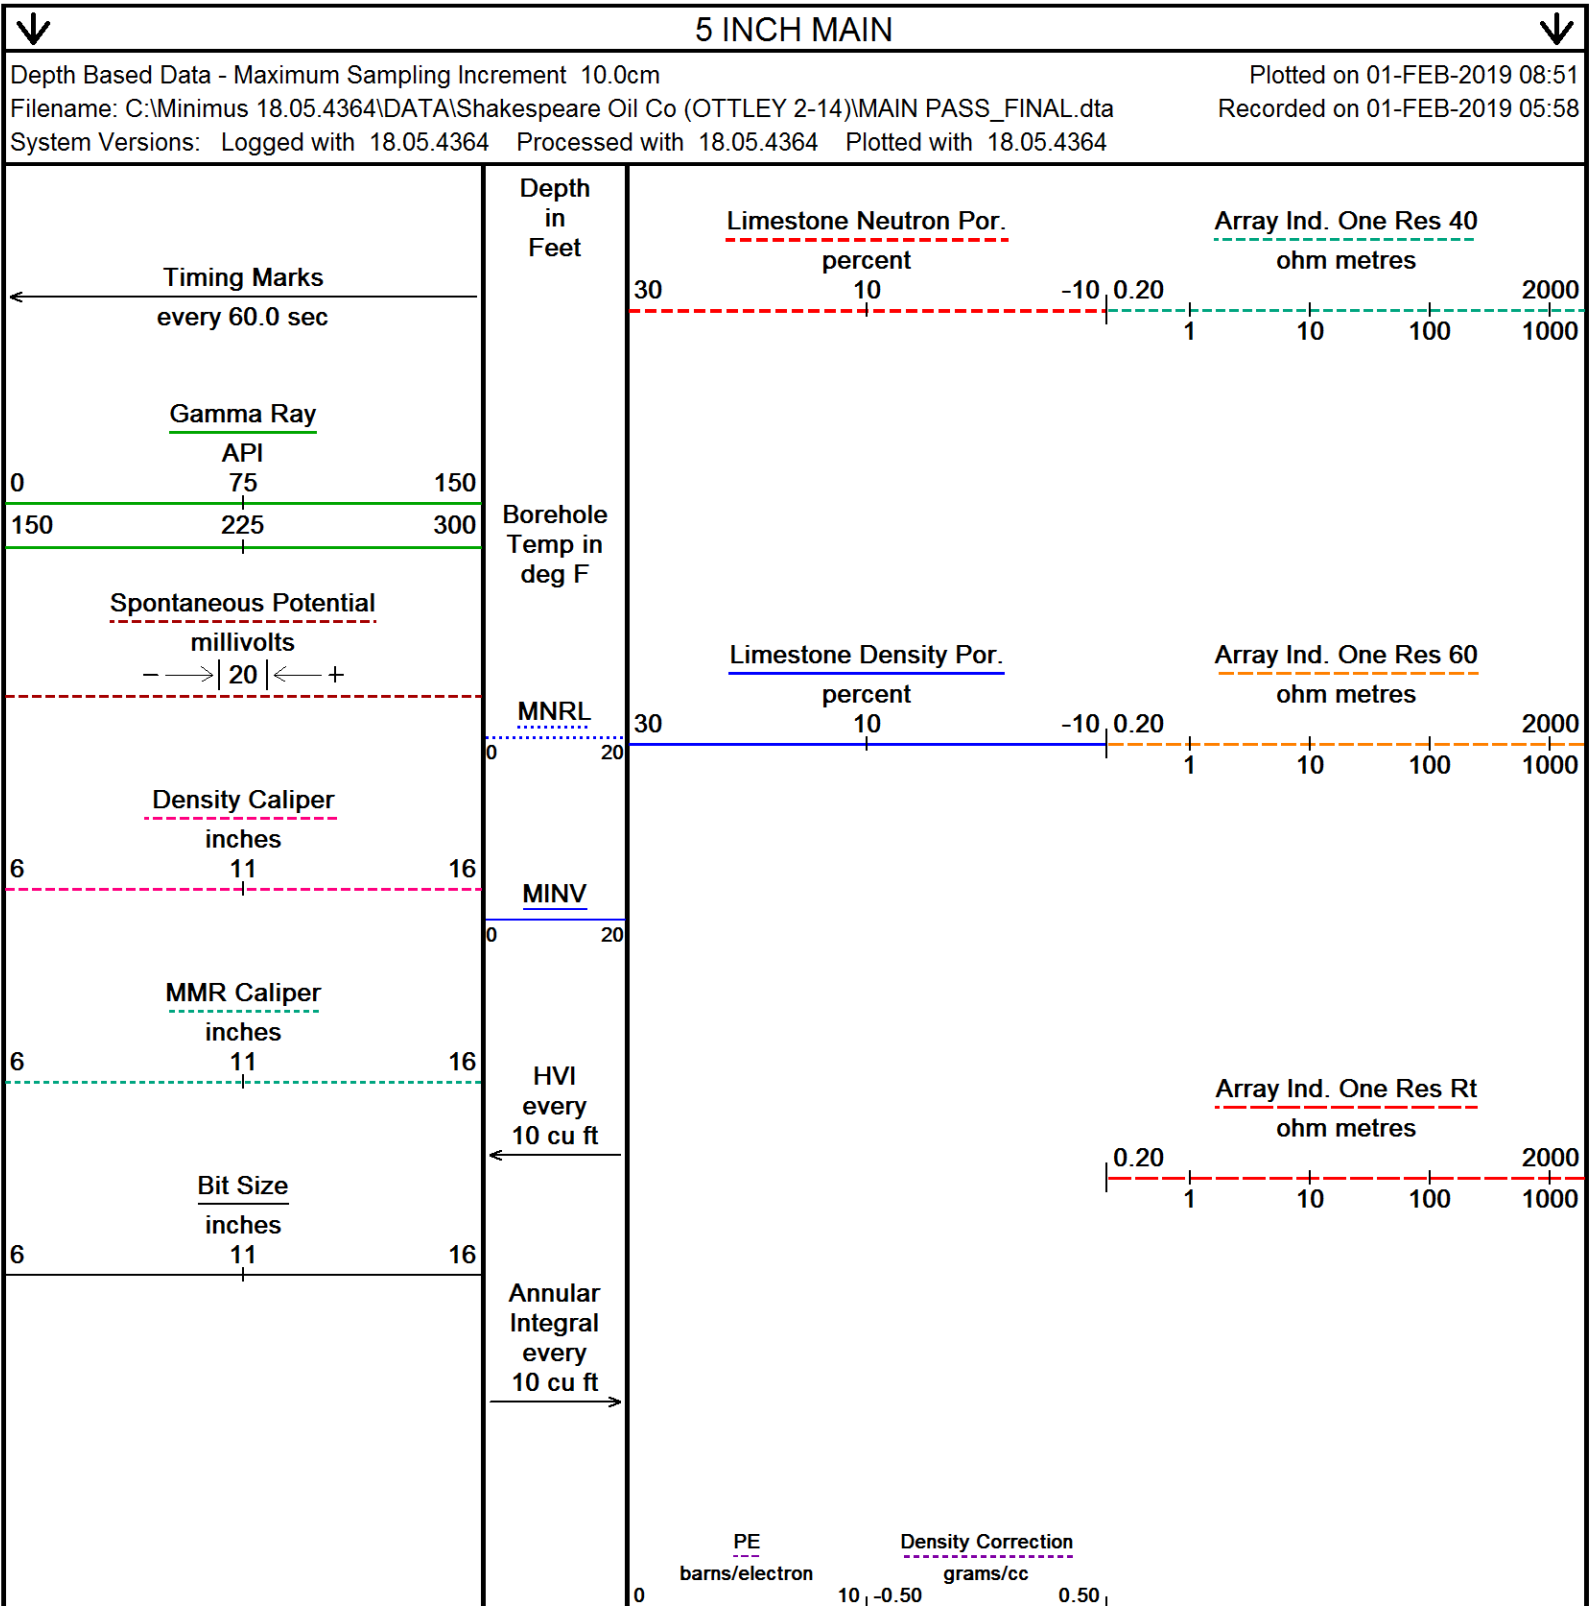

DST Uphole Tension
pounds
5000 0

Replay
Scale
1:240

250

Casing
Shoe

83°

300


83°


1800

350

84°

400

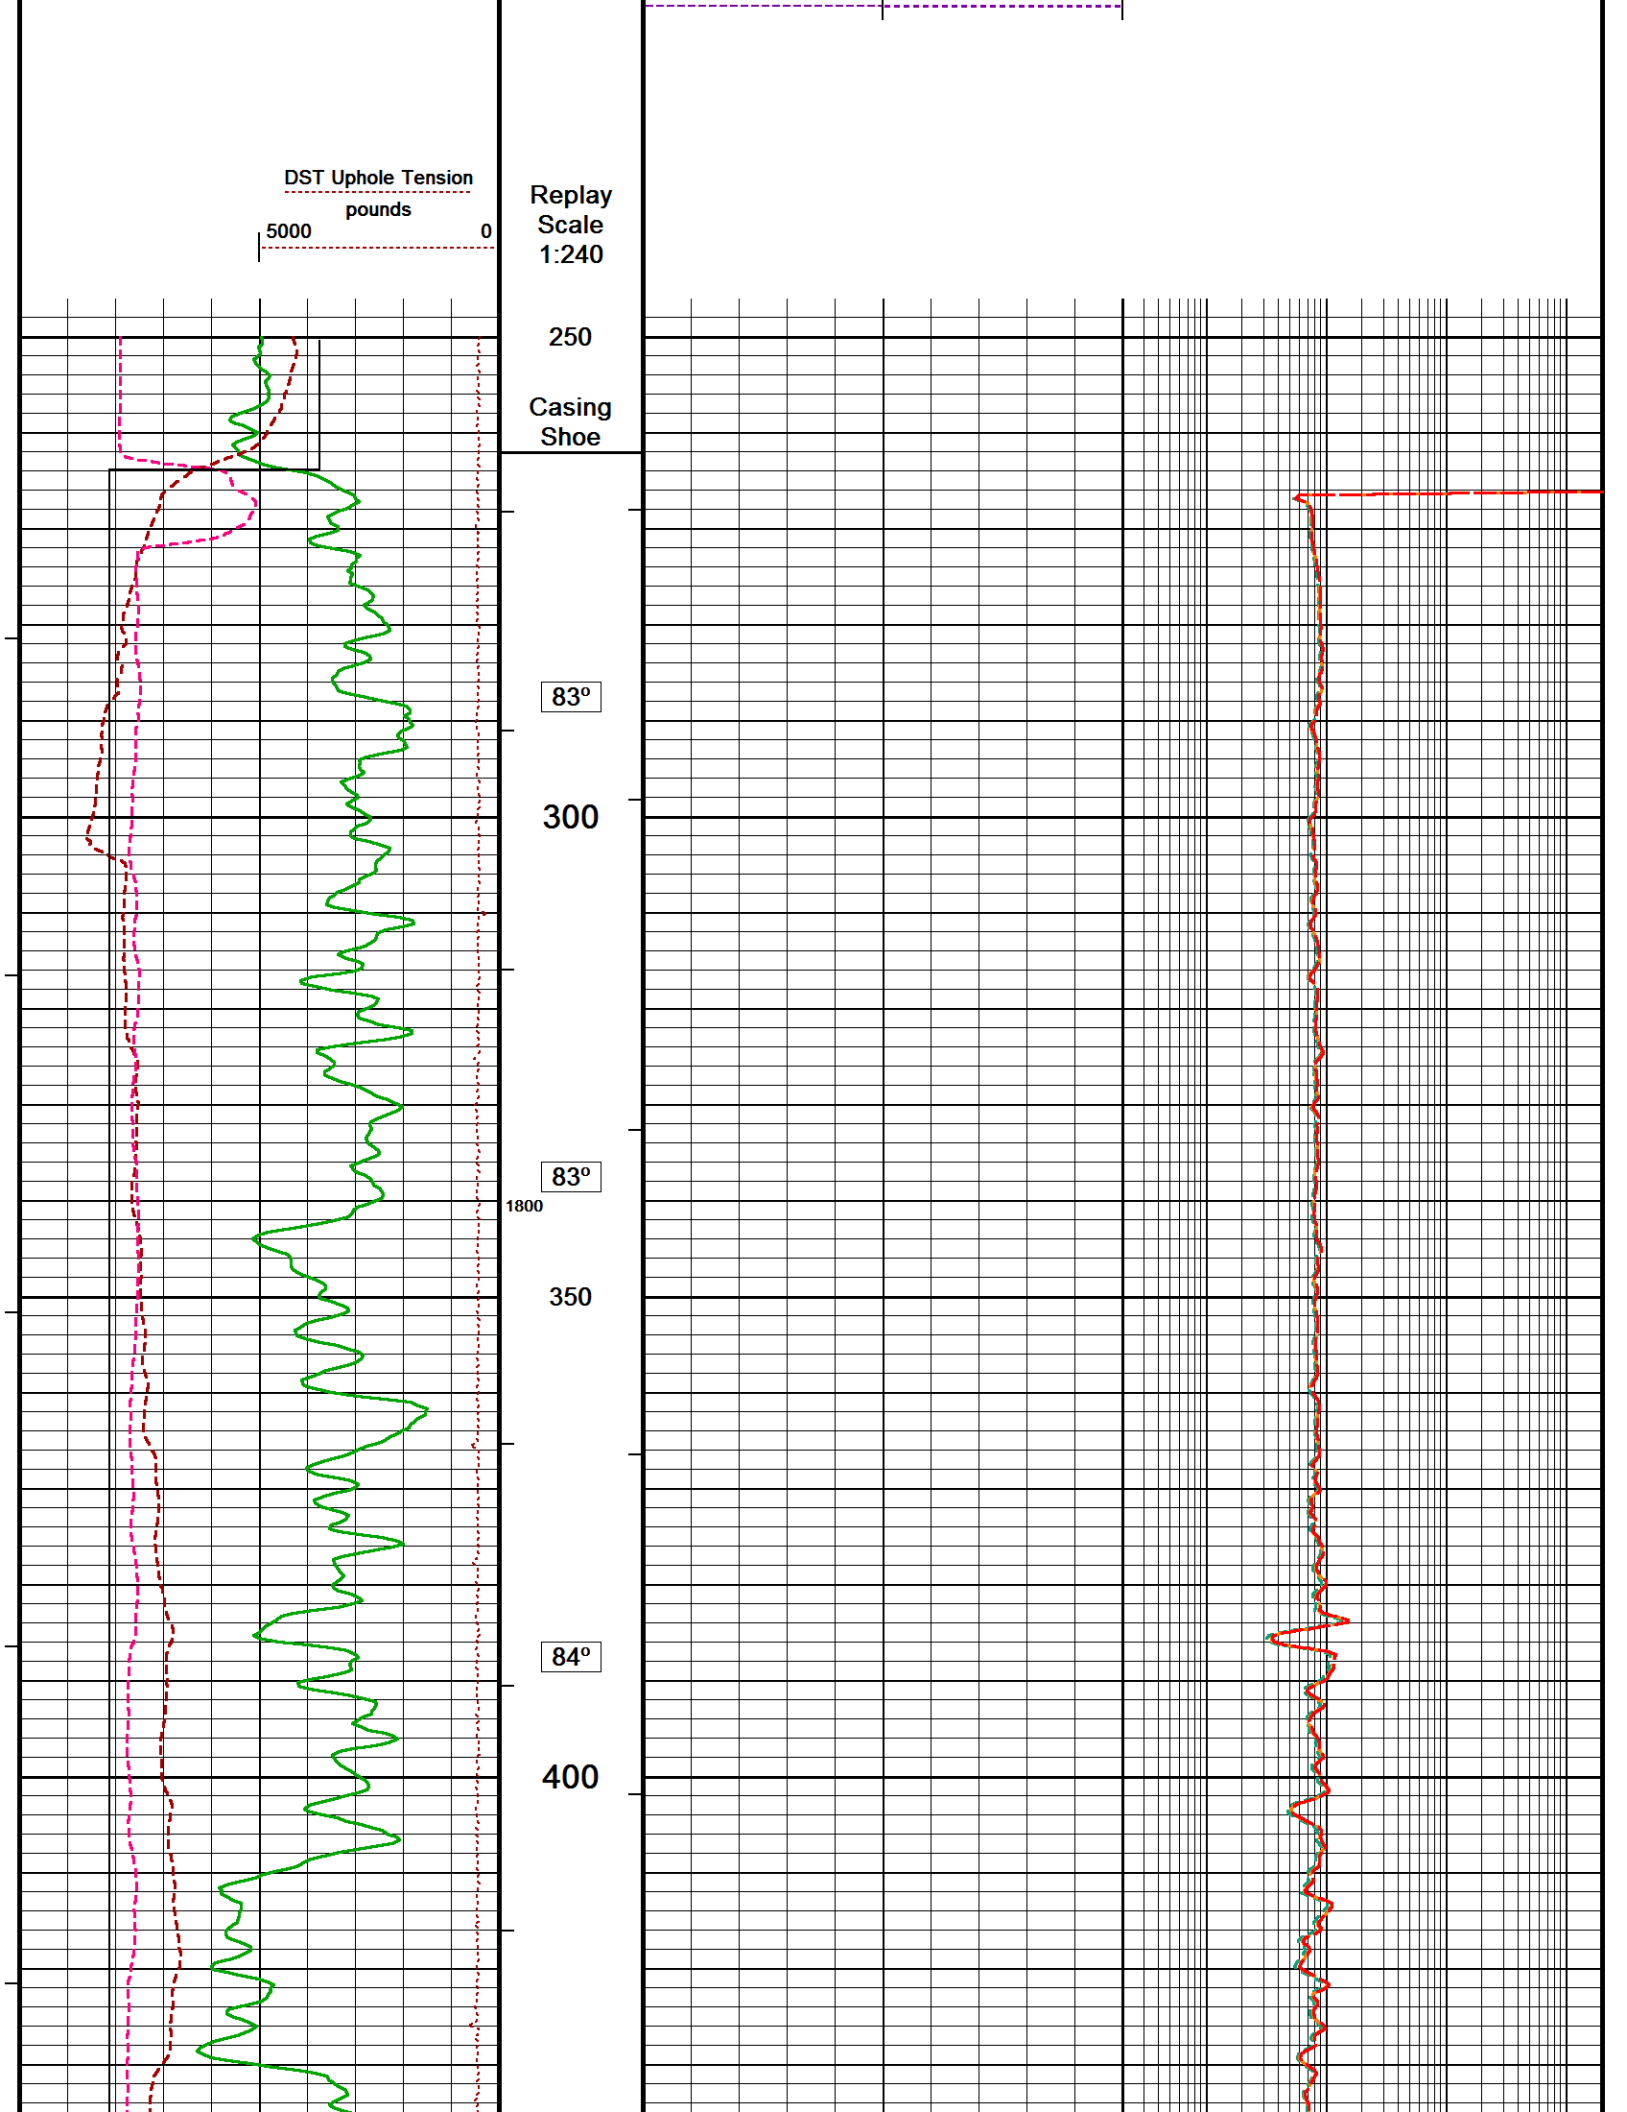

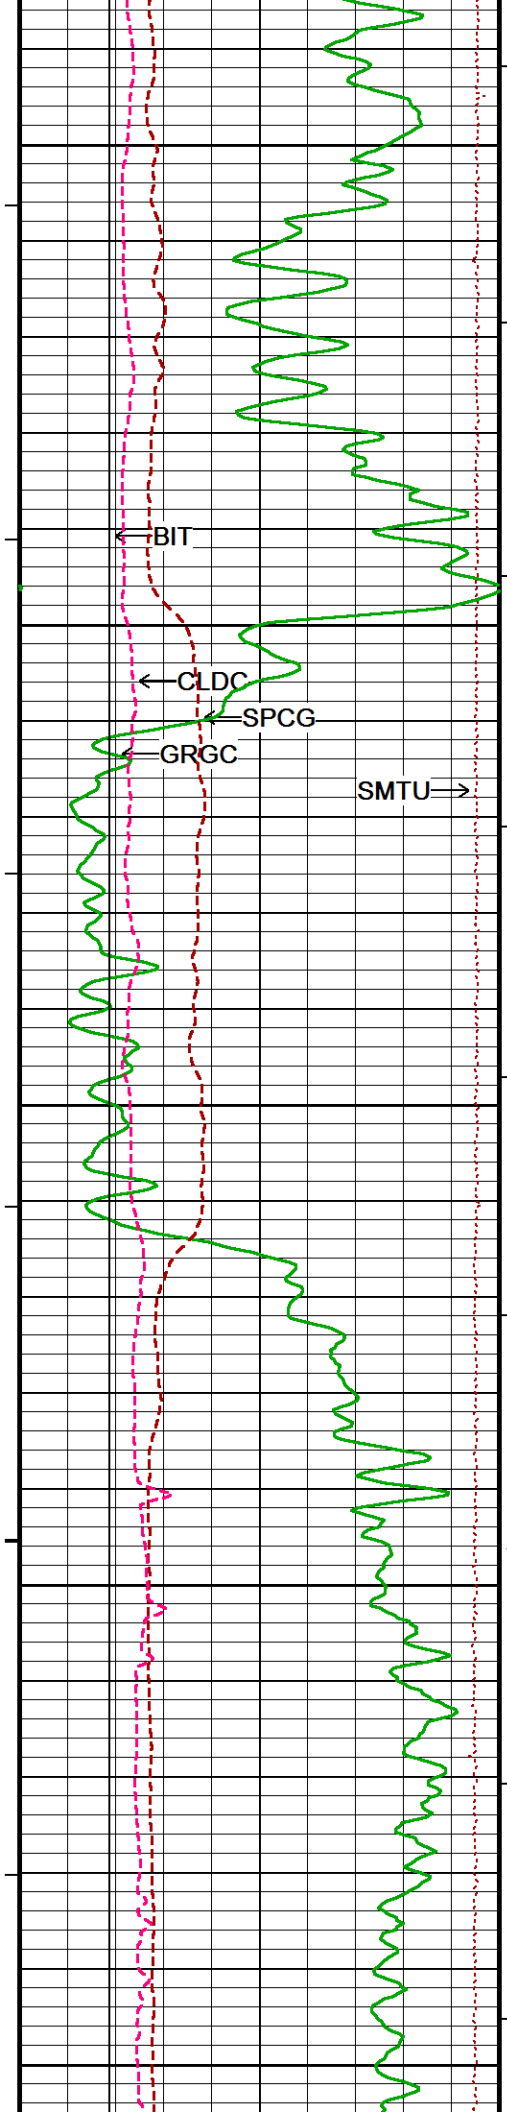

84°

450

1300

84°

500

85°

550


86°



1700



600



86°



650


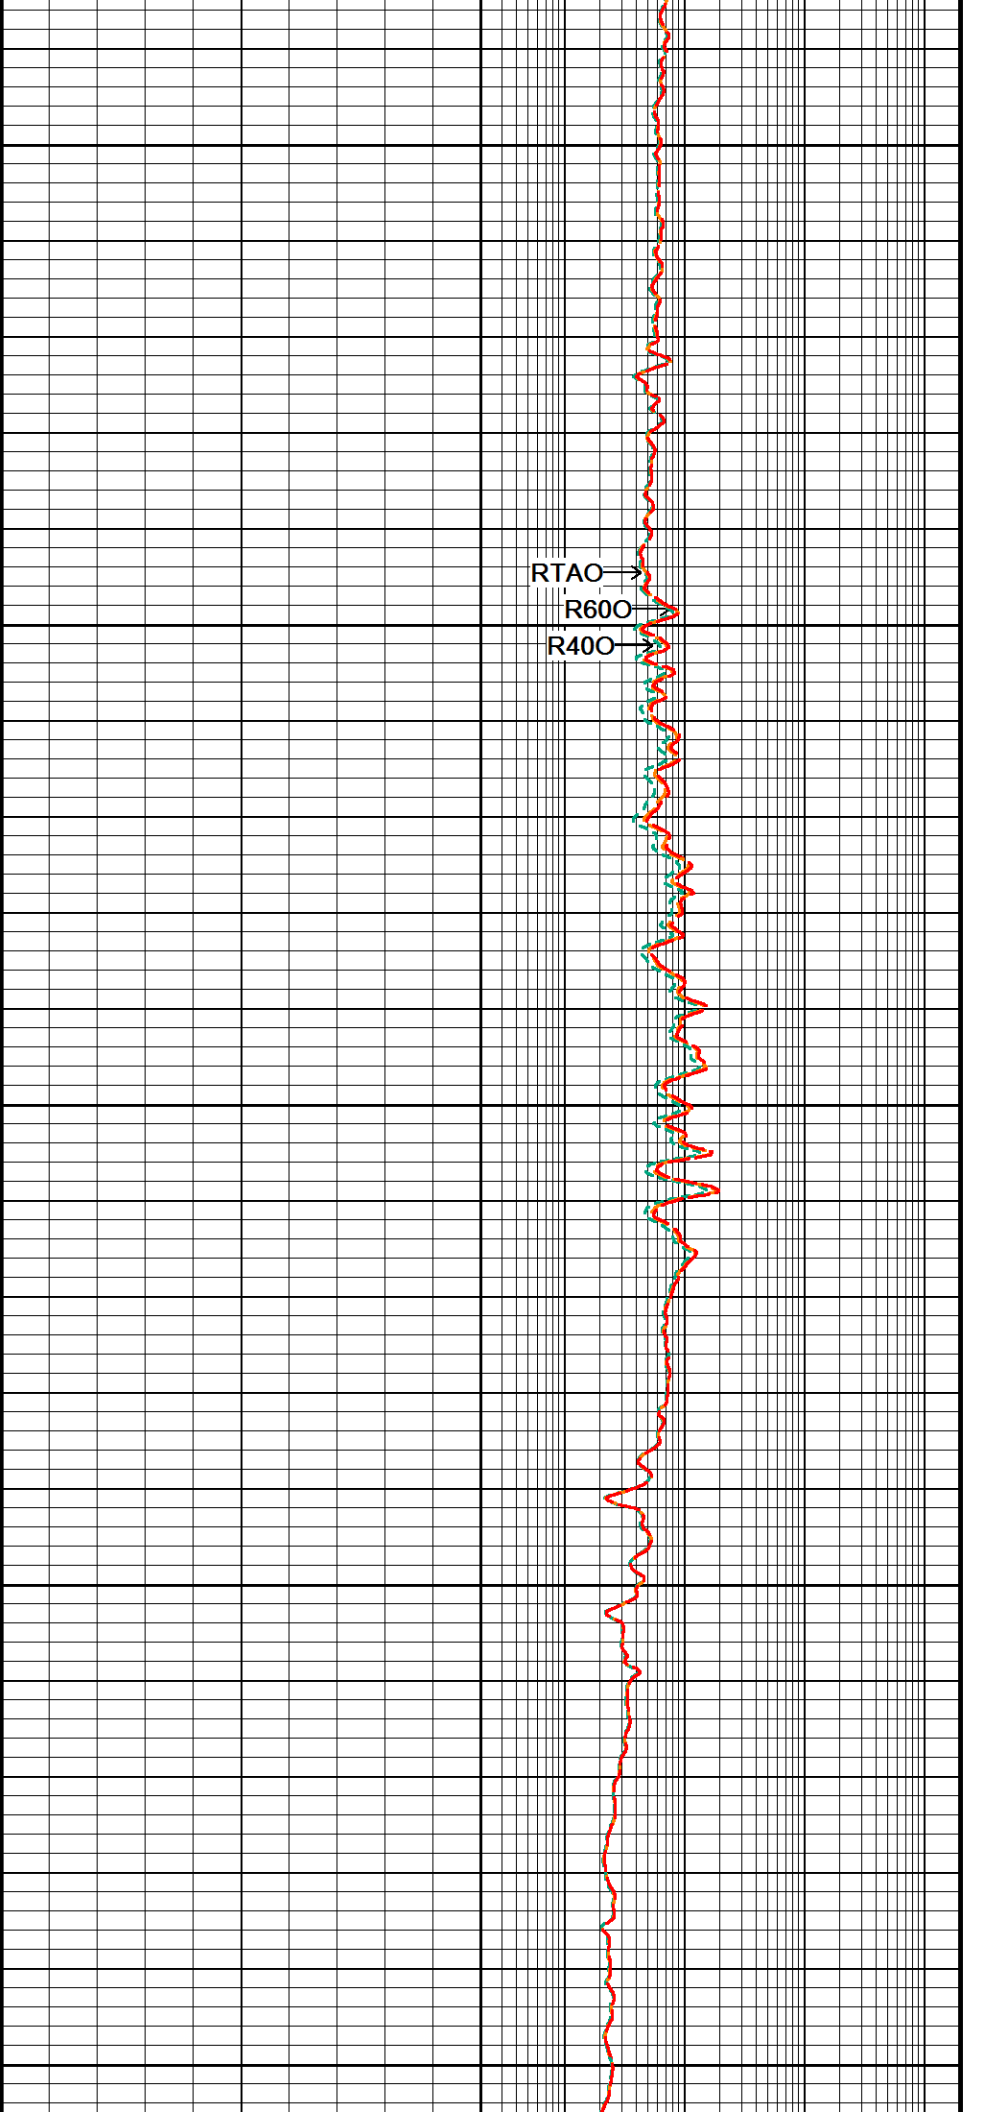


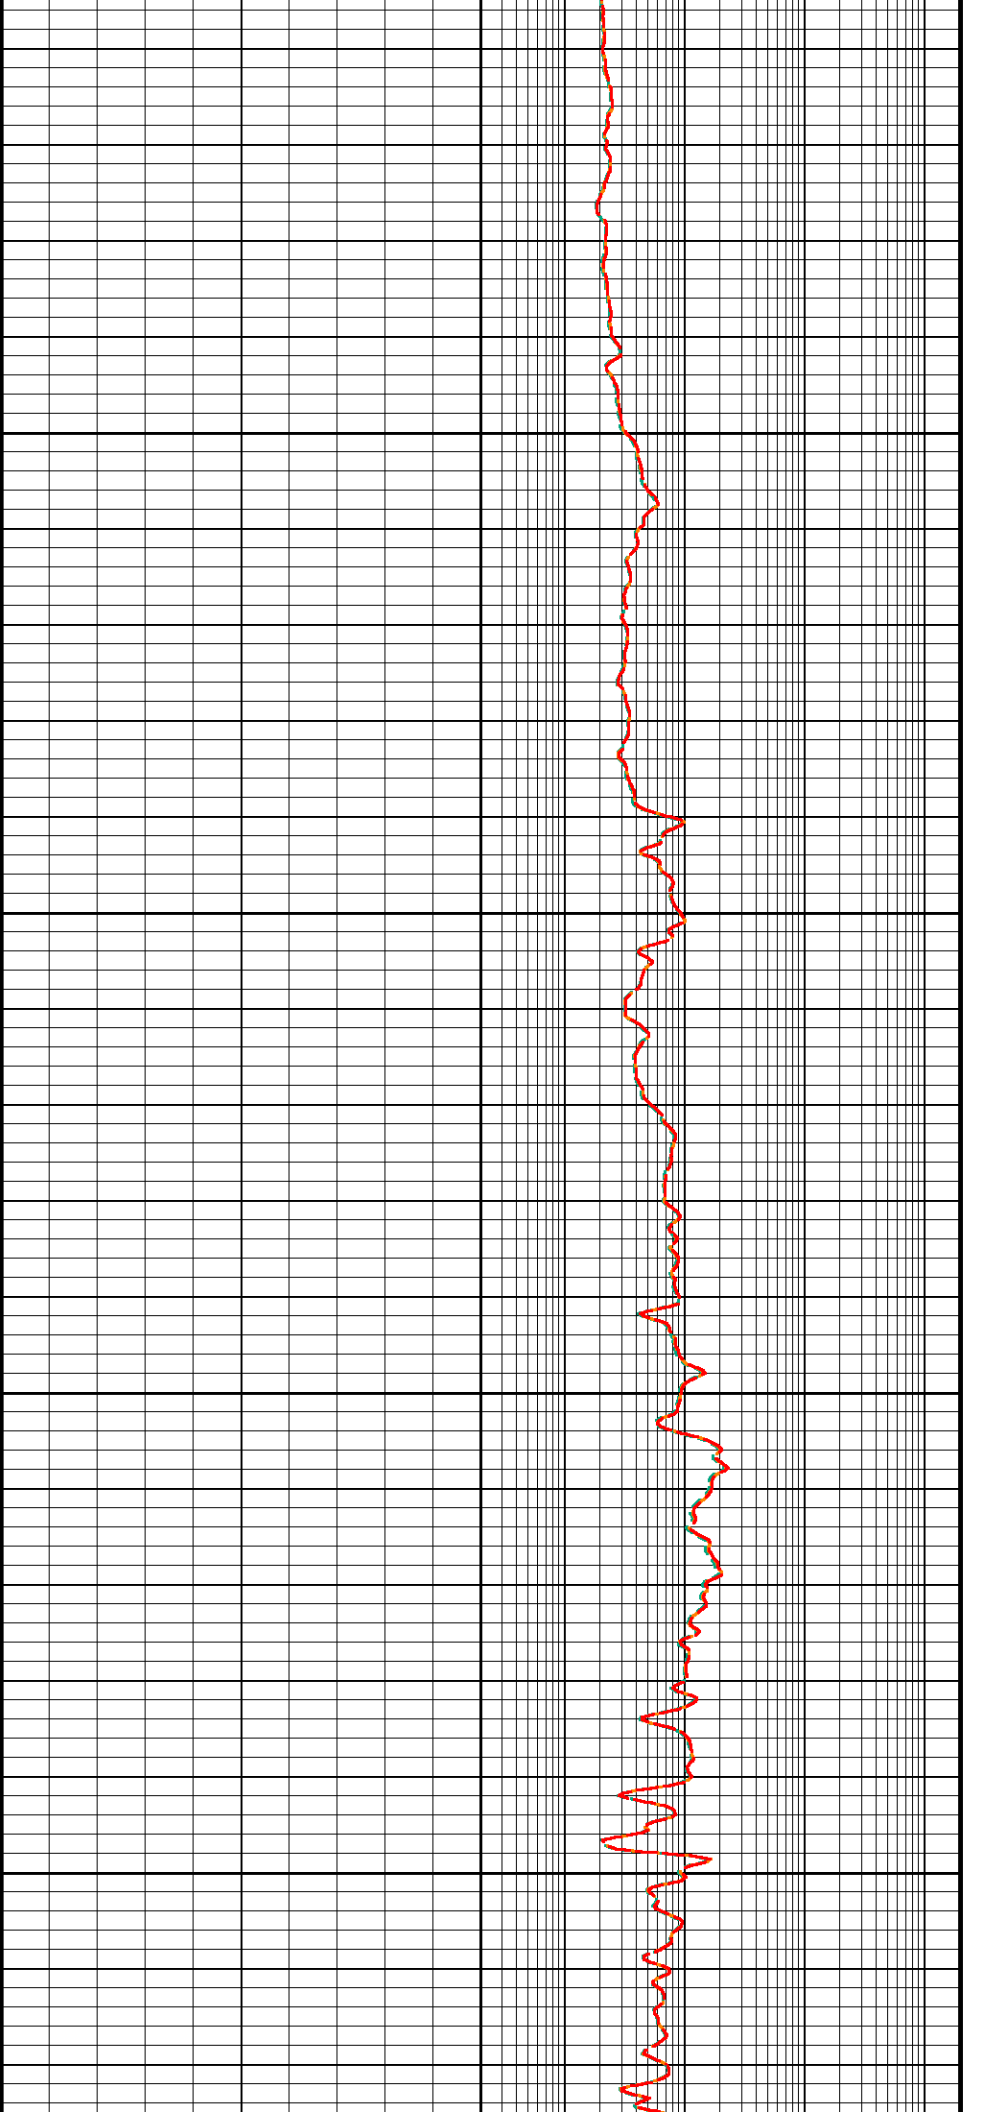
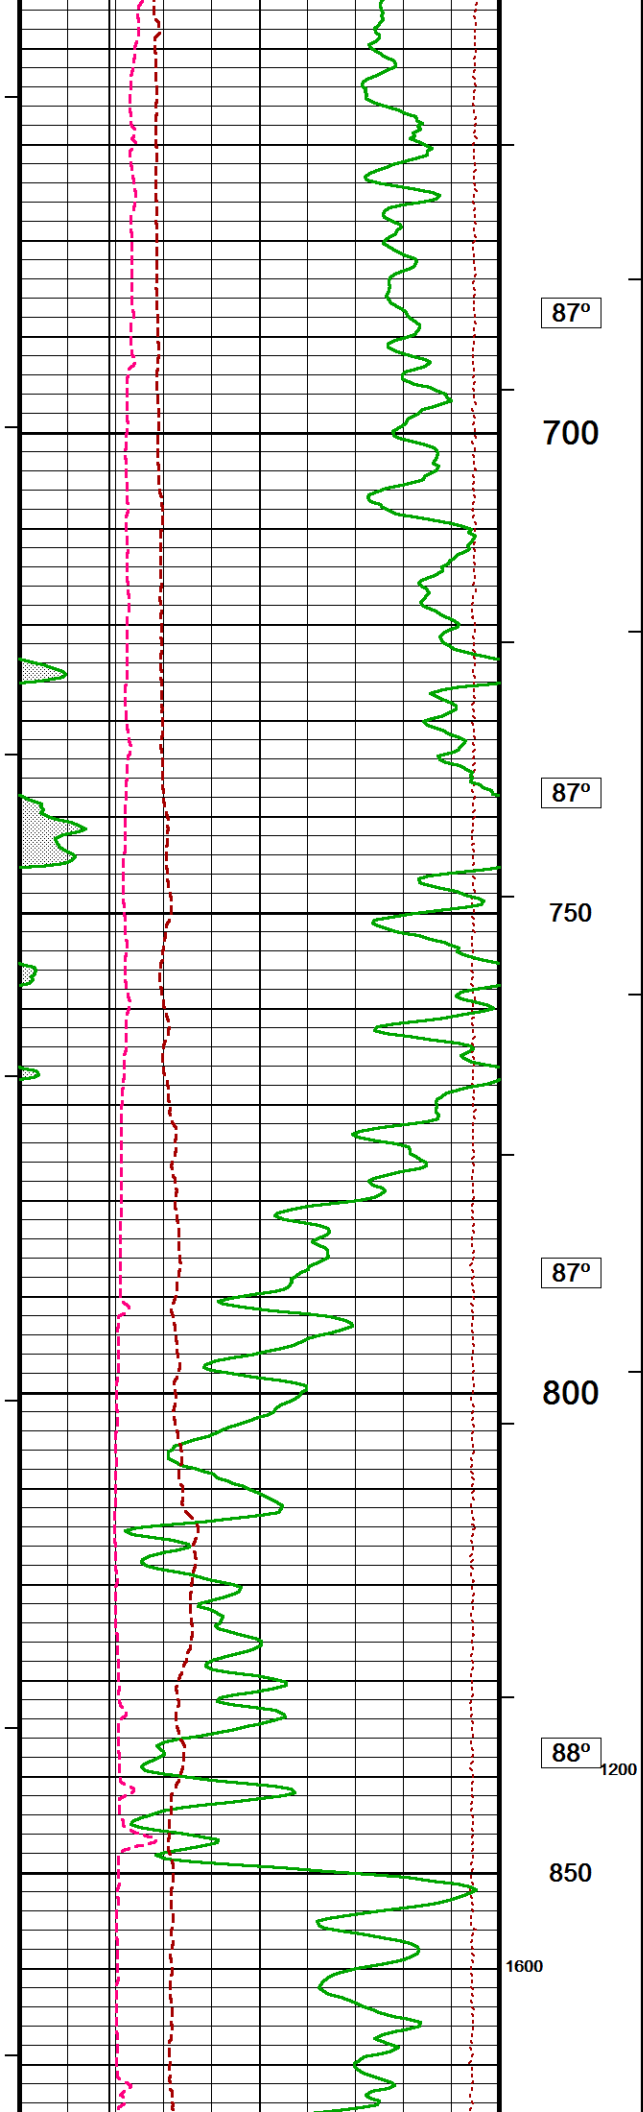


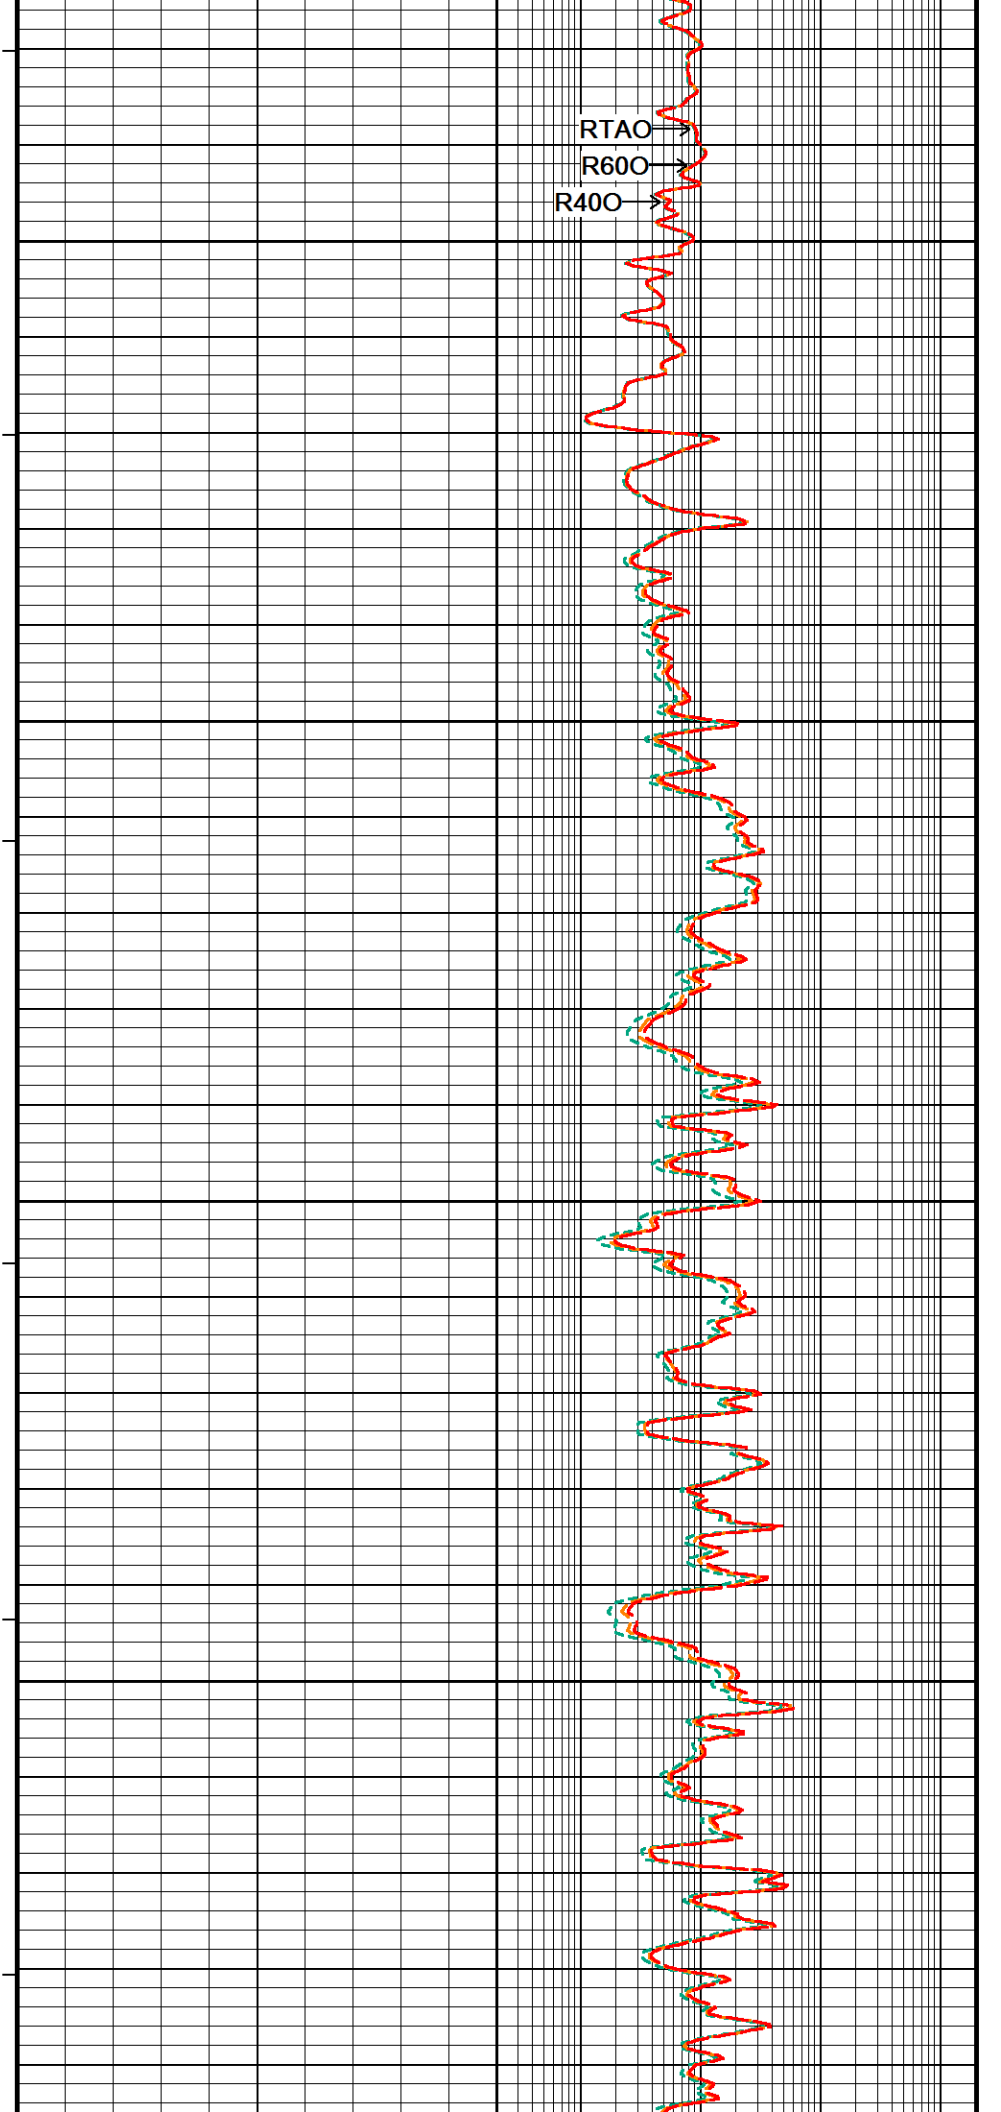
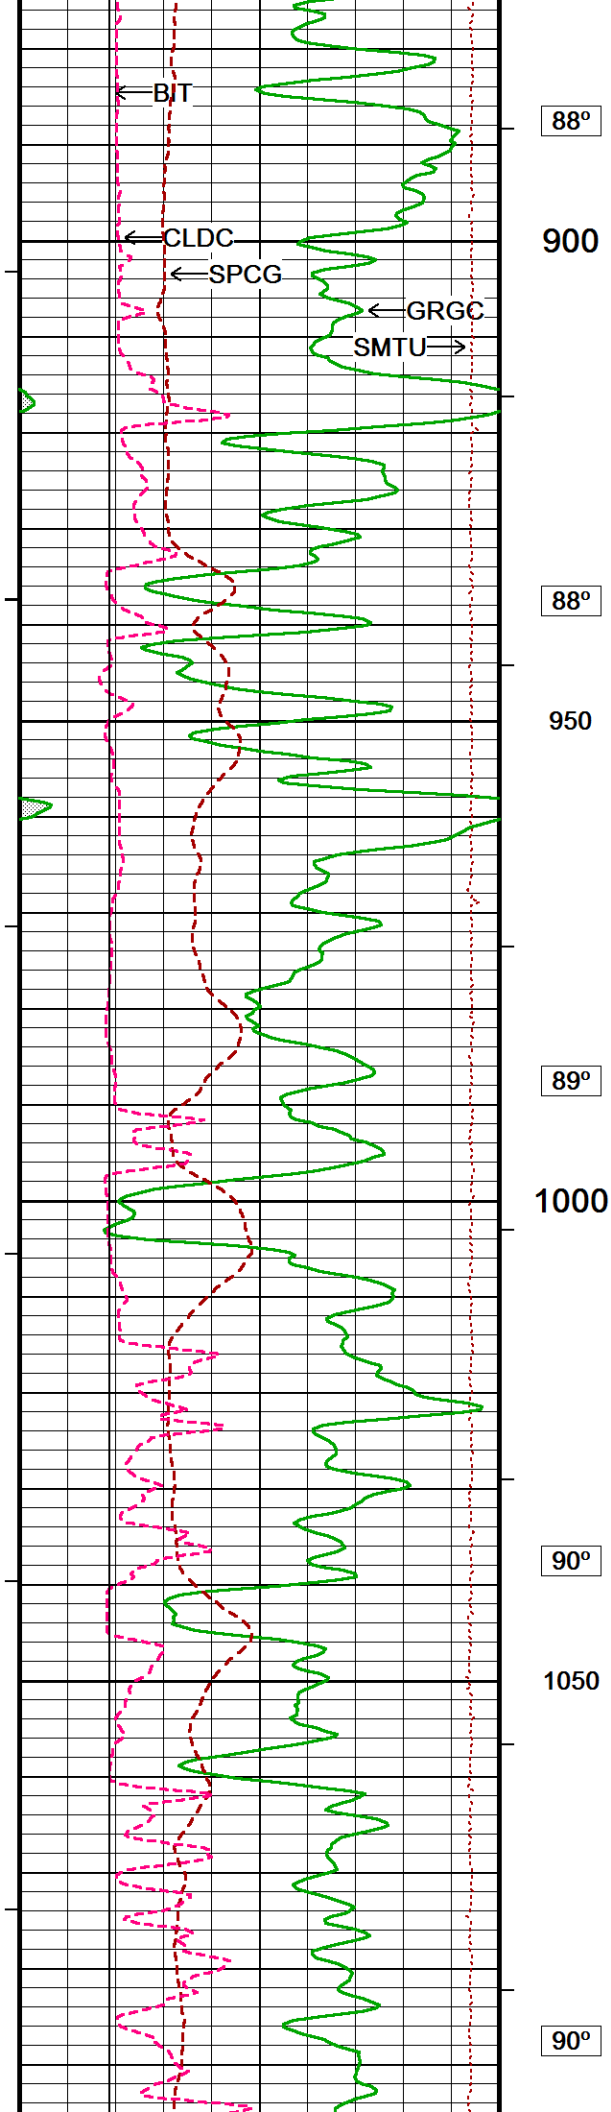


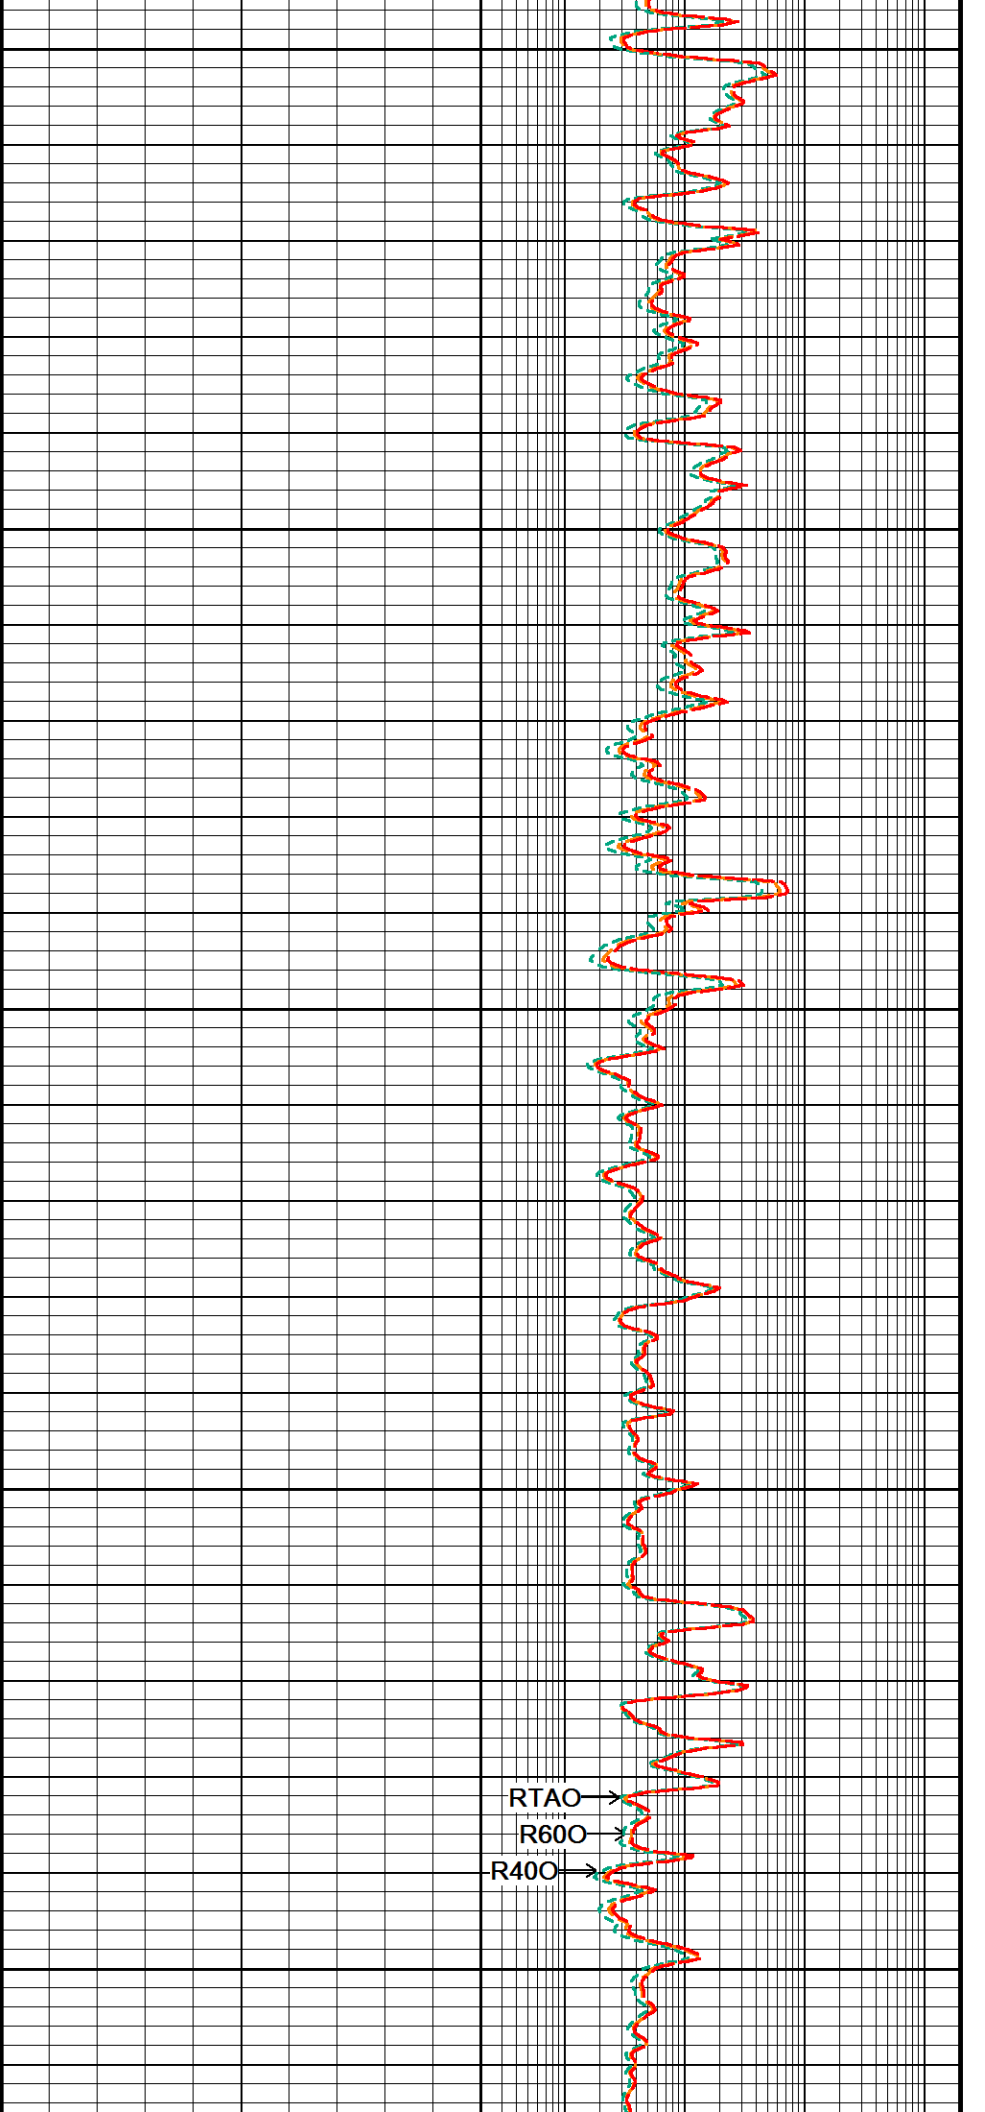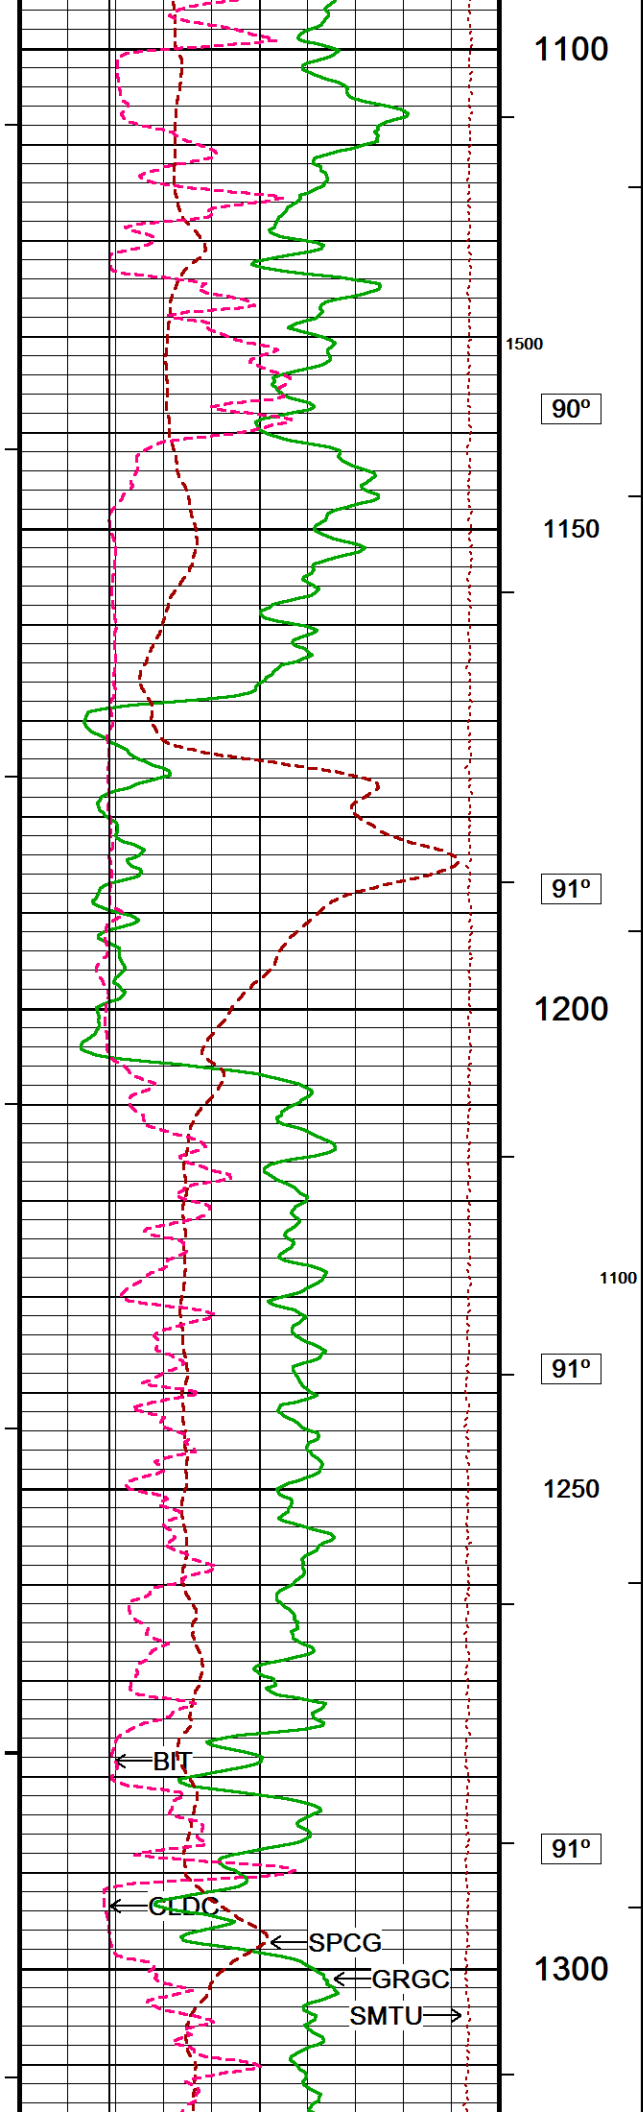


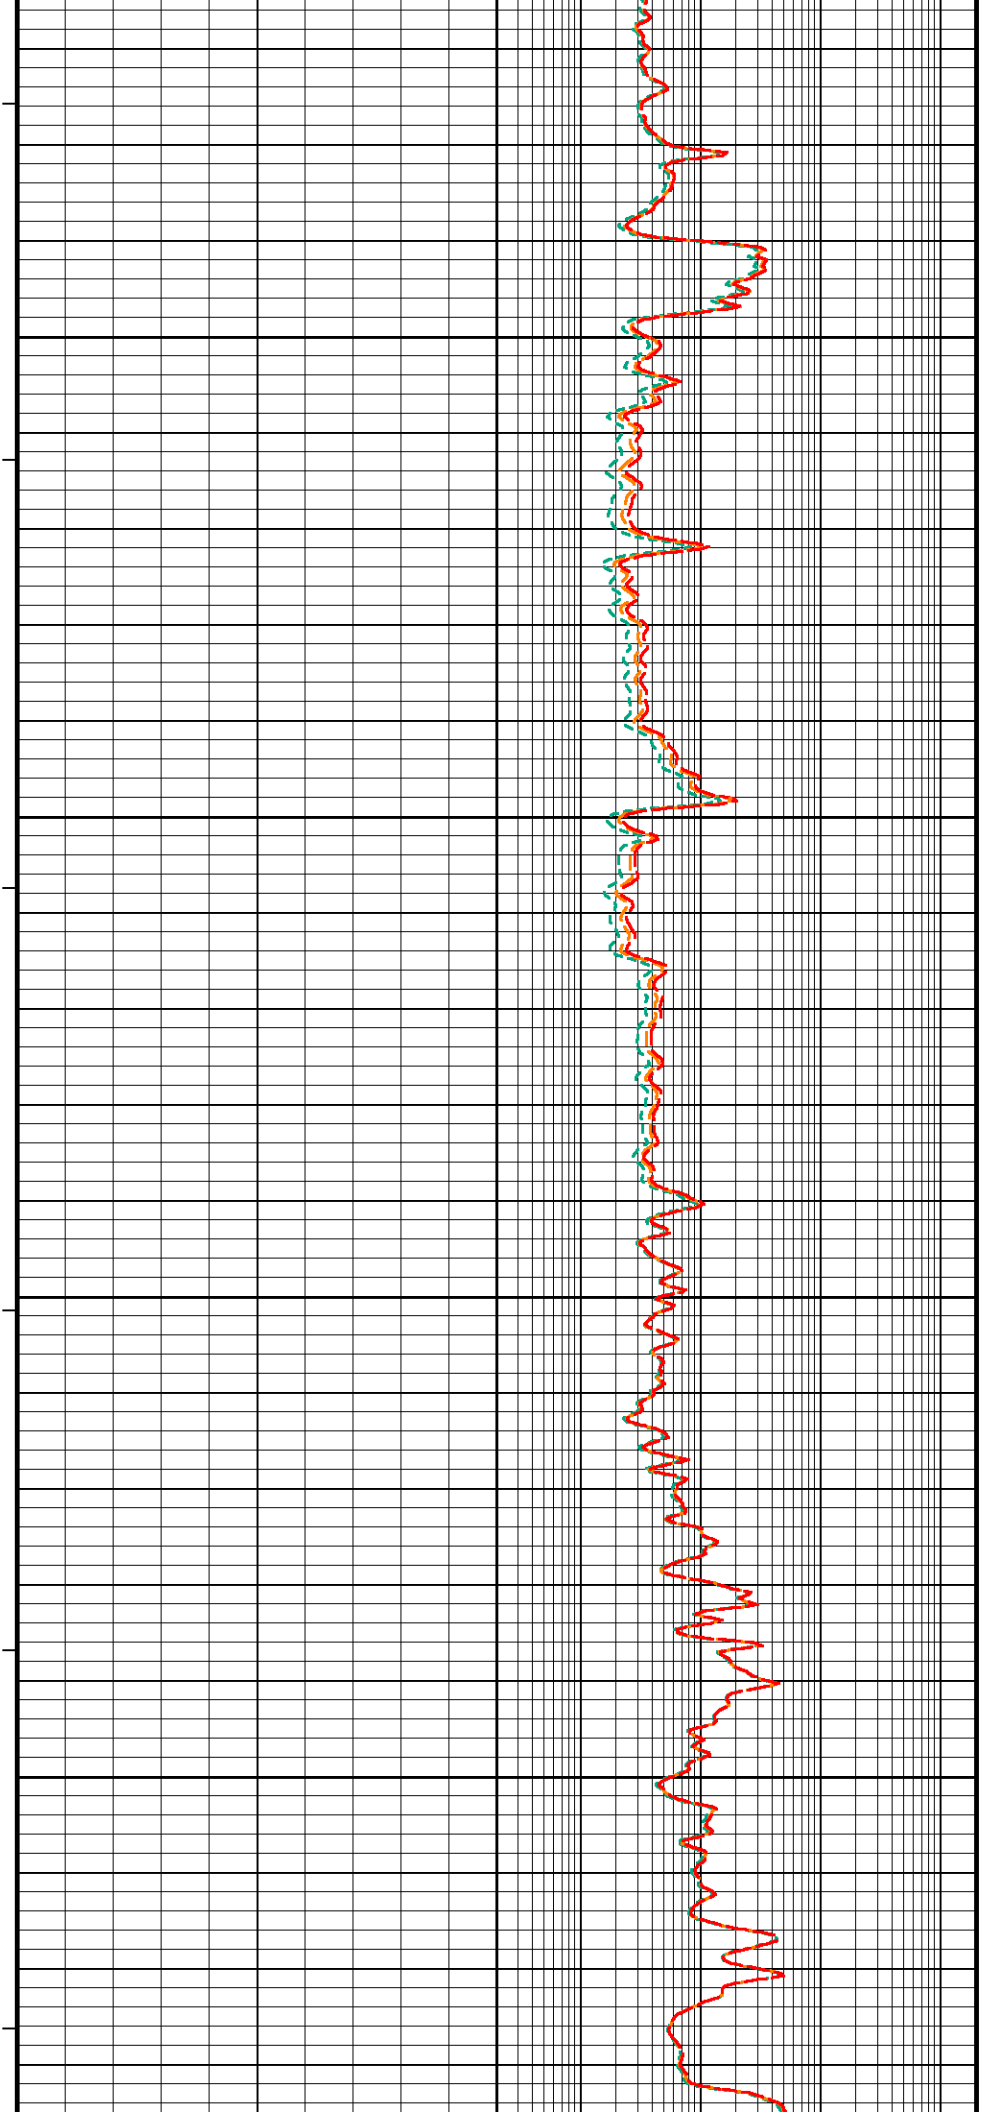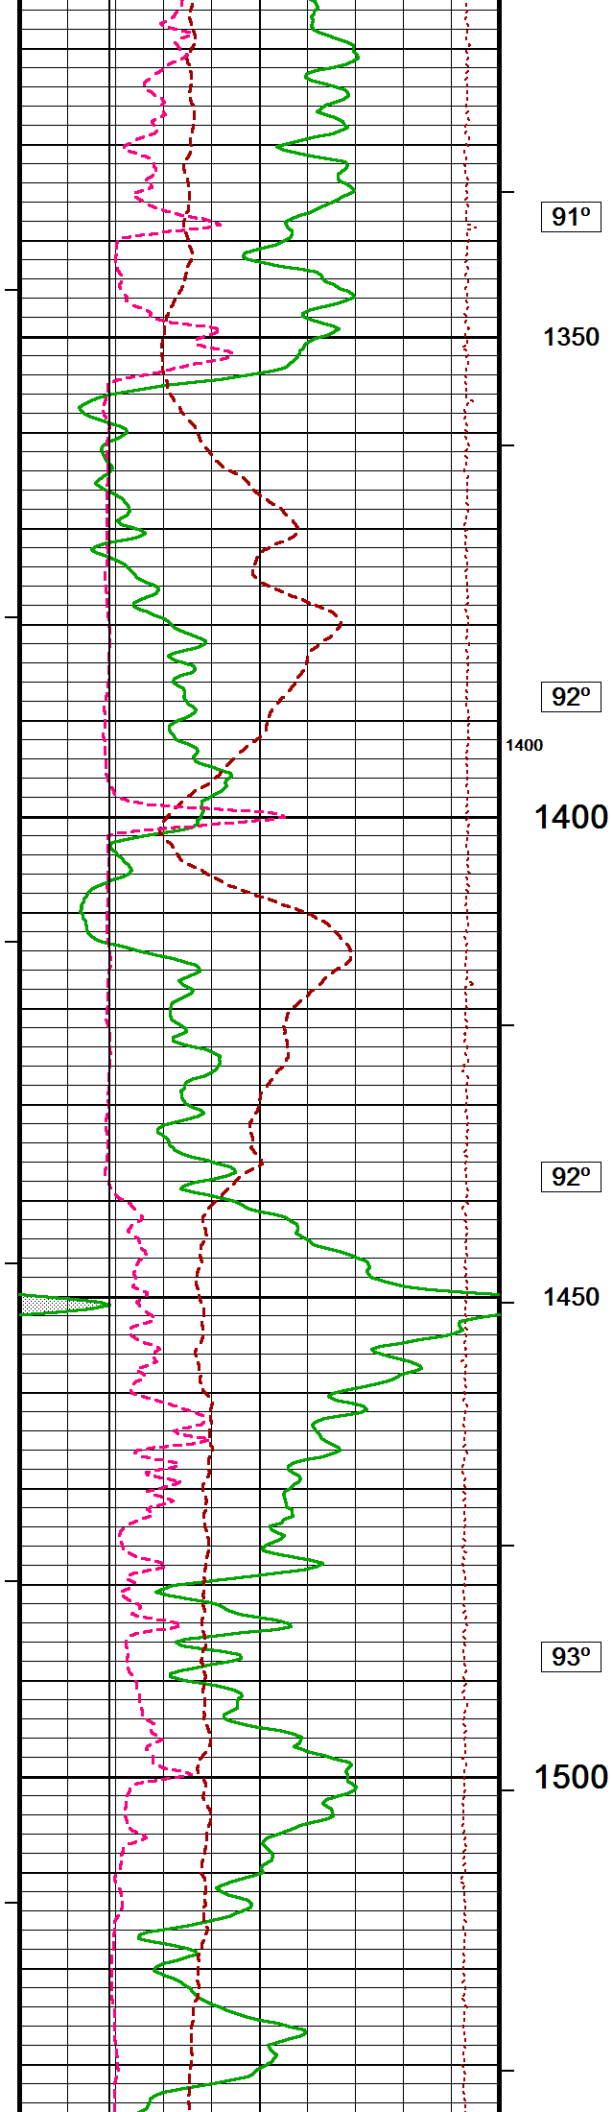

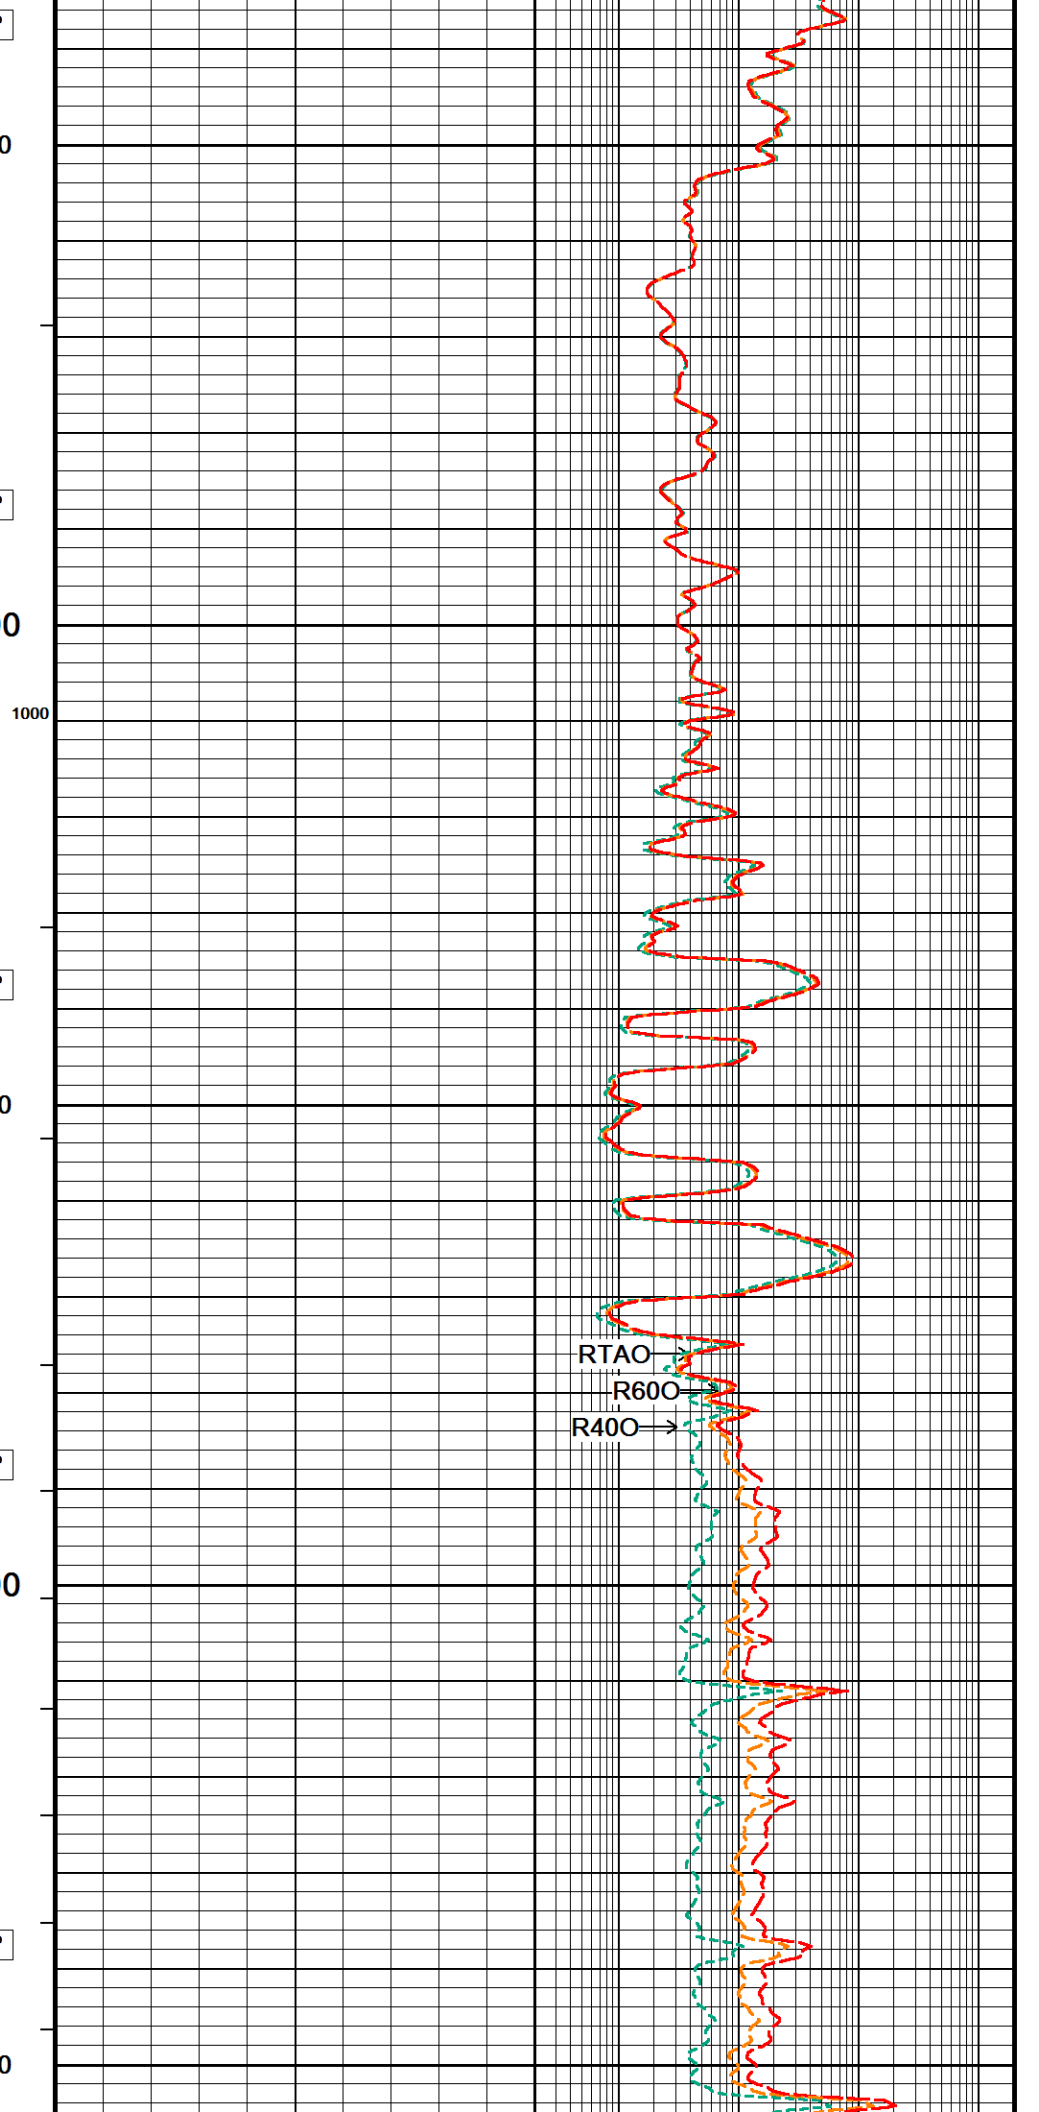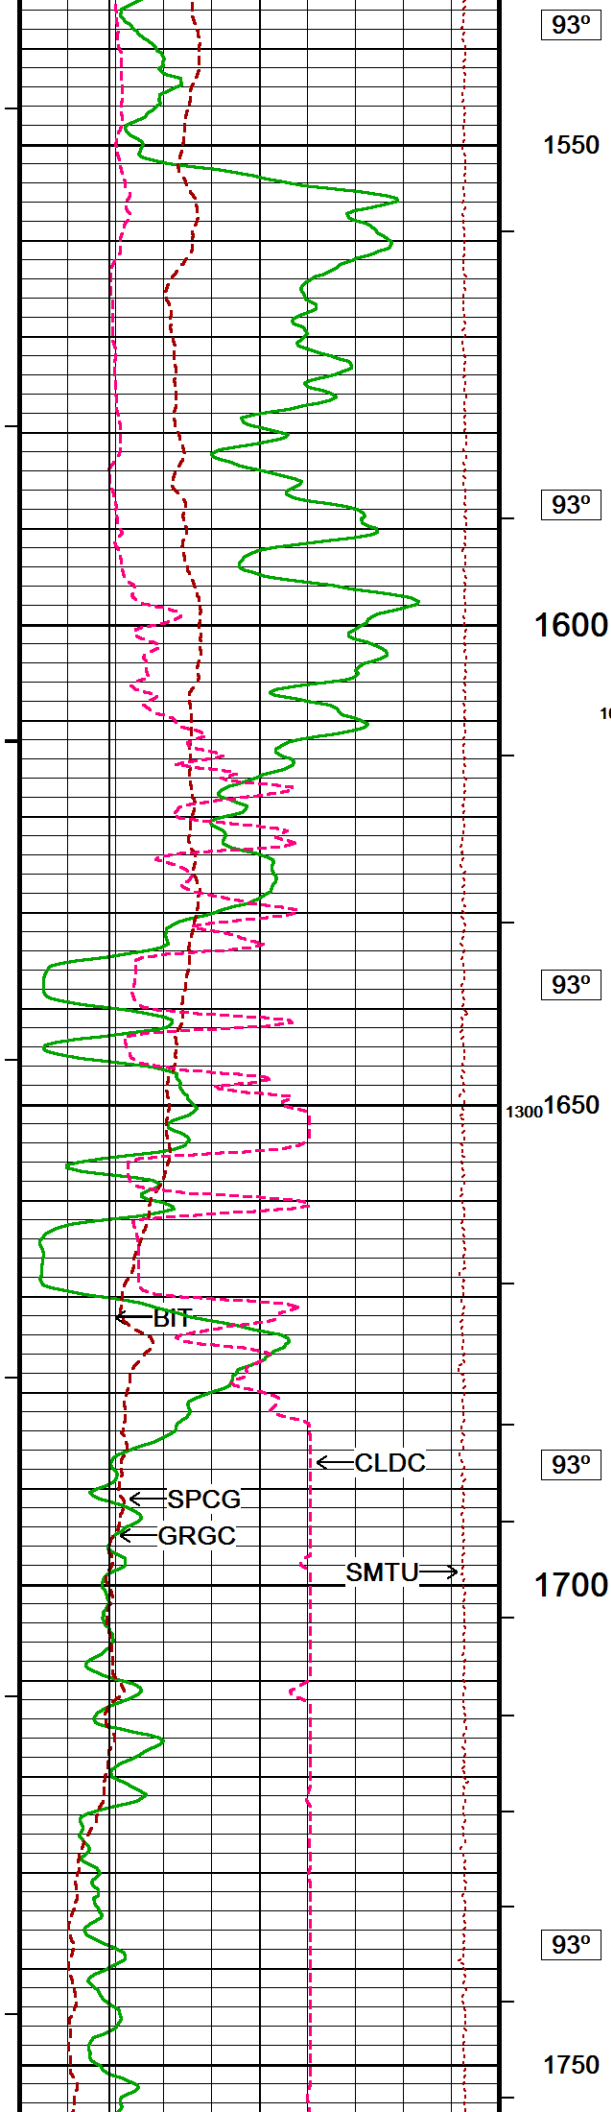

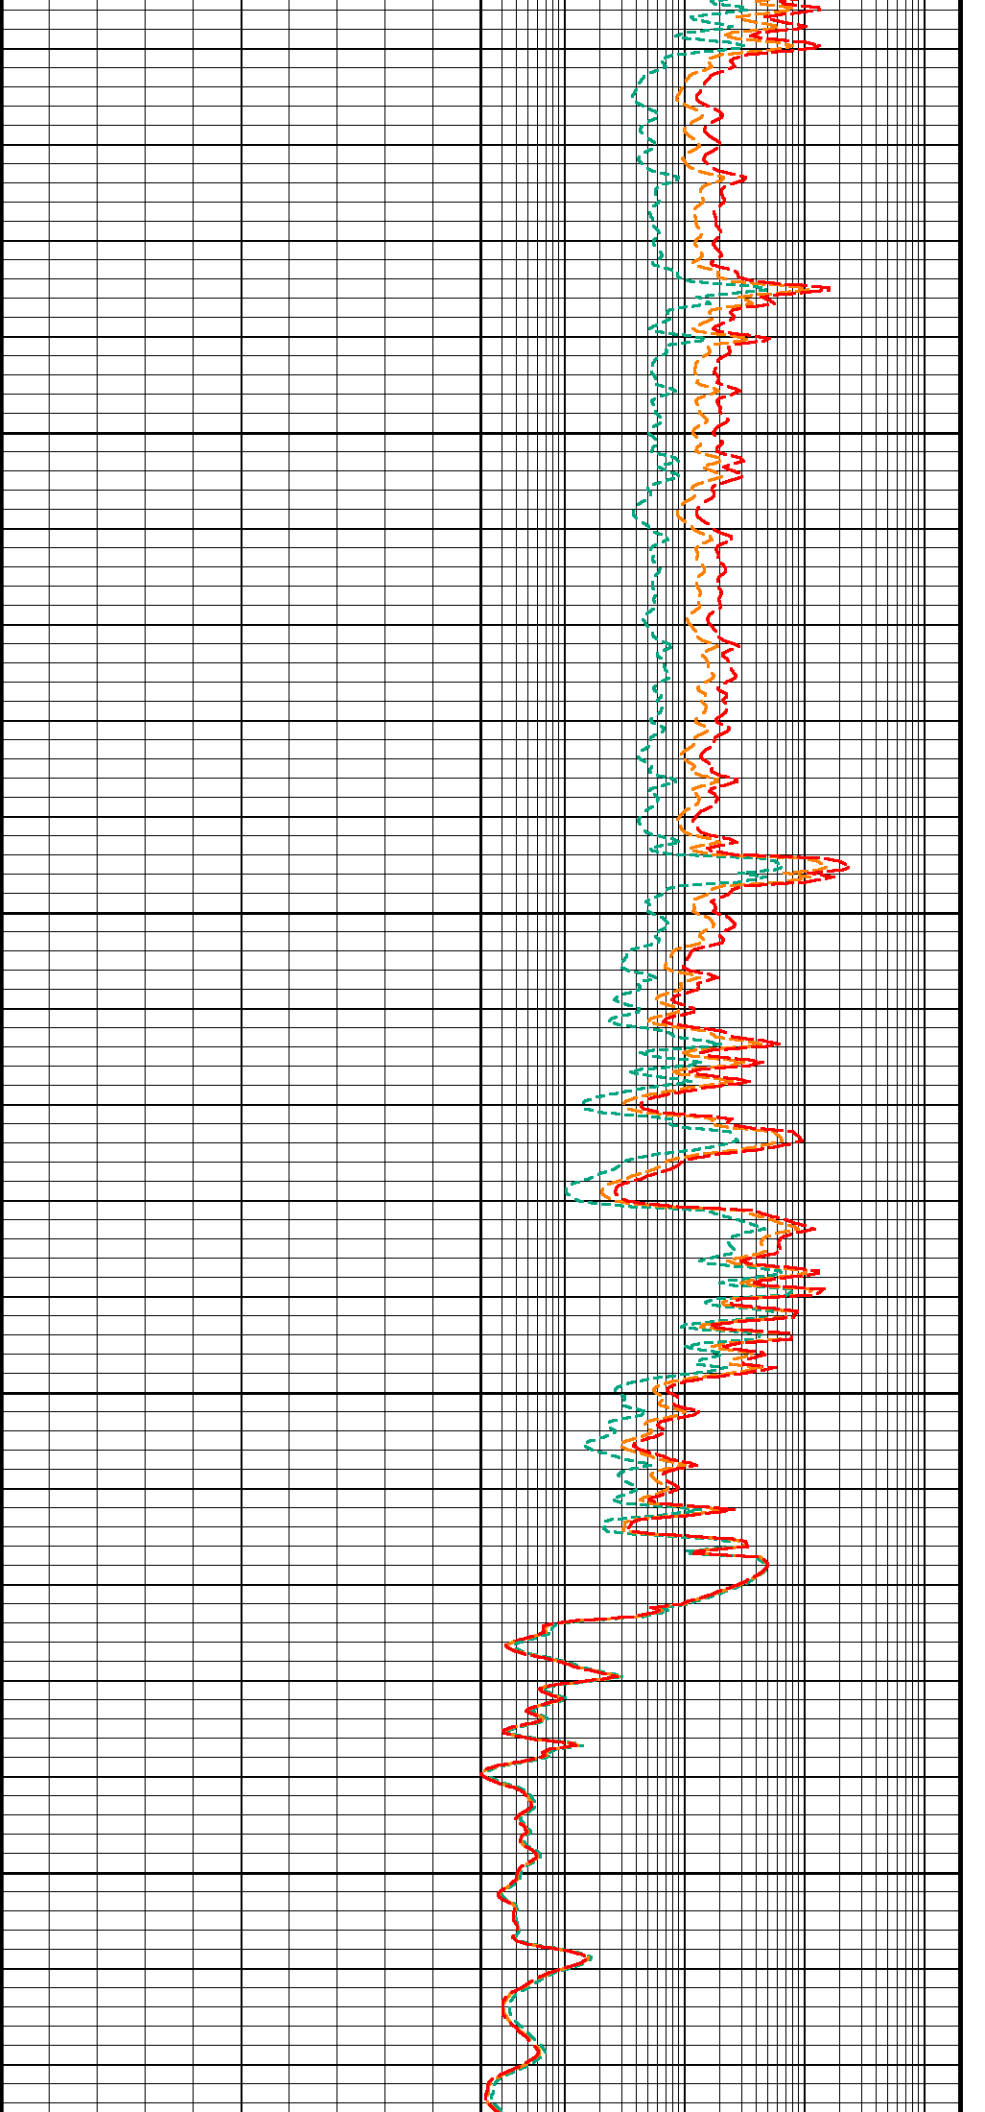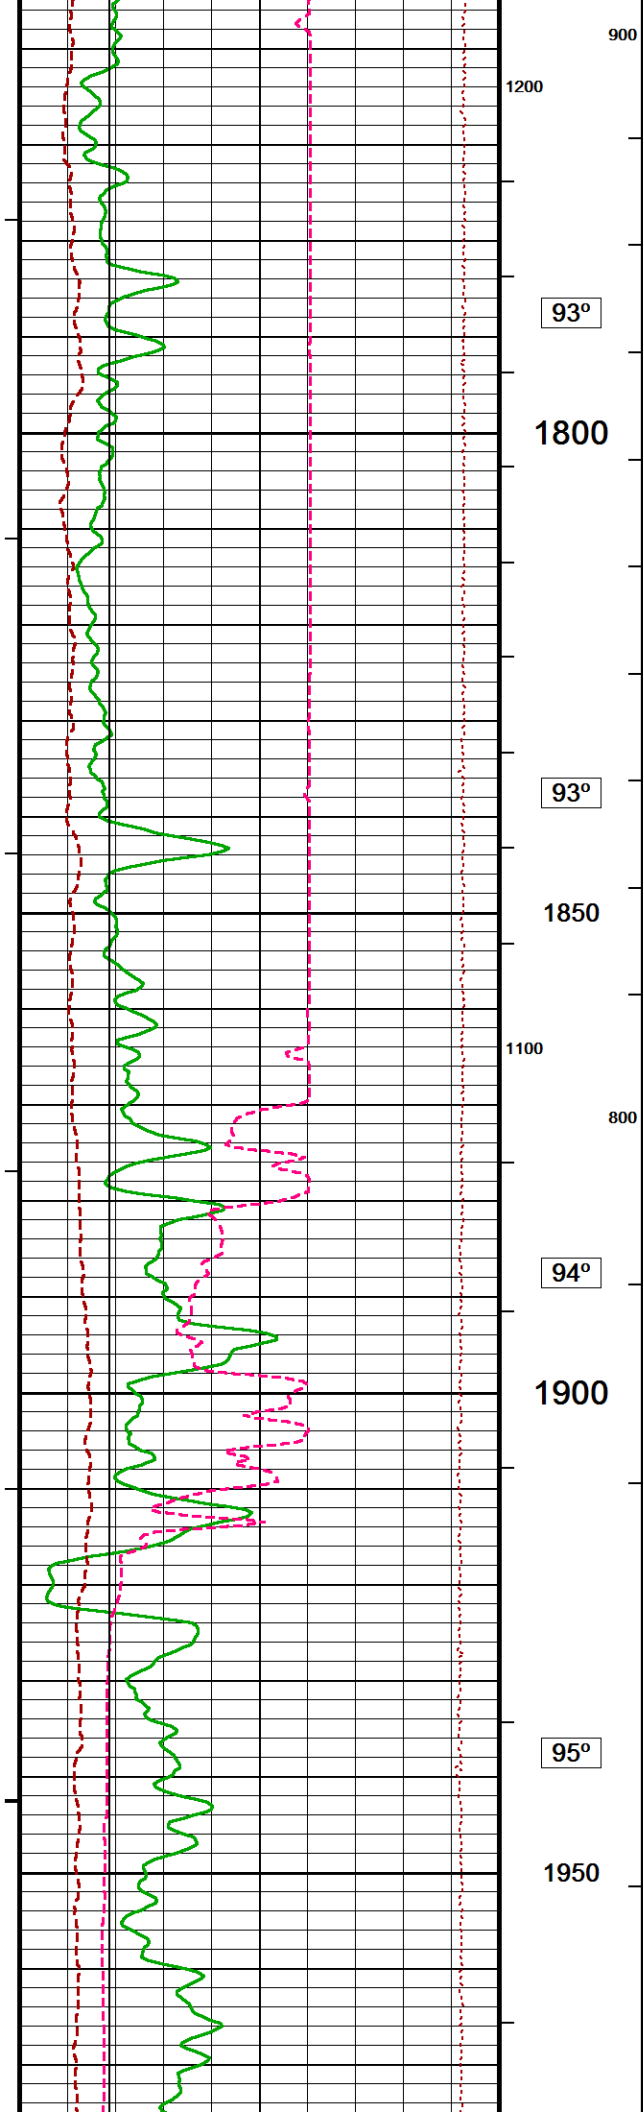

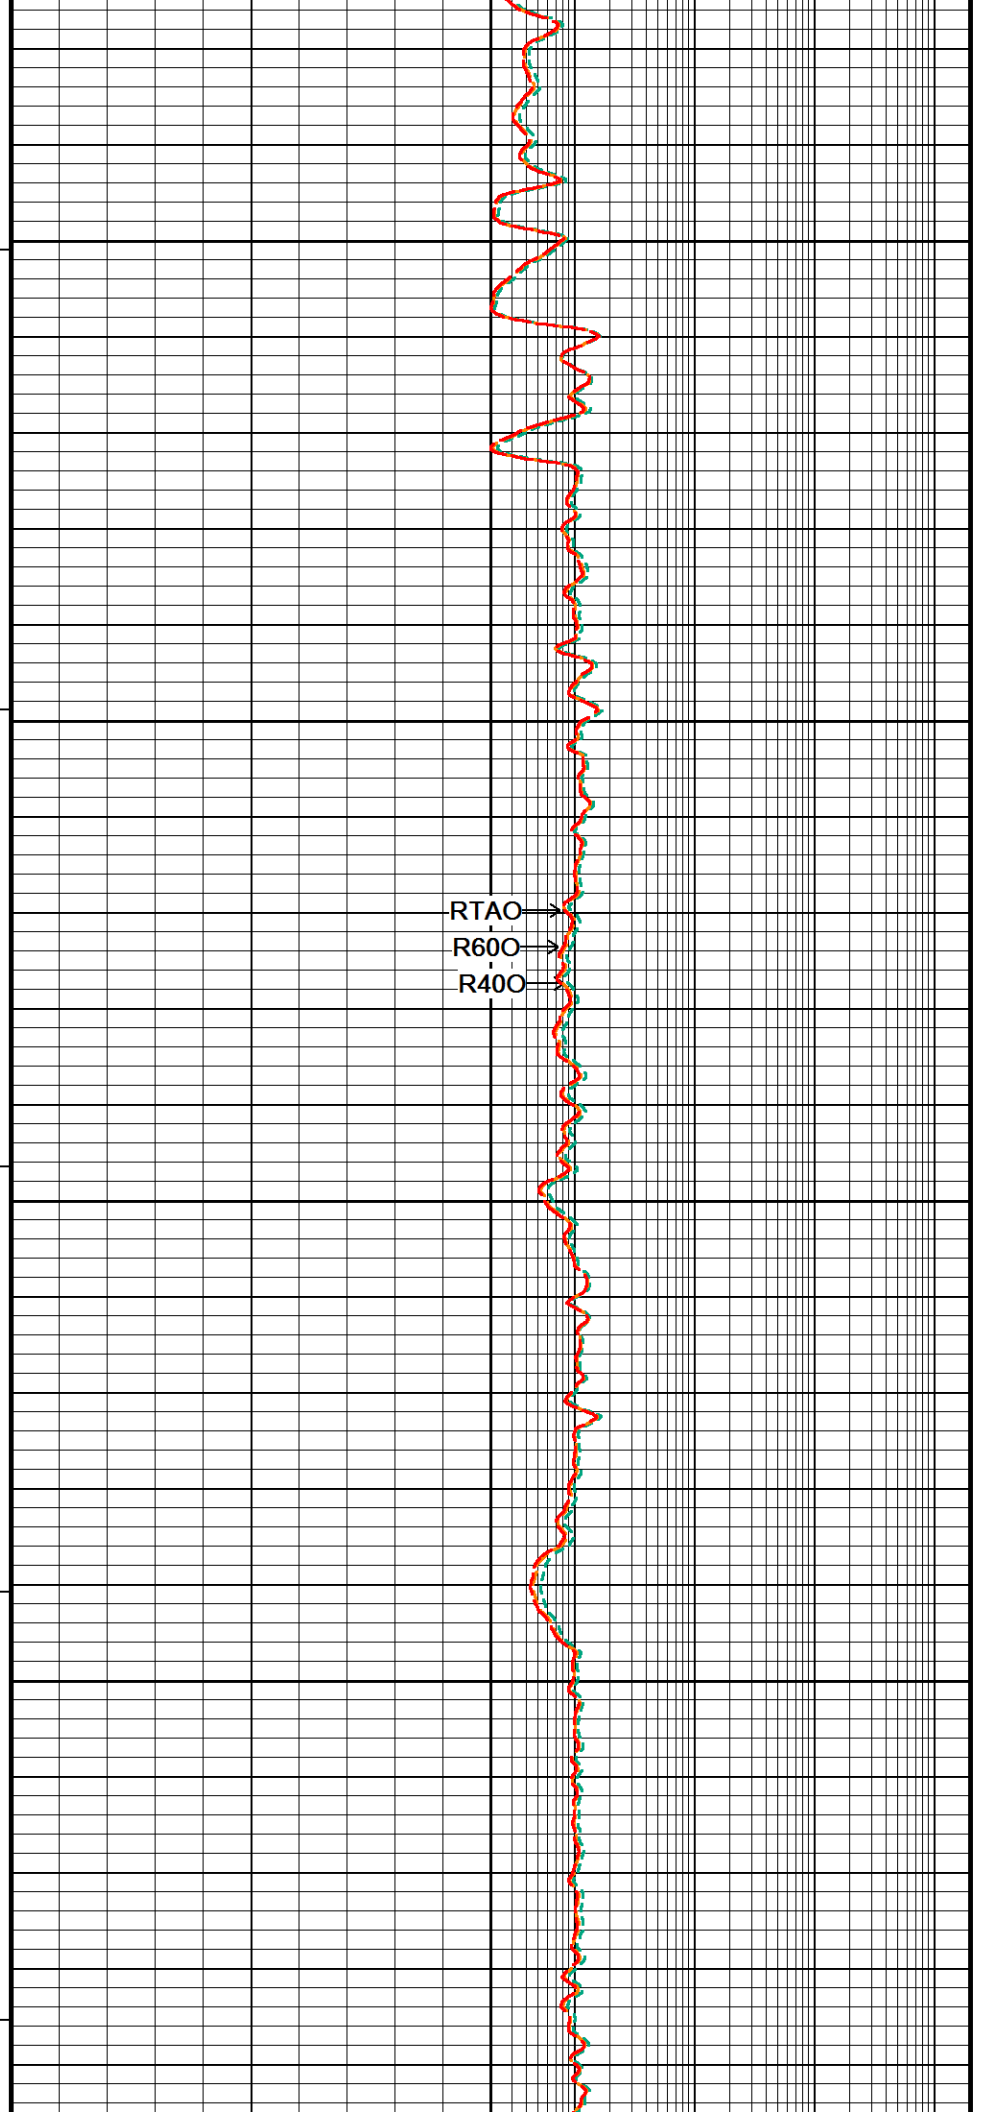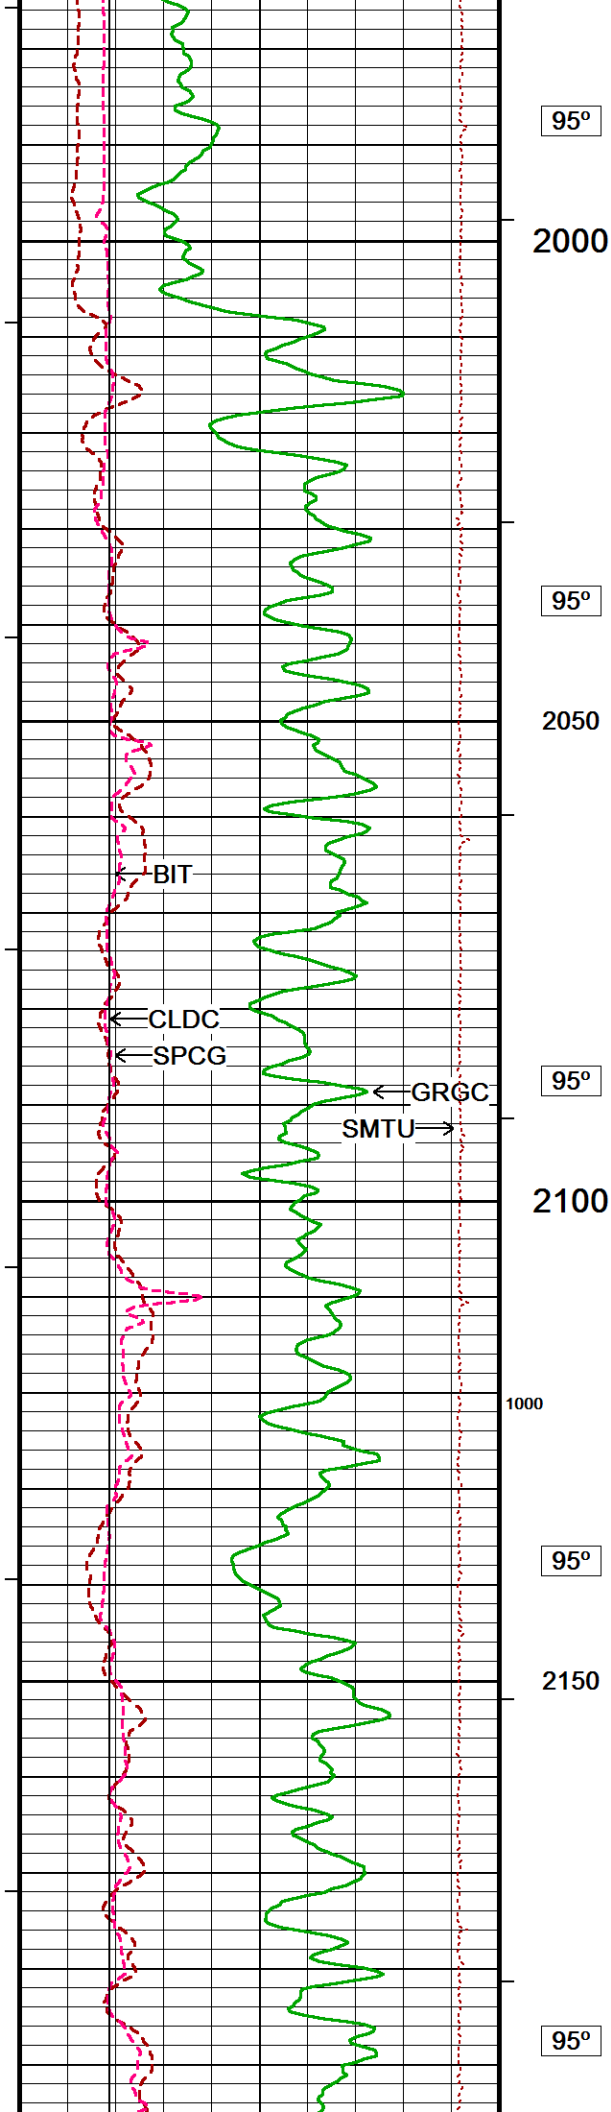

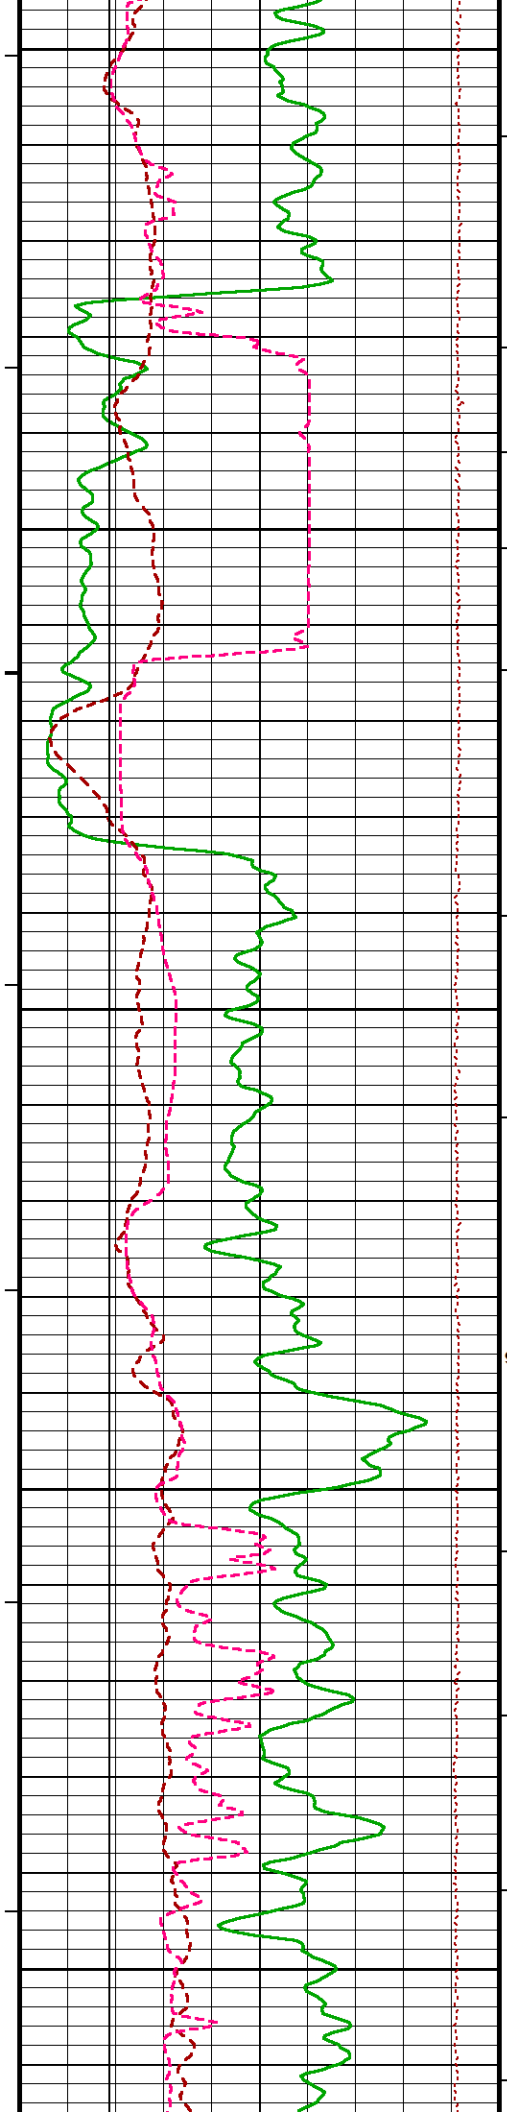

2200


95°

2250

2300

2350

2400


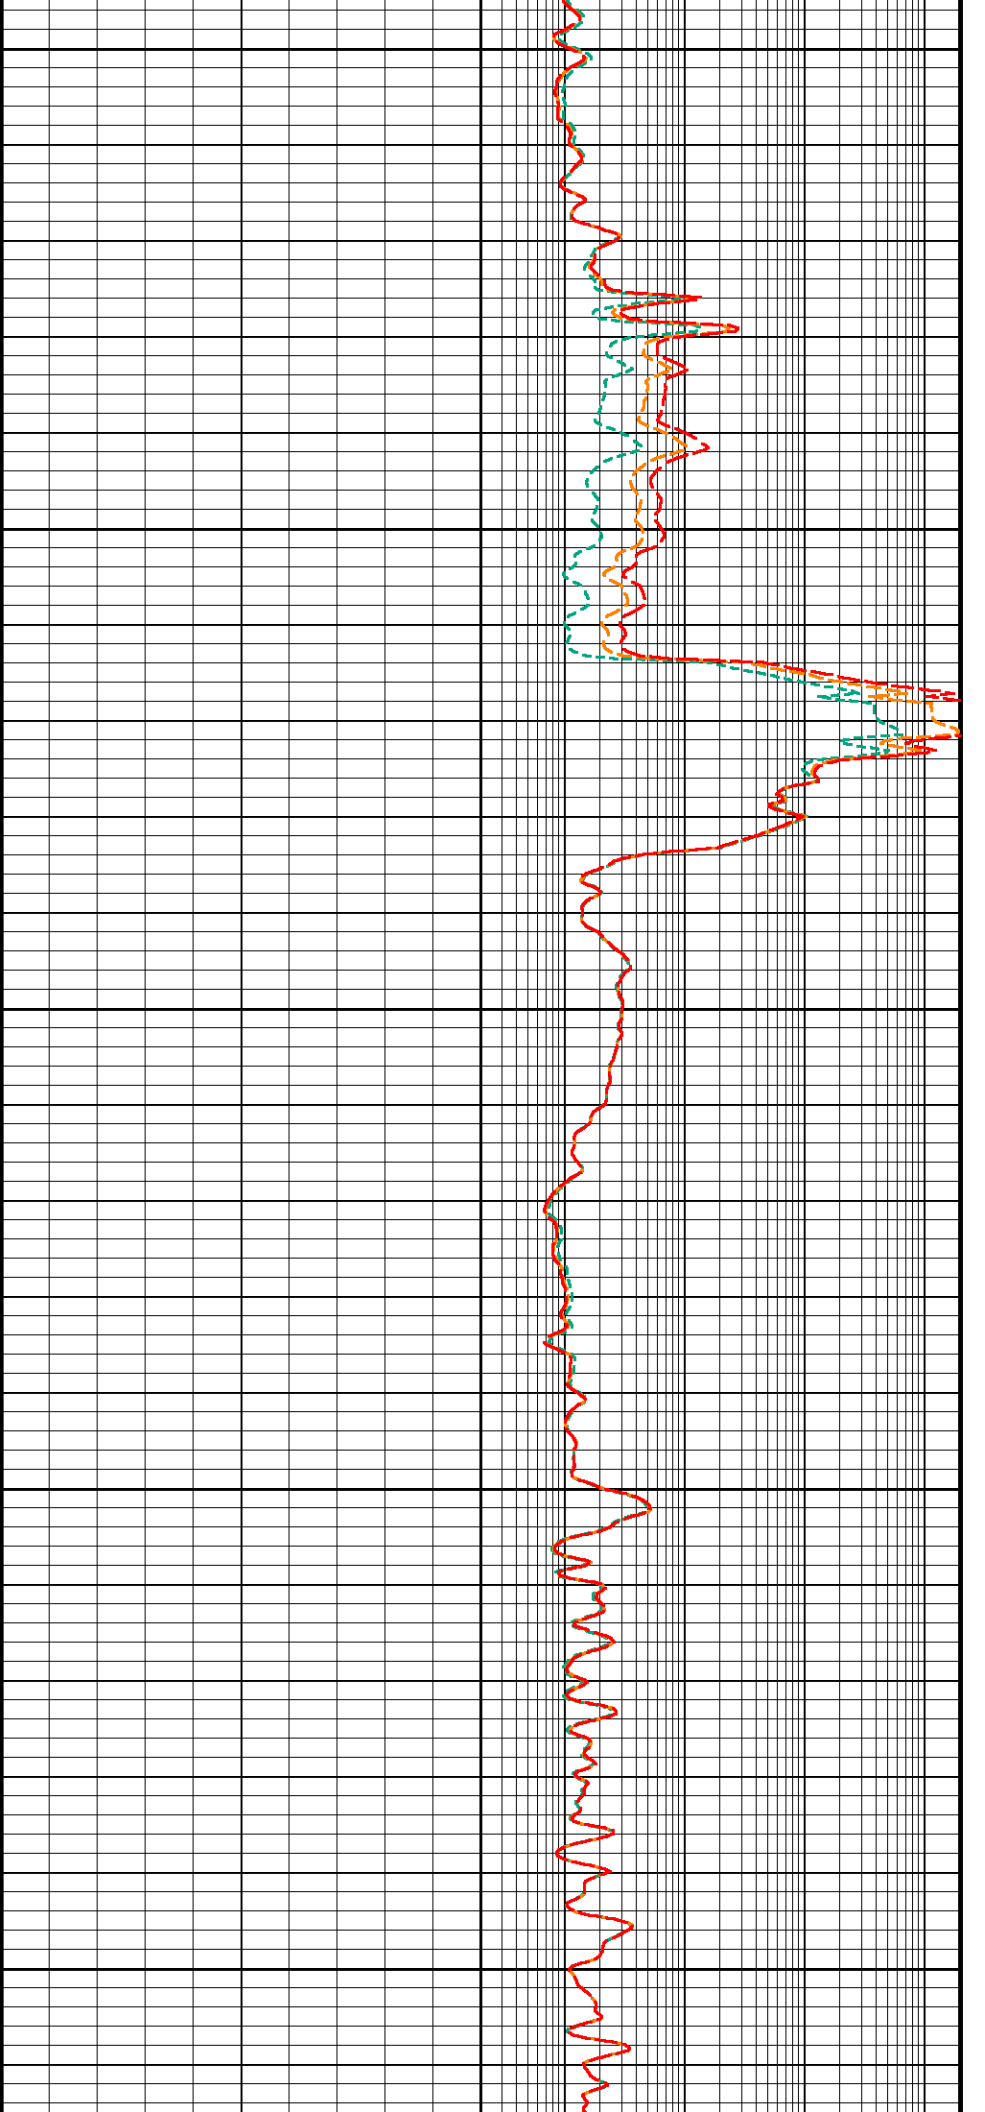



95°



96°


96°


96°

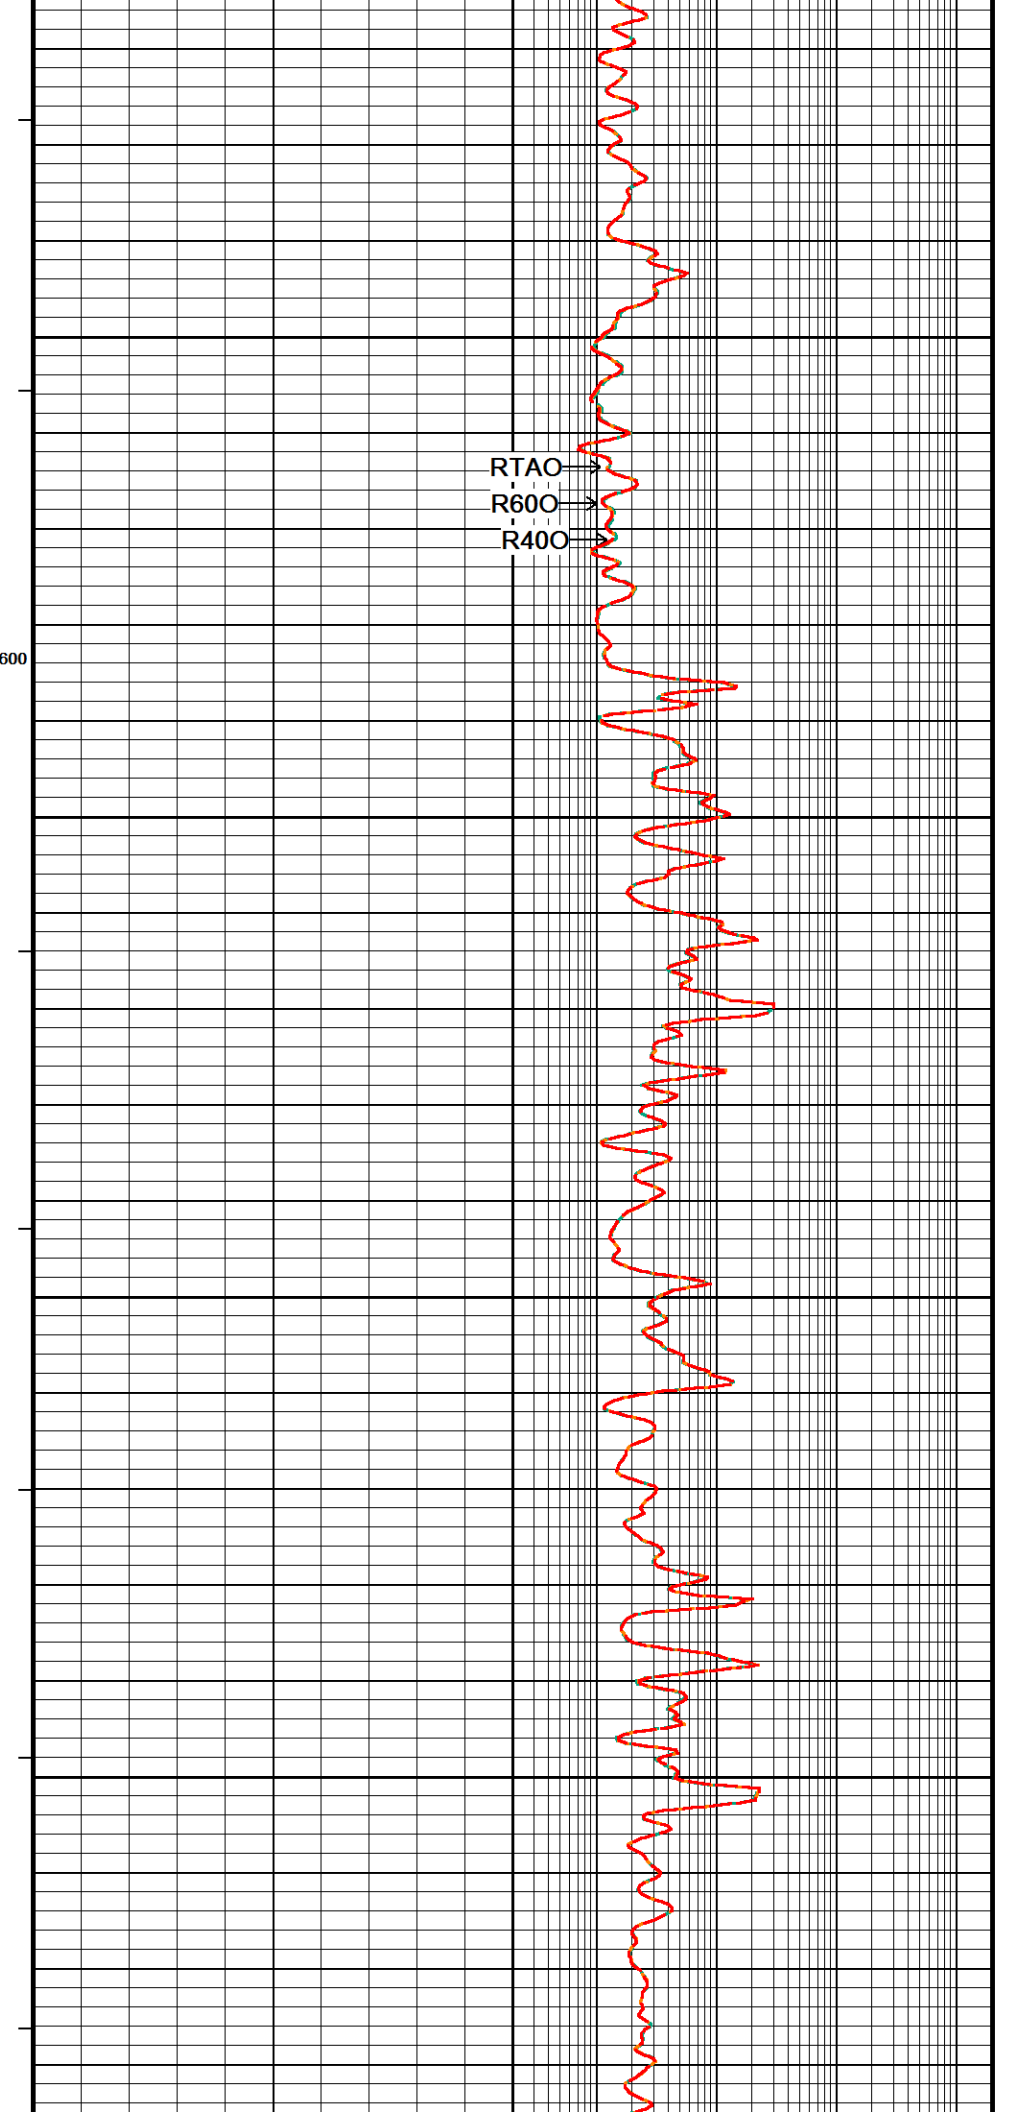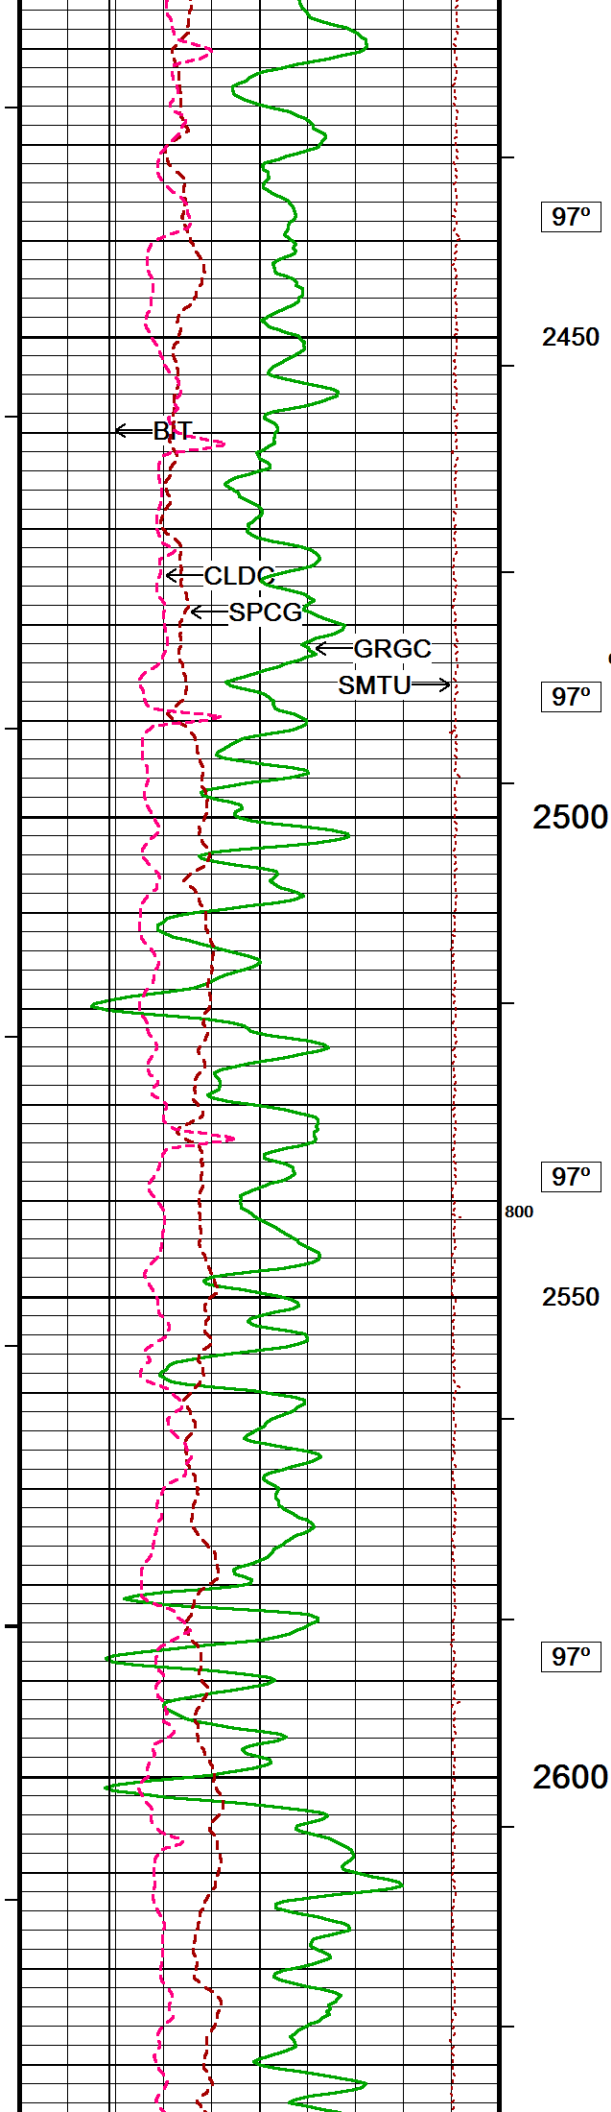


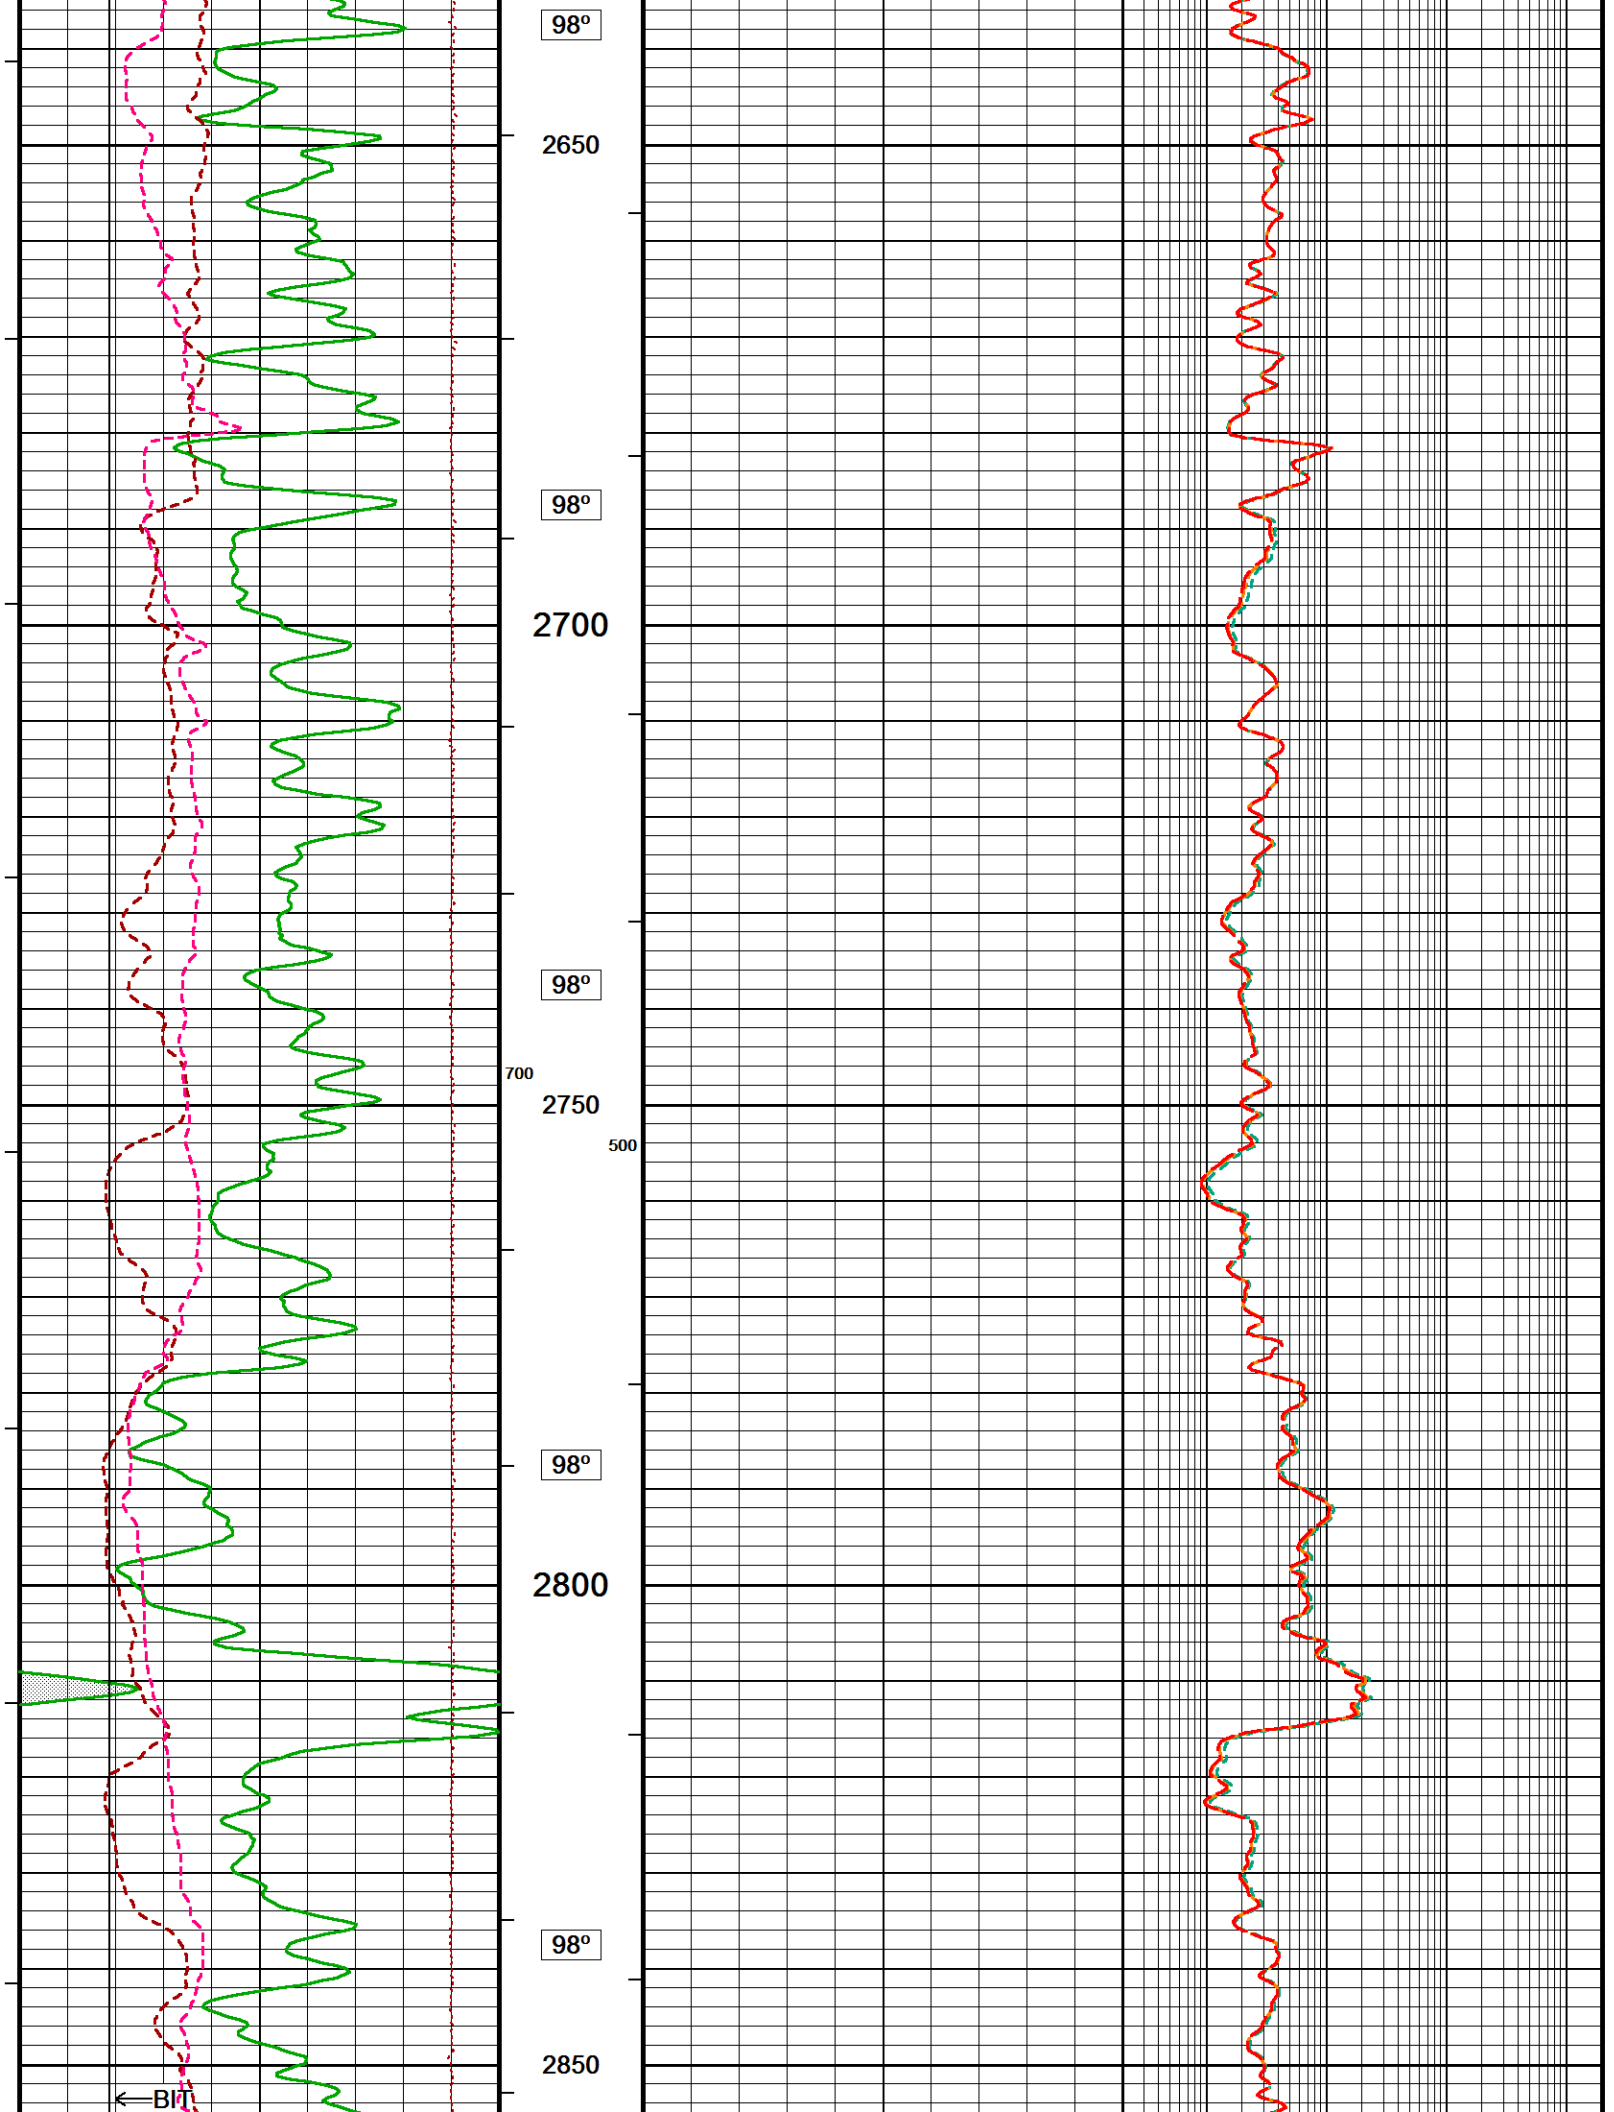


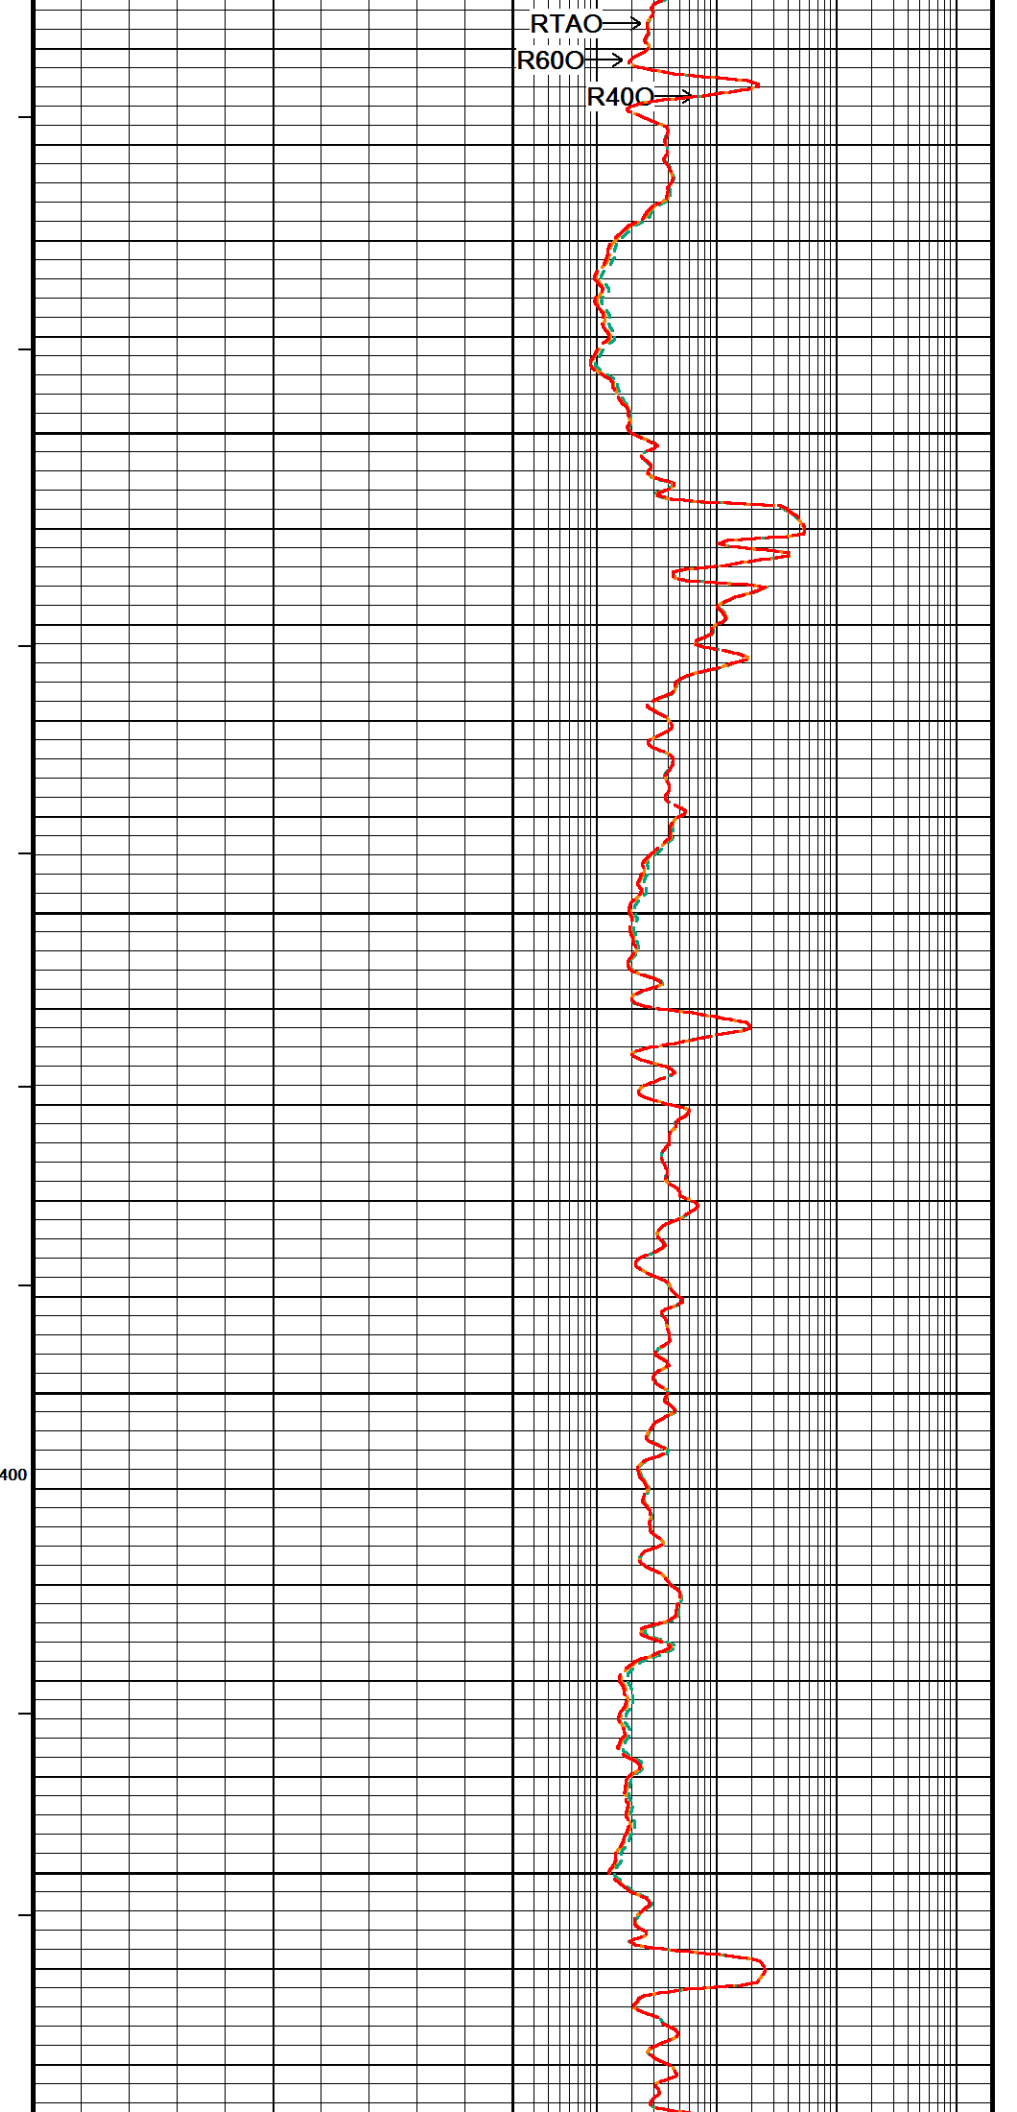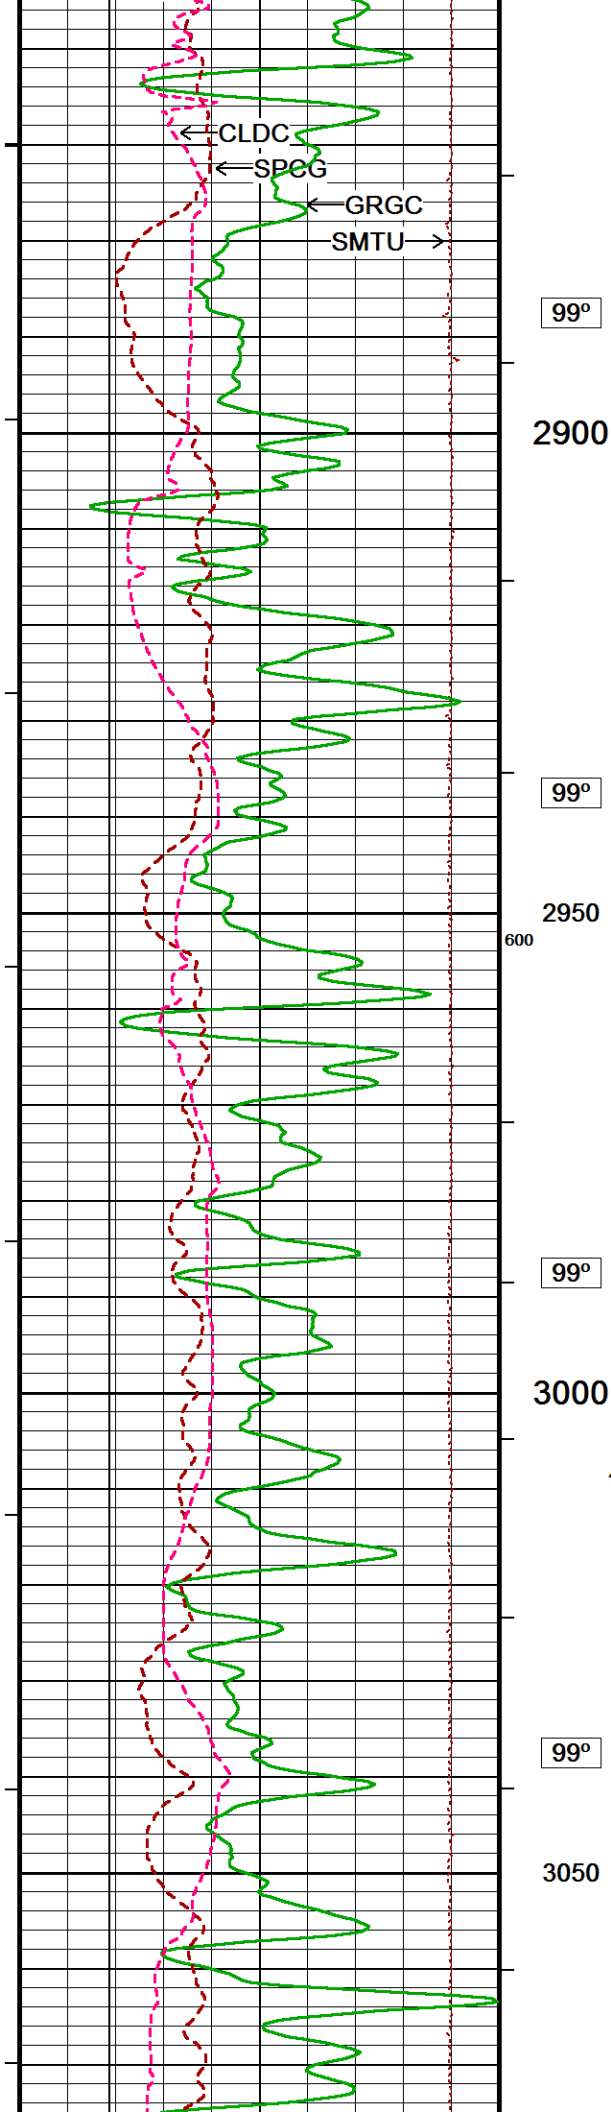


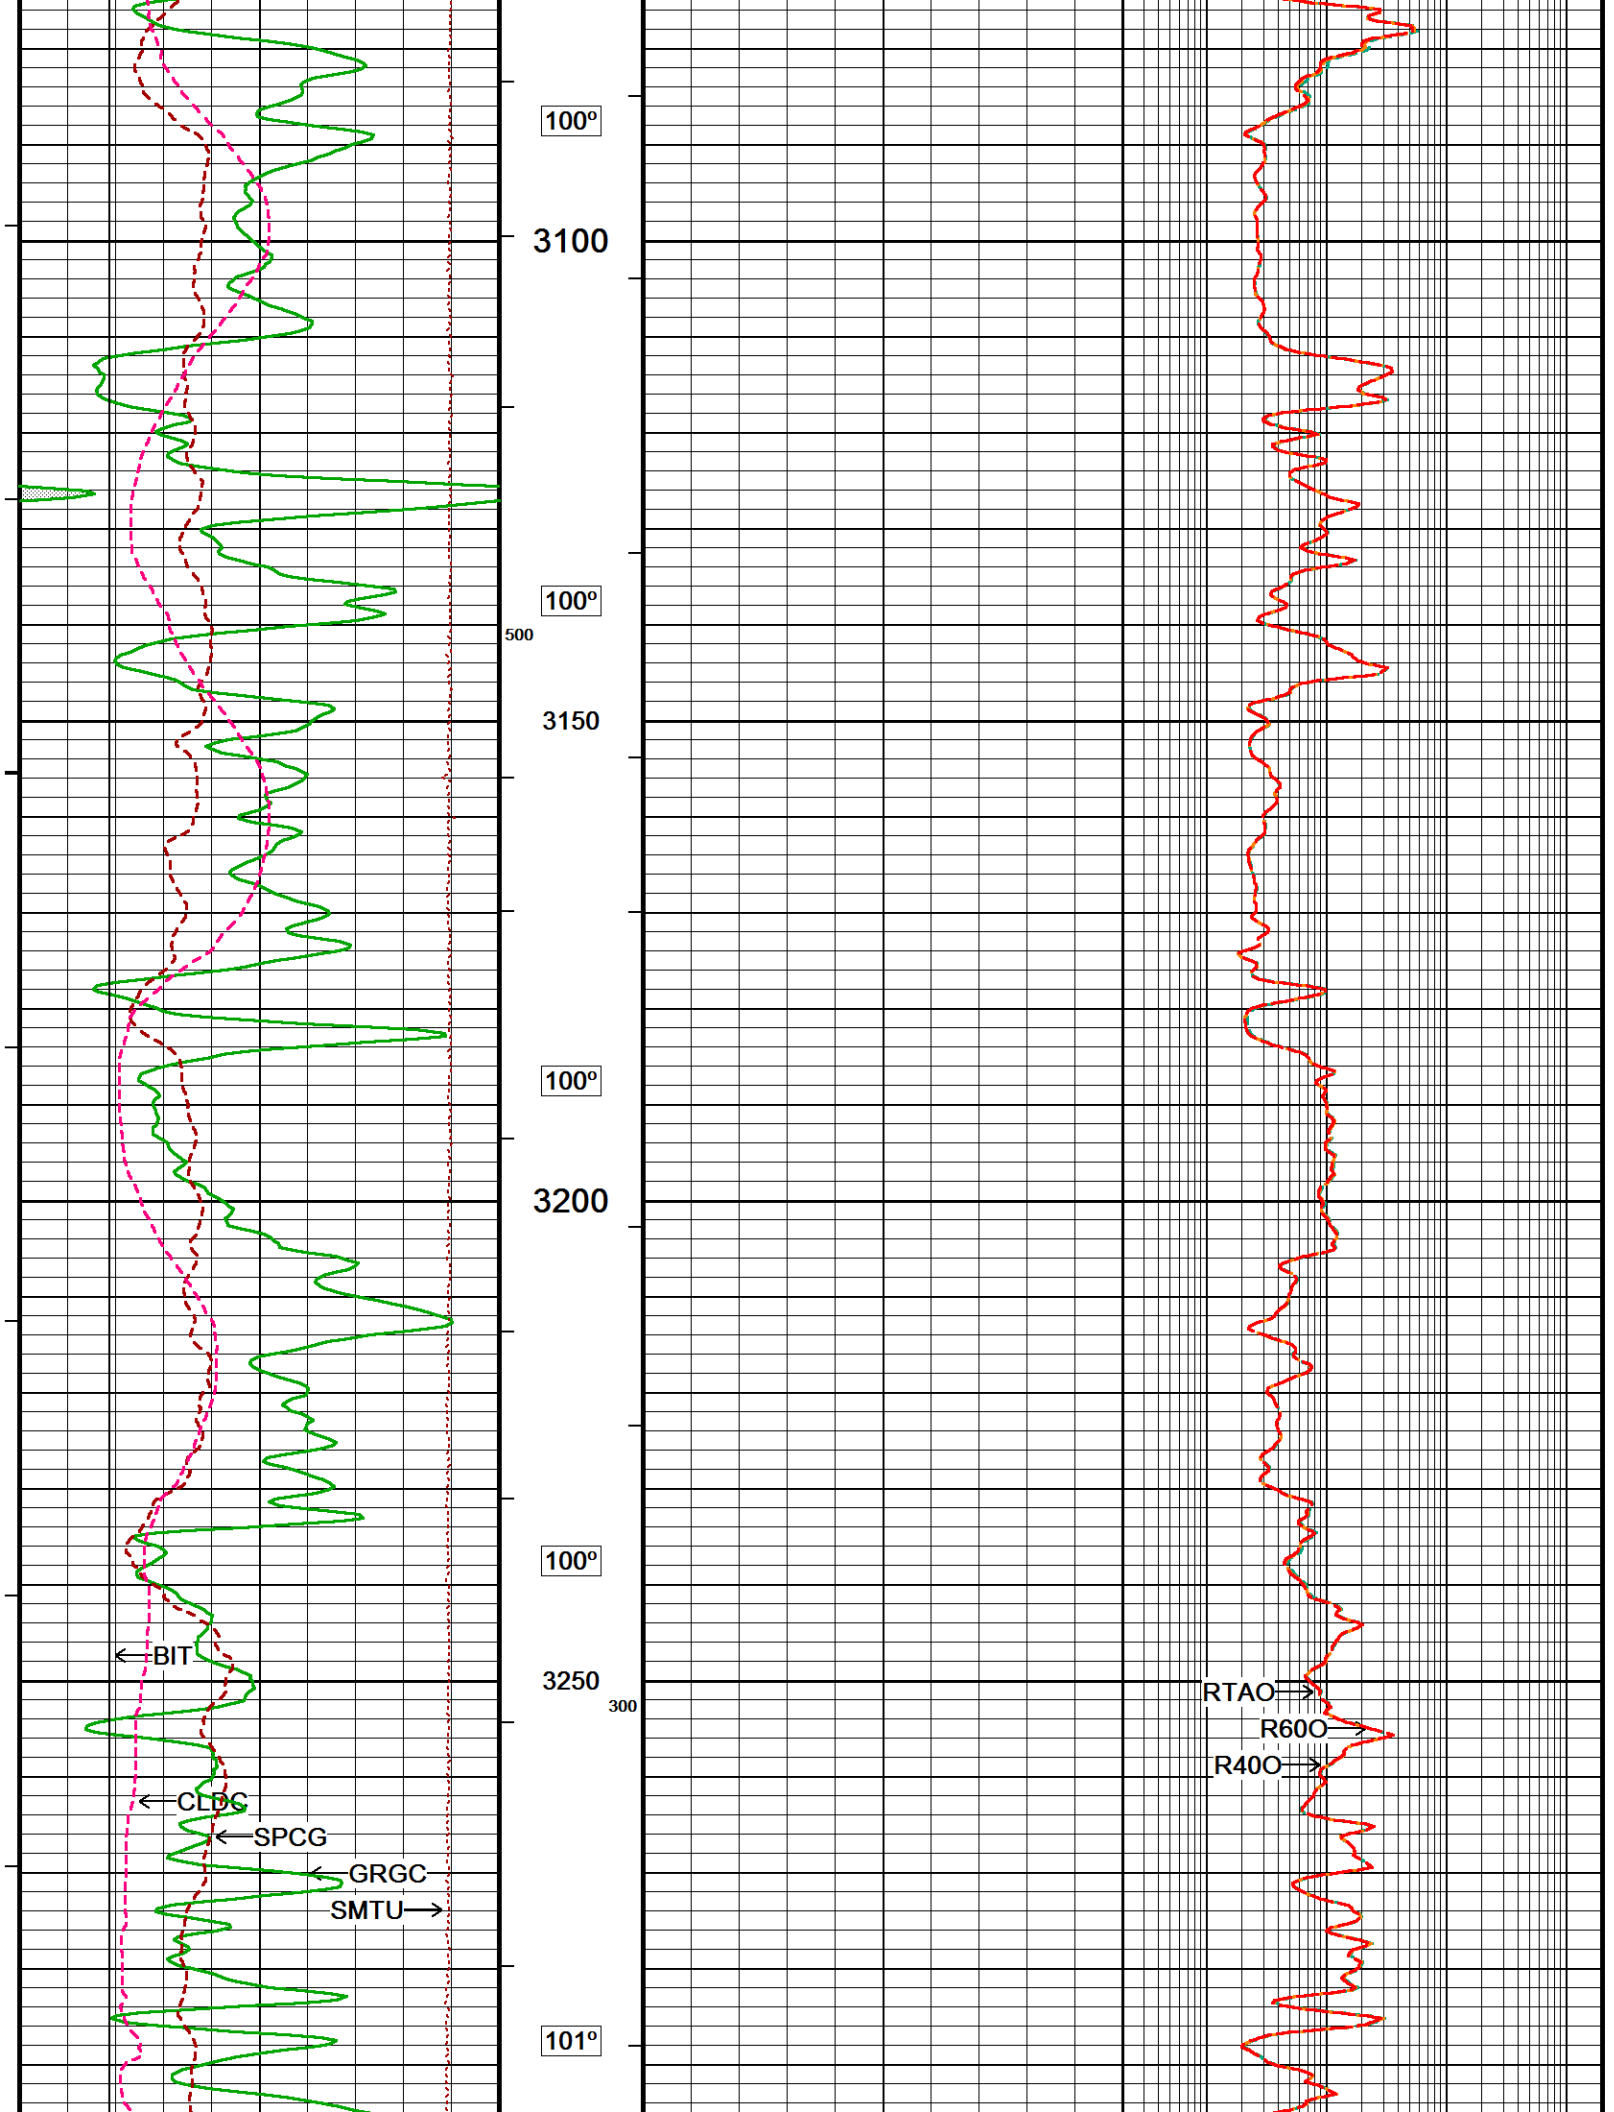


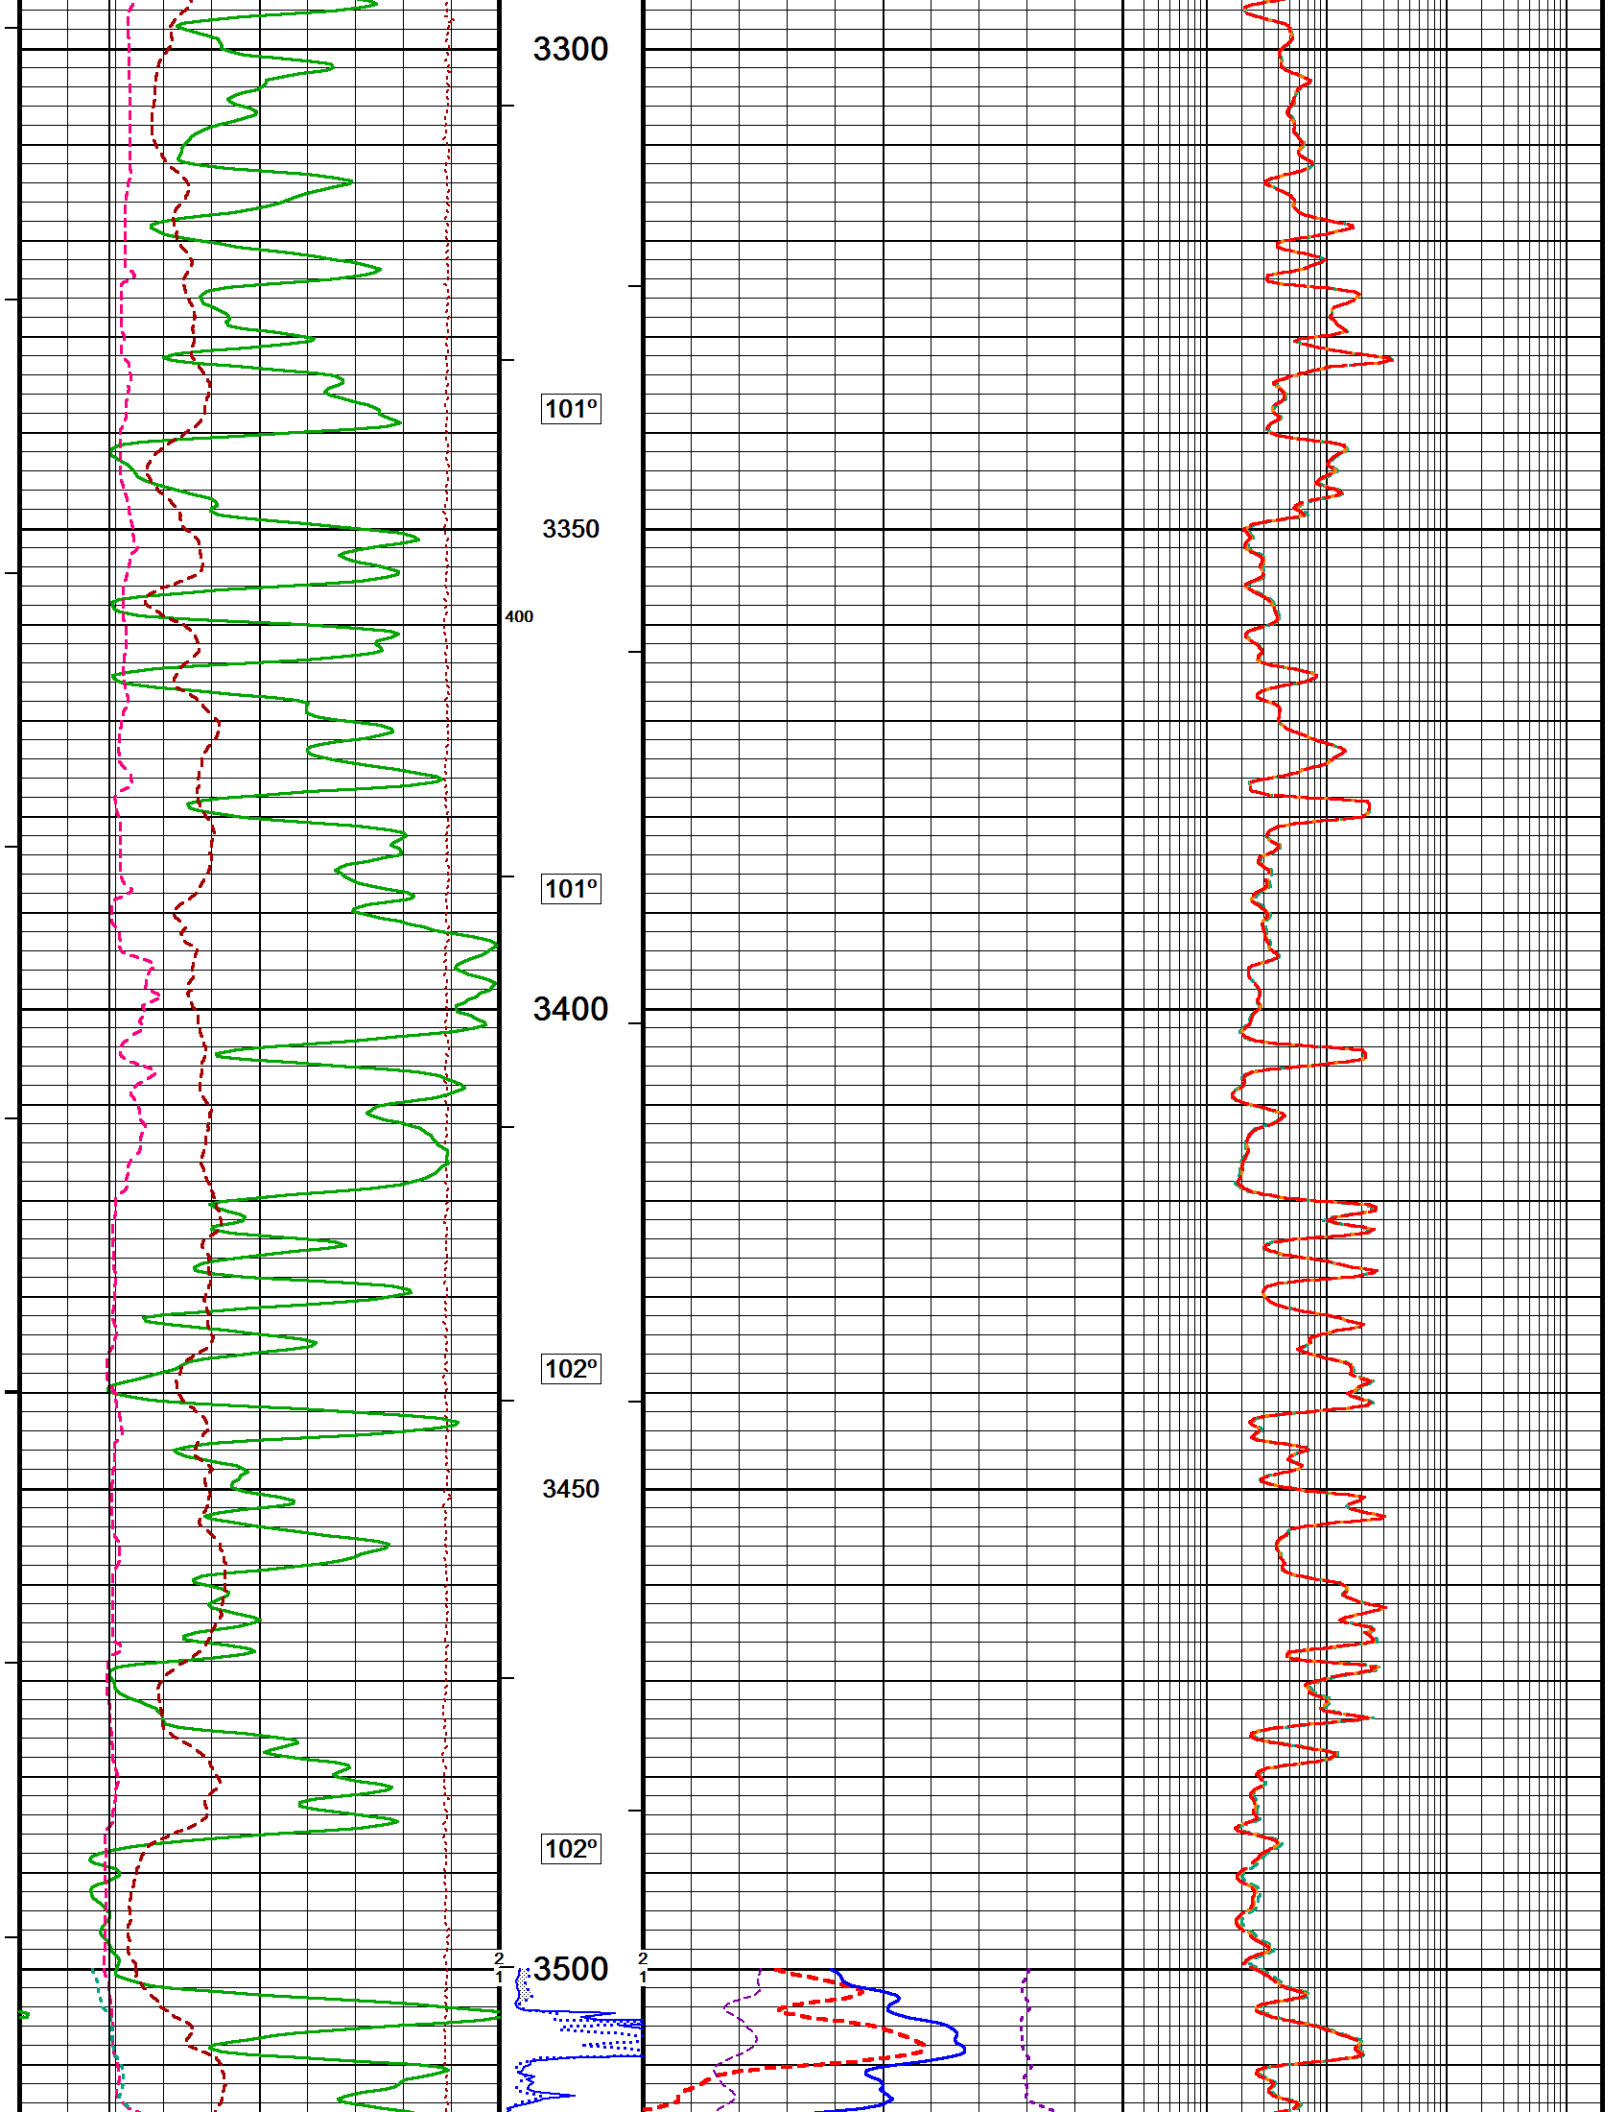


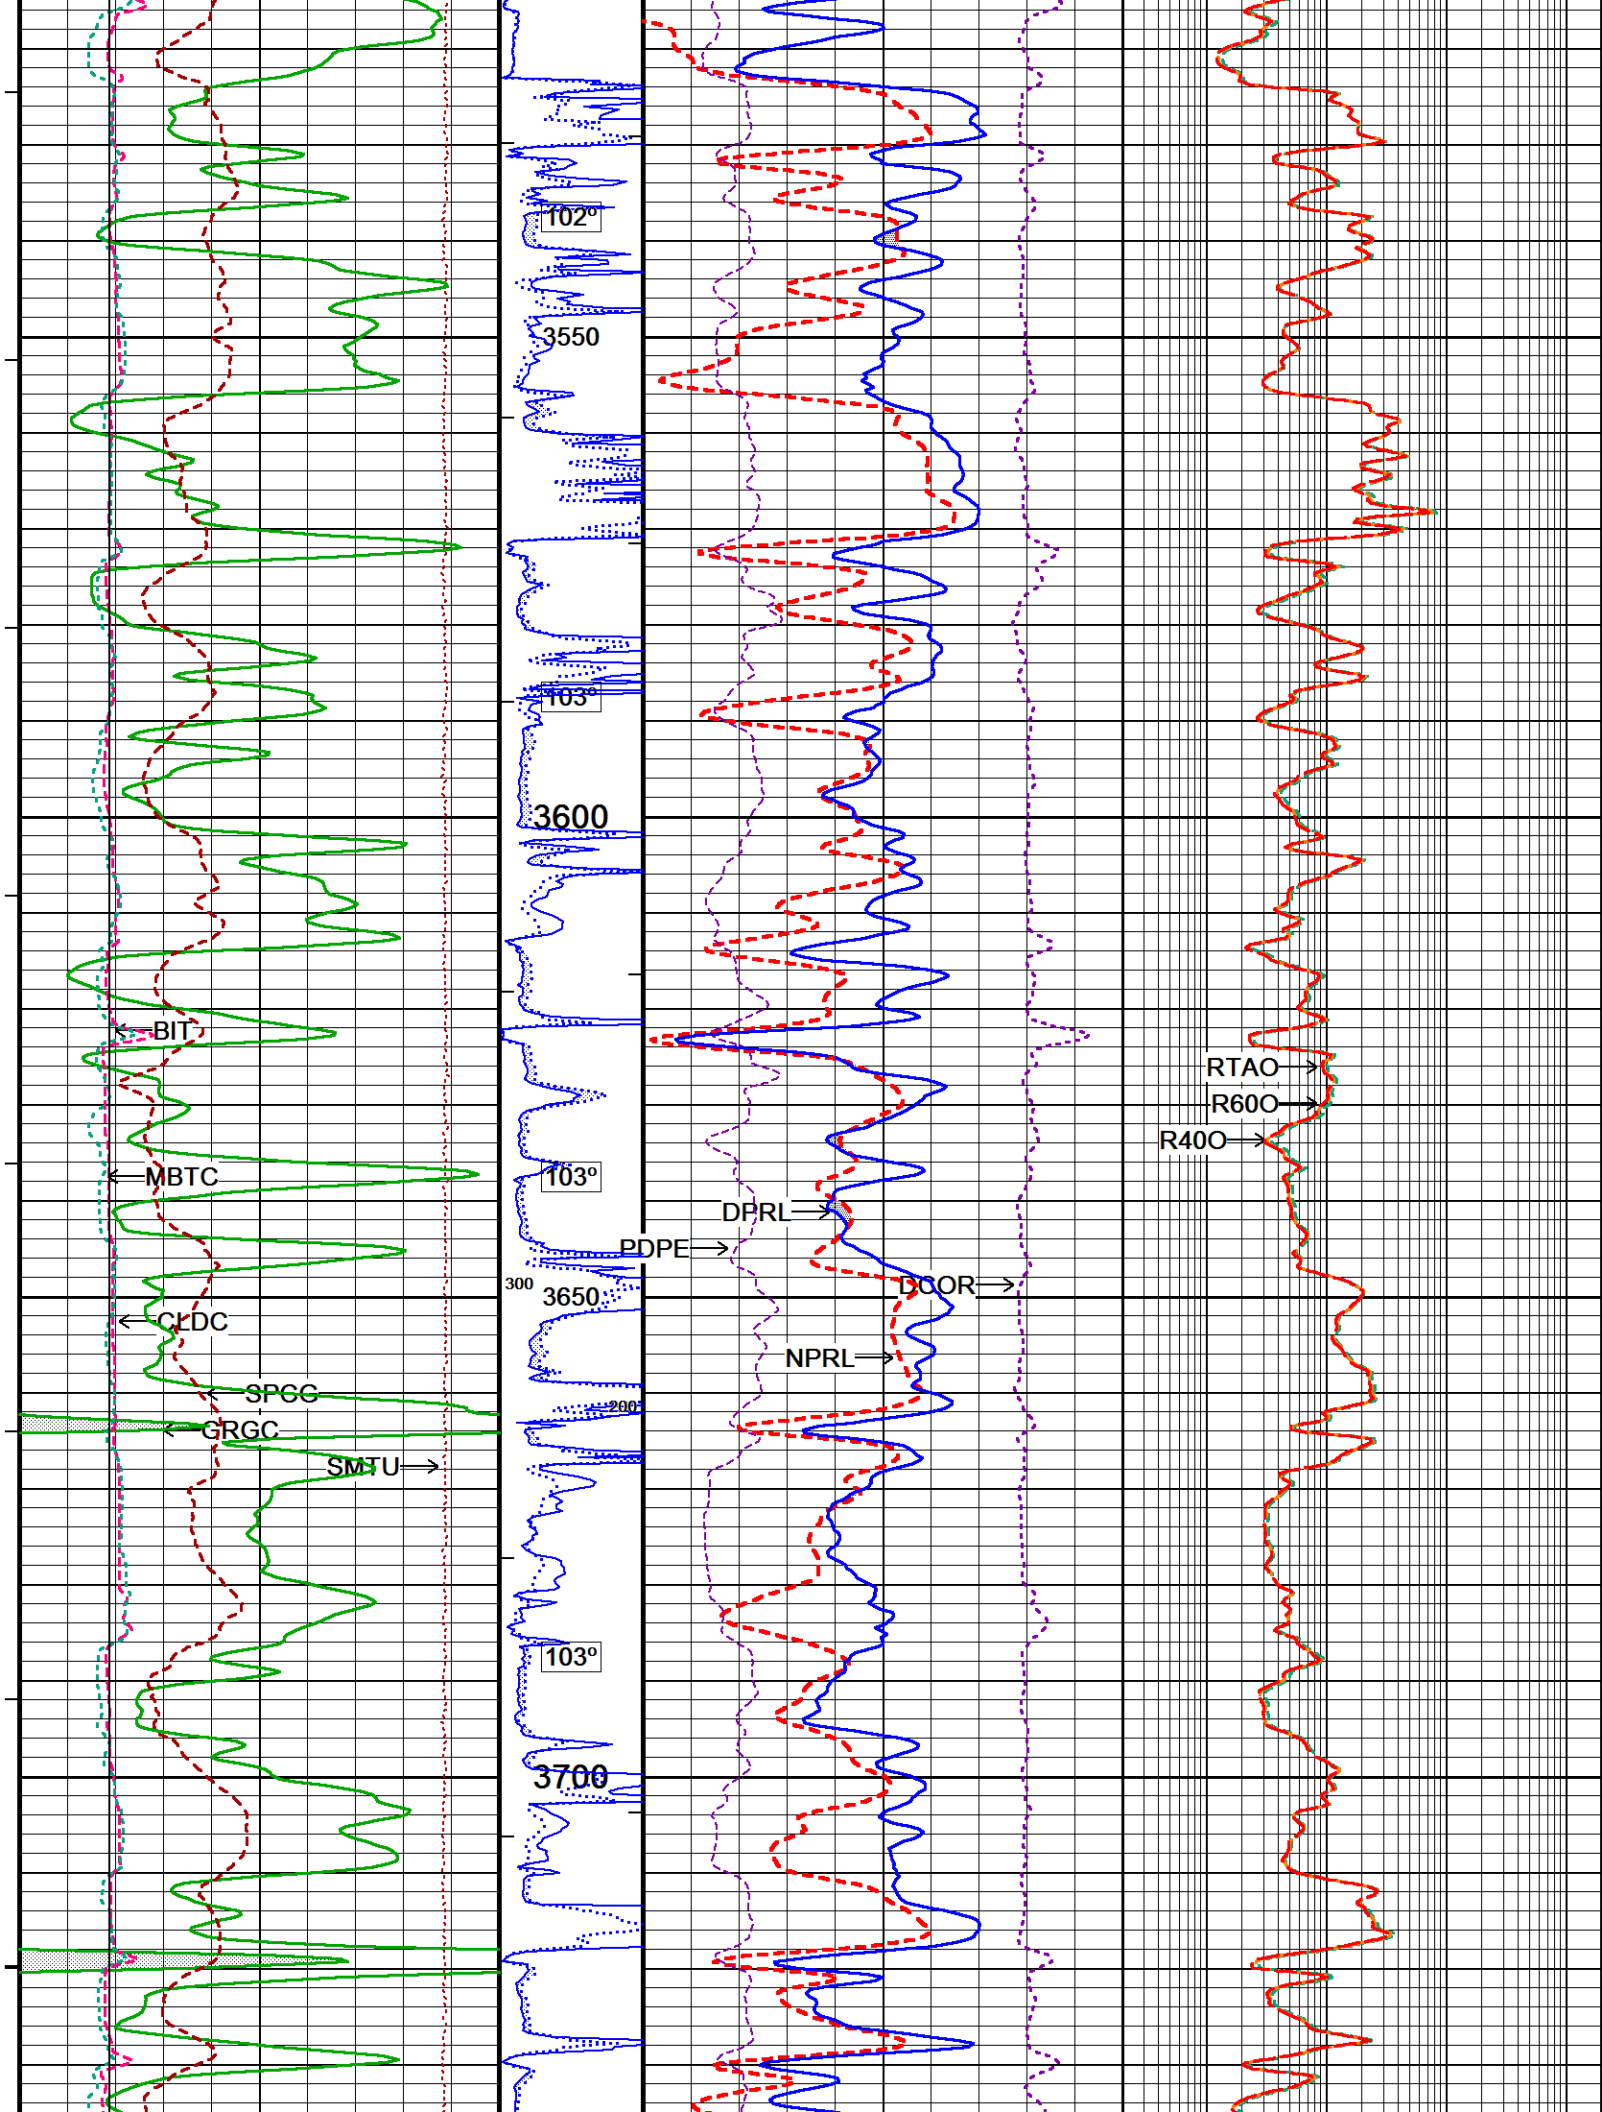


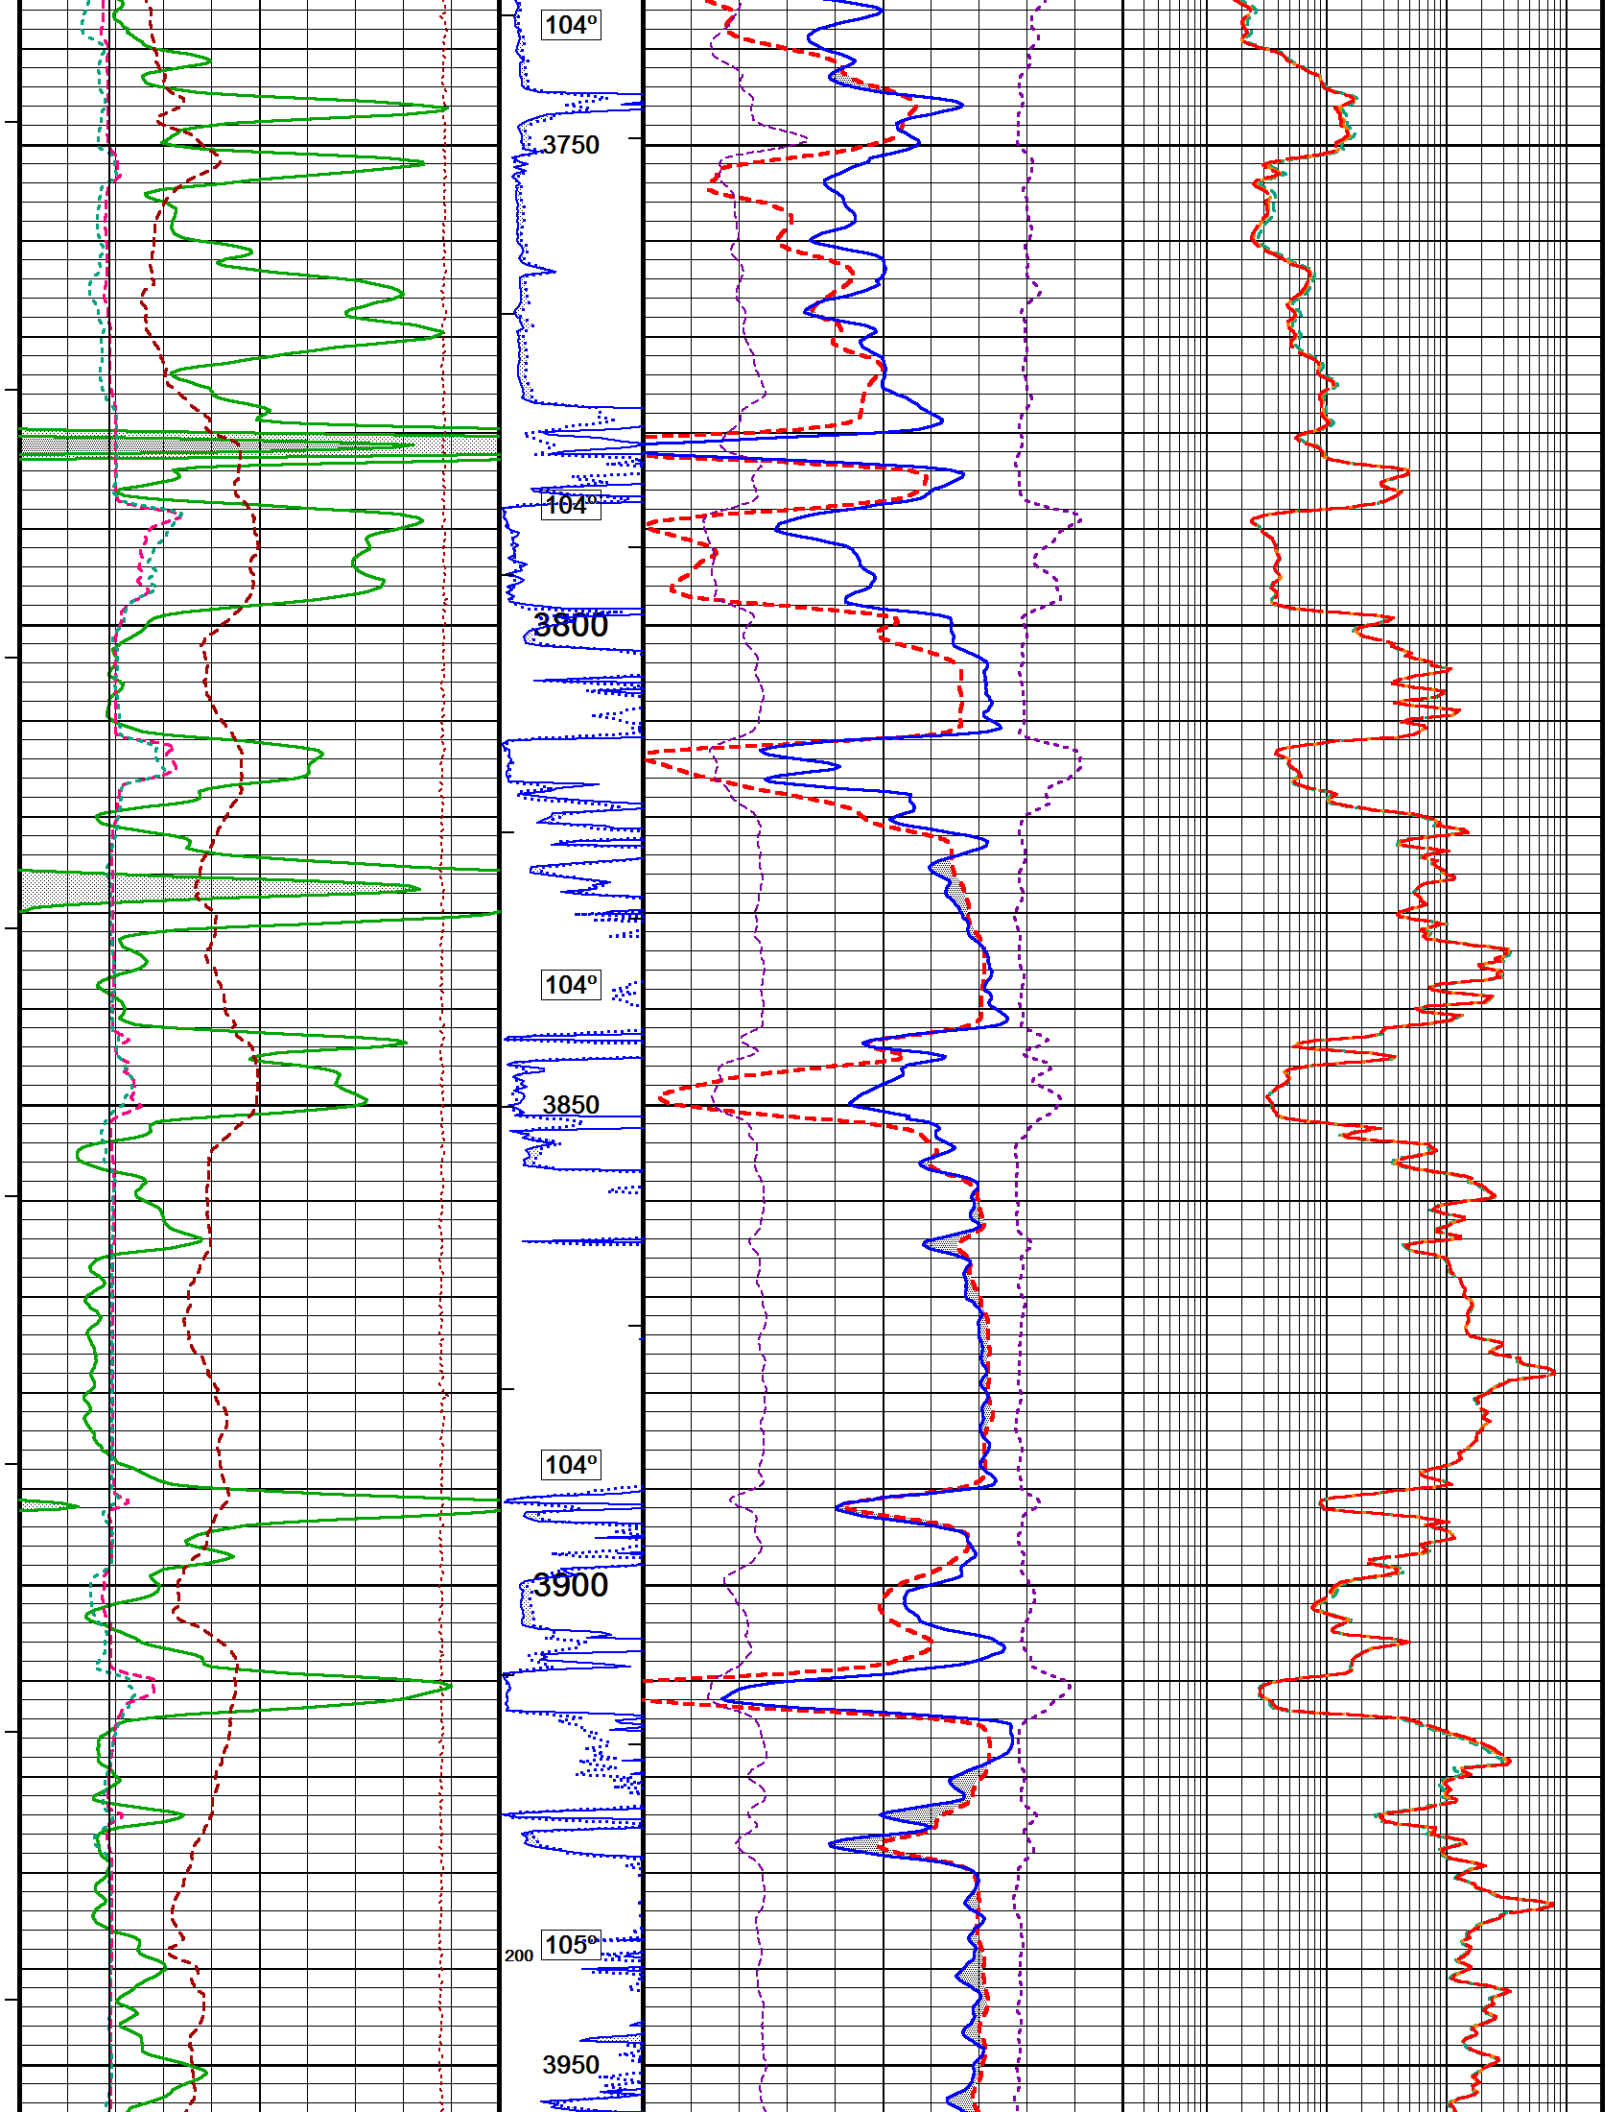

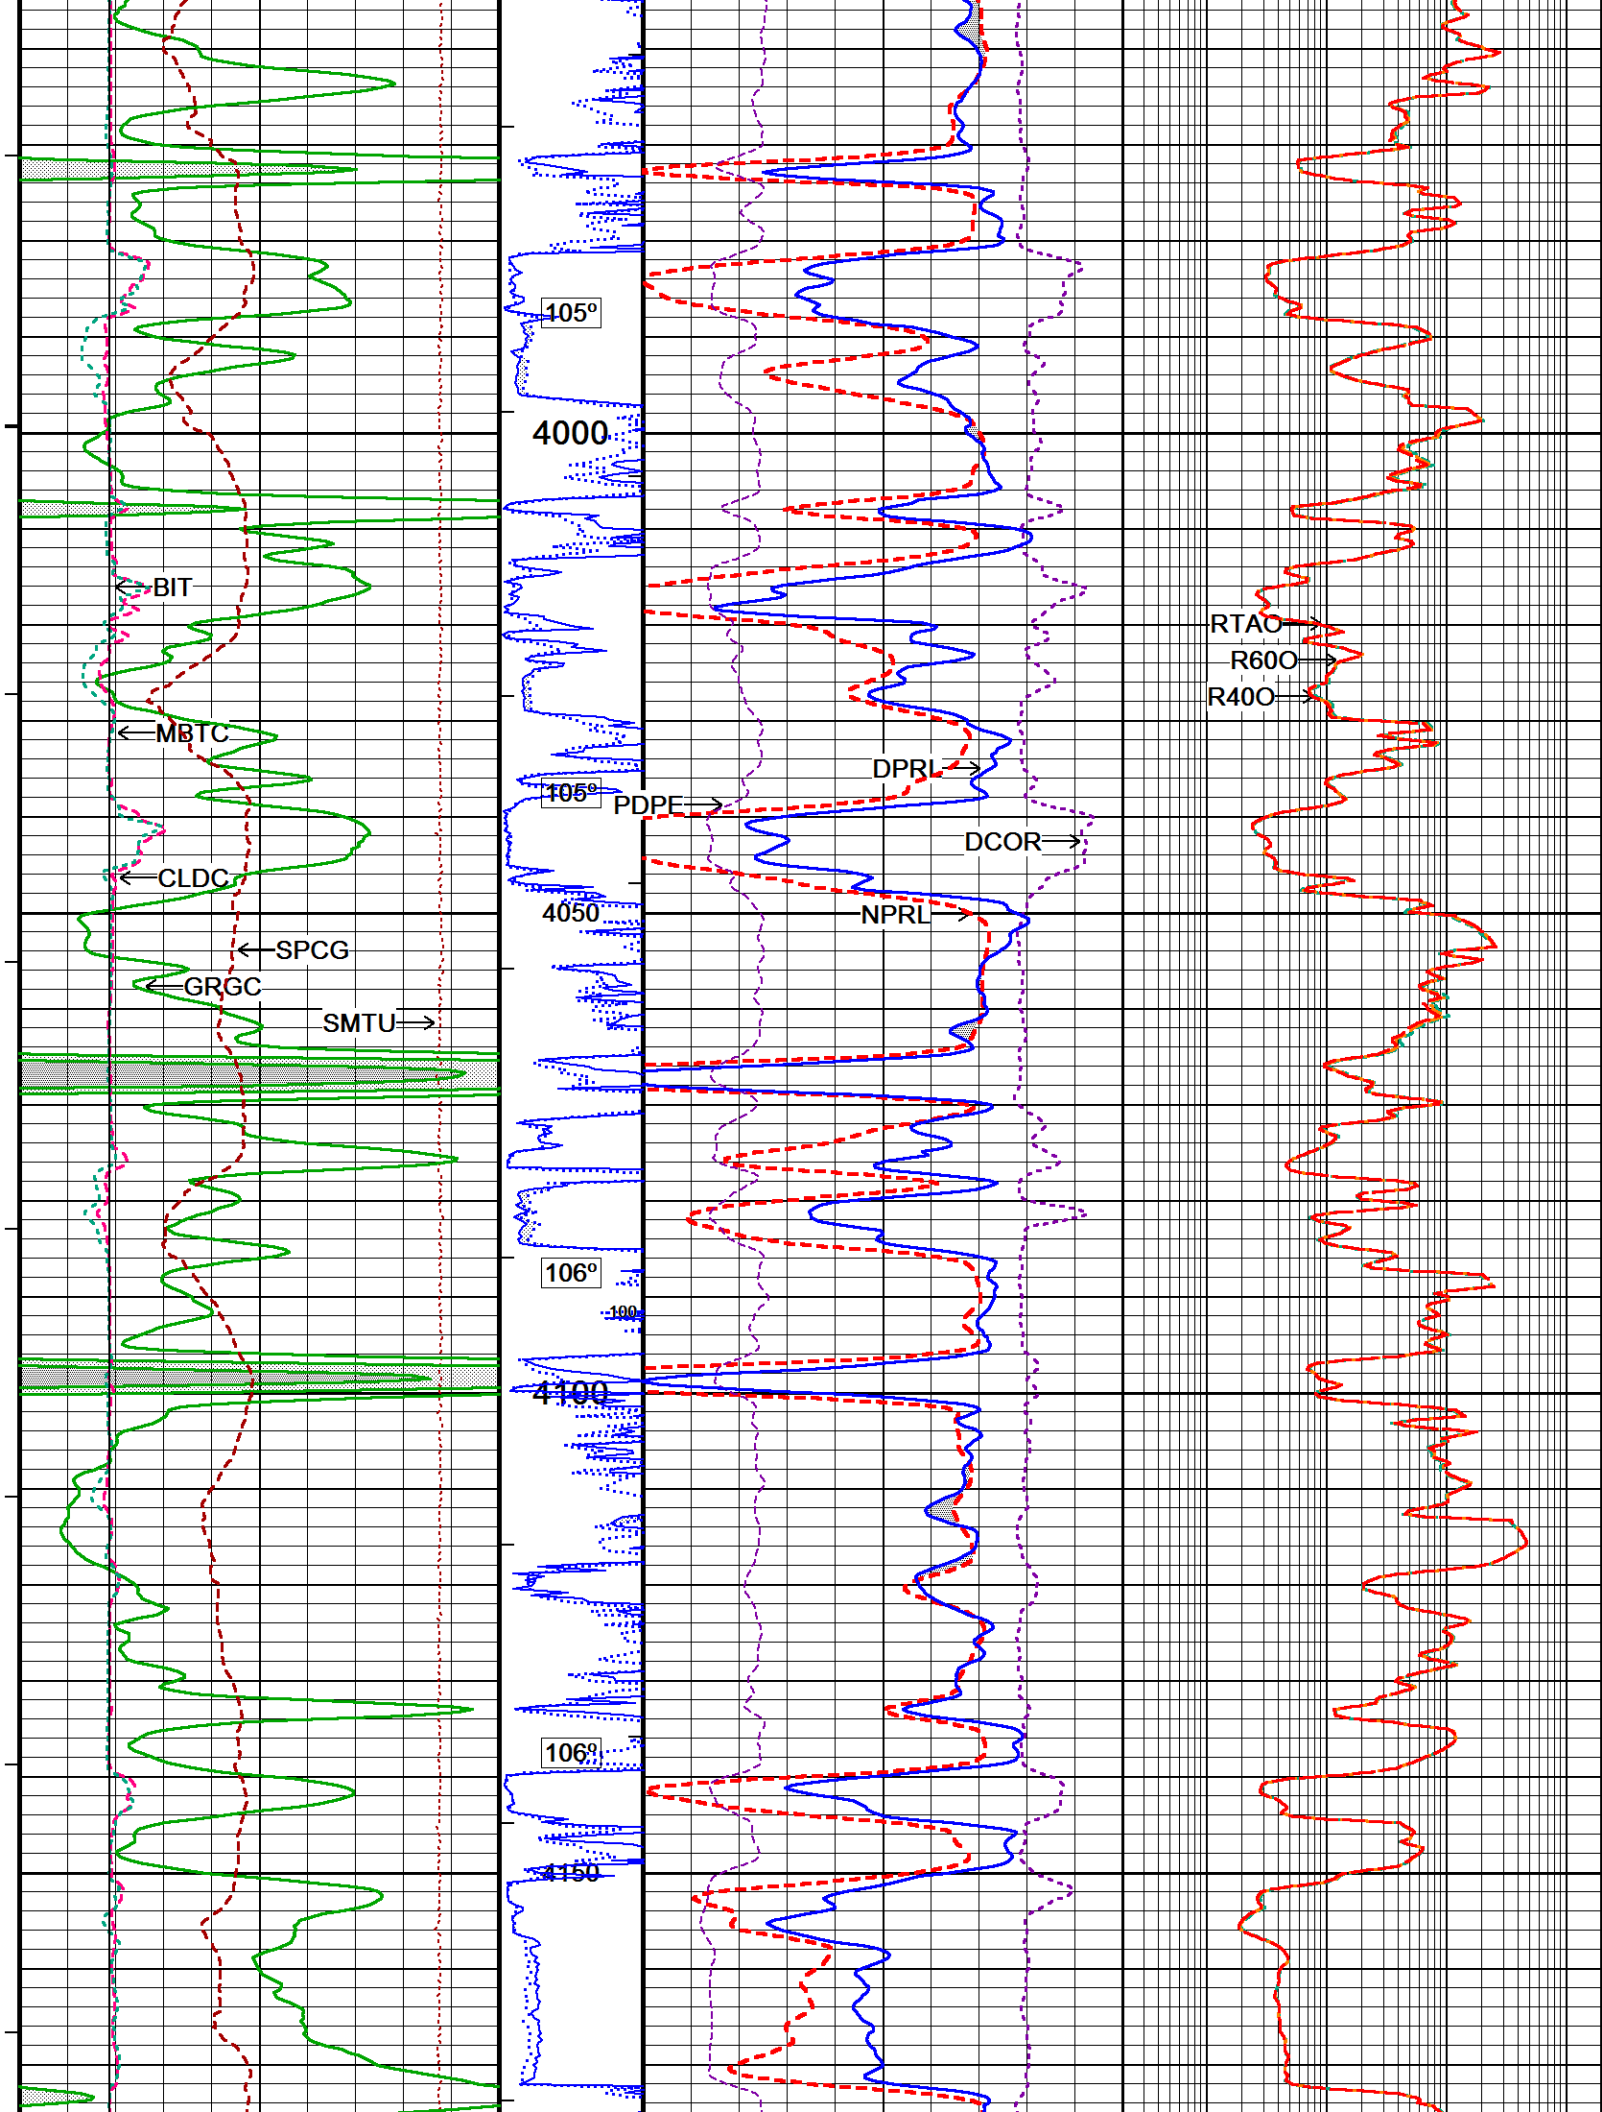

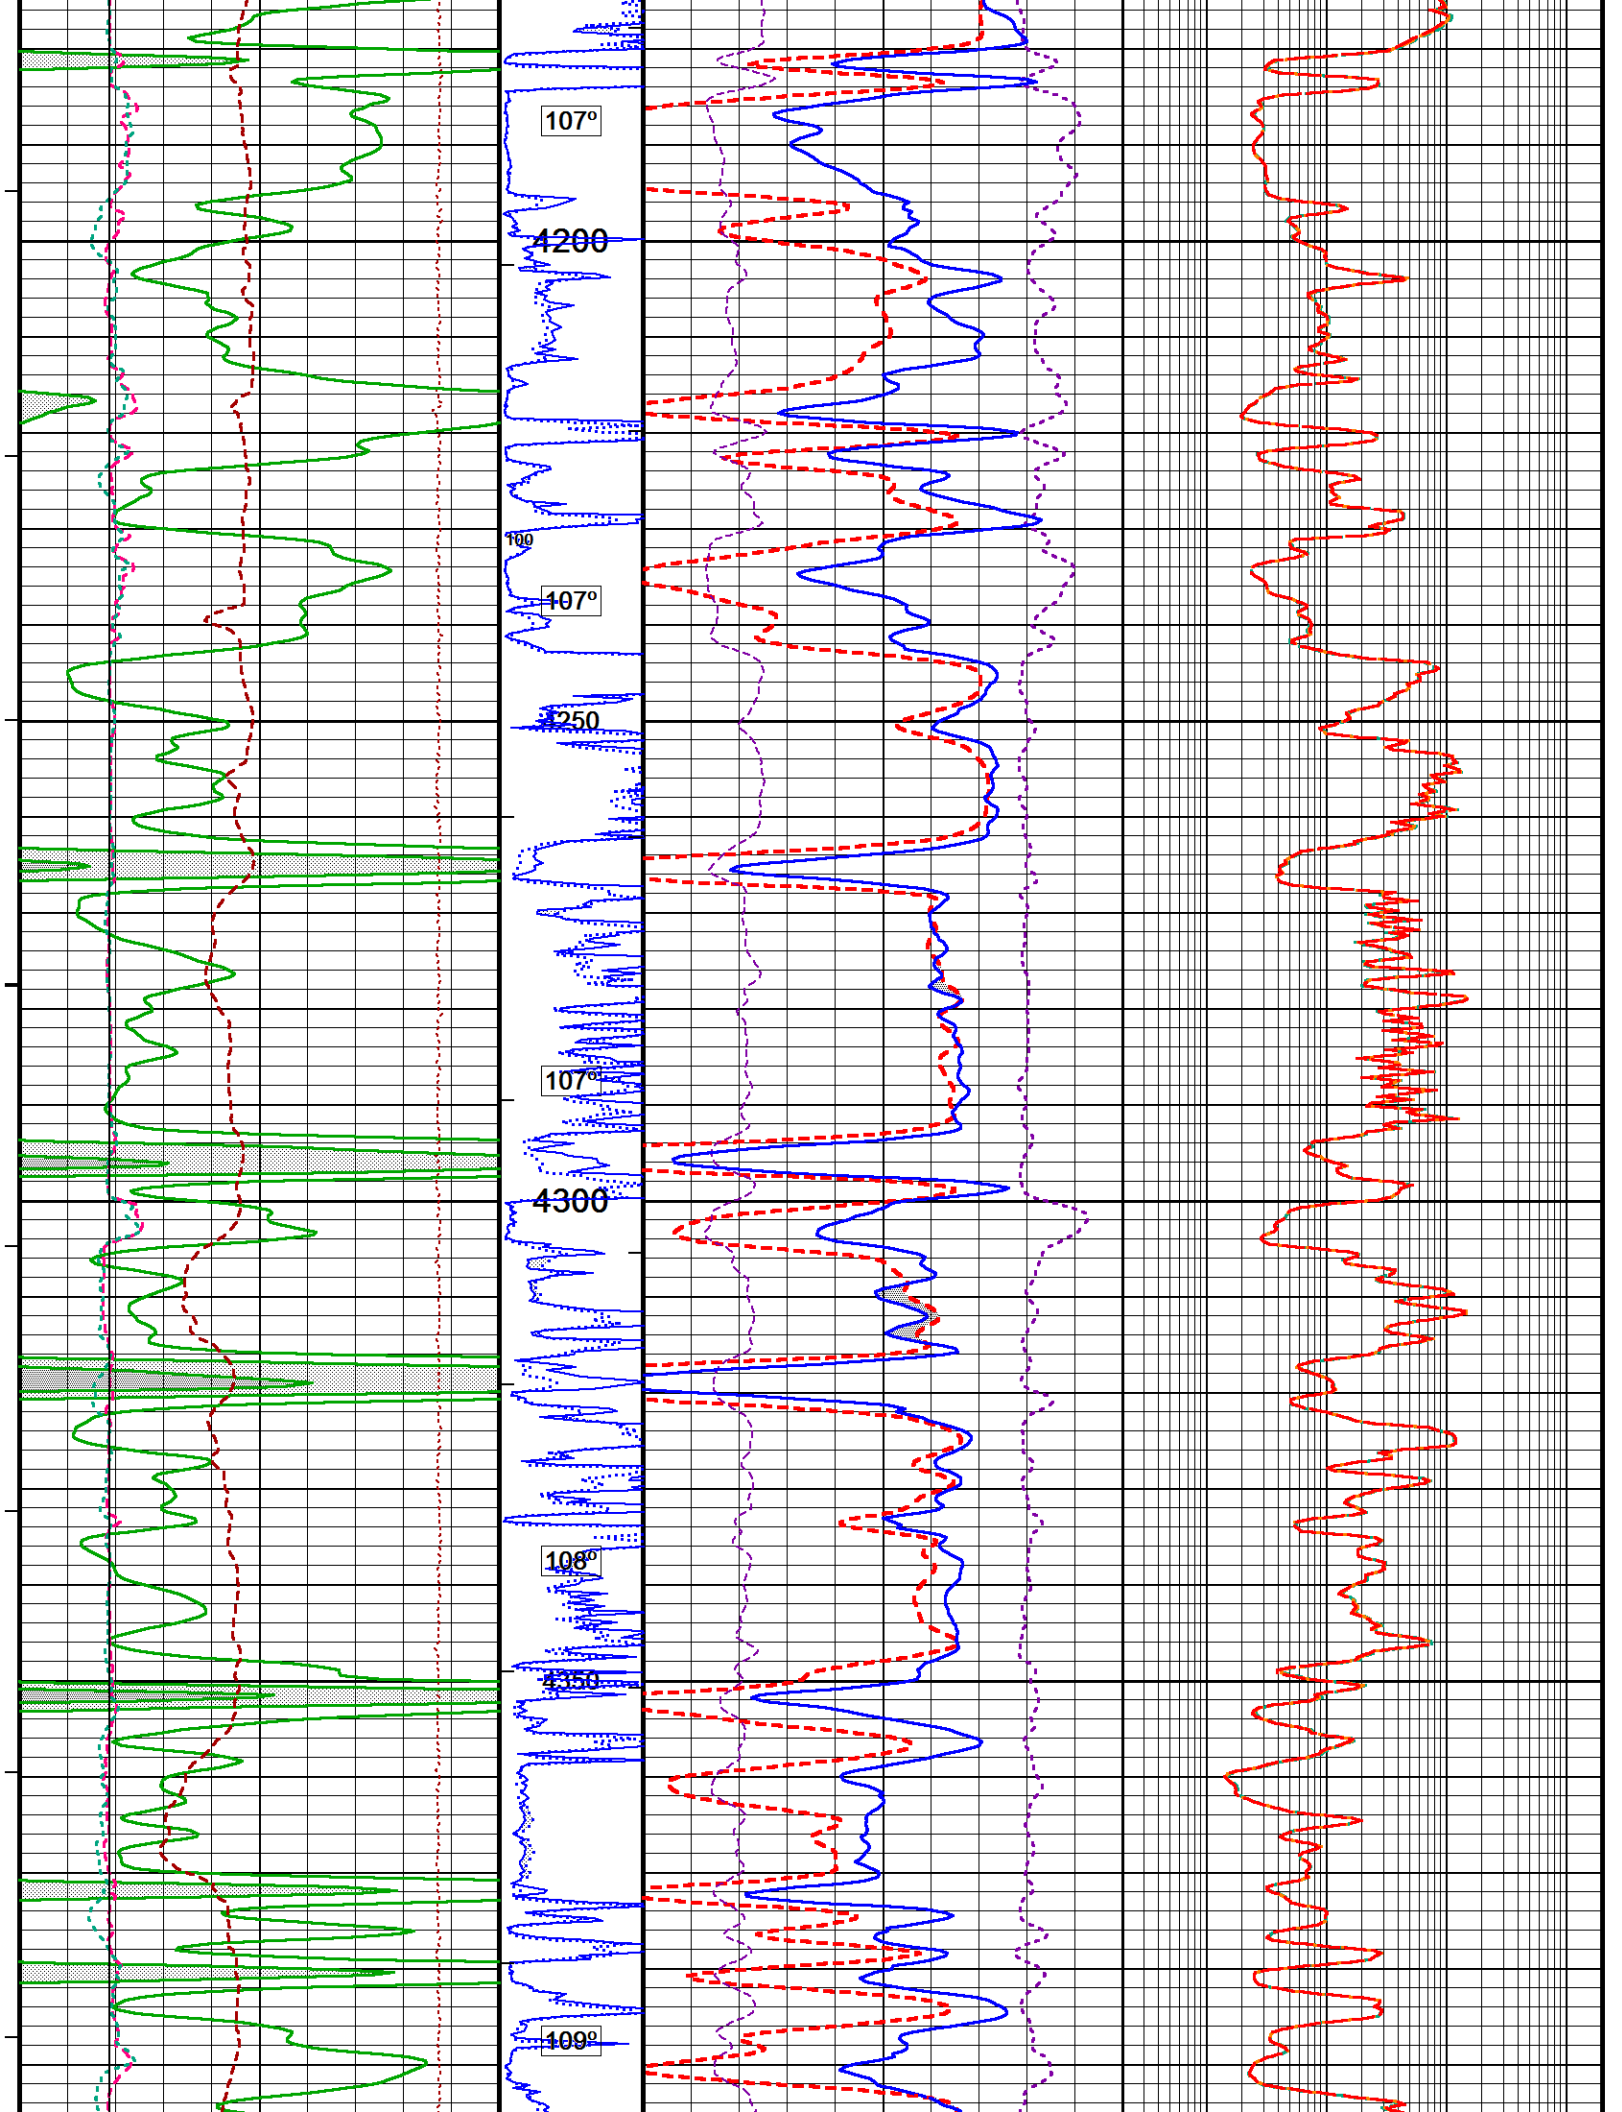

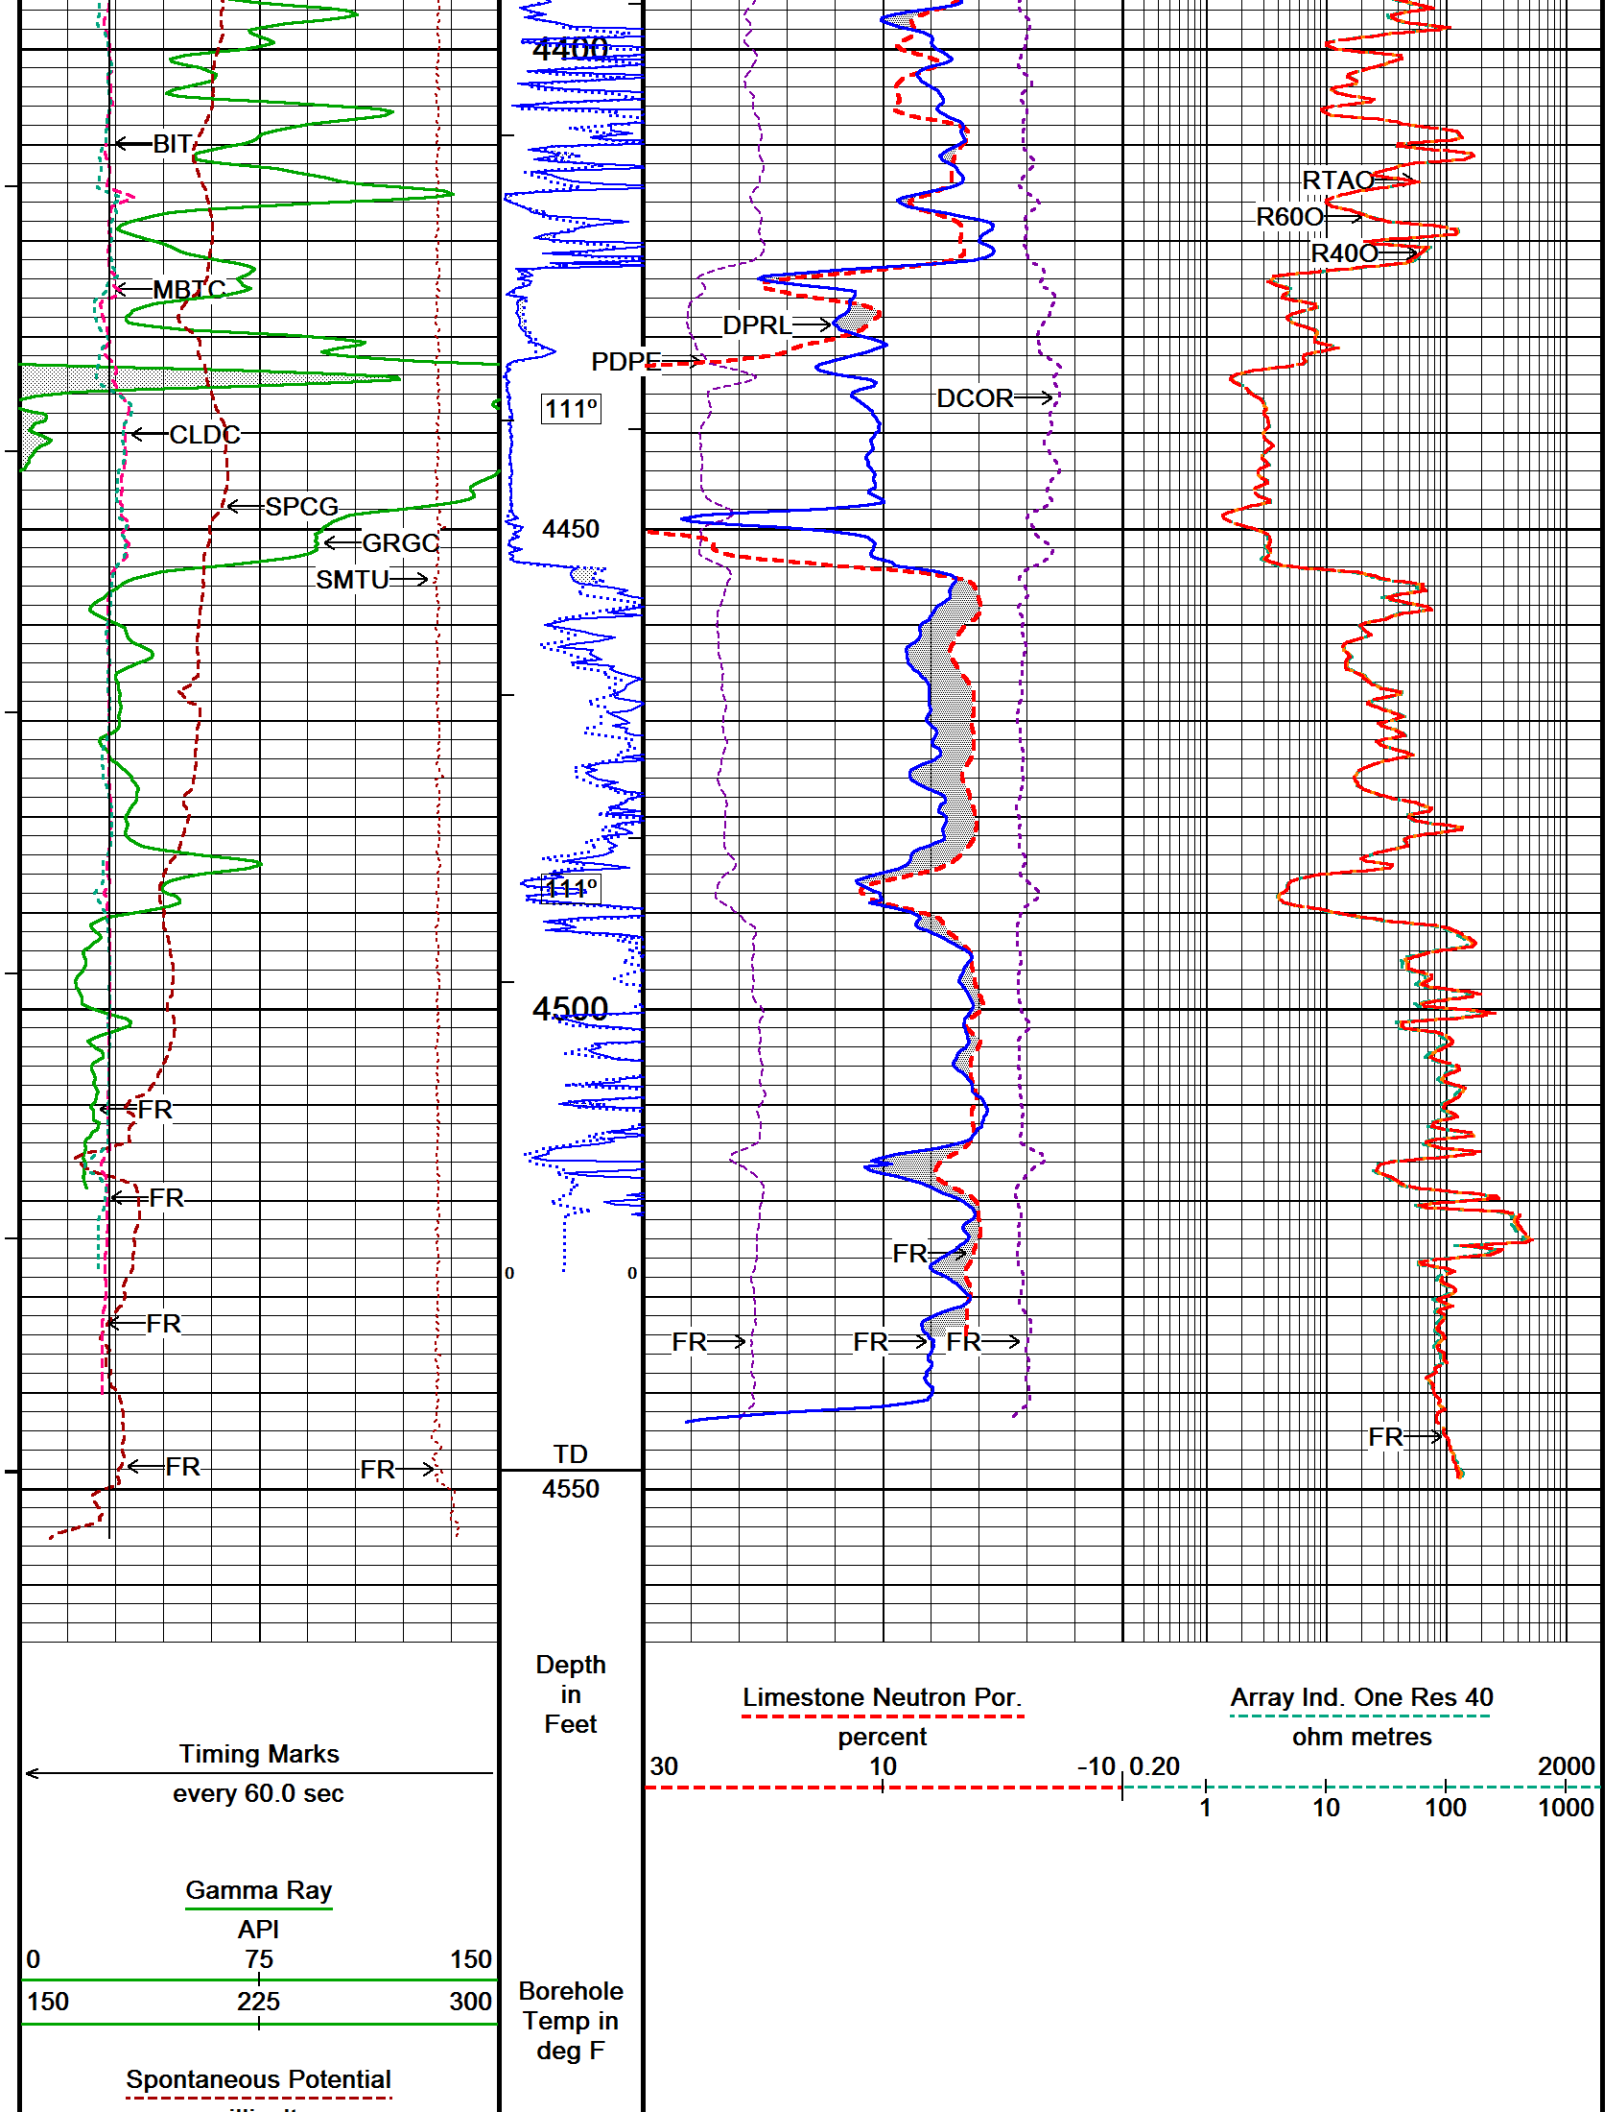

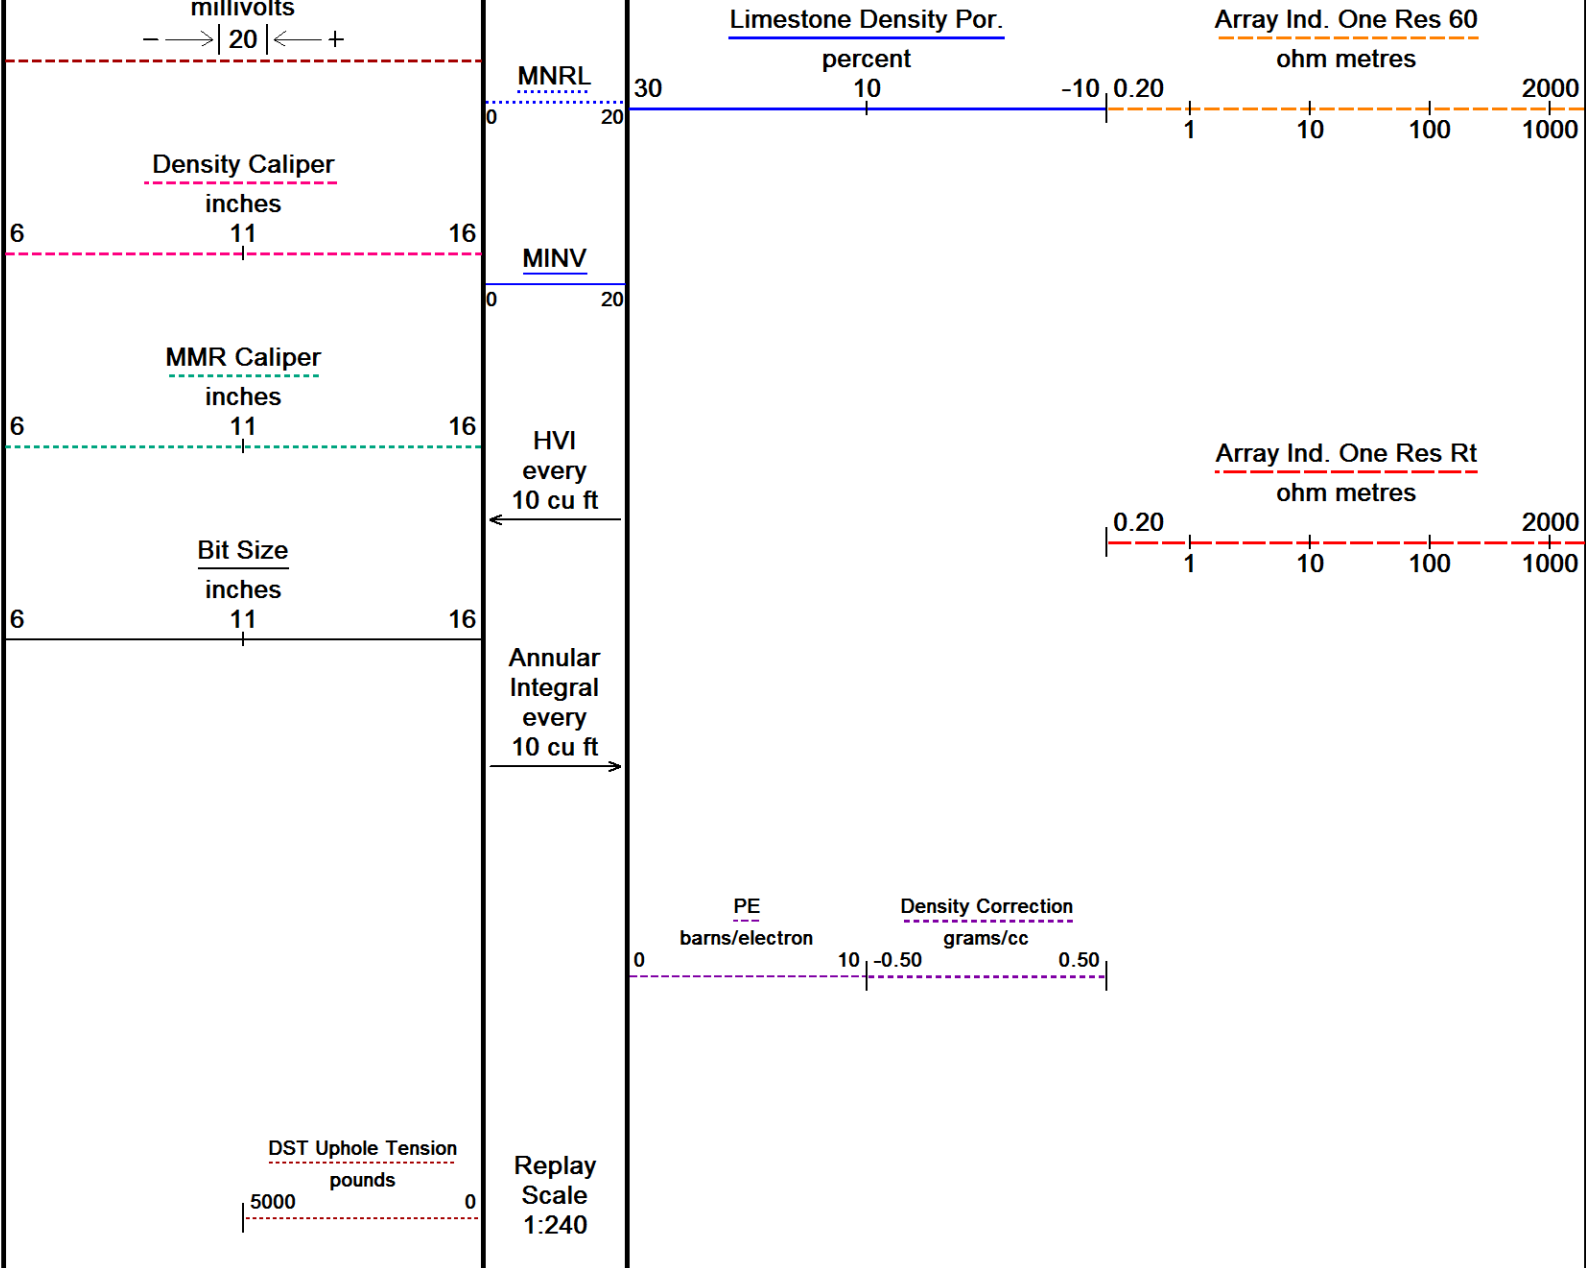

Depth Based Data - Maximum Sampling Increment 10.0cm
Filename: C:\Minimus 18.05.4364\DATA\Shakespeare Oil Co (OTTLEY 2-14)\MAIN PASS_FINAL.dta
System Versions: Logged with 18.05.4364 Processed with 18.05.4364 Plotted with 18.05.4364


Plotted on 01-FEB-2019 08:51
Recorded on 01-FEB-2019 05:58


↑ 5 INCH MAIN ↑


↓ REPEAT SECTION ↓


Depth Based Data - Maximum Sampling Increment 10.0cm
Filename: C:\Minimus 18.05.4364\DATA\Shakespeare Oil Co (OTTLEY 2-...)\REPEAT PASS_FINAL.dta
System Versions: Logged with 18.05.4364 Processed with 18.05.4364 Plotted with 18.05.4364

Plotted on 01-FEB-2019 08:51
Recorded on 01-FEB-2019 05:35

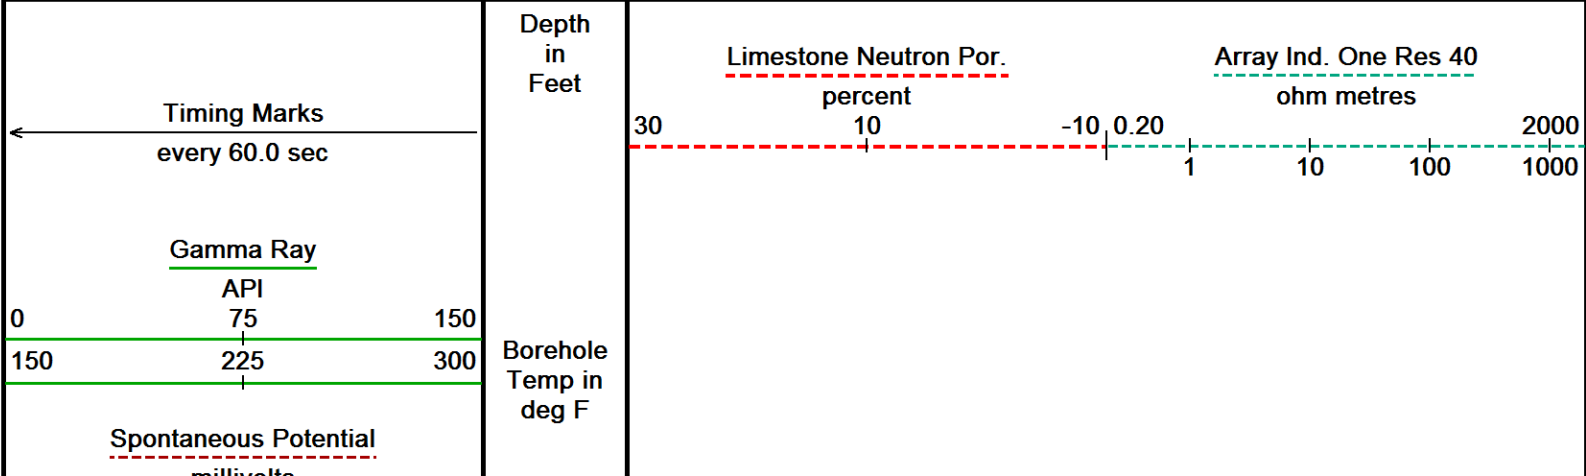

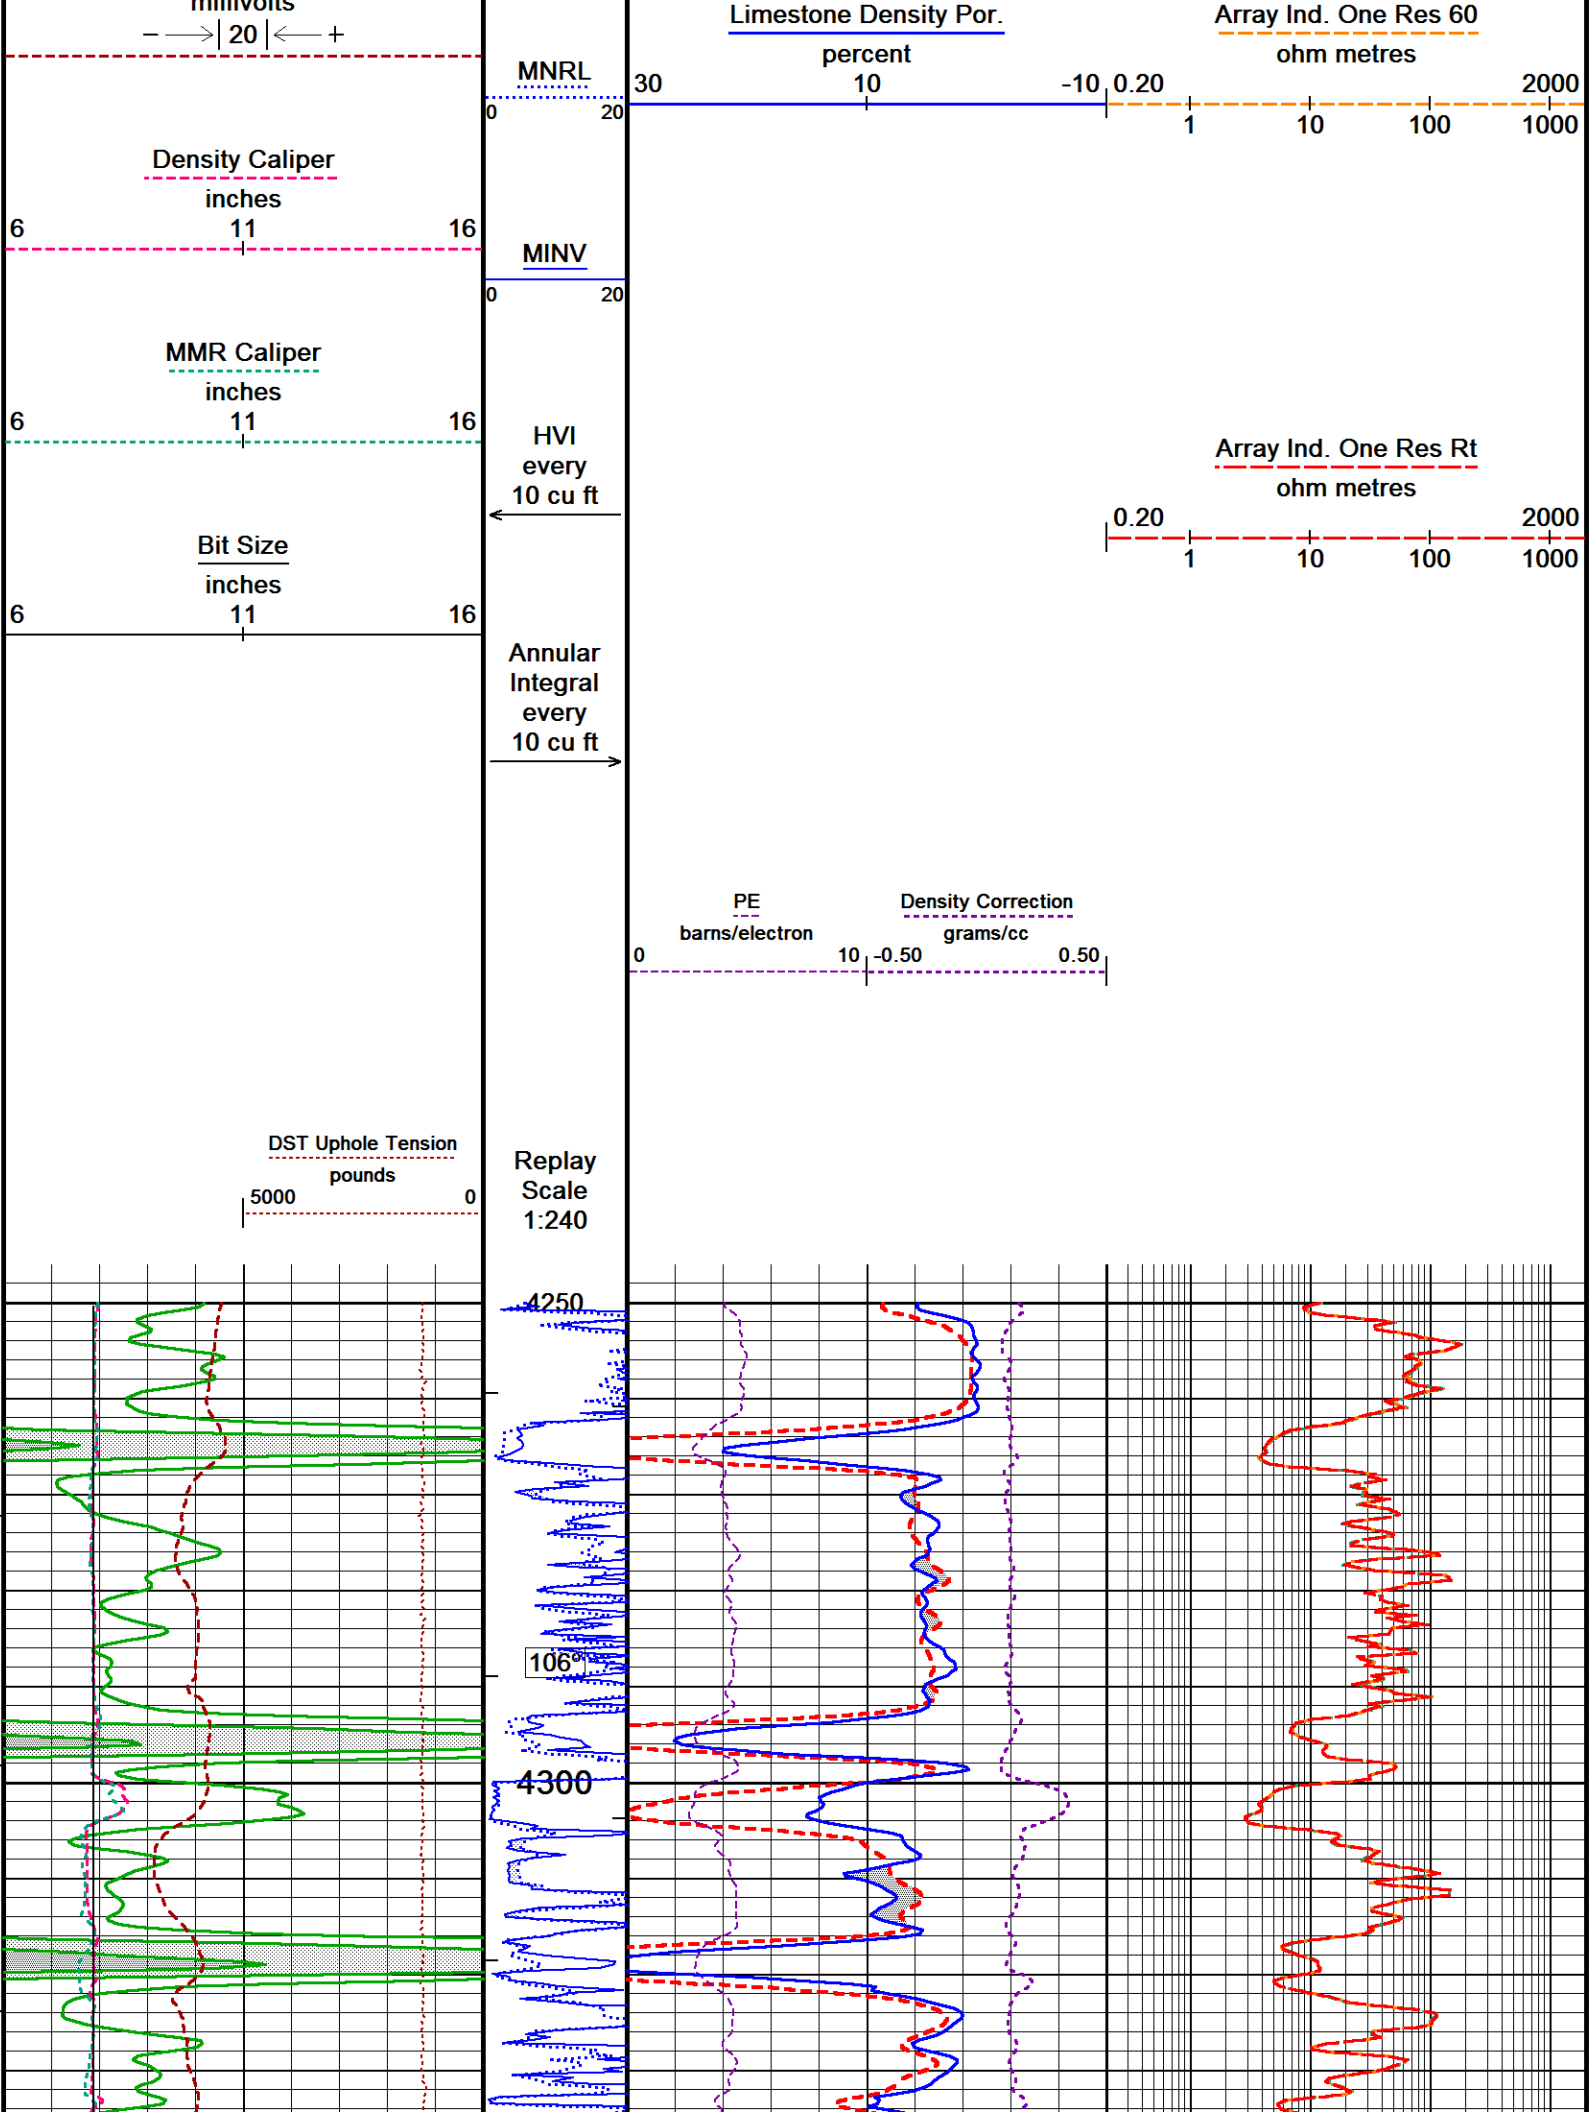

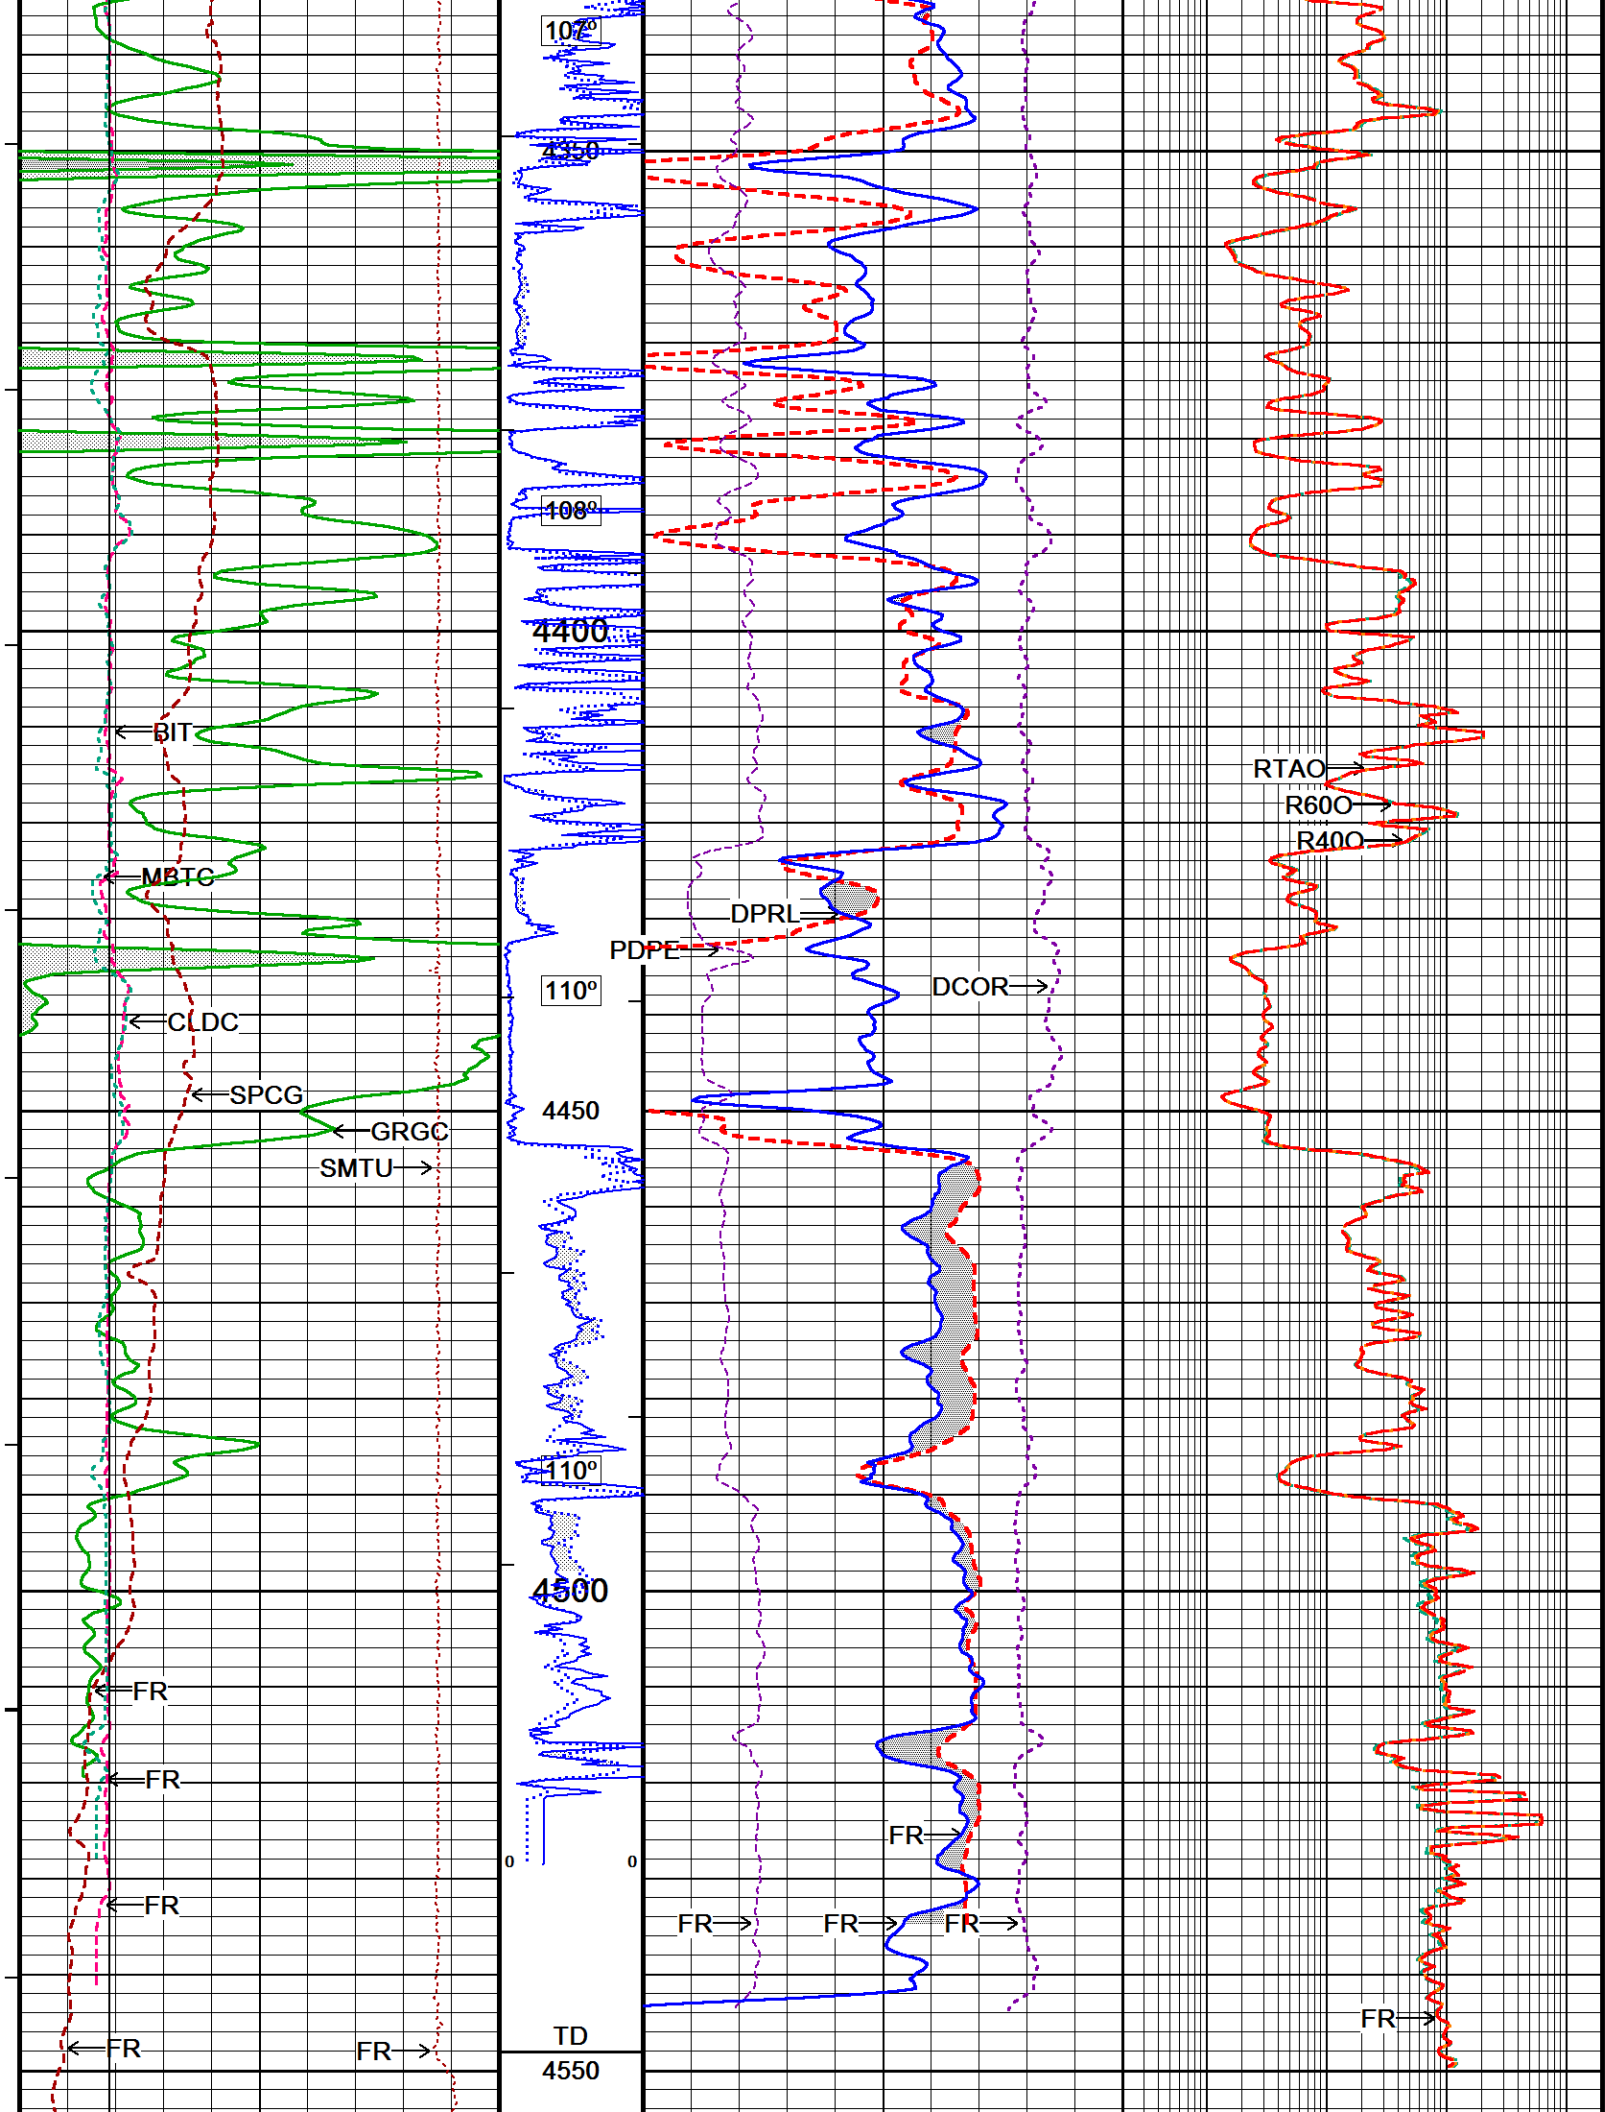

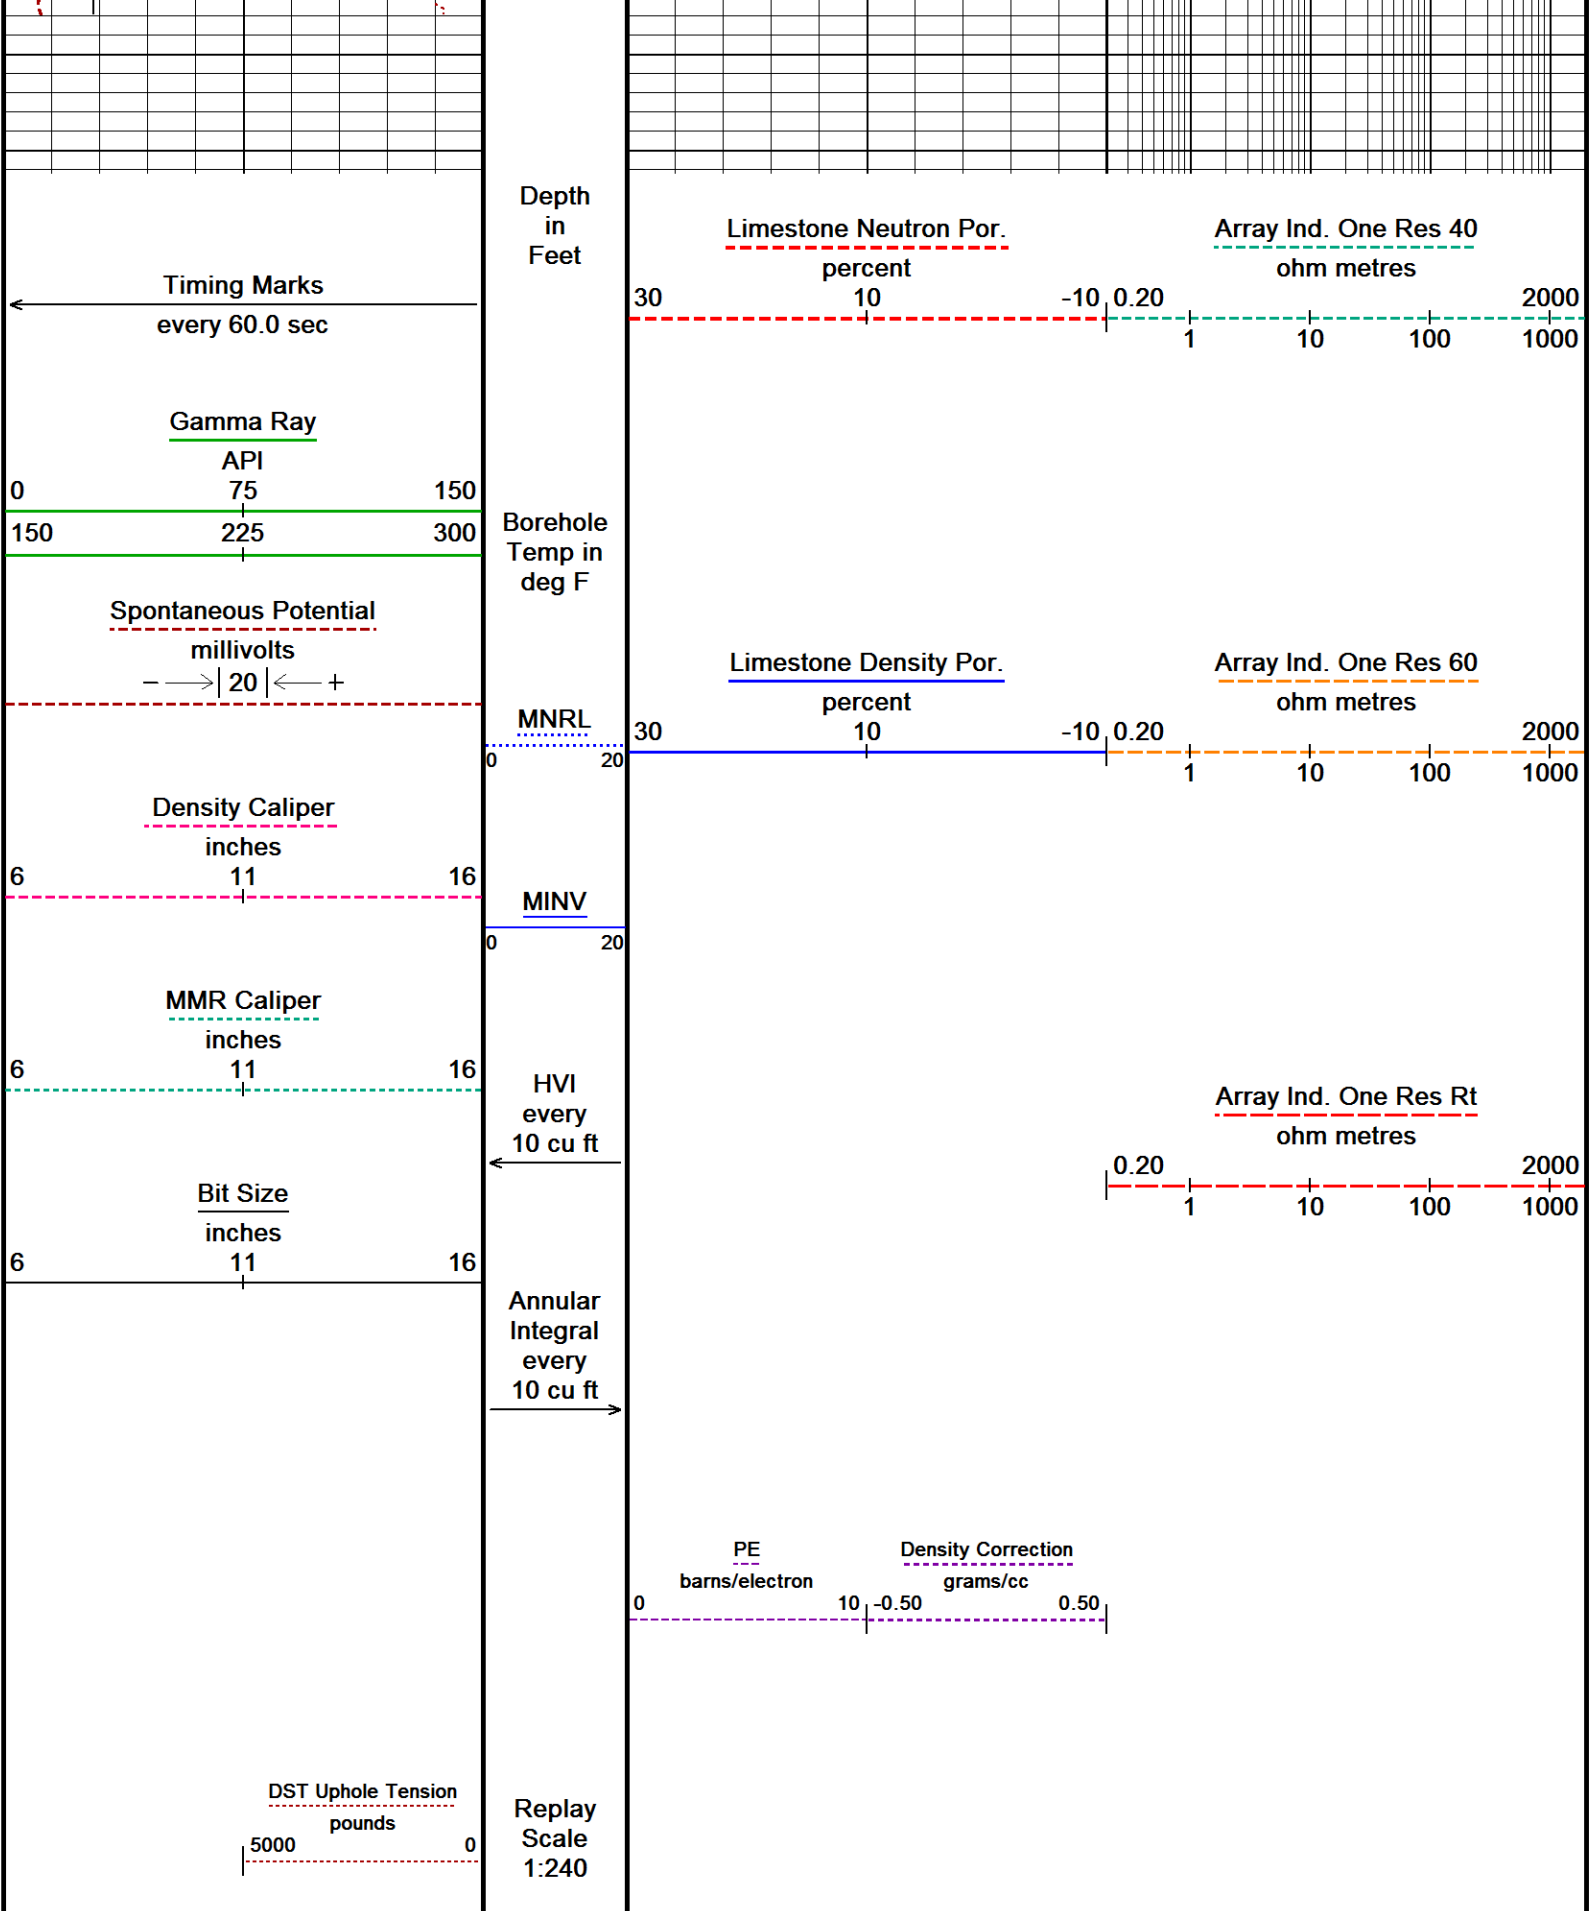

Depth Based Data - Maximum Sampling Increment 10.0cm
Filename: C:\Minimus 18.05.4364\DATA\Shakespeare Oil Co (OTTLEY 2-...\REPEAT PASS_FINAL.dta
System Versions: Logged with 18.05.4364 Processed with 18.05.4364 Plotted with 18.05.4364

Plotted on 01-FEB-2019 08:51
Recorded on 01-FEB-2019 05:35

BEFORE SURVEY CALIBRATION

C:\Minimus 18.05.4364\DATA\Shakespeare Oil Co (OTTLEY 2-14)\MAIN PASS_FINAL.dta

General Constants All 000

Last Edited on 01-FEB-2019,08:32

General Parameters

Mud Resistivity	0.450	ohm-metres
Mud Resistivity Temperature	83.000	degrees F
Water Level	0.000	feet
Borehole Fluid Processing	Wet Hole	

Hole/Annular Volume and Differential Caliper Parameters

HVOL Method	Single Caliper	
HVOL Caliper 1	MMR Caliper	
HVOL Caliper 2	N/A	
Annular Volume Diameter	4.500	inches
Caliper for Differential Caliper	MMR Caliper	

Rwa Parameters

Porosity used	Crossplot Porosity
Resistivity used	Array Ind. Four Res Rt
RWA Constant A	0.620
RWA Constant M	2.150
SW/APOR Tool Source	0.000

Down-hole Tension Calibration SMS 0

Field Calibration on 01-FEB-2019 04:18

Reading No	Measured	Calibrated (lbs)
1	14340.40	0.00
2	14867.91	377.00

SP Calibration MCG-D.K 443

Field Calibration on 10-DEC-2018 15:37

	Measured	Calibrated (mV)
Reference 1	100.8	99.9
Reference 2	-98.4	-99.9

High Resolution Temperature Calibration MCG-D.K 443

Field Calibration on 12-OCT-2018,05:20

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	212.00	212.00

High Resolution Temperature Constants MCG-D.K 443

Last Edited on 12-OCT-2018,05:20

Pre-filter Length 11

Gamma Calibration MCG-D.K 443

Field Calibration on 31-JAN-2019 17:18

	Measured	Calibrated (API)
Background	79	54
Calibrator (Gross)	744	510
Calibrator (Net)	665	456

Gamma Calibration Tolerances MCG-D.K 443

Ratio	1.458		Counts/API
-------	-------	---	------------

Gamma Constants MCG-D.K 443

Last Edited on 01-FEB-2019,04:57

Gamma Calibrator Number	MCGGRCC141	
GRC-M Calibrator Jig in Use?	NO	
Inactive Background Jig in Use?	NO	
Mud Density	1.13	gm/cc
Caliper Source for Processing	MMR Caliper	
Tool Position	Eccentred	
Potassium Equivalence	Chloride	
K Mud Concentration	0.00	%

Micro Normal and Micro Inverse Calibration MMR-B.A 91

Base Calibration on 18-JAN-2019 12:24

Field Check on 31-JAN-2019 16:51

Resistor 1 (ohm)	Resistor 2 (ohm)
10.0	50.0

Base Calibration

		Measured	Calibrated (ohm-m)	
Micro Normal	10.2	49.8	5.1	25.6
Micro Inverse	9.9	49.4	3.4	16.9

Channel	Base Check (ohm-m)	Field Check (ohm-m)
Micro Normal	93.8	93.8
Micro Inverse	62.3	62.3

Micro Normal & Micro Inverse Calibration Tolerance MMR-B.A 91

Micro Normal Res. 1	10.2		ohm	Micro Normal Res. 2	49.8		ohm
Micro Inverse Res. 1	9.9		ohm	Micro Inverse Res. 2	49.4		ohm
Micro Normal Base Check	93.8		ohm-m				
Micro Inverse Base Check	62.3		ohm-m				
Micro Normal Field Check	93.8		ohm-m				
Micro Inverse Field Check	62.3		ohm-m				

Micro Normal and Micro Inverse Constants MMR-B.A 91

Last Edited on 13-APR-2018,05:04

Pad Type	8-12 in Soft Rubber Inflatable 006-9011-159
Micro Normal K Factor	0.5110
Micro Inverse K Factor	0.3380
Standoff Offset	0.0000 inches

Caliper Calibration MMR-B.A 91

Base Calibration on 18-JAN-2019 14:14

Field Calibration on 31-JAN-2019 16:54

Base Calibration		
Reading No	Measured	Calibrator Size (in)
1	14078	5.98
2	17477	7.97
3	20615	9.86
4	24868	11.92
5	0	0.00
6	N/A	N/A

Field Calibration		
Measured Caliper (in)	Actual Caliper (in)	
7.97	7.97	

Caliper Calibration Tolerances MMR-B.A 91

Short Arm Field Cal.	7.97		in
----------------------	------	--	----

Micro-Resistivity Caliper Constants MMR-B.A 91

Sonde Configuration	Resistivity Mode
---------------------	------------------

Micro Laterolog Calibration MMR-B.A 91

Base Calibration on 31-DEC-1999 00:00

Field Check on 31-DEC-1999 00:00

	Resistor 1 (ohm)	Resistor 2 (ohm)
	0.0	0.0
Base Calibration		
	Measured	Calibrated (ohm-m)
	Ref 1	Ref 2
	0.0	0.0
	0.0	0.0
	Base Check (ohm-m)	Field Check (ohm-m)
	0.0	0.0

Micro Laterolog Constants MMR-B.A 91

Pad Type	6 in Solid Nylon B23059
Standoff Offset	0.0000 inches
Micro Laterolog K Factor	0.0128
Micro Laterolog Rm K Factor	N/A

Mudcake Thickness Correction Constants

Mud Cake Source	Constant Value	
Mud Cake Thickness	0.4000	inches
Mud Cake Thickness Caliper		
Mud Cake Resistivity	0.1500	ohm-m
Mud Cake Resistivity Temp.	20.00	Degrees C
Mud Cake Resistivity Source	Constant Value	
Temp. for Rmc Corr.	MCG External Temperature	

Neutron Calibration MDN-B.A 292				Base Calibration on 07-JAN-2019,13:23 Field Check on 31-JAN-2019 17:01			
Base Calibration							
	Measured		Calibrated (cps)				
	Near	Far	Near	Far			
	2910	91	3714	110			
Ratio	31.871		33.764				
Field Calibrator at Base							
			Calibrated (cps)				
			2207	3209			
Ratio			0.688				
Field Check							
			Calibrated (cps)				
			2227	3174			
Ratio			0.702				

Neutron Calibration Tolerances MDN-B.A 292							
Ratio	31.871	-5% 33 +5%					
Base Check	0.688	0.65 0.7 0.75					
Field Check	0.702	0.668 0.688 0.708					

Neutron Constants MDN-B.A 292			Last Edited on 31-JAN-2019,16:57		
Neutron Source Id	P0204NN				
Neutron Jig Number	NJ5736				
Air Hole Processing	Legacy				
Caliper Source for Processing	Density Caliper				
Stand-off	0.00	inches			
Mud Density	1.00	gm/cc			
Limestone Sigma	7.10	cu			
Sandstone Sigma	4.26	cu			
Dolomite Sigma	4.70	cu			
Formation Pressure Source	None				
Formation Pressure	N/A	kpsi			
Temperature Source	Constant Value				
Temperature	68.00	degrees F			
Mud Salinity	0.00	kppm			
Salinity Correction	Not Applied				
Formation Fluid Salinity Source	None				
Formation Fluid Salinity	N/A	kppm			
Barite Mud Correction	Not Applied				

Induction Calibration MAI-B.J 390				Factory Loop Calibration 07-JAN-2019 10:28			
				Field Check on 31-JAN-2019 16:41			
Factory Loop Calibration							
High Conductivity Reference Resistor		3.3	ohm				
Low Conductivity Reference Resistor		333.3	ohm				
Measured Signal (unitless)		Reference Conductivity (mmho/m)		Calibration			
Array	Low	High	Low	High	Gain	Offset	
1 (near)	16.8	458.6	9.3	966.2	2.166	-27.2	
2	6.3	377.7	7.6	821.4	2.191	-6.2	
3	3.8	258.6	5.2	566.0	2.200	-3.0	
4 (far)	1.9	132.3	2.6	279.2	2.121	-1.4	
Array Temperature		77.9	Deg F				
Tool Checks							
Factory Reference (mmho/m)				Before Survey (mmho/m)			

Array	Low	High	Low	High
1 (near)	13.2	3960.1	13.2	3959.7
2	29.9	3563.5	30.0	3563.4
3	27.9	3061.4	28.0	3061.6
4 (far)	19.7	2087.8	19.7	2087.8
Array Temperature	64.9		65.0	Deg F

Induction Check Tolerances MAI-B.J 390

Low Array 1	13.2	11.7 13.2 14.7	mmho/m	High Array 1	3959.7	-0.5% 3960.1 +0.5%	mmho/m
Low Array 2	30.0	28.4 29.9 31.4	mmho/m	High Array 2	3563.4	-0.5% 3563.5 +0.5%	mmho/m
Low Array 3	28.0	26.4 27.9 29.4	mmho/m	High Array 3	3061.6	-0.5% 3061.4 +0.5%	mmho/m
Low Array 4	19.7	18.2 19.7 21.2	mmho/m	High Array 4	2087.8	-0.5% 2087.8 +0.5%	mmho/m

Induction Constants MAI-B.J 390

Last Edited on 01-FEB-2019,04:51

Induction Model	RtAP-NC		
Borehole Correction Constants			
Tool Centred	No		
Hole Size Source	Density Caliper		
Hole Size Constant Value	N/A inches		
Stand-off Type	Fins		
Stand-off	0.50 inches		
Number of Fins on Stand-off	8.0000		
Stand-off Fin Angle	45.00 degrees		
Stand-off Fin Width	0.5000 inches		
Rm Source	Global Value: Temperature Corrected		
Temp. for Rm Corr.	MCG External Temperature		
Borehole Correction Method	Default		
Squasher Start	0.0020	mhos/metre	
Squasher Offset	N/A	mhos/metre	
Borehole Normalisation			
DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000
Calibration Site Corrections			
Channel 1	0.00	mmhos/metre	
Channel 2	0.00	mmhos/metre	
Channel 3	0.00	mmhos/metre	
Channel 4	0.00	mmhos/metre	
Symmetrised Receiver Gains			
Receiver 1	1.00		
Receiver 2	1.00		
Receiver 3	1.00		
Receiver 4	1.00		
Apparent Porosity and Water Saturation Constants			
Archie Constant (A)	1.00		
Cementation Exponent (M)	2.00		
Saturation Exponent (N)	2.00		
Saturation of Water for Apor	100.00	percent	
Resistivity of Water for Apor and Sw	0.05	ohm-m	
Resistivity of Mud Filtrate for Sw	0.00	ohm-m	
Source for Rt	0.00		
Source for Rxo	0.00		

High Resolution Temperature Calibration MAI-B.J 390

Field Calibration on 15-MAY-2018,12:48

	Measured	Calibrated(Deg F)
Lower	10.00	10.00
Upper	100.00	100.00

Pre-filter Length 11

Caliper Calibration MPD-C.A 216

Base Calibration on 18-JAN-2019 17:06

Field Calibration on 31-JAN-2019,17:29

Base Calibration

Reading No	Measured	Calibrator Size (in)
1	16199	3.99
2	24624	5.98
3	33344	7.97
4	41632	9.86
5	50912	11.92
6	N/A	N/A

Field Calibration

Measured Caliper (in)	Actual Caliper (in)
7.93	7.97

Caliper Calibration Tolerances MPD-C.A 216


Long Arm Field Cal. 7.93  in

Photo Density Calibration MPD-C.A 216

Base Calibration on 18-JAN-2019 16:36

Field Check on 31-JAN-2019 16:50

Density Calibration

Base Calibration	Measured		Calibrated (sdu)	
	Near	Far	Near	Far
Background	993	1180		
Reference 1	46604	22300	59556	30836
Reference 2	18380	2158	24941	2541

Field Check at Base

993.3 1179.8

Field Check

994.6 1180.0

PE Calibration

Base Calibration	Measured			Calibrated
	WS	WH	Ratio	Ratio
Background	179	890		
Reference 1	19088	46448	0.415	0.371
Reference 2	5249	18271	0.292	0.272



Field Check at Base


179.3 890.5


Field Check


183.0 894.1


Photo Density Calibration Tolerances MPD-C.A 216


Near Density Ratio 2.62 
 PE Calibration 0.115 

Far Density Ratio 21.59 

Near Den. Field Check 994.6 

Far Den. Field Check 1180.0 

PE WS Field Check 183.0 

PE WH Field Check 894.1 

Density Constants MPD-C.A 216

Last Edited on 01-FEB-2019,05:51

Density Source Id P50557B
 Nylon Calibrator Number DNCE695
 Aluminium Calibrator Number DACD698
 Density Shoe Profile 8 inch
 Caliper Source for Processing MMR Caliper
 PE Correction to Density Not Applied
 Mud Density 1.13 gm/cc
 Mud Density Type
 Mud Filtrate Density

Mud Filtrate Density	1.00	gm/cc
Dry Hole Mud Filtrate Density	1.00	gm/cc
DNCT	0.00	gm/cc
CRCT	0.00	gm/cc
Density Z/A Correction	Hybrid	
Precision Enhanced Density Processing	Applied	
Matrix Density (gm/cc)	Depth (ft)	
2.71	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	

DOWNHOLE EQUIPMENT

C:\Minimus 18.05.4364\DATA\Shakespeare Oil Co (OTTLEY 2-14)\MAIN PASS_FINAL.dta

11B Tension Cablehead
MCB-A 1 LG: 2.18 ft WT: 19.8 lb OD: 2.244 in

Compact Swivel Head Adaptor
SHA-J.B 717 LG: 2.30 ft WT: 22.0 lb OD: 2.244 in

Compact Comms Gamma
MCG-D.K 443 LG: 8.70 ft WT: 63.9 lb OD: 2.244 in

Compact Micro-Resistivity
MMR-B.A 91 LG: 8.59 ft WT: 81.6 lb OD: 4.882 in

Compact Neutron
MDN-B.A 292 LG: 5.04 ft WT: 50.7 lb OD: 2.244 in


Compact Density/Caliper
MPD-C.A 216 LG: 9.59 ft WT: 90.4 lb OD: 2.449 in

Compact Induction
MAI-B.J 390 LG: 10.81 ft WT: 48.5 lb OD: 2.244 in

Total

Length: 47.21 ft

Weight: 377.0 lb

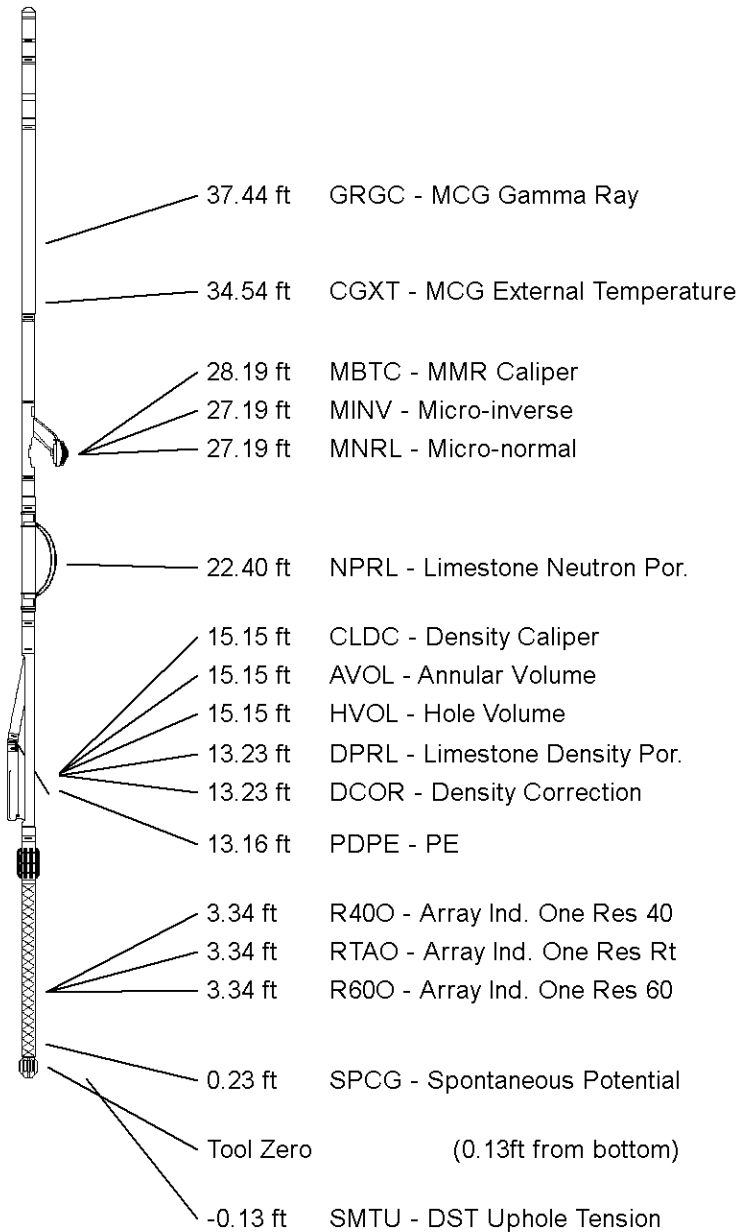

All measurements relative to tool zero.

COMPANY
WELL

SHAKESPEARE OIL CO., INC.
K OTTLEY 2-14

FIELD	WILDCAT
PROVINCE/COUNTY	LOGAN
COUNTRY/STATE	USA / KANSAS

Elevation Kelly Bushing	2800	feet	First Reading	4544.60	feet
Elevation Drill Floor		feet	Depth Driller	4550.00	feet
Elevation Ground Level	2791	feet	Depth Logger	4548.00	feet



Weatherford®

COMPOSITE LOG