

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-145-20711-00-00
Spot: SWSWNW Sec/Twnshp/Rge: 22-20S-19W
2310 feet from N Section Line, 330 feet from W Section Line
Lease Name: SMITH H Well #: 1
County: PAWNEE Total Vertical Depth: 4357 feet

Operator License No.: 30886
Op Name: THOMAS, JOHN R. DBA VAMCO OPER
Address: 265 AVENUE K
CHASE, KS 67524

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	4374	0	WITH 125 SX CMT
SURF	8.625	370		WITH 250 SX CMT

\$ 141.60

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 07/07/2006 7:30 AM
Plug Co. License No.: 99981 Plug Co. Name: COPELAND ACID & CEMENT, INC.
Proposal Rcvd. from: JOHN THOMAS Company: VAMCO OPERATIONS Phone: (620) 938-2411

Proposed Plugging Method: PUMP 200# HULLS & 25 SX CMT. PUMP 20 SX CMT AT 1350'. TEST CASING. CIRCULATE CMT TO SURFACE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 07/12/2006 11:00 AM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

Perfs:


PUMP 4055' PUMPED 15 SX GEL - 50# HULLS - 20 SX CMT. SPOT 20 SX CMT AT 1350'. LAY DOWN TUBING. 7/12/06: TAGGED CMT AT 1000'. PERFORATE AT 600'. PUMP 250 SX CMT THROUGH CASING. CMT CIRCULATED. PRESSURED BACKSIDE.

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND ACID.

Plugged through: CSG

INVOICED
DATE: 7-25-06
2007060248

District: 01

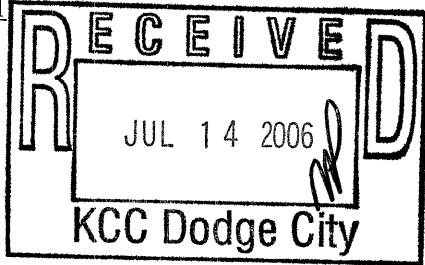

Signed Eric MacLaren
(TECHNICIAN)

RECEIVED
JUL 24 2006
KCC WICHITA

Handwritten signature and initials

PKT