

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

*KCC 7/25/06 PICT
Per wellmaster
data Form by
AB.*

API Well Number: 15-195-22359-00-00
Spot: NENWNW Sec/Twnshp/Rge: 14-15S-22W
570 feet from N Section Line, 930 feet from W Section Line
Lease Name: SCHMIDT Well #: 1-14
County: TREGO Total Vertical Depth: 4300 feet

Operator License No.: 9855
Op Name: GRAND MESA OPERATING COMPANY
Address: 200 E. 1ST STREET N. STE 307 FRMRS
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	219		160 SX CMT.

\$139.75

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 07/02/2006 4:30 PM
Plug Co. License No.: 33493 Plug Co. Name: AMERICAN EAGLE DRILLING LLC
Proposal Rcvd. from: DON ANDERSON - TOOL P Company: GRAND MESA OPERATING COMP Phone: (785) 216-0082

Proposed Plugging Method: Order 190 sxs 60/40 pozmix - 6% gel with 1/4# flocele per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: HERB DEINES Witness Type: NONE
Date/Time Plugging Completed: 07/02/2006 7:15 PM KCC Agent: HERB DEINES

Actual Plugging Report:

1st. Plug at 1675' w/25 sxs.
2nd. Plug at 750' w/100 sxs.
3rd. Plug at 275' w/40 sxs.
4th. Plug at 40' w/10 sxs.
Rathole with 15 sxs.

Perfs:


Remarks: ALLIED CEMENTING COMPANY.

Plugged through: DP

INVOICED
DATE 7-25-06
NO 2007060243

District: 04

Signed

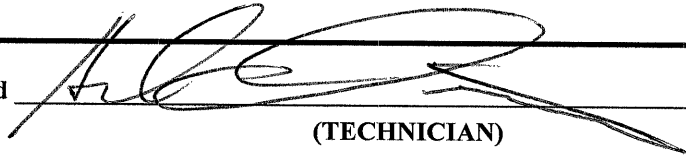

(TECHNICIAN)

RECEIVED

JUL 24 2006

KCC WICHITA

Form CP-2/3

JUL 21 2006

KCC