

MICRO LOG


Company		DIXON OPERATING COMPANY, LLC.	
Well		#1-2 KNAR	
Field		MIKES METEOR	
County		STAFFORD	
State		KANSAS	
Location:		APL # : 15-185-24034-0000 4950' FSL & 4290' FEL NE - NW - NW	
Permanent Datum		GROUND LEVEL	
Log Measured From		KELLY BUSHING 11' A.G.L.	
Drilling Measured From		KELLY BUSHING	
SEC 2 TWP 23S RGE 12W		Elevation K.B. 1840 D.F. 1838 G.L. 1829	
Date	11/7/18		
Run Number	TWO		
Depth Driller	3900		
Depth Logger	3916		
Bottom Logged Interval	3914		
Top Log Interval	00		
Casing Driller	8 5/8"@312'		
Casing Logger	312		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 15,300 PPM	
Density / Viscosity	9.3/63		
pH / Fluid Loss	10.0/10.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.800@75F		
Rmf @ Meas. Temp	.600@75F		
Rmc @ Meas. Temp	.960@75F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.522@115F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	8:45 P.M.		
Maximum Recorded Temperature	115F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	CHUCK SCHMALTZ		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
HUDSON, KS., 2E. TO "NE 70TH", 1S., E. INTO @TANK BATTERY


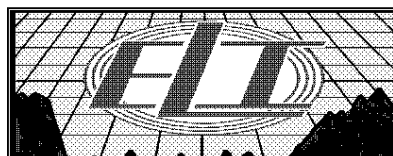




MAIN SECTION



Database File: 3056pe.db
Dataset Pathname: pass8.2
Presentation Format: micro
Dataset Creation: Wed Nov 07 21:27:47 2018 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240



0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		


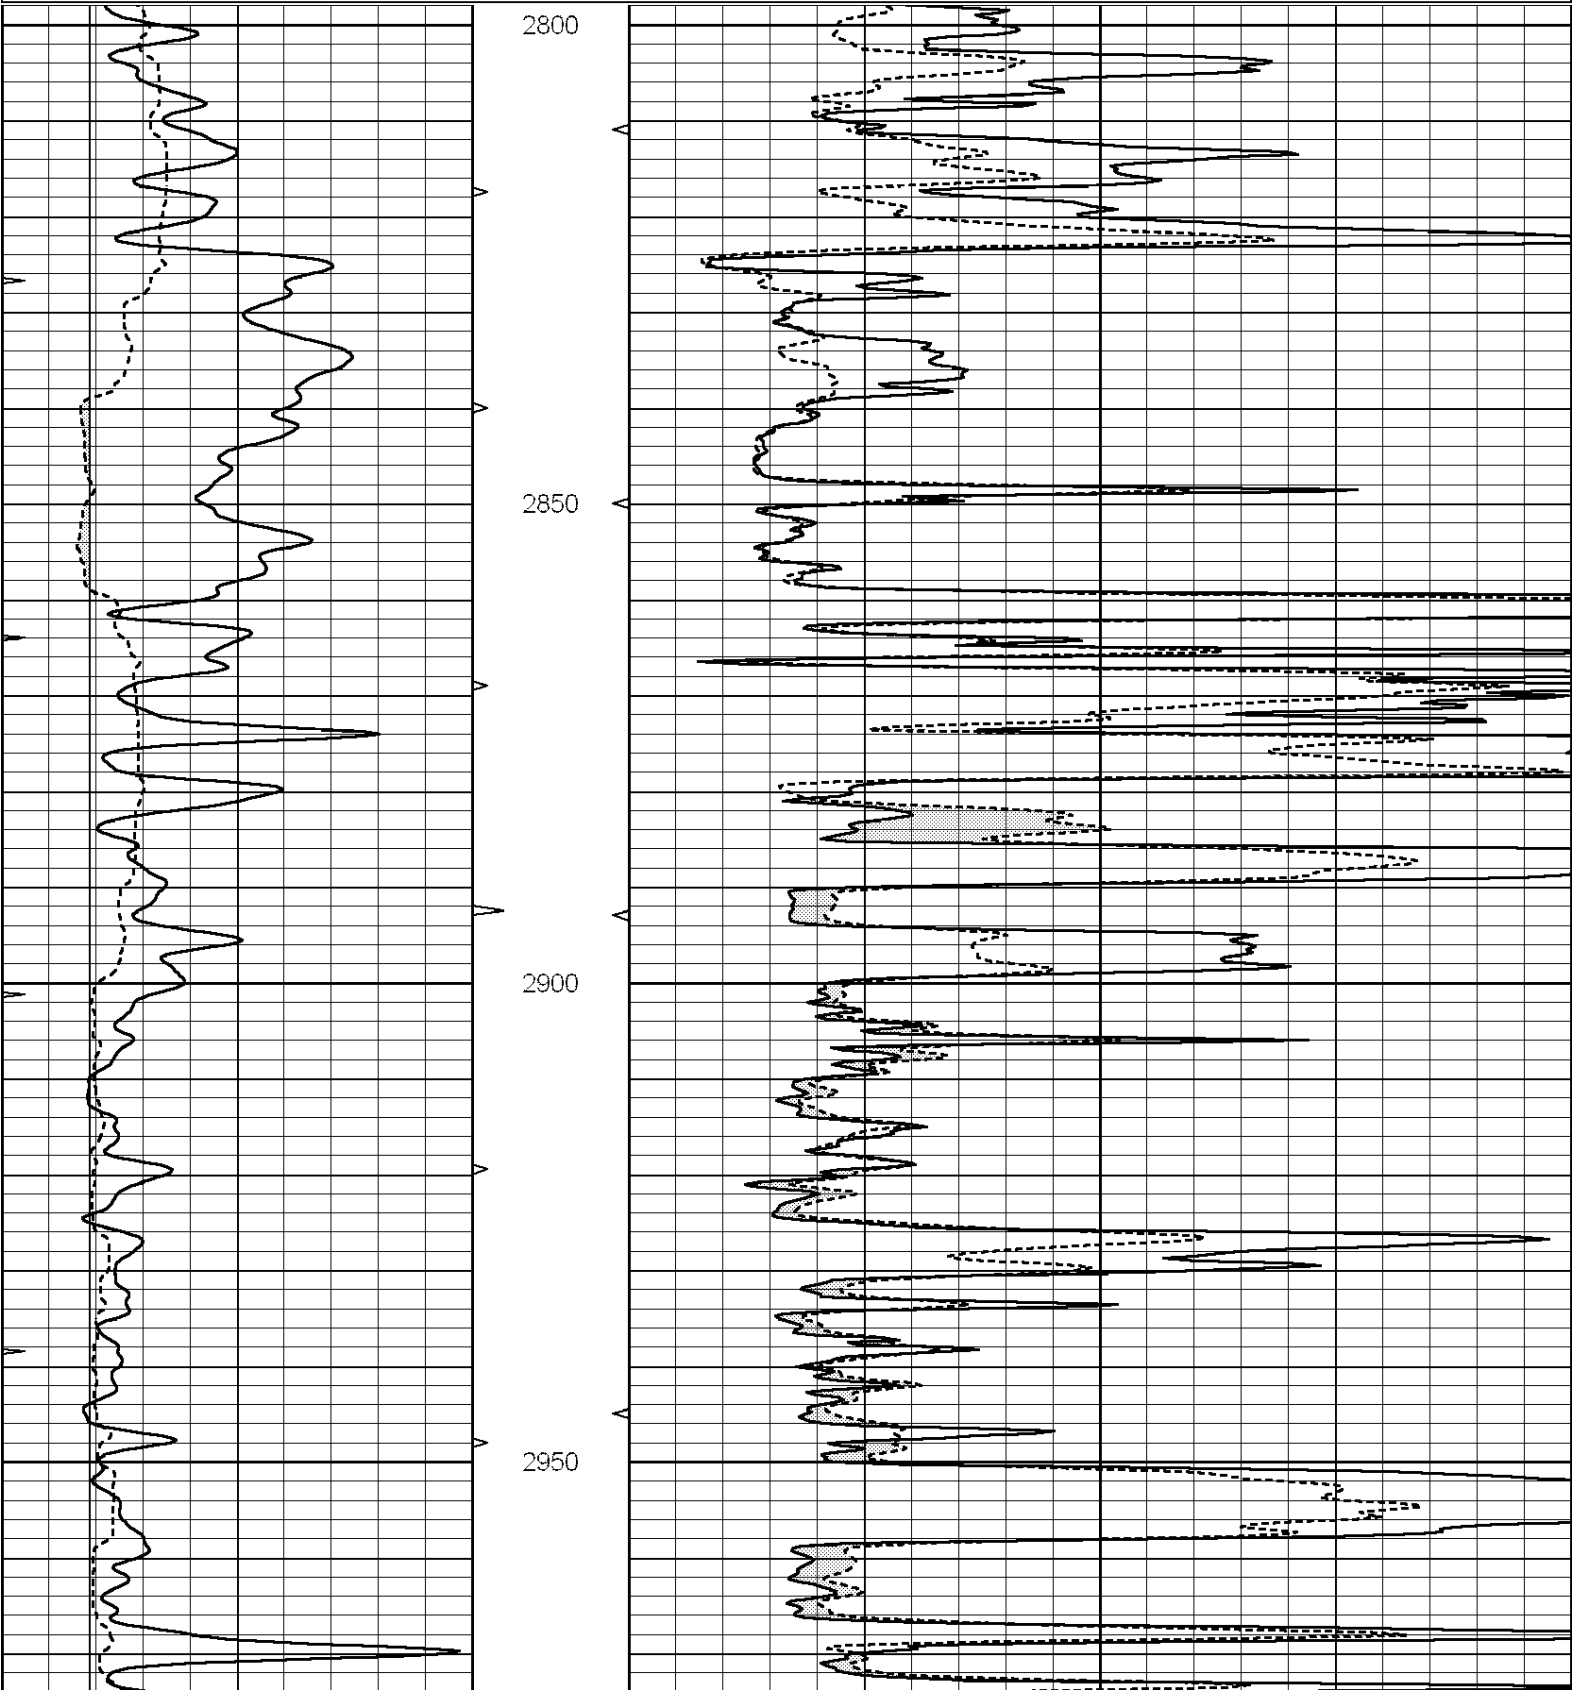


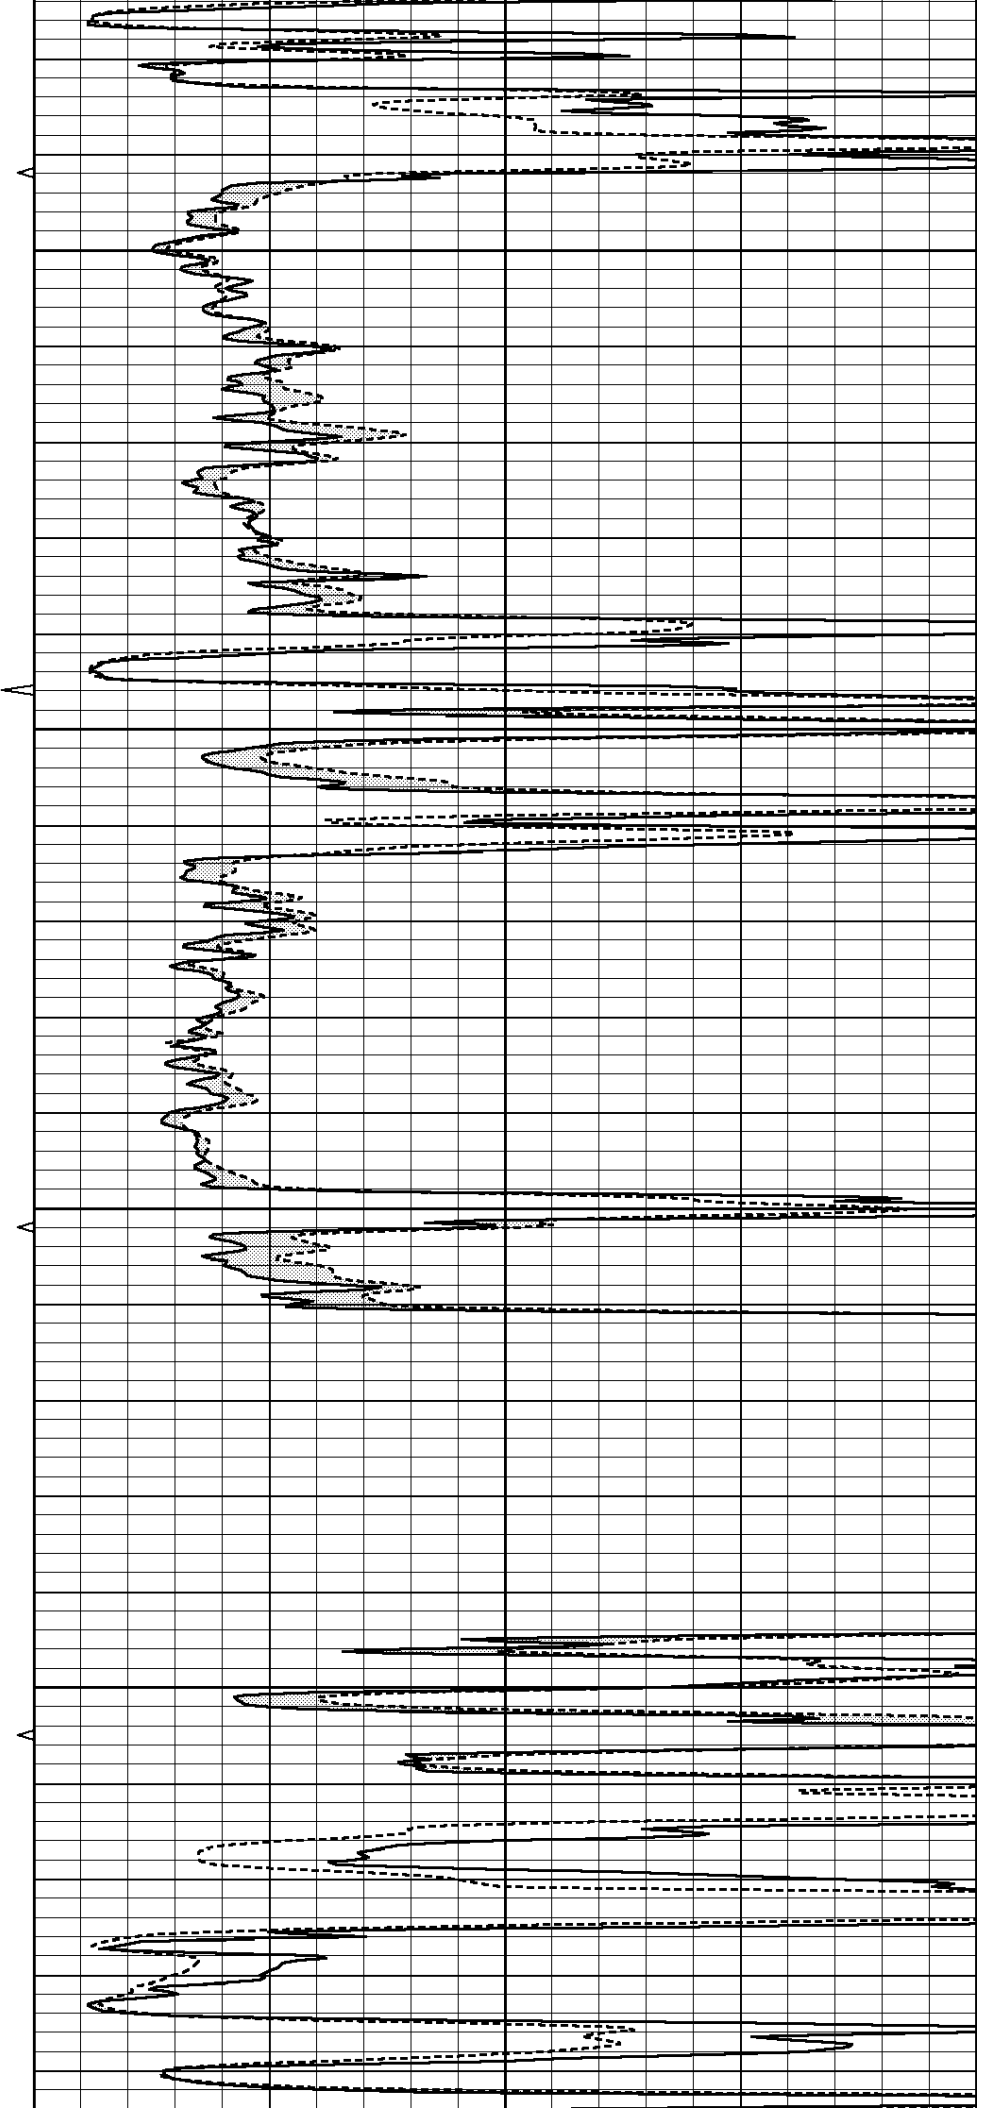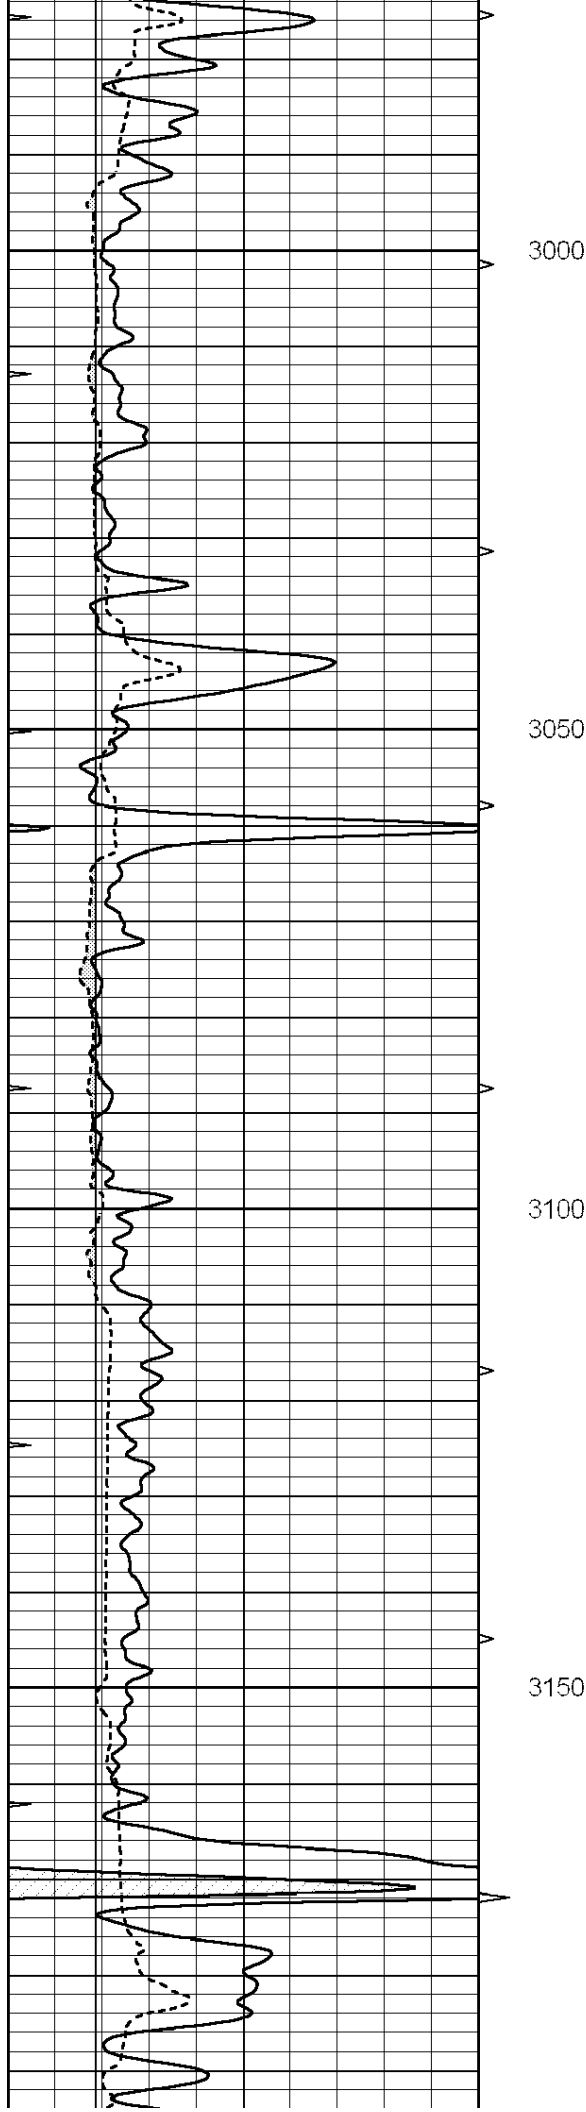

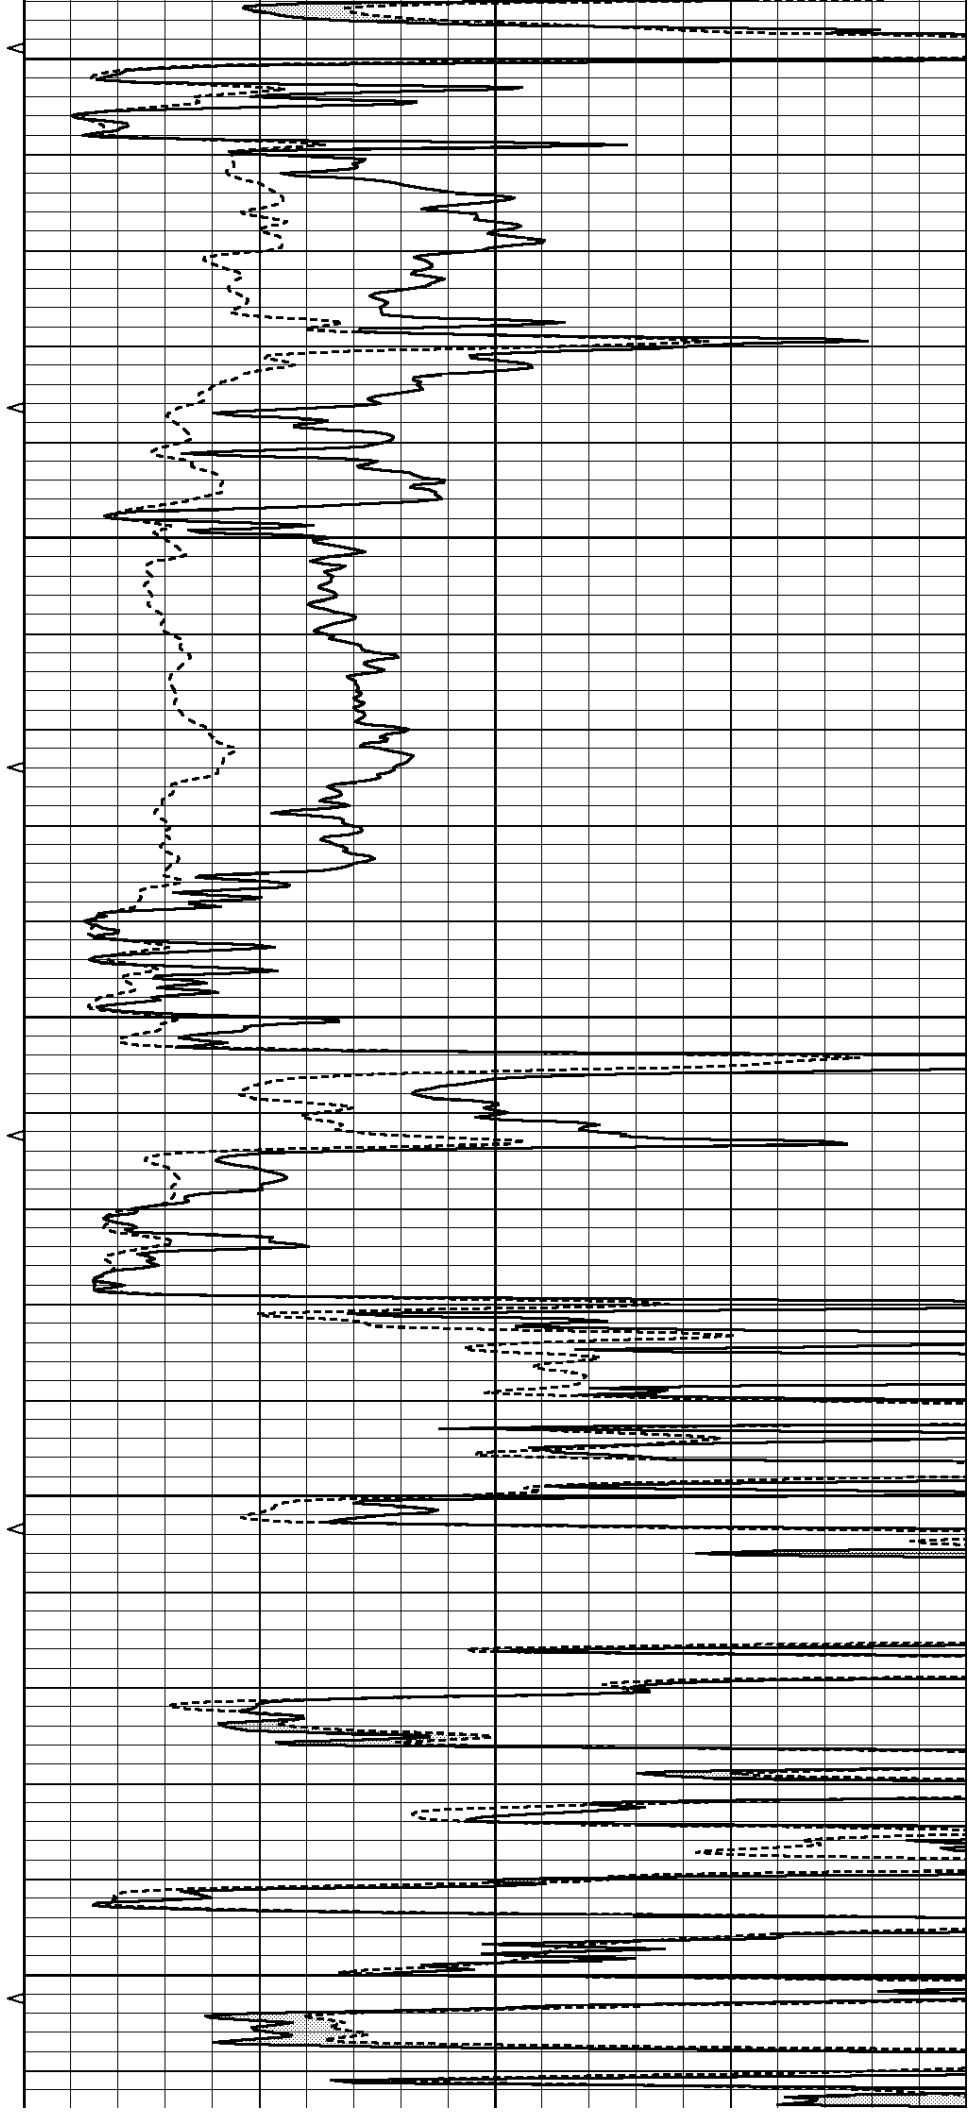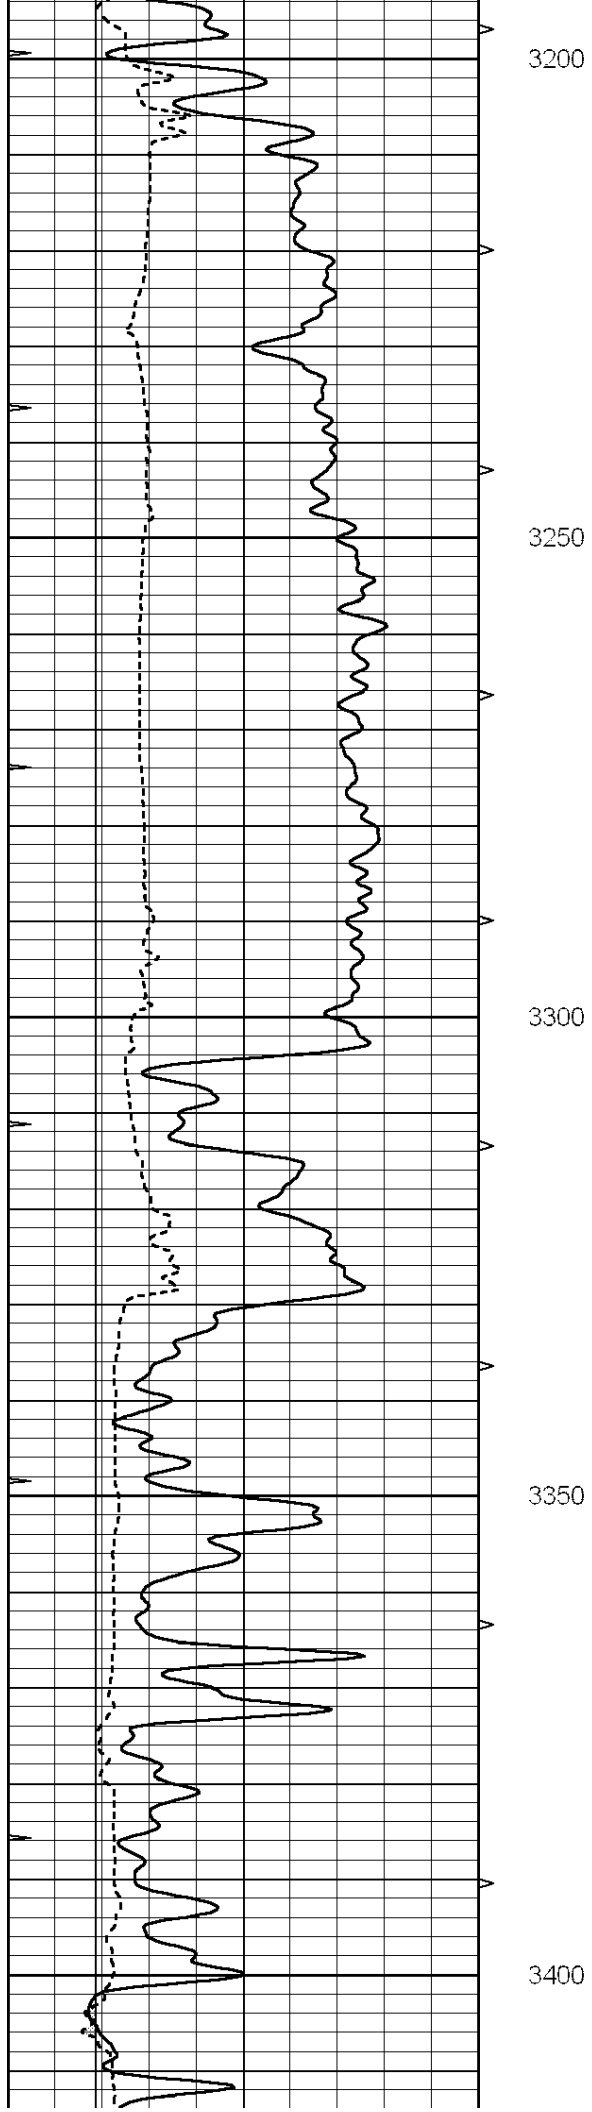

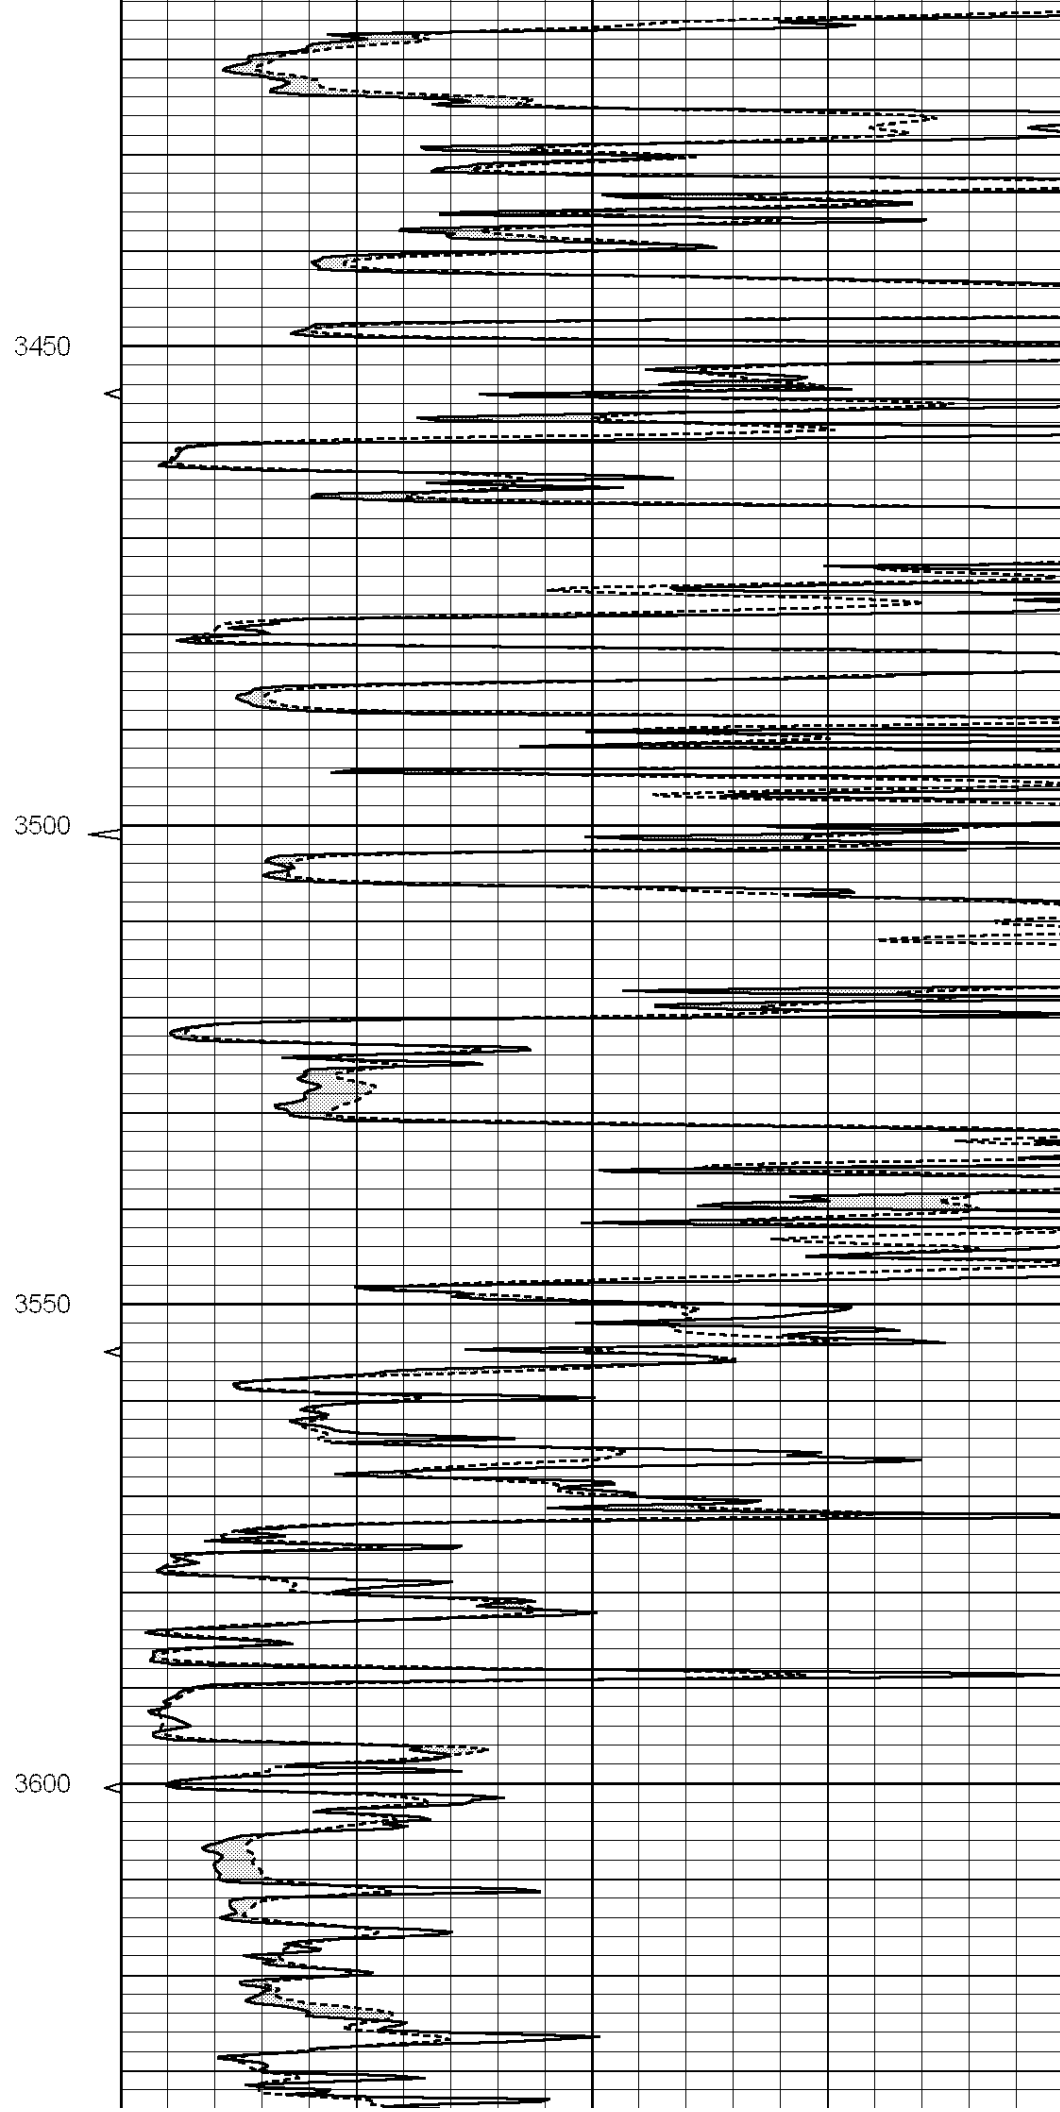
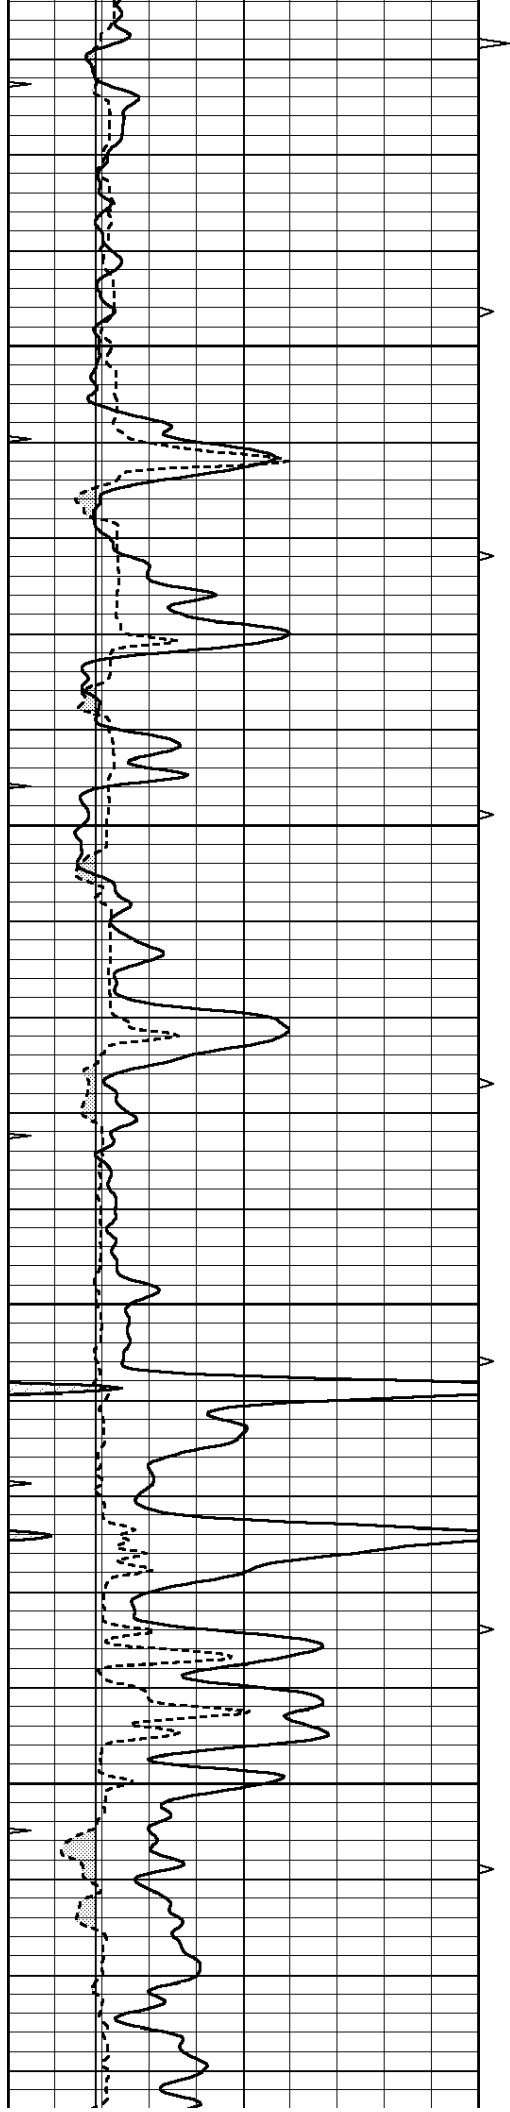


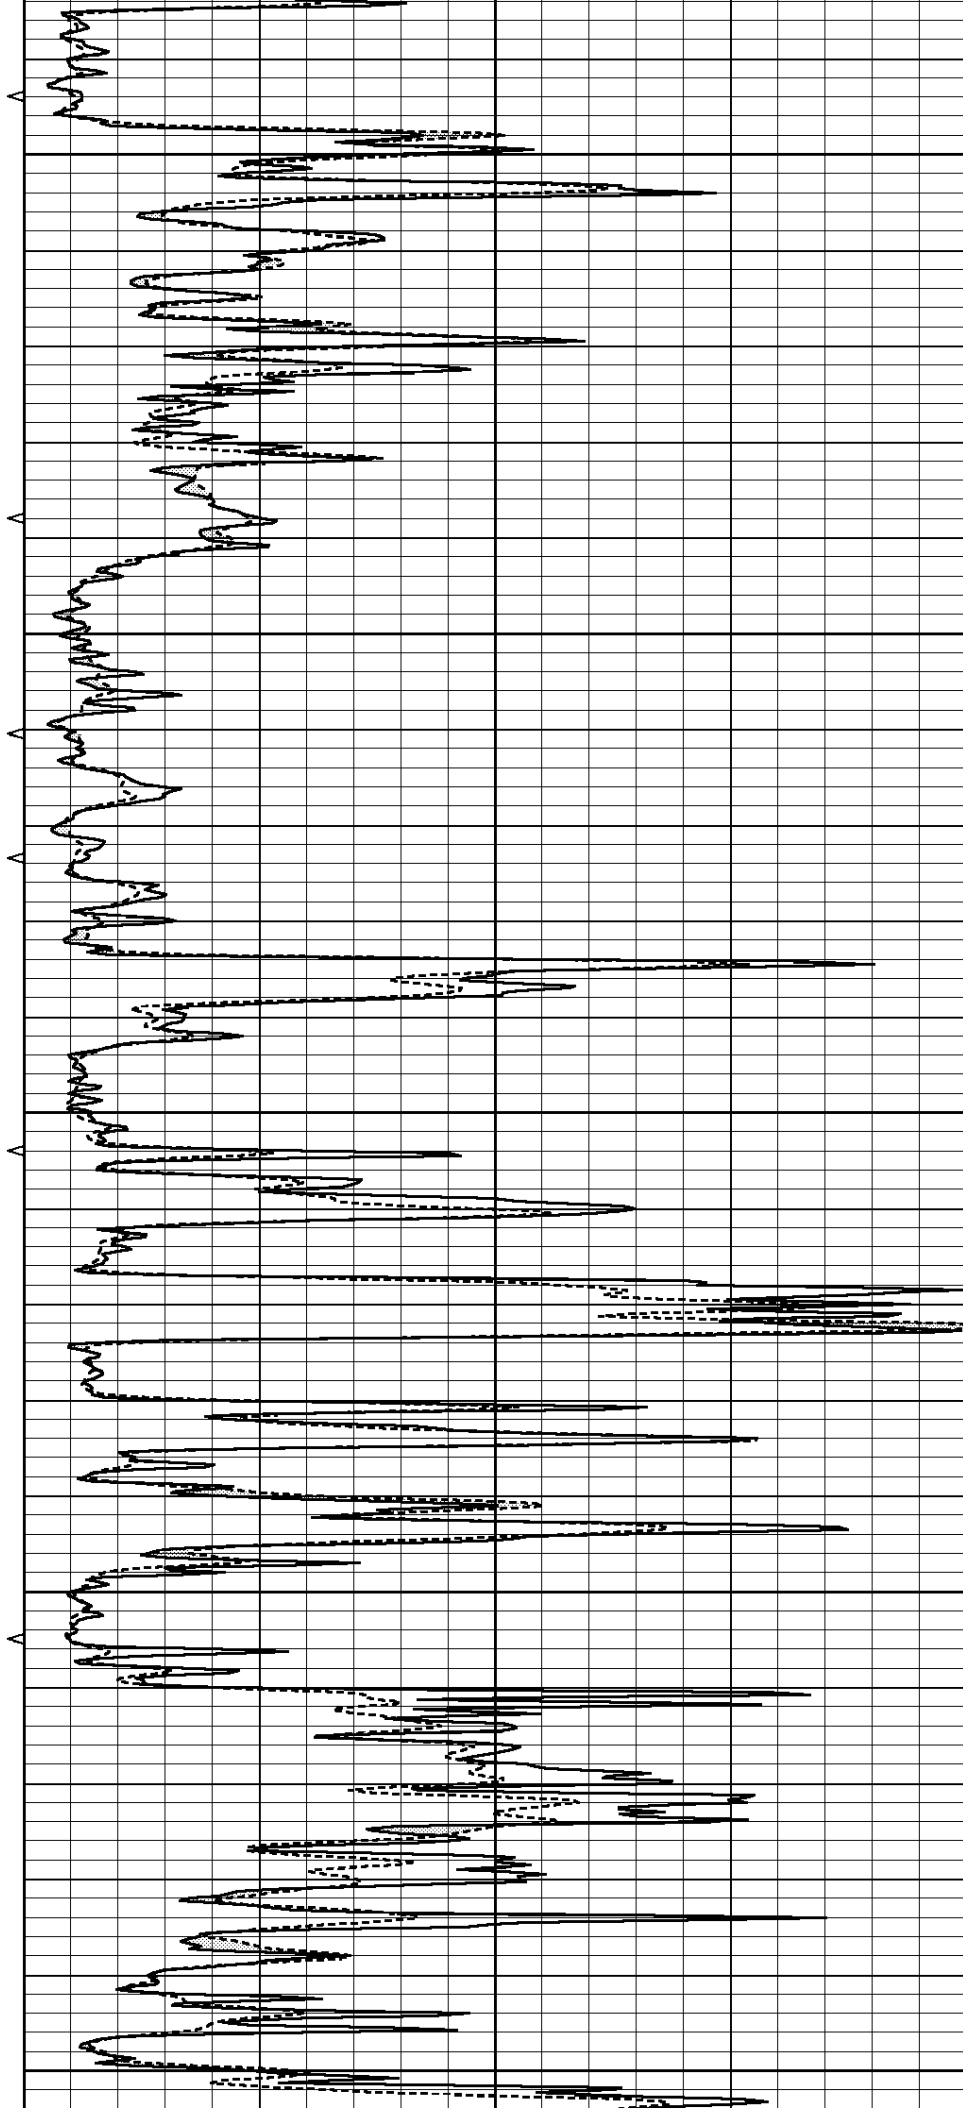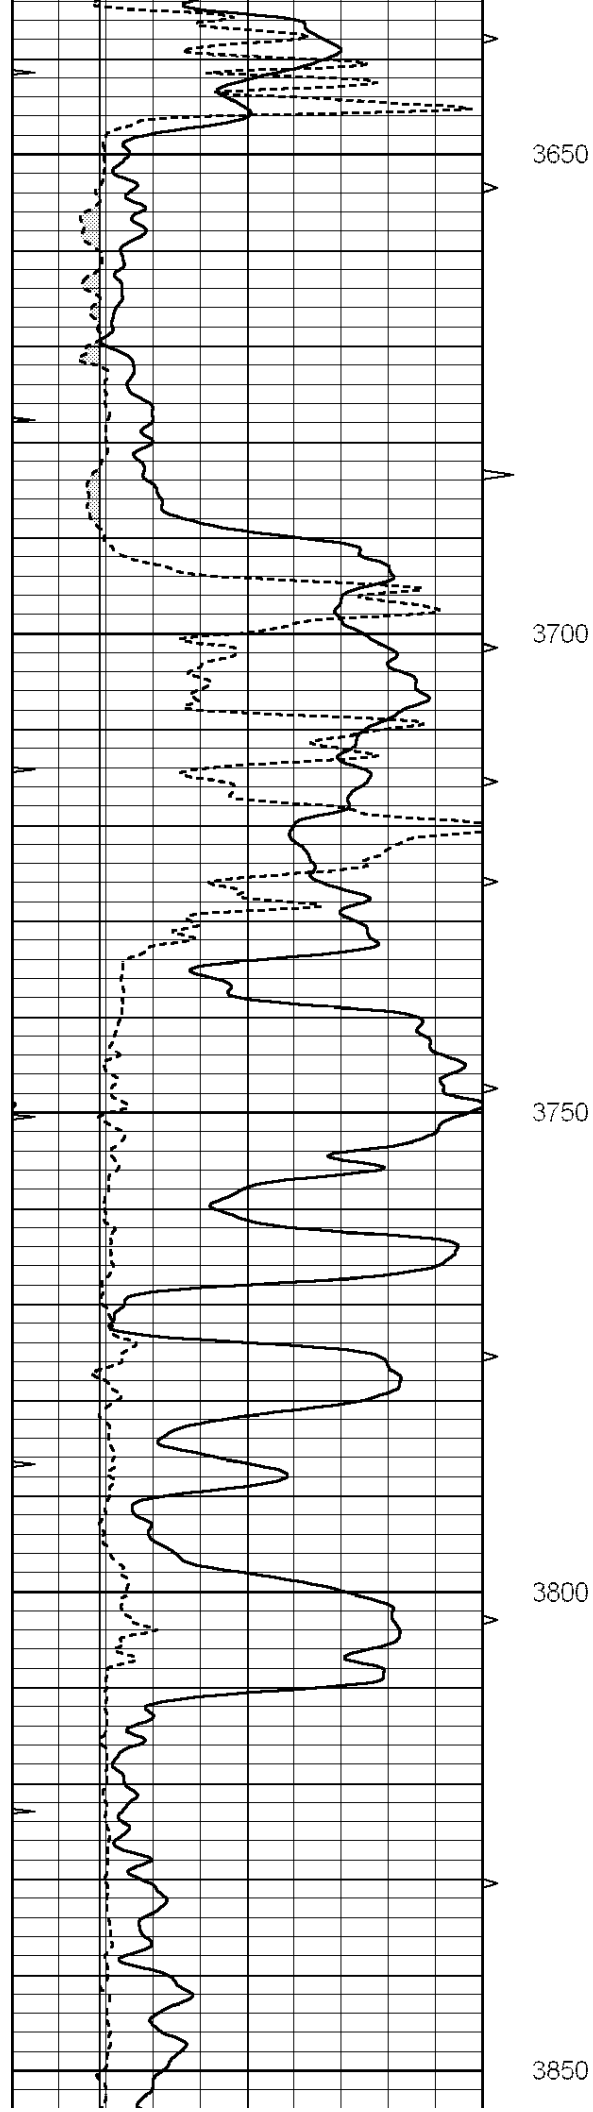


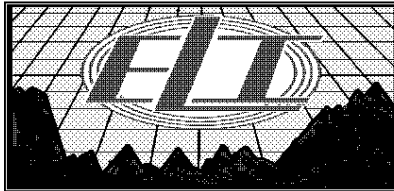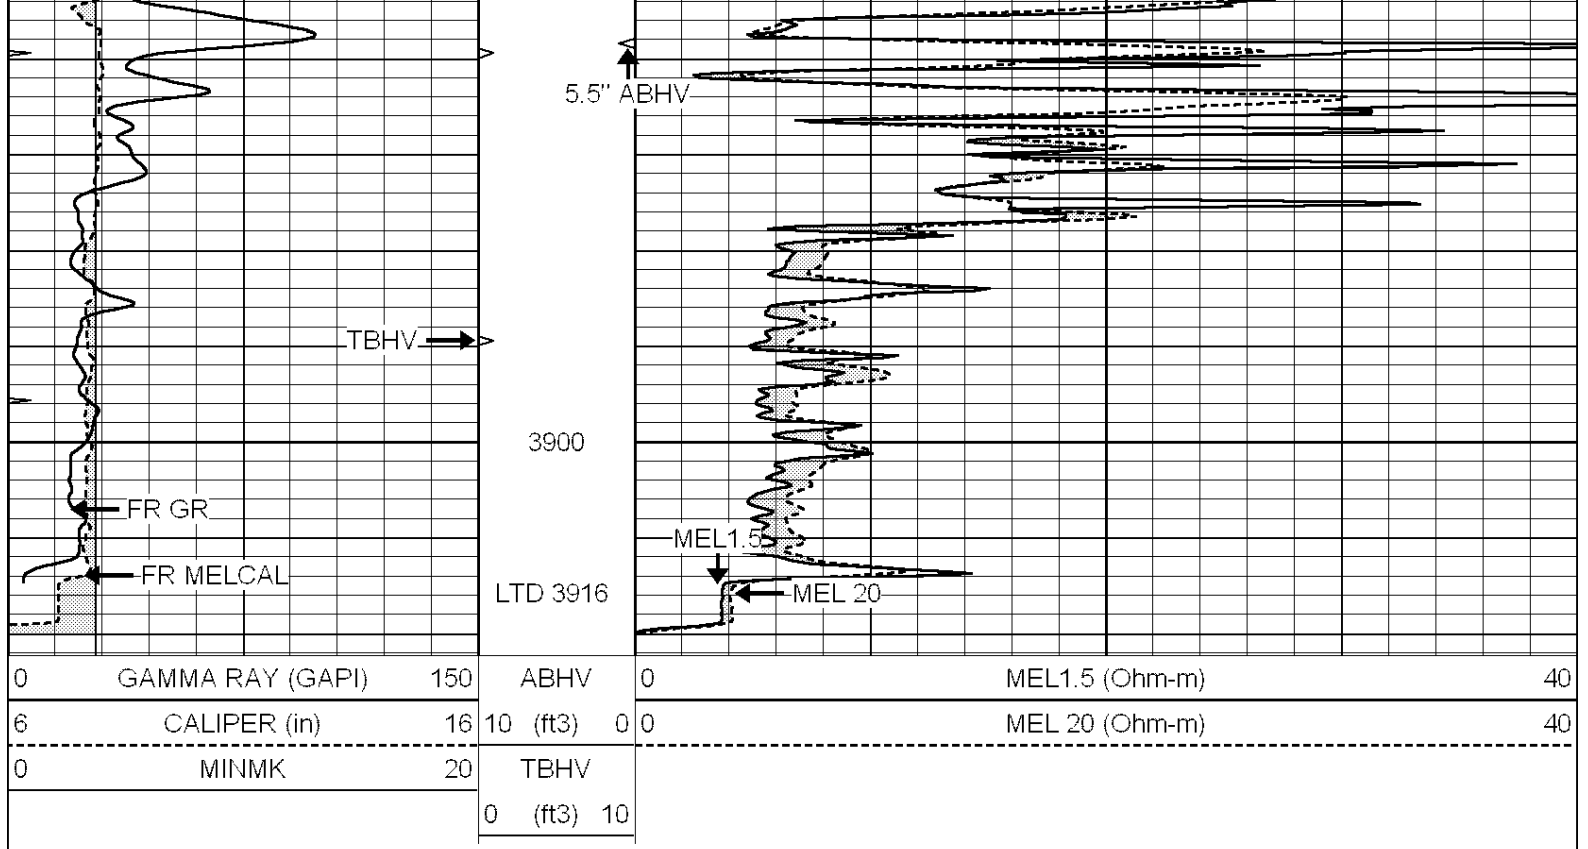

REPEAT SECTION

Database File: 3056pe.db
 Dataset Pathname: pass7.1
 Presentation Format: micro
 Dataset Creation: Wed Nov 07 20:51:26 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

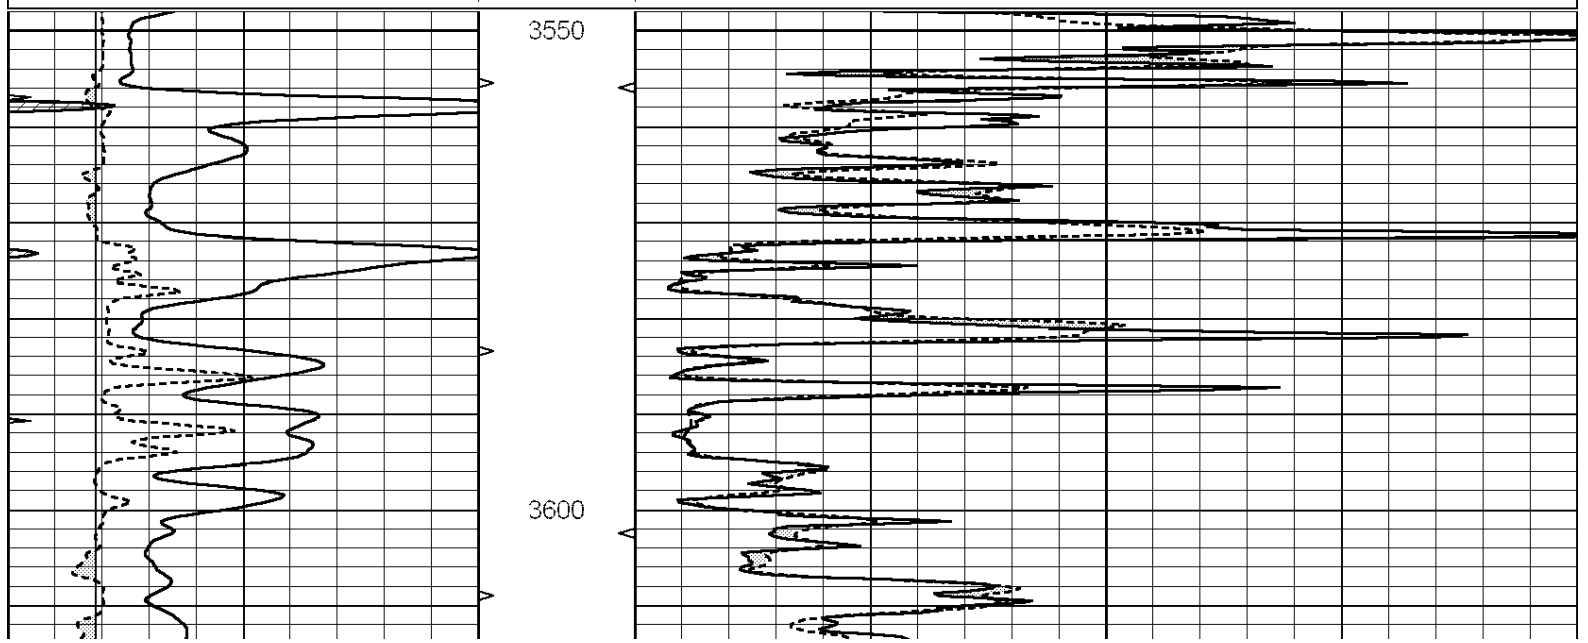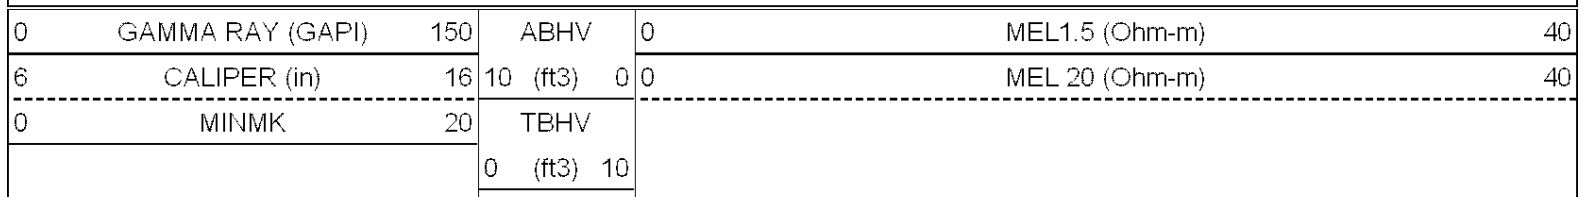

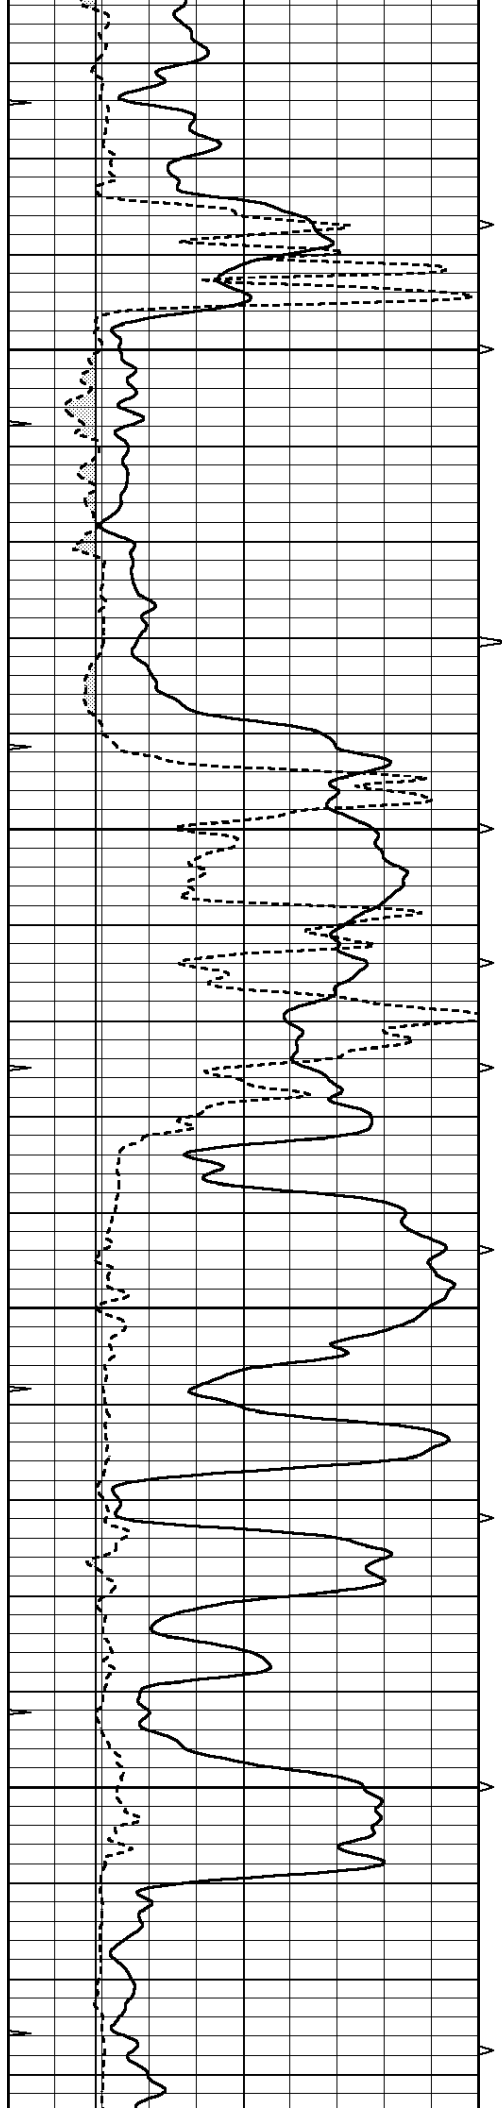



3650

3700

3750

3800

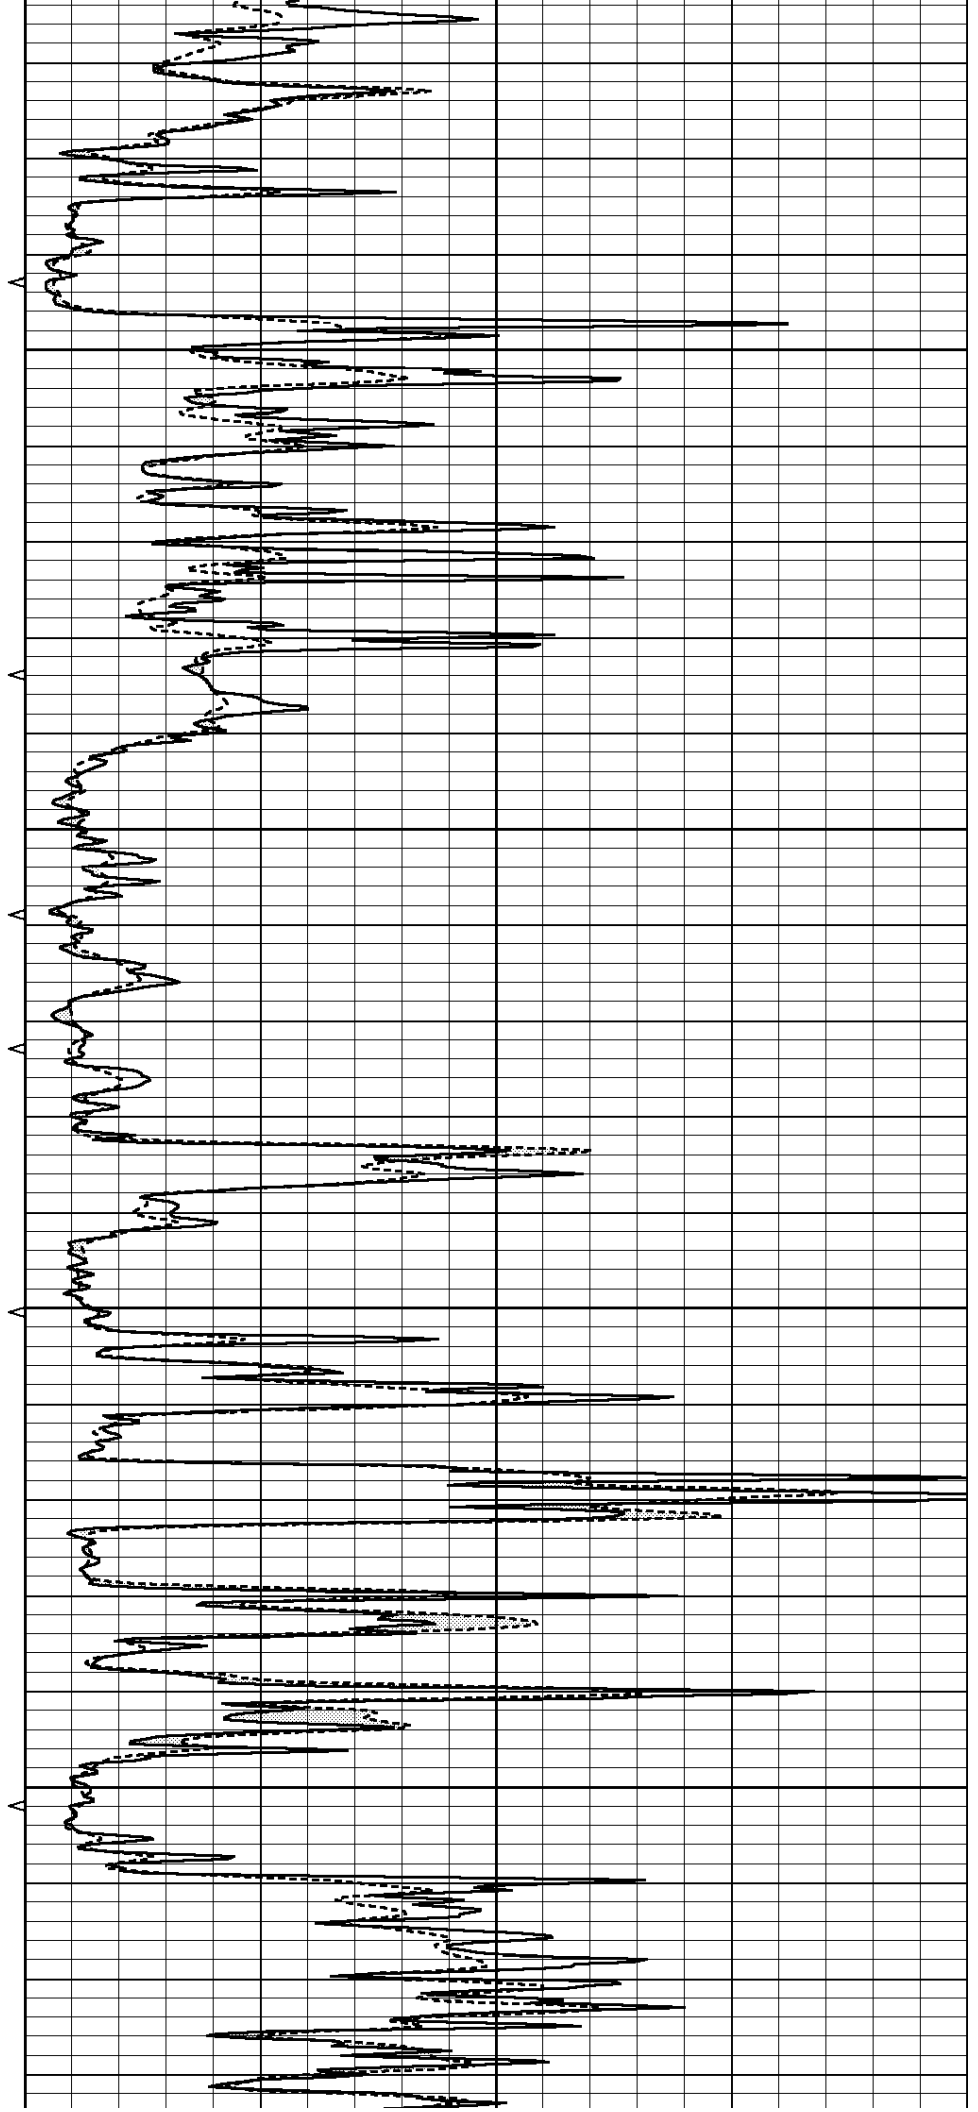

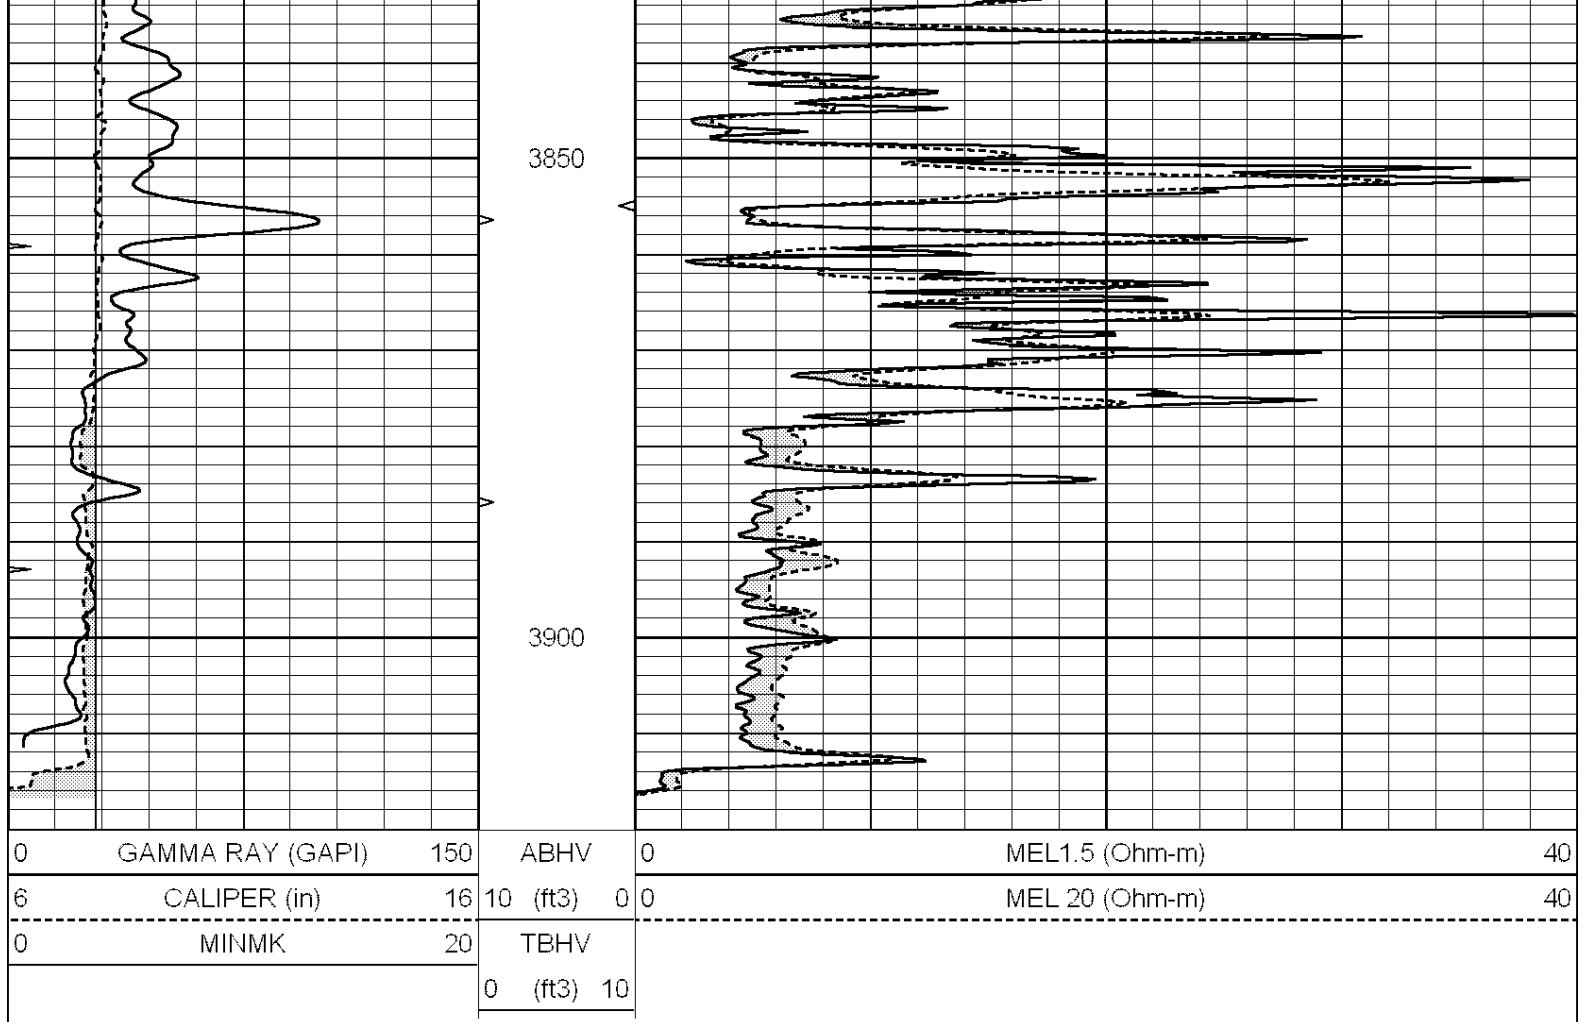

Calibration Report			
Database File:	3056pe.db		
Dataset Pathname:	pass8.2		
Dataset Creation:	Wed Nov 07 21:27:47 2018 by Calc SOC 120430		
MICRO Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeN		
Performed:	Sat Nov 03 13:33:04 2018		
Caliper Calibration:	Gain=4.537	Offset=1.512	
	Low Cal	High Cal	
References	8.000	20.000	
Readings	1.430	4.075	
1.5" Calibration:	Gain=60.000	Offset=0.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.001	1.240	
2" Calibration:	Gain=66.000	Offset=0.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.001	1.076	
Gamma Ray Calibration Report			
Serial Number:	070559		
Tool Model:	OPEN_GR		
Performed:	Wed Nov 07 08:22:42 2018		

Performed: Wed Nov 07 08:33:43 2016

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps

Calibrator Reading: 1.0 cps

Sensitivity: 0.2300 GAPI/cps